

Software Dependencies 2.0: An Empirical Study of Reuse and Integration of Pre-Trained Models in Open-Source Projects

Jerin Yasmin · Wenxin Jiang* · James C. Davis · Yuan Tian

Received: date / Accepted: date

Abstract *Context:* Pre-trained models (PTMs) are machine learning models that have been trained in advance, often on large-scale data, and can be reused for new tasks, thereby reducing the need for costly training from scratch. Their widespread adoption introduces a new class of software dependency, which we term *Software Dependencies 2.0*, extending beyond conventional libraries to learned behaviors embodied in trained models and their associated artifacts. The integration of PTMs as software dependencies in real projects remains unclear, potentially threatening maintainability and reliability of modern software systems that increasingly rely on them.

Objective: In this study, we investigate Software Dependencies 2.0 in open-source software (OSS) projects by examining the reuse of PTMs, with a focus on how developers manage and integrate these models. Specifically, we seek to understand: (1) how OSS projects structure and document their PTM dependencies; (2) what stages and organizational patterns emerge in the reuse pipelines of PTMs within these projects; and (3) the interactions among PTMs and other learned components across pipeline stages.

Method: We conduct a mixed-methods analysis of a statistically significant random sample of 401 GitHub repositories from the PeaTMOSS dataset (28,575

*Most of the work was performed during his PhD at Purdue University.

Jerin Yasmin
Queen's University, Kingston, ON, Canada
E-mail: jerin.yasmin@queensu.ca

Wenxin Jiang
Socket Inc., Wilmington, DE, USA
E-mail: wenxin@socket.dev

James C. Davis
Purdue University, West Lafayette, IN, USA
E-mail: davisjam@purdue.edu

Yuan Tian
Queen's University, Kingston, ON, Canada
E-mail: y.tian@queensu.ca

repositories reusing PTMs from Hugging Face and PyTorch Hub). We quantitatively examine PTM reuse by identifying patterns and qualitatively investigate how developers integrate and manage these models in practice.

Results: We find that multi-PTM reuse is common (52.6% of the studied projects). In these projects, a notable portion of PTMs are interchangeable (37%), meaning one model can seamlessly replace another in the workflow, while others are complementary (23%), performing distinct functional roles. This integration complexity is compounded by fragmented dependency declarations across code, documentation, and configuration files, with only 21.2% of projects documented outside code. We identify three types of PTM reuse pipelines, *i.e.*, feature extraction, generative, and discriminative, all involving varying degrees of PTM adaptation, from as-is reuse to head addition or architectural modification. PTMs also frequently interact with other models in tightly coupled or modular designs, reflecting the complexity of such systems. *Conclusion:* Managing Software Dependencies 2.0 and PTM reuse pipeline complexity introduces unique technical challenges in ML-enabled software. Our findings underscore the need for enhanced tools and practices that treat PTMs as first-class, modular components, facilitating their reliable integration and long-term maintenance within Software Dependencies 2.0. We identify future research on PTM reuse and integration as a way to further understand Software Dependencies 2.0.

Keywords Pre-trained Models · Software Dependencies · Model Reuse · ML pipeline · Software Supply Chain · Model Interactions · Technical Debt · Machine Learning · Deep Learning

1 Introduction

Deep neural networks (DNNs) are driving major advances in domains such as image analysis (Namysl and Konya, 2019; Yin et al., 2019), natural language processing (Collobert and Weston, 2008; Nakano et al., 2021; Zhou, 2022), and speech recognition (Gaikwad et al., 2010; Abdel-Hamid et al., 2014; Nassif et al., 2019). In software engineering, DNNs are increasingly applied to tasks such as code generation and automated testing (Le et al., 2020; Ale and Yarram, 2024; Chen et al., 2025). Yet, training these models from scratch is resource-intensive, requiring substantial computational power and engineering effort as architectures grow in size and complexity (Narayanan et al., 2019; Geiping and Goldstein, 2023). ***Pre-trained models (PTMs)*** have emerged as a practical solution to this challenge. By encapsulating both the architecture and the parameters learned from data, PTMs enable developers to transfer knowledge across tasks, significantly reducing training costs and development time (Marcelino, 2018; Han et al., 2021). The recent emergence of foundation models (FMs), *i.e.*, large-scale PTMs trained on broad, heterogeneous data and adaptable to a variety of tasks (Bommasani et al., 2021), has further accelerated PTM reuse, with models such as GPT-4 (OpenAI, 2023a) and Stable Diffusion (Rombach et al., 2022a). Reports indicate that the global AI market,

encompassing technologies like PTMs, is projected to grow from USD 279.22 billion in 2024 to USD 1,811.75 billion by 2030 (Grand View Research, Inc., 2025). This momentum highlights the need to better understand how PTMs are being reused in practice.

Integrating PTMs as dependencies has lots of problems (Jiang et al., 2024; Banyongrakkul et al., 2025). We believe that these problems signal a new form of software dependency, which we term ***Software Dependencies 2.0***. We contrast this with *Software Dependencies 1.0*, by which we refer to the integration of conventional software libraries or packages, which are composed of human-written instructions (code-centric) and are often governed by mature package management ecosystems (Decan et al., 2019). *Software Dependencies 2.0*, by comparison, refers to the integration of software with learned behaviors encapsulated in machine learning models whose parameters are determined by data and optimization processes (model-centric). These dependencies are often distributed by model hubs with reusable artifacts, such as pre-trained parameters, architectures, and vocabularies. This shift from code-centric to model-centric dependencies may pose new challenges to the maintainability of software that incorporates such dependencies.

Recent work (Jiang et al., 2024) frames PTM development and deployment as a model supply chain, spanning upstream model producers (Brown et al., 2020; Rombach et al., 2022b; OpenAI, 2023a), intermediary platforms (Castano et al., 2023; Mitchell et al., 2019), and downstream software systems that consume these models. While prior research has primarily focused on upstream concerns such as model documentation, security, and sharing (Castano et al., 2023; Jiang et al., 2022; Kathikar et al., 2023; Jiang et al., 2025), downstream reuse remains less understood. Understanding downstream PTM reuse is crucial: without it, systems may become harder to maintain and reproduce (Decan et al., 2019; Okafor et al., 2022), and upstream producers may miss key requirements for designing PTMs, platforms, and tools. From the perspective of *Software Dependencies 2.0*, understanding downstream practices reveals how model-centric dependencies are managed and integrated into software. By empirically examining how PTMs are reused in real-world projects, our study provides a foundation for developing tools, standards, and guidelines to support reliable and maintainable PTM integration.

In this paper, we use PTMs as a lens to study *Software Dependencies 2.0*, focusing on their management and integration into ML-enabled systems, including the interaction between multiple models within such systems. By integration, we refer to the entire process through which PTMs are incorporated into software projects, encompassing multiple stages such as initialization of models and adapting them to project-specific requirements. Understanding these stages provides a structured view of PTM reuse and informs our analysis of practical challenges and patterns. Our study is organized around three research questions:

RQ₁: *How do open-source projects structure and document their PTM dependencies?*

RQ2: *What are the stages and their organization in the pipeline of PTM-based open source projects?*

RQ3: *How do PTMs interact with other learned components?*

To address these questions, we use the PeaTMOSS dataset (Jiang et al., 2024), which contains 28,575 GitHub repositories that employ models from Hugging Face and PyTorch Hub. From this dataset, we extract a stratified statistically representative sample of 650 popular projects (341 using PTMs from Hugging Face Hub and 314 from PyTorch Hub). After categorizing these projects by the functional role of PTMs, we focus our analysis on a manually-curated 401 projects that employ PTMs to implement their core functionalities.

We adopt a mixed-methods approach to analyze these target projects. For RQ1, we detect and trace PTM usage across these projects, examining how their dependencies on PTMs are structured and documented. For RQ2 and RQ3, we first review literature from the SE and ML domains to establish a theoretical grounding on PTM reuse pipelines and their interactions with other learned components (*i.e.*, PTMs or scratch-trained models) in ML-enabled systems. We then analyze the same 401 projects to qualitatively characterize real-world reuse and multi-model interaction patterns, comparing our empirical observations with theoretical expectations.

Combining these analyses, we report the characteristics and challenges of PTM reuse in ML-enabled systems. For **RQ1**, we observed diverse and *ad hoc* practices in structuring and declaring dependencies on PTMs (§4.1). Dependencies are often inconsistently specified across source code, configuration files, and README documents, with limited use of structured tools for version control. For **RQ2**, we first analyzed the stages of PTM reuse and identified ten recurring stages (§4.2). Based on how projects select and organize these stages, we observed three common types of PTM reuse pipelines: feature extraction, generative, and discriminative. Across all pipeline types, PTMs were reused either as-is or with adaptation (*e.g.*, head addition or architectural modification). Adaptation was far more common, showing that PTM reuse is rarely plug-and-play. Compared to conventional ML pipelines (Amershi et al., 2019; Biswas et al., 2022), these PTM-centric pipelines often bypass or restructure standard stages such as model training or feature engineering. However, this shift introduces new challenges related to adapting and maintaining PTMs within downstream applications. For **RQ3**, we found that PTMs frequently interact with other models (in 50% of the studied projects). We developed a taxonomy of four recurring interaction types (§4.3), *i.e.*, feature handoff, feedback guidance, evaluation, and post-processing refinement to describe cross-stage interaction between pipelines involving both PTMs and conventional ML models. These interactions, which vary from tightly coupled to modular designs, introduce additional architectural complexity that has been overlooked in previous literature (Peng et al., 2020; Sens et al., 2024).

In summary, our study provides the following main contributions to understanding Software Dependencies 2.0:

- We provide the first systematic analysis of how PTMs are defined and managed as dependencies in OSS projects, highlighting widespread inconsistency and fragmentation (§4.1).
- We characterize PTM reuse pipelines by identifying three dominant orientations and common adaptation strategies (§4.2).
- We propose a taxonomy of four multi-model PTM interaction types, revealing additional architectural complexity (§4.3).
- We conceptualize Software Dependencies 2.0, highlight key engineering risks related to PTM reuse, and clarify major differences between Software Dependencies 1.0 and 2.0, motivating the need for improved tooling and further research. We also provide suggestions for different stakeholders involved in PTM integration (§5).

Significance: This study is the first to characterize the reuse patterns of PTMs sourced from public model hubs in real-world software projects, examining them as a new kind of software dependency that differs from conventional library reuse. Our findings highlight technical challenges that have been largely overlooked in the SE literature on PTM reuse. At the same time, our study complements the ML literature by bridging the gap between model design and real-world system integration.

Paper organization: Section 2 discusses the background on software dependencies, PTM, and PTM reuse. Section 3 motivates the RQs and presents the study design. Section 4 details the methodology and results for RQs. Section 5 presents discussions and implications of our findings. Section 6 discusses threats to validity, Section 7 discusses the related work, and finally Section 8 concludes the article. This paper is accompanied by an artifact for reproducibility, described in Section 9.

2 Background

Reusing pre-trained models (PTMs) has become a common practice in modern software systems. Such reuse introduces a new type of software dependency that differs from conventional libraries. In this section, we provide background on three key topics. First, we review *Software Dependencies*. Second, we discuss PTMs as Software Dependencies 2.0, highlighting their unique characteristics. Third, we describe *PTM Reuse Pipelines* and *cross-stage multi-model interactions*, focusing on how multiple models are composed and coordinated within complex systems.

2.1 Software Dependencies

Software systems are rarely built in isolation; they rely heavily on external components that provide functionality through well-defined interfaces (Sonatype,

Inc., 2024). These relationships are commonly referred to as *software dependencies*. A software dependency represents a relationship in which one software component relies on another to function correctly. This dependence can occur through function calls, data access, or library usage. We refer to the typical dependencies with which the reader is familiar — logging libraries, web frameworks, wrappers to interact with different services — as *Software Dependencies 1.0*. By this we mean the code-centric components whose behavior is explicitly programmed. In widely used package ecosystems such as PyPI and NPM, dependencies are typically declared in manifest files (e.g., `requirements.txt`, `package.json`) and resolved automatically by package managers (Wittern et al., 2016; Decan et al., 2019). In this context, dependency management primarily concerns versioning, API stability, and security risks, rather than the behavior of the dependency itself, since the functionality of these components is fully defined by human-written code (Pashchenko et al., 2020). While most dependencies require little to no configuration, there are occasional cases of components with more extensive configurability (Clements and Northrop, 2002).

In contrast, the reuse of PTMs in downstream projects introduces a new class of software dependency, which we term *Software Dependencies 2.0*. These components extend beyond human-written code to include reusable, model-centric artifacts such as model architecture, pretrained parameters, vocabulary files, and configuration settings (Jiang et al., 2022; Castano and et al., 2023), all of which are essential for correct usage and integration in downstream systems. PTMs are commonly distributed as installable packages through centralized model registries, which facilitate adoption, versioning, and integration. This distribution mechanism enables downstream applications to leverage PTMs’ learned behaviors much like libraries, but with the additional complexity introduced by the model-centric nature of the artifacts. Jiang et al. (2023b) previously observed that packages differ structurally and functionally; our study, however, focuses on the implications of these dependencies for integration and management in downstream systems. Recent qualitative evidence from Jiang et al. (2025) on PTM package development further suggests that these properties lead to different integration and management practices, which we investigate in this study.

2.2 Pre-Trained Models (PTMs) and Software Dependencies 2.0

PTMs represent neural network architectures that have undergone prior training in large datasets, enabling them to generate output or adapt for downstream tasks (González et al., 2025). These models encapsulate learned parameters, often including a defined data pipeline and training regime, making them distinct from conventional software components whose behavior is explicitly programmed (Karpathy, 2017).

PTMs are commonly distributed as *PTM packages*, which bundle the model architecture, pre-trained weights, metadata such as training datasets, data pre-

processing steps, and evaluation metrics (Jiang et al., 2024). These packages are typically shared through *model registries* or *hubs*, which facilitate adoption and fine-tuning of PTMs for specialized applications (Jiang et al., 2024). Examples include open registries like Hugging Face (Hugging Face, 2021) and PyTorch Hub (PyTorch, 2023), and commercial registries such as NVIDIA NGC (NVIDIA, 2023) and the Qualcomm AI Hub (Qualcomm, 2023).

The scale of these registries has grown rapidly; for example, Hugging Face’s model hub expanded from just a few thousand models in 2022 to over one million models by 2024 (Hugging Face, 2024), reflecting the accelerating community adoption. At the same time, usage has intensified: downloads of the top 10% of PTMs nearly doubled within a single year, growing from 269 billion in August 2022 to 587 billion in August 2023 (Jiang et al., 2024).

Downstream applications adopt PTMs as *dependencies* to leverage pre-trained capabilities. For example, in the Hugging Face ecosystem, developers can load a tokenizer and a multilingual BERT model via the `transformers` library, as shown in Figure 1.

```
from transformers import AutoTokenizer, AutoModelForMaskedLM

tokenizer = AutoTokenizer.from_pretrained("bert-base-multilingual-cased")
model = AutoModelForMaskedLM.from_pretrained("bert-base-multilingual-cased")
```

Fig. 1: Example of PTM reuse in the Hugging Face ecosystem. This code snippet loads a multilingual BERT model and tokenizer using the `transformers` library. While reuse appears straightforward at the API level, the underlying model introduces complex dependencies, including learned behavior, format constraints, and resource requirements, that are not immediately visible in code. Such *Software Dependencies 2.0* represent a distinct and underexplored dimension of software reuse. Beyond dependencies, PTM reuse also involves broader aspects of integration and interaction between models, highlighting the complexity of real-world usage.

Managing Software Dependencies 2.0 involves familiar concerns such as versioning (Ajibode et al., 2025) and compatibility, but the probabilistic and data-driven nature of PTMs adds complexity. Updates or retraining can unpredictably alter model behavior, complicating validation and increasing the risk of subtle errors (Jiang et al., 2022). These challenges are further amplified by the computationally intensive and specialized runtime environments often required by PTMs (Guo et al., 2022; Banyongrakkul et al., 2025).

The multiple interdependent components of a PTM, such as its architecture, learned parameters, and auxiliary assets, further complicate integration and introduce risks rarely encountered with conventional libraries. Understanding these parallels and divergences is critical for developing dependency management practices that address both inherited challenges and novel risks introduced by PTMs. While prior research has documented difficulties in conventional ML systems (Sculley et al., 2015; Bogner et al., 2021), the practical challenges of integrating and maintaining PTMs in real-world projects remain less explored, motivating a systematic investigation of PTM reuse practices. In

this work, we systematically investigate PTM reuse and integration in open-source projects, focusing on model-centric dependencies.

2.3 PTM Reuse Pipelines and Cross-stage Multi-model Interactions

Following the discussion of PTMs and their role as dependencies in Section 2.2, we next focus on the pipelines that operationalize them. We define a *PTM reuse pipeline* as a structured sequence of stages through which a pretrained model progresses from acquisition to operational use. Figure 2 depicts such a pipeline and its possible interactions with other pipelines.

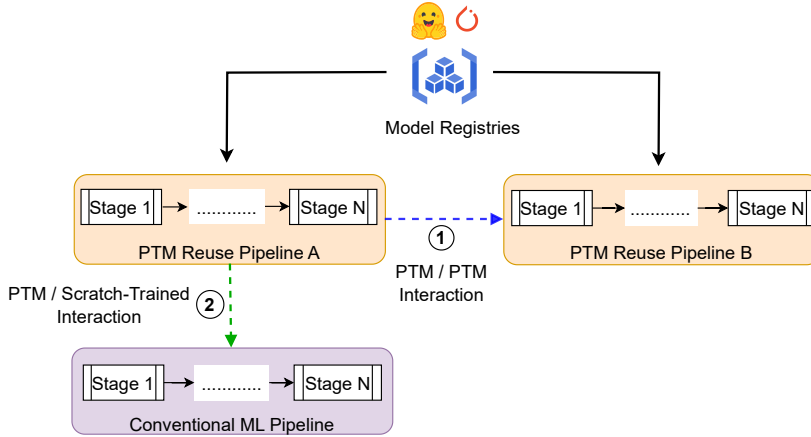


Fig. 2: Overview of PTM reuse pipelines and their interactions within a project. PTM Reuse Pipeline A reuses models from registries such as Hugging Face and PyTorch. It may interact with other pipelines in two ways: PTM/PTM Interaction (①): interaction with PTM Reuse Pipeline B. PTM/Scratch-Trained Interaction (②): interaction with Conventional ML Pipeline. Dashed arrows indicate optional steps. Ellipses show omitted intermediate stages.

The notion of a PTM reuse pipeline builds on the broader concept of software and data processing pipelines, introduced by Shaw and Garlan (1996) as an architectural style in which components (filters) are connected by data flows (pipes). Garlan (2000) further developed this idea with descriptions and examples that help software developers design and communicate complex systems in a clear and intelligible manner. In conventional ML ¹, pipelines are the dominant abstraction for workflows involving data processing, modeling, training, and post-processing (Amershi et al., 2019; Biswas et al., 2022). We extend this convention by treating the PTM reuse pipeline as a reusable architectural unit distinct from both the PTM itself and the broader software system.

PTM reuse can involve multiple models within a project, including PTMs and scratch-trained models, resulting in diverse reuse pipelines that may inter-

¹ Conventional ML refers to models trained from scratch on data.



Fig. 3: Overview of conventional ML pipelines. Stages such as data processing and post-processing are treated at a coarse level, as their fine-grained substeps (*e.g.*, data acquisition, data preparation) vary widely and are often implicit or domain-specific.

act with one another. We refer to such interactions as *cross-stage multi-model interactions*, *i.e.*, cases where the output of one pipeline (features, representations, or predictions) serves as input, context, or augmentation for another. Research on conventional ML model integration has shown that systems often contain interconnected models organized into functional configurations (Peng et al., 2020; Sens et al., 2024). For example, Peng et al. (2020) analyze ML architectures in autonomous driving systems and reveal patterns of model interconnection within monolithic applications, though their work focuses on scratch-trained components and does not specifically address PTM reuse. Similarly, Sens et al. (2024) provide a broader survey across 23 real-world projects, identifying multi-model configurations such as alternative models (for the same task), independent models (serving different tasks), as well as sequential chains, and joining integrations of models. While valuable, these classifications primarily reflect co-existence rather than interaction. Even sequential and joining patterns are described at a coarse system level, without attention to the structured reuse of PTMs or pipeline-based composition. In other words, prior work either analyzed code-level interactions of scratch-trained models or provided high-level system-wide patterns of model interactions, but did not examine how PTMs and optional scratch-trained models interact across stages within reusable pipelines.

In contrast, our work centers on how PTMs are reused through pipelines and how the pipelines of PTMs and scratch-trained models interact with one another across different stages. Each model—whether pretrained or scratch-trained—can be associated with its own operational pipeline. We therefore analyze interactions not solely at the model level, but in terms of how these pipelines exchange data, features, or representations across stages. In this framing, one of the interacting pipelines is always a PTM reuse pipeline, while the other may be built around a scratch-trained model or another reused model. This approach offers a more nuanced understanding of compositional integration and modularity compared to existing taxonomies. To facilitate our analysis of PTM reuse in these settings, we identify two categories of cross-stage multi-model interactions, grounded in patterns observed across the studied projects:

1. **PTM/PTM interactions:** Interactions in which two or more PTM reuse pipelines within the same project coordinate to fulfill complementary roles. Figure 2 (①) illustrates this with PTM reuse Pipeline A and PTM reuse Pipeline B, each using models from registries such as Hugging Face or PyTorch.

2. **PTM/Scratch-trained interactions:** Interactions in which a PTM reuse pipeline and a scratch-trained model pipeline coordinate to enhance, support, or augment each other within the same project. Figure 2 (②) illustrates this interaction between PTM reuse Pipeline A and the conventional ML (scratch-trained) pipeline.

3 Study Design

This section describes the design of our empirical study. We first present our research questions and study overview (Section 3.1), then detail the shared data preparation steps that underpin all three research questions (Section 3.2). These steps produce a dataset suitable for downstream analyses. While all RQs draw from this common foundation, each applies additional filtering or annotation in Section 4 to address its specific focus.

3.1 Research Questions and Study Overview

The goal of this study is to conduct the first empirical investigation of Software Dependencies 2.0 in open-source software projects, focusing on PTMs accessed via model hubs. We examine how PTM dependencies are structured and documented (RQ1), how PTMs are organized within reuse pipelines (RQ2), and how they interact with other learned components across stages (RQ3). While RQ1 directly addresses dependency specification, RQ2 and RQ3 focus on pipeline organization and model interactions, thereby providing a more comprehensive view of how these dependencies are used and integrated in practice. Through this investigation, we aim to uncover characteristics of Software Dependencies 2.0, identify real-world PTM reuse patterns, highlight associated software engineering risks, and inform the development of improved tooling and practices.

Our research is guided by three questions:

- RQ₁:** *How do open-source projects structure and document their PTM dependencies?*
- RQ₂:** *What are the stages and their organization in the pipeline of PTM-based open source projects?*
- RQ₃:** *How do PTMs interact with other learned components?*

We begin with **RQ₁**, which focuses on the structure and documentation of PTM dependencies. Conventional libraries are typically declared in configuration or manifest files (*e.g.*, `package.json`, `pom.xml`) that are processed by package managers to install and manage them. PTMs, by contrast, combine executable code with learned artifacts (Jiang et al., 2023b) and are often integrated through local model checkpoints or inline hub references (Jiang et al., 2024). Currently, no standardized package manager exists for PTM dependencies, and important information about model configurations and auxiliary

assets may be scattered across code, scripts, or textual files. As a result, it is difficult to trace which PTMs are reused within a project and how they are reused. This traceability forms the critical foundation for reasoning about their reuse and integration, which we explore further in RQ2 and RQ3. RQ1, therefore, takes the first step by asking: How many PTMs are reused within a project? How do these PTMs relate to one another (*e.g.*, are they interchangeable or complementary)? And where and how are these dependencies documented? By addressing these questions, RQ1 establishes an understanding of how PTM dependencies are structured and documented in practice, providing the basis for deeper analysis in subsequent RQs.

RQ2 examines how PTM reuse pipelines diverge from conventional ML pipeline structures (see Figure 3), which typically consist of standardized stages, including data preparation, feature engineering, modeling, training, and evaluation. Because PTMs are pre-trained and reusable, PTM reuse may lead to the introduction of alternative or additional stages, such as inference, fine-tuning, or model adaptation. Characterizing these real-world reuse pipelines is essential for understanding how developers adapt and integrate PTM dependencies into their systems, revealing practical reuse patterns and the underlying complexity of integration.

RQ3 explores how multiple models interact within a single project. In practice, developers can connect models either by chaining them sequentially (where the output of one model feeds into another) or by combining them in parallel (Sens et al., 2024). PTMs, due to their modularity and adaptability, can support cross-stage interactions (§2.3) by serving diverse roles across pipelines. Studying these interaction patterns provides critical insights into modular system composition, integration complexity, and robustness.

To address these research questions, we systematically extract and analyze PTM-related artifacts such as model loading scripts, configuration files, and downstream usage code from OSS repositories. Our analysis is further enriched with insights from hub documentation and existing integration guides. Figure 4 illustrates our methodological framework.

3.2 Data Collection and PTM Usage Tracing

As illustrated in Figure 4, we collected candidate projects that use PTMs from two major model hubs (Hugging Face and PyTorch Hub), applied filtering and stratified sampling, and then further refined the selection based on their PTM reuse category to identify relevant targets for addressing our three research questions. In the rest of this subsection, we first detail the data collection and sampling process, followed by our approach for tracing PTM usage within the selected repositories.

Data Source. To study PTM reuse in real-world software, we need a dataset of repositories that actually incorporate pretrained models. We examined the available datasets (Jones et al., 2024) and identified the PeaTMOSS dataset (Jiang et al., 2024) as suitable for our purpose. The PeaTMOSS dataset (Jiang et al.,

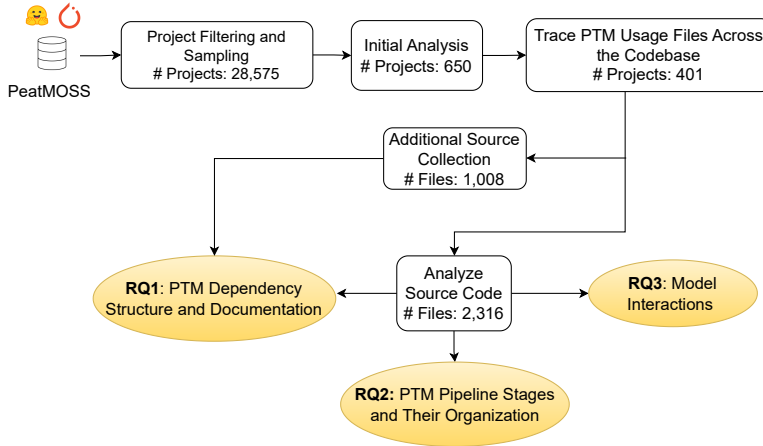


Fig. 4: Study Overview: Projects were filtered and analyzed to investigate PTM usage, pipeline stages, and model interactions.

2024) contains 28,575 GitHub repositories that reuse PTMs from Hugging Face and PyTorch Hub. These repositories were identified through a signature-based approach that targets project source code, where a signature is defined as the combination of a specific library import (*e.g.*, `transformers`) and a corresponding function call used to load a PTM (*e.g.*, `from_pretrained`).

The dataset captures repositories available as of July 10, 2023. For our analysis, we collected the February 2024 snapshot of these repositories.

Project Filtering and Sampling. Analyzing all 28,575 projects is infeasible due to the intensive manual effort required to examine source code and answer our three research questions. Therefore, we curate a representative subset of projects through a multi-step filtering process.

First, we filter by project popularity, including only repositories with at least 100 GitHub stars, an approach consistent with prior work (Han et al., 2019), to focus on impactful OSS projects. This yields 3,067 repositories that reuse models from Hugging Face and 1,707 repositories that reuse models from PyTorch Hub. Next, to ensure statistical representativeness while keeping the analysis tractable, we apply stratified random sampling by hub (Hugging Face and PyTorch Hub) with a 95% confidence level and a 5% margin of error. Stratifying by hub was chosen because the two hubs differ in their typical domains (*e.g.*, NLP, computer vision, audio). This results in a final sample of 341 Hugging Face and 314 PyTorch Hub repositories. After removing duplicates, 650 unique projects remained.

Initial Analysis. Not every software project that uses a PTM qualifies as a target PTM reuse project for our study, as some may simply host tutorials demonstrating PTM usage. To better understand the nature of PTM usage, we conducted an initial analysis of how the 650 sampled projects incorporate PTMs.

We adopt an open coding approach (Seaman, 1999) to manually review each repository. For simplicity, rather than analyzing the full source code, we examined only the README files, which typically summarize project goals, usage, and functionality in a concise and accessible manner.

- **Pilot Construction:** A random sample of 30% of the projects that reuse PTMs from each hub (105 from Hugging Face and 95 from PyTorch) was selected for manual review. Two authors collaborated to develop an initial set of categories that reflect the diversity of projects across both hubs.²
- **Extension to the Remaining Projects:** The same two authors annotated the remaining projects based on the initial categories, achieving a Cohen’s kappa coefficient of 0.79 for Hugging Face and 0.80 for PyTorch, indicating substantial inter-rater agreement (Viera et al., 2005). They discussed and resolved any discrepancies.

Our categorization reveals four primary types of PTM reuse, as summarized in Table 1. Among the sampled projects, 61.5% are classified as Functional Applications, followed by 27% as PTM Facilitation Frameworks. Educational Resources comprise 11%, and 0.05% falls under the Other category.

Given that our study focuses on understanding how PTMs are integrated into downstream applications, we limit our in-depth analysis to the 401 projects categorized as Functional Applications. Among the 401 Functional Application projects, star counts range from 100 to 4,200, with a median of 320 and an average of 540 (Borges and Valente, 2018; He et al., 2024).

Tracing PTM Usage Files Across the Codebase. To identify the subset of files transitively involved in PTM usage, we develop a lightweight tracing procedure. The PeaTMOSS dataset provides method signatures for identifying PTM-loading functions (*e.g.*, `from_pretrained()`) via static analysis, but it only locates model-loading points. Analyzing every file in each repository is infeasible due to their size and complexity. Our procedure focuses on files that participate in the PTM reuse pipeline, a structured sequence of stages from model acquisition to operational use (§2.3). We begin by locating model-loading calls using PeaTMOSS signatures and `git grep` to search for matching patterns. For each match, we identify the enclosing function or method (*e.g.*, `load_model`) using static analysis.

These functions serve as the starting points for our tracing procedure. We then perform an iterative, breadth-first traversal of the call graph using `git grep`, identifying where each function is called and extracting the enclosing caller functions. We set the depth limit to 6 to balance completeness and noise. Based on a pilot study of 20 randomly sampled projects, we observed that more than 95% of PTM-related activities occur within 3 to 4 levels of indirection from the model load call. Beyond 6 levels, the likelihood of encountering unrelated or utility function references increases significantly. Since our tracing is based on static patterns, it may miss dynamic method calls (*e.g.*,

² Both authors have over 9 years of software engineering experience, including 5 years working with pre-trained models, ensuring accurate project categorization.

Table 1: Categories of PTM reuse in OSS projects. Our study is focused on Functional Applications.

Category	Definition	Example Projects
Functional Applications	Projects that employ PTMs to implement core functionalities such as question answering, image generation, object recognition, text classification, or other domain-specific tasks.	AudioLDM ¹ (generates speech and sounds), CodeRL ² (code generation and assistance)
PTM Facilitation Frameworks	Projects that provide tools, APIs, or libraries to support the reuse, fine-tuning, and deployment of PTMs. These typically focus on enabling broader and easier access to PTMs.	Quaterion ³ (similarity learning framework), Espresso ⁴ (toolkit for ASR with GPU training)
Educational Resources	Projects that aim to educate developers on PTM usage, offering tutorials, documentation, and example implementations.	Hugging Face Notebooks ⁵ (research code and tutorials)
Other	Projects that replicate prior work, offer benchmarks, or provide datasets and metrics for PTM evaluation.	MLCommons ⁶ (reference implementations for MLPerf benchmarks)

¹ See <https://github.com/haoheliu/AudioLDM>.² See <https://github.com/microsoft/CodeRL>.³ See <https://github.com/UKPLab/sentence-transformers>.⁴ See <https://github.com/espnet/espnet>.⁵ See <https://github.com/huggingface/notebooks>.⁶ See <https://github.com/mlcommons/inference>.

reflection, dynamic dispatch) or implicit data flows (*e.g.*, via global state or object attributes). To mitigate these limitations, we manually inspect cases where tracing appears incomplete or ambiguous, especially in projects with non-standard control flow. For 15 projects, we have identified the relevant files during this manual inspection. This manual step helps validate results and recover connections that static analysis alone may miss.

Additional Source Collection. In addition to PTM-usage files, we identify several other types of files for further analysis. Our collection includes **README** files, which provide insight into the project. Configuration files are collected as they define the settings and parameters necessary for model usage, including architecture configurations, training hyperparameters, and optimization techniques. We collect all configuration files with `.yaml`, `.yml`, `.xml`, `.config` or `.json` extensions.³

4 Detailed Methods and Results

This section presents the detailed method and results for each of our RQs.

³ In our dataset, 95% of projects that included configuration files used these extensions.

4.1 RQ1: *How do open-source projects structure and document their PTM dependencies?*

To answer RQ1, we analyze both the *structure* of dependencies and their *documentation*. We design a multi-step analysis with shared procedures to address both aspects. This analysis leverages 401 projects processed as described in §3.2.

4.1.1 Methodology

Step 1: PTM Model Name Identification. For both sub-RQs, we need to identify the PTMs used in target projects. We begin with the model-loading signatures identified by the PeaTMOSS dataset. PeaTMOSS provides direct mappings between known loading functions and PTM names when those names are *statically defined*, *i.e.*, hardcoded string literals in the source code. These mappings are already included in the dataset. For example:

```
- AutoModel.from_pretrained("bert-base-uncased")    (HuggingFace
  Transformers)
- torchvision.models.resnet18(pretrained=True)        (TorchVision)
```

In contrast, for *dynamically loaded* models, names are not fixed in the code but stored in variables, passed as arguments, or read from configuration files or command-line inputs. Although PeaTMOSS includes the loading function (*e.g.*, `from_pretrained(...)`), it does not identify the exact model name. We start from the files where these calls appear and manually check nearby code and other project files collected in Section 3.2 to manually trace the data flow and find the actual model names being loaded. In total, we identify 1059 unique PTMs loaded across the 401 projects. Figure 5a shows the total number of PTMs by model type across all projects. NLP models are the most prevalent (169 PTMs), followed by vision models (136 PTMs). Multi-modal models are also substantial, with 51 PTMs, while speech- and audio-focused models are less common, with 20 and 5 PTMs, respectively.

Step 2: Manual Examination of PTM Dependency Structure (for RQ1.1).

Using the PTM names extracted in Step 1, we first classify each repository as using either a single PTM or multiple PTMs. For repositories containing multiple PTMs, we examine the relationships between them at the project level, specifically asking whether the PTMs used within a project belong to the same base family or span across different families. To support this analysis, we group individual PTMs into broader *base model families*, where each family represents a core architecture shared by several model variants. A model family groups PTMs with the same underlying architecture. For example, the BERT family includes `bert-base-uncased`, `roberta-base`, and `distilbert-base-uncased`. This approach aligns with prior literature treating models such as RoBERTa and DistilBERT as BERT variants (Liu et al., 2019; Sanh et al., 2019).

We assign models to (base model) families using a two-step process. First, we apply a keyword-based heuristic that relies on architecture-identifying substrings in model names. For instance, any model whose name contains “bert” was assigned to the BERT family, “gpt” to GPT. This approach is supported by prior work (Jiang et al., 2023a; Hao et al., 2023), which reports that Hugging Face model names generally reflect underlying architectures. Second, when model names do not explicitly include the family name, we manually map them to the appropriate family. For example, inpainting models such as **anything-4.0-inpainting**, which omit “Stable Diffusion” but are known community variants, **Stable Diffusion** family based on official documentation (Hugging Face, 2021; PyTorch, 2023) and our prior knowledge. Labeling is performed by one author and fully reviewed by another. Inter-annotator agreement was 85%, and disagreements are resolved through discussion. Because architecture is typically embedded in model names, this task involves little subjectivity.⁴

In addition, for projects containing multiple PTMs, we inspect the source code to understand how these models are integrated. Projects are labeled as interchangeable if they included PTMs that could be swapped within the workflow without altering the surrounding pipeline, such as models appearing in optional lists or conditional branches (*e.g.*, **if-else** blocks). Otherwise, they are labeled as complementary. Some projects exhibited both types.

Step 3: Identify PTM Name Declarations (for RQ1.2). Building on the PTMs identified in Step 1, we examine how these models are declared within each repository. Specifically, we perform textual searches using the identified model names across relevant project artifacts, including configuration files (*e.g.*, **YAML**, **JSON**) and the **README**. This step allows us to assess whether PTM dependencies are explicitly and centrally documented, or whether such declarations are scattered or implicit.

Step 4: Identify PTM Version Declarations (for RQ1.2). Versioning promotes the reproducibility, stability, and traceability of machine learning experiments. Since pretrained models may change over time (*e.g.*, due to updated weights, bug fixes, or architectural changes), specifying the version of a PTM used in a project helps guarantee consistent behavior across environments and over time.

Hugging Face models are hosted in versioned Git repositories. Users can specify a particular model version using the **revision** parameter in the **from_pretrained()** API, for example:

```
AutoModel.from_pretrained("bert-base-uncased",
                           revision="v4.2.0")
```

⁴ Note that Hugging Face provides metadata fields such as **model_type** for each model hosted on the hub. However, this metadata does not consistently capture shared architectures and is therefore unreliable for family-level grouping (Jiang et al., 2025).

Similarly, models loaded from PyTorch Hub can reference specific commits or tags by specifying the appropriate version string:

```
torch.hub.load("pytorch/vision:v0.10.0", "resnet18")
```

To identify version declarations, we statically analyze model-loading code and check whether these version parameters (*e.g.*, `revision` in Hugging Face, version tags in PyTorch Hub) are explicitly provided. This allows us to measure how often projects declare exact PTM versions, and thus, how they approach reproducibility in their dependency practices.

4.1.2 Results

PTM Dependency Structure. Our findings reveal two high-level PTM usage patterns: Single PTM and Multiple PTMs. Figure 5b summarizes the distribution of target projects, grouped by their model type. Most single-PTM projects rely exclusively on vision models (113 projects) or NLP (55 projects), with only a handful centered on speech, audio, or multi-modal models. By contrast, multi-PTM projects overwhelmingly involve cross-modality combinations, most commonly NLP + vision (8 projects). Other combinations, such as multi-modal + vision (8 projects), multi-modal + NLP (3 projects), or NLP + speech (3 projects), are less frequent but illustrate the diversity of integration patterns. Multiple-PTM projects tend to combine models across different modalities.

Within the Multiple PTMs category, we further distinguish two structural subtypes: *Interchangeable* and *Complementary*. Figure 6 shows the distribution of these dependency structures in the examined project set.

Interchangeable PTMs structure exists when multiple PTMs are included in a project to fulfill the same functional role, forming parallel and substitutable dependency structure. For instance, a project might support variants such as `clip_vit`, `clip_vit_b16`, and `clip_rn50`, all used for the same task (*e.g.*, vision encoding). These models typically belong to the same architecture family and differ in size, configuration, or pretraining dataset. Their usage reflects a flexible dependency structure, where models can be swapped at runtime based on performance or resource constraints, without requiring changes to the surrounding pipeline.

Complementary PTMs structure exists when a project integrates multiple PTMs with multiple roles, forming a functionally diverse dependency structure. Each PTM is typically used for a different task or type of data (modality). For example, a project might use `Wav2Vec2` for speech input, `BERT` for textual encoding. These PTMs are non-substitutable and together enable multi-modal or multi-stage processing. Complementarity may also occur within a single modality if models address different subtasks. This structure reflects intentional modular design, where each PTM dependency supports a specialized component of the system.

In our dataset, interchangeable PTMs are typically drawn from the same family, while complementary PTMs typically combine models from different

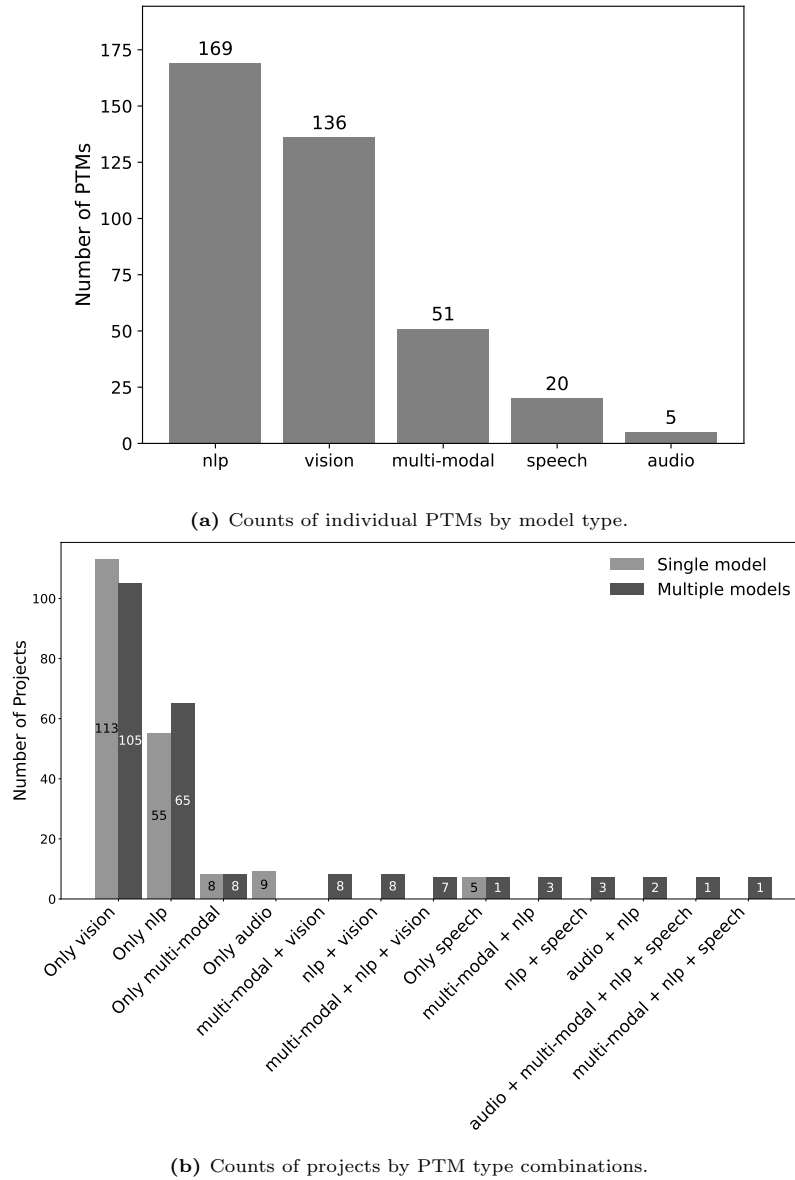


Fig. 5: Distribution of PTM usage: (a) number of models by type and (b) number of projects by modality combinations.

families to address different tasks or modalities. This observation is based on a manual review of 50 multi-PTM projects, of which 81% used PTMs from the same family in interchangeable roles and 85% combined PTMs from different families in complementary roles. Exceptions exist: some projects employ multiple models from the same family for different tasks, while others use models

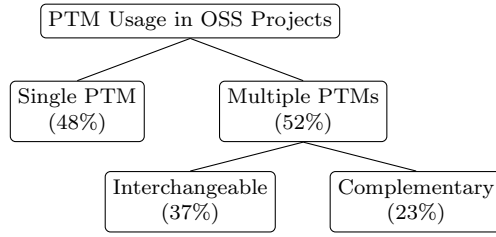


Fig. 6: PTM Dependency Structures in OSS Projects. Some projects include both interchangeable and complementary PTMs, which is why the percentages add up to more than 52%.

from different families to perform overlapping or similar functions. Thus, although this heuristic reflects common patterns in PTM usage, it should not be interpreted as a universal rule.

These two dependency structures reflect different design goals: interchangeable PTMs offer flexibility and configurability, while complementary PTMs enable functional decomposition and complex, modular architectures. These findings highlight how developers balance flexibility and specialization: interchangeable PTMs allow runtime configurability within a single family, while complementary PTMs enable modular, multi-modal, or cross-stage workflows across families. A comparison of their characteristics is presented in Table 2.

Table 2: Comparison of interchangeable and complementary PTM dependency structures

Aspect	Interchangeable PTMs	Complementary PTMs
Architectural Similarity	Typically from the same base model family (<i>e.g.</i> , CLIP variants, ViT models)	Typically from different families (<i>e.g.</i> , BERT, Wav2Vec2, ResNet); may also differ within a modality
Configuration Differences	Vary in size, tokenizer, or pretraining dataset	Vary in both configuration and architecture, tailored to specific tasks
Modality	Same modality (<i>e.g.</i> , all text, all vision, or all multi-modal)	Same or cross-modality (<i>e.g.</i> , combining text, vision, speech)
Functional Role	Serve the same task; models are used interchangeably	Generally serve distinct functions; models are used jointly to form a complete workflow

PTM Dependency Documentation. Our analysis revealed three high-level PTM dependency patterns. The first pattern is projects with no PTM declarations outside of the source code. The second pattern includes projects with partial or scattered mentions. The third pattern covers projects with explicit and centralized documentation.

Among the projects, 58.9% (236 projects) mention PTMs only in source code and not in configuration or documentation files. Identifying the actual PTM dependencies in these cases requires code analysis, especially for models

loaded dynamically at runtime. Another 20.0% (80 projects) provide partial mentions of PTMs. Figure 7 details this breakdown, showing that 12.0% (48 projects) mention PTMs only in documentation, 3.5% (14 projects) only in configuration files, and 4.5% (18 projects) in both. These mentions are often scattered or informal, such as listing model names without version information or source specification. Only 21.2% (85 projects) explicitly declare all used PTMs in external files. Of these, 15.5% (62 projects) do so only in documentation, 1.5% (6 projects) only in configuration files, and 4.2% (17 projects) in both. Our review also found that even when PTM names are present in configuration files (*e.g.*, YAML or JSON), they rarely include explicit hub information, such as Hugging Face or PyTorch Hub, which limits reproducibility and automation.

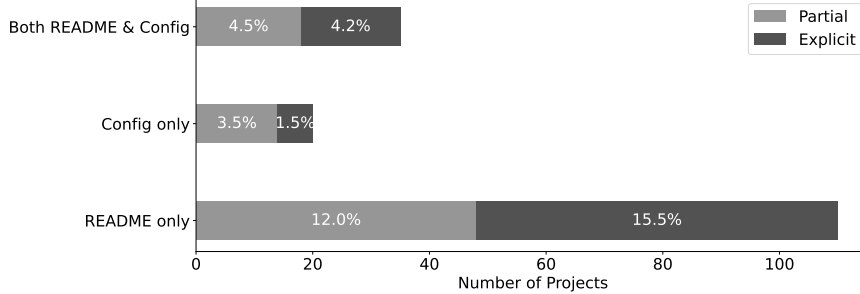


Fig. 7: Breakdown of PTM mentions in projects. Partial mentions refer to projects that mention some PTMs either in documentation or configuration files but not comprehensively. Explicit mentions refer to projects that fully declare all used PTMs in external files. Subcategories show projects documenting PTMs only, configuring PTMs only, or including both, with counts and percentages for each.

Versioning Practices. Version control is critical for ensuring reproducibility, especially as PTMs may evolve over time with updated weights or architecture refinements (Ajibode et al., 2025). However, we find that explicit PTM versioning is rare. Out of 401 projects, only 47 (12%) specify a model version, either via the revision parameter in Hugging Face’s `from_pretrained()` API or a version tag in `torch.hub.load()`. These declarations appear exclusively in code; we did not find any PTM version information in configuration or documentation files. This lack of structured versioning further limits traceability and long-term reliability in PTM-based development. These findings highlight a gap in standardized dependency documentation practices for PTMs and suggest the need for better tools and conventions to promote reproducibility and transparency in ML development.

RQ1: *How do open-source projects structure and document their PTM dependencies?*

Our analysis reveals varied and non-uniform patterns in how projects use and declare dependencies on PTMs. Among the 401 projects studied, 52.6% utilize more than one PTM. Within these multi-PTM projects, some dependencies are interchangeable (37%), allowing one PTM to substitute for another in the workflow, while others are complementary (23%), where PTMs serve distinct functional roles. We also observe inconsistency in dependency declaration practices: PTM references are frequently decentralized, *i.e.*, appearing across source code, documentation, and configuration files (*e.g.*, config.yaml, config.json). Only 21.2% of projects declares all PTMs in a centralized file outside of code. Versioning practices are similarly limited: only 12% specify a model version, typically in code.

4.2 RQ2: *What are the stages and their organization in the pipeline of PTM-based open source projects?*

To answer RQ2, we analyze both the *stages* involved in PTM reuse pipelines and the *organization* of these stages. Our analysis is based on a manual coding of the 401 projects described in §3.2. Specifically, we first identify the sequence of ML stages that involve PTMs, and then examine how these stages are connected to form complete PTM reuse pipelines.

4.2.1 Methodology

Step 1: Stage Identification. Conventional ML pipelines typically follow a data-first sequence, progressing from data acquisition to model building and training (§3). In contrast, PTM reuse pipelines adopt a reuse-first organization: developers often begin by loading external PTMs and adapting them to specific tasks, instead of building and training models from scratch. This shift moves modeling and training away from being central activities and instead emphasizes new tasks such as prompt engineering, adapter integration, fine-tuning, and post-inference handling.

Despite these fundamental differences, the literature lacks a clear definition of PTM reuse as a cohesive pipeline. As outlined in Section 2, we define a PTM reuse pipeline as a structured workflow describing how PTMs are retrieved, adapted, and operationalized. However, the specific stages within such pipelines remain unclear. To address this gap, we conduct a targeted literature review with the specific goal of identifying PTM reuse pipeline stages. Following the principles of systematic mapping studies in software engineering (Biswas et al., 2022), we query academic sources using the search string:

```
("machine learning pipeline" OR "data science workflow"
OR "lifecycle")
```

AND ("pre-trained model" OR "foundation model" OR "large language model")
 AND (published in 2018--2024)

The search is conducted across the following databases: IEEE Xplore, ACM Digital Library, and Google Scholar (queried using the Publish or Perish tool.⁵) After removing duplicates and irrelevant papers based on titles and abstracts, 300 scholarly papers are selected for full-text review.

Our review finds no prior work provides a taxonomy of PTM reuse pipelines or their stages. Most papers describe isolated PTM reuse activities (*e.g.*, fine-tuning, prompt engineering) without situating them in a unified pipeline structure. Based on our analysis, we manually identify a minimal, reusable set of PTM-centric stages that consistently appear across both the literature and open-source projects. We focus specifically on model-level, code-observable practices, and intentionally exclude full-stack, DevOps, or governance frameworks (Fitsilis et al., 2024). Table 3 lists the eight identified stages. Stages such as data processing and post-processing are treated at a coarse level, as their fine-grained substeps (*e.g.*, data acquisition, data preparation) vary widely and are often implicit or domain-specific.

To map these stages to real-world code, we follow an approach inspired by prior ML pipeline analyses (Wang et al., 2021; Biswas et al., 2022), where framework-specific API calls are mapped to conceptual stages. However, because existing taxonomies are not tailored to PTM reuse, we extend this process with open coding to inductively identify new reuse-specific stages based on emerging patterns.

We begin with a preliminary API dictionary constructed from prior literature and enriched with PTM-related frameworks (*e.g.*, Hugging Face, PyTorch). This includes characteristic functions such as `from_pretrained()`, `Trainer.train()`, `evaluate()`, and `predict()`.

Because APIs like `model()` or `forward()` are reused across stages, we resolve ambiguities using contextual cues such as:

- Mode switches (*e.g.*, `model.train()` vs. `model.eval()`),
- Optimization behavior (*e.g.*, presence of `optimizer.step()`),
- Functional use of outputs (*e.g.*, loss computation vs. prediction).

While the first author is primarily responsible for labeling the pipeline stages across all target projects, the two authors participate in multiple rounds of collaborative discussion to refine the stage definitions. To validate the reliability of the coding scheme, we conduct a cross-check by having a third author independently annotate a randomly selected subset of 282 PTMs. This subset is generated using a random sampling approach calculated to achieve a 95% confidence level and a 5% margin of error, ensuring it is statistically representative of the full dataset. The comparison between the two annotators yields an inter-rater agreement score of 0.81, indicating substantial agreement (Viera et al., 2005).

⁵ See <https://harzing.com/resources/publish-or-perish>.

Step 2: Identifying PTM Adaptation Strategies in Practice (for RQ2.1). Because adaptation is a defining feature of PTM reuse, we conduct an in-depth analysis of the strategies developers employ during the Model Adaptation stage of the PTM reuse pipeline. We first extracted the default configurations of the PTMs used in our dataset projects from their official documentation, including (1) Model Architecture: the structural layout, such as layer types and depths, and (2) Parameter Settings: the number of parameters and their default trainable or frozen status. These defaults served as a baseline for the initial state of each PTM before any user intervention. We then compared these defaults to actual usage observed in projects to detect modifications.

Step 3: Categorizing organizations of Stages (for RQ2.2). After identifying the individual stages involved in PTM reuse pipeline (Step 1), we focus on how these stages are structured and interconnected, which we refer to as the *organization* of stages within a pipeline. To characterize these organizations, we analyzed patterns across annotated projects from Step 1, examining both the sequence of stages and the functional role of the PTM at each stage. We iteratively grouped similar workflows and refined our categorization scheme through collaborative discussion, using representative examples from our dataset to guide decisions.

4.2.2 Results

Stages in PTM Reuse Pipelines. From our empirical study of 401 target projects, we derive a representative taxonomy of PTM reuse pipelines consisting of 10 distinct stages, as summarized in Table 3. These stages span the entire lifecycle of PTM integration, from model initialization to downstream delivery, providing a conceptual structure for analyzing PTM reuse practices.

Table 3 shows that while many stages in our taxonomy mirror those in the literature-based taxonomy, our analysis of real-world code surfaced two additional stages:

1. **Evaluation (EVAL)** assesses model outputs systematically using quantitative metrics (*e.g.*, FID score, BLEU, accuracy) or qualitative criteria to measure quality and task alignment. In practice, evaluation is often coupled with *validation testing and feedback loops*, which provide continuous performance checks, guide hyperparameter adjustments, and prevent overfitting during model adaptation.
2. **Delivery (DLV)** provides final outputs via APIs, interfaces, dashboards, or other integration points for practical deployment. It exposes the results of the PTM reuse pipeline via interfaces such as APIs, web dashboards, or other user- or system-facing endpoints. This stage focuses on making the model’s outputs accessible and usable, providing a bridge between the pipeline’s computations and practical consumption.

Table 3: Unified taxonomy of PTM reuse pipeline stages from our empirical study of 401 projects, arranged chronologically from model initialization to final delivery. Stages that differ from or expand on prior literature are highlighted in **bold**, including **Adaptation (ADPT)**, **Prompt Generation (PROM)**, **Post-Processing (POST)**, and the newly surfaced **Evaluation (EVAL)** and **Delivery (DLV)** stages. Literature-based highlights and our taxonomy-based descriptions are provided for each stage.

Stage	Literature Highlights and Notes	Description (Taxonomy)
Model Initialization (INIT)	Loading pretrained weights and architectures from repositories or local storage (Ramachandran, 2023; Ran et al., 2025).	Loads a pretrained model from local storage or external repositories. Restores architecture and parameters for inference or adaptation.
Model Adaptation (ADPT)	Integrating task-specific heads/modules including LoRA (Ramachandran, 2023; Davies et al., 2024).	Adjusts or customizes architecture or parameters without extra training.
Data Processing (PROC)	Preparing inputs (<i>e.g.</i> , normalization). Often coarsened in literature (Amershi et al., 2019; Ran et al., 2025).	Converts raw data into formats compatible with pretrained models, including tokenization, resizing, cleaning, augmentation.
Prompt Generation (PROM)	Crafting prompts—manually or automatically—to guide generative PTMs (Ramachandran, 2023).	Creates prompts manually, templated, or automatically using prompt engineering techniques.
Feature Engineering (FEAT)	Constructing features from raw data. Often bypassed due to pretrained embeddings (Biswas et al., 2022).	Transforms raw data into structured, informative features for retrieval, classification, or other tasks.
Fine-Tuning (FT)	Further training PTMs on labeled or domain-specific data (Ramachandran, 2023; Ran et al., 2025; Davies et al., 2024).	Trains the model on additional labeled data to specialize it for downstream tasks.
Inference (INF)	Running the model on new inputs (<i>e.g.</i> , sequence generation, classification) (Ramachandran, 2023; Xia et al., 2024).	Produces sequences for generative models or class labels/scores for discriminative tasks.
Post-Processing (POST)	Formatting or filtering outputs (<i>e.g.</i> , detokenization, label mapping) (Biswas et al., 2022).	Refines outputs for usability, including filtering, hallucination detection, re-ranking.
Evaluation (EVAL)	–	Assesses outputs using quantitative metrics or qualitative criteria.
Delivery (DLV)	–	Provides outputs via APIs, dashboards, or other integration points.

Table 4: Adaptation strategies for using PTMs. **Addition** and **Deletion** operations are highlighted accordingly.

Adaptation	Description and Example
Using PTM As-Is	The PTM is applied directly to a downstream task without modifications. <i>Example: Using ResNet-50 pretrained on ImageNet for a similar image classification task.</i>
Using PTM Weights	Only the PTM’s weights are used to initialize a different model structure. <i>Example: Loading BERT weights into a variant with an added adapter layer.</i>
Addition	A new prediction head is appended to the base PTM, which remains otherwise unchanged. <i>Example: Adding a classification head on top of BERT for intent recognition.</i>
Deletion	Parts of the PTM are removed to simplify or repurpose the model. Head Deletion Only: Final classifier is removed; the PTM acts as a feature extractor. <i>Example: Using all convolutional layers of ResNet for image retrieval.</i> Head + Layer Deletion: Both the classifier head and some upper layers are removed to reduce depth. <i>Example: Extracting features from early layers of AlexNet for texture matching.</i>
Modification	The final layer is replaced with a task-specific component, LoRA, Prefix tuning, Adapter layers. <i>Example: Substituting BERT’s pooled output head with a regression layer.</i>
Configuration Changes / Optimization	Modifications to dropout, hidden size, or other hyperparameters to improve performance or fit. <i>Example: Adjusting dropout in a BERT variant to better suit low-resource settings.</i>

In addition, several existing stages take on different emphases in practice. For example, **Adaptation** appears prominently in real-world pipelines, encompassing not only the addition of a head but also head replacement, selective layer use, architectural changes, and configuration tweaks (Table 4). Fine-tuning itself spans a spectrum of strategies, from fully updating all parameters to partially freezing layers (*e.g.*, freezing lower-level feature extractors while training the higher-level layers), thereby balancing computational efficiency with task specialization. Likewise, **Prompt Generation** and **Post-Processing** often serve as critical operational stages in generative tasks, with the latter ensuring output quality and safety.

Compared to prior work on traditional ML, foundation models, and large language models (*e.g.*, Ramachandran, 2023; Ran et al., 2025), our taxonomy is model-type-agnostic and captures a broader range of strategies observed in empirical PTM reuse.

Organization of the Stages in PTM Reuse Pipelines. To characterize the structure of pretrained model (PTM) reuse workflows, we identify three

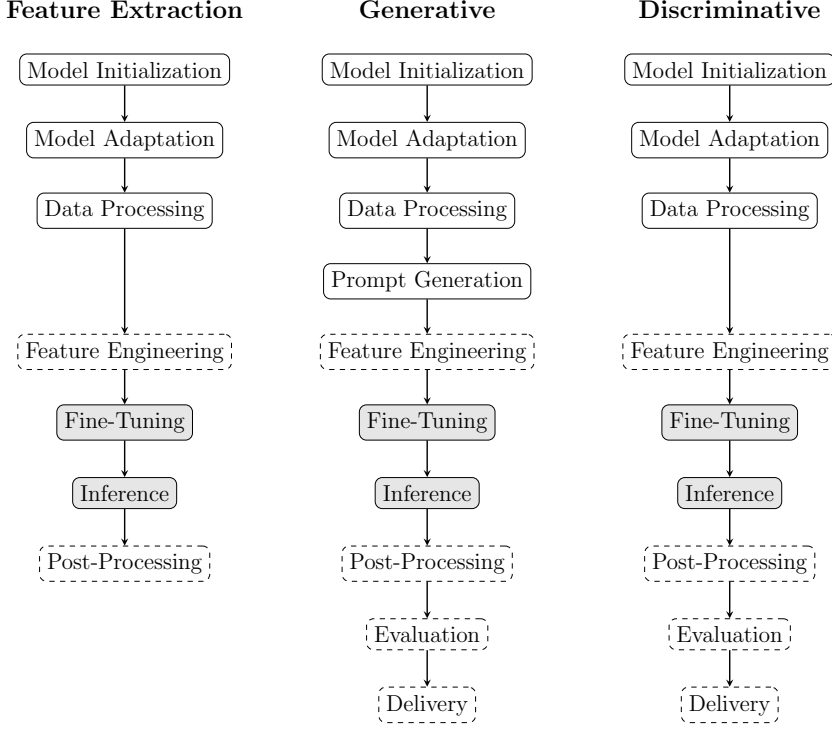


Fig. 8: Visualization of three pipeline organizations for reusing pretrained models. Grey boxes indicate stages common to most pipelines, *i.e.*, Fine-Tuning and Inference. Dashes indicate optional stages.

dominant pipeline organizations based on the functional role of the PTM. These organizations, illustrated in Figure 8, capture whether the PTM is primarily used as a feature extractor, a generative engine, or a discriminative predictor. While many stages (*e.g.*, model initialization, adaptation) appear in pipelines, their function and sequencing differ depending on the intended use of the PTM.

Each pipeline includes at least one of the two stages, *inference* or *fine-tuning*, which may appear independently or together, depending on the level of task alignment required. Inference is the most consistently used stage, appearing in around 75% of pipelines. Some stages (*e.g.*, post-processing, feature engineering) are used selectively, depending on downstream requirements.

The three pipeline organizations are:

1. **Feature Extraction–Oriented Pipeline.** In this organization, the PTM is primarily used for its representational capacity. The pipeline begins with *model initialization and adaptation*, followed by *data processing*. The PTM transforms input data into high-dimensional feature vectors or embeddings, which are consumed by downstream systems (*e.g.*, for clustering, retrieval, ranking). Either *fine-tuning* or direct *inference* may be applied to tailor

the representations to the target task. Optional stages include *feature engineering* and *post-processing*.

2. **Generative-Oriented Pipeline.** This organization centers on generating novel outputs such as text, code, or images. After *model initialization*, *adaptation*, and *data processing*, a defining stage is *prompt generation*, which guides the model’s generative behavior. Depending on the application, the PTM may be used as-is via *inference*, or *fine-tuned* for greater task alignment. *Feature engineering* may be incorporated in hybrid methods (e.g., retrieval-augmented generation). As in other organizations, optional stages such as *post-processing* and *delivery* serve to clean, format, or serve the outputs.
3. **Discriminative-Oriented Pipeline.** This organization is structured for prediction tasks such as classification, regression, or structured prediction. After *model initialization*, *adaptation*, and *data processing*, the PTM is used as a predictive engine. Either *inference* or *fine-tuning* is used to make task-specific predictions. In some cases, lightweight *feature engineering* enhances or augments model outputs. *Post-processing* and *delivery* stages handle formatting, thresholding, or integration into downstream services.

To complement the design-level characterization of reuse interactions, we also quantified the implementation-level organization of reuse pipelines across repositories. On average, a pipeline spans approximately 3.9 relevant source files per repository (median = 2), with each repository containing around 886 lines of relevant code in total (median = 361). Considering only repositories that reference more than one models, this corresponds to roughly 221 lines of code per model on average (median = 174).

RQ2: What are the stages and their organization in the pipeline of PTM-based open source projects?

Our analysis reveals that PTM reuse pipelines follow three dominant organizations: feature extraction, generative, and discriminative. Across all types, inference is the most consistently used stage, underscoring its central role in practical deployments. While some applications adopt minimal adaptation, complex workflows incorporate full-stage pipelines, including data processing, fine-tuning, post-processing, and delivery. The Model Adaptation stage is especially diverse; developers reuse PTMs as-is, initialize with pre-trained weights, add task-specific heads, or selectively modify layers. These patterns demonstrate that PTM reuse is rarely plug-and-play; instead, customization is key to optimizing performance and aligning with task-specific requirements across varied real-world scenarios.

4.3 RQ3: *How do PTMs interact with other learned components?*

4.3.1 Methodology

In RQ3, our goal is to understand how PTMs collaborate with other learned components, *i.e.*, scratch-trained models or additional PTMs, to form learned behaviors within ML-enabled systems. Similar to RQ2, we first conduct a literature review to identify commonly discussed model interaction patterns across deep learning subfields, which forms a theoretical basis for our analysis. Next, we manually examine the 401 target projects and identify 200 that include more than one model; these form the dataset for RQ3. For each selected project, we analyze whether any PTM interacts with other model(s) within its reuse pipeline. We then map the observed interaction patterns to those identified in the literature and extend the taxonomy as novel patterns emerge.

Step 1: Literature Review. We begin by reviewing prior research to understand how model interactions are conceptualized in deep learning literature. Although our interest centers on PTMs, we consider both PTM and non-PTM interactions to develop a holistic view of reusable multi-model patterns.

To collect relevant work, we focus on survey papers because they consolidate canonical design patterns and offer generalized architectural taxonomies, unlike individual empirical studies. Here, we only use Google Scholar because we prioritize popular architectural designs over whether they are published in SE or ML venues. Similar to RQ2, we use the Publish or Perish tool to query Google Scholar with the following search string:

```
("deep learning" OR "large language model" OR "foundation
  model" OR "pre-trained model" OR "pretrained model")
AND "survey"
AND ("interaction" OR "multi-modal" OR "multimodal" OR "multi-model"
  OR "architecture" OR "fusion")
```

This search yields the top 1,000 results ranked by citation count. From these, we select papers according to two criteria: (1) general-domain surveys (*e.g.*, NLP, computer vision, multimodal learning) that describe reusable architectures, and (2) domain-specific surveys (*e.g.*, robotics, medicine) from application areas where deep learning has seen significant adoption. Applying these criteria results in 224 survey papers. Next, we apply adaptive reading (Petersen et al., 2008), following the same approach used in RQ2, examining each survey paper in detail only when necessary to determine whether it explicitly discussed model interactions (*e.g.*, feature fusion, multi-PTM workflows). This process yields a final set of 145 survey papers.

After reviewing the selected papers, we find that model interactions are rarely defined or explicitly discussed in the literature, and that no prior work specifically addresses interactions between PTMs and other models (§2.3). However, many studies implicitly describe recurring, high-level multi-model interaction patterns in their discussions of model design patterns or training

strategies for specific domain applications. From these, we identify two forms of interaction between PTMs and other models:

- **Feature Handoff (FH)**. This interaction occurs when the output of one model, typically a learned representation, is passed to another model for further processing. For instance, vision transformers often rely on convolutional backbones such as ResNet-50 to extract image features, which are then handed off to transformer layers for higher-level interpretation (Khan et al., 2022). Multimodal models frequently encode different modalities (*e.g.*, text and image) using separate specialized components, followed by fusion or decoding layers (Chen et al., 2023; Wang et al., 2024). Similarly, in time series modeling, graph or recurrent encoders produce latent representations that are fed into task-specific heads (Liang et al., 2024).
- **Feedback Guidance (FB)**. This interaction occurs when a model serves as an evaluator during the training stage or fine-tuning of another model. One model’s outputs are assessed using similarity scores or perceptual distances computed by another model, and this signal is used to update the first model. For example, perceptual loss is often computed using pretrained vision networks such as VGG to shape image generation outputs (Ousidi and Elhassouny, 2018). In multimodal generative systems, pretrained embedding models (*e.g.*, CLIP) provide alignment feedback between text prompts and generated images, offering a form of self-supervised guidance without being updated themselves (Li et al., 2024; Zhu et al., 2023).

Step 2: Identify and Categorize Cross-stage Multi-model Interactions. In this step, we examine how the model interactions identified in our literature review are manifested in real-world projects. We focus on detecting interactions between PTMs and other models, either additional PTMs or models trained from scratch, within the same project (§2.3).

From RQ2, we already have PTM reuse pipelines labeled with their functional stages (*e.g.*, feature engineering, inference, fine-tuning). For each labeled PTM reuse pipeline, we further examine whether additional models interact with it. For every identified interaction, we annotate the following:

- *Stage*: The stage(s) at which the interaction occurs (*e.g.*, training, inference, evaluation) within the involved pipelines.
- *Directionality*: Whether data flows into, out of, or through the PTM.
- *Function*: The role of the PTM in the interaction, *e.g.*, providing features or embeddings to another model, or offering evaluative signals for the training of another model.

When interactions occur between two PTMs, the stages of both reuse pipelines are already labeled. However, when an interaction occurs between a PTM and a scratch-trained model, we must label the stage of the conventional ML pipeline (defined in Figure 3) in which the interaction takes place. We apply the same approach used for identifying PTM stages in real-world code, *i.e.*, leveraging ML-related frameworks to map the implementation details to the corresponding stages.

Table 5: Types of model interactions in PTM reuse pipelines. “Evaluation” and “Post-Processing Refinement” represent additions to prior literature.

Category	Description	Frequency
Feature Handoff	One model’s output is passed as structured input to another, forming multi-step pipelines.	42%
Feedback Guidance	A PTM provides evaluative signals (<i>e.g.</i> , CLIP loss) during training of another model.	45%
Evaluation	PTM used only for evaluation or metric computation (<i>e.g.</i> , FID, NER robustness), not during training or inference.	9%
Post-Processing Refinement	A PTM refines or validates the output of another model post-hoc. <i>e.g.</i> , safety checkers on generated images.	4%

For each interaction, we annotate its *Stage*, *Directionality*, and *Function*. While stage and directionality describe the technical flow of data, the function captures the higher-level role of the PTM (*e.g.*, feature provider, evaluator, or refiner). We use function as the primary basis for categorization, resulting in four primary categories (Table 5): Feature Handoff, Feedback Guidance, Evaluation, and Post-Processing Refinement. The first author performs the initial labeling. Ambiguous or novel interaction types are discussed and resolved through consensus among all authors. This process yields a refined taxonomy grounded in real-world OSS practice.

4.3.2 Result

Interaction Types in PTM Reuse Pipeline. Table 5 summarizes the four interaction types identified in the 200 target projects. Feature Handoff and Feedback Guidance are the most common, each accounting for more than 40% of observed examples, while Evaluation and Post-Processing are less frequent. This indicates that PTM reuse in OSS pipelines is dominated by patterns involving either direct feature passing or bidirectional feedback during training. Compared with prior literature, which covers two interaction types without focusing on PTMs, our study identifies four interaction types, two more than previously recognized, and highlights finer-grained cross-stage PTM-specific patterns. Next, we describe the characteristics and provide examples for each category.

Category 1: Feature Handoff. Feature Handoff describes scenarios where the output of a PTM is passed as structured or latent input to another model. A PTM can generate embeddings or intermediate representations through *inference* or *fine-tuning* and pass them to another pipeline’s stage (*e.g.*, *feature engineering*).⁶ For example, a pretrained EfficientNet encoder can provide embeddings to a task-specific model, allowing it to leverage the PTM’s learned features without recomputing them. This hierarchical reuse of pretrained representations enables more efficient computation and integration across pipeline stages. Figure 9 illustrates this setup: output generated by the PTM in its reuse

⁶ For example, see <https://github.com/zhvng/open-musiclm>

pipeline’s *inference* stage is passed (Circle ①) to the *feature engineering* stage of the conventional ML pipeline.

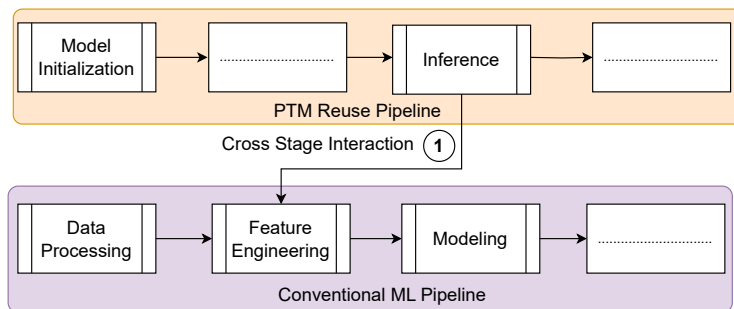


Fig. 9: Feature Handoff: The PTM generates outputs during *inference* and passes them (①) to the *feature engineering* stage of a downstream pipeline, enabling task-specific models to reuse pretrained representations.

Category 2: Feedback Guidance. In this interaction type, a PTM provides supervisory signals to another model during *training* or *fine-tuning*. These signals are often perceptual, semantic, or similarity-based, and are incorporated into custom loss functions to improve task-specific models. For example, a CLIP model computes similarity between text prompts and generated images. This similarity score is used as a perceptual loss to guide the image generator’s training.⁷ The PTM may serve purely as a signal provider (Figure 10) or it may be trainable, with its parameters updated in tandem with those of the target model. In the latter case, a bidirectional feedback loop is formed.

Category 3: Evaluation. In this interaction type, a PTM’s output is employed to assess the quality of another model’s outputs. These interactions typically occur post hoc (at the evaluation stage). The PTM provides objective metrics or diagnostic insights but does not influence model behavior directly. This pattern is common in generative systems. For instance, Inception-v3 and CLIP are often used to compute Fréchet Inception Distance (FID) or CLIP-based similarity scores for evaluating images or text-to-image models. It also appears in NLP applications. For instance, pretrained language models (*e.g.*, GPT) can be used to generate paraphrased or alternative entity descriptions, which are then fed into a named entity recognition (NER) system to test its robustness. These models are not involved in the training or adaptation of the NER model but serve only as tools to generate diverse evaluation inputs.⁸ Figure 11 illustrates a typical setup.

⁷ For example, see <https://github.com/ai-forever/Kandinsky-2>

⁸ For example, see <https://github.com/IBM/zshot>

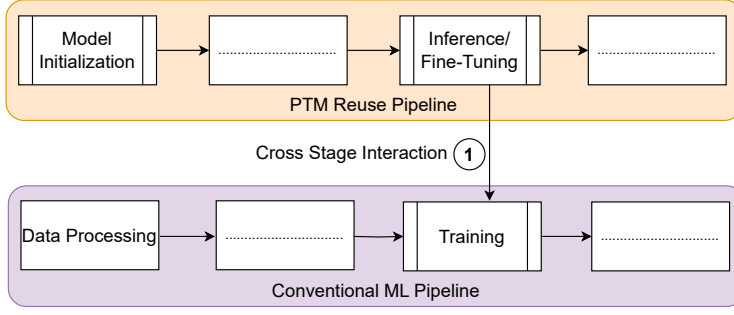


Fig. 10: Feedback Guidance: The PTM performs *inference* to produce outputs that are used to compute a loss, which is then passed ① to another pipeline and used during its *training*.

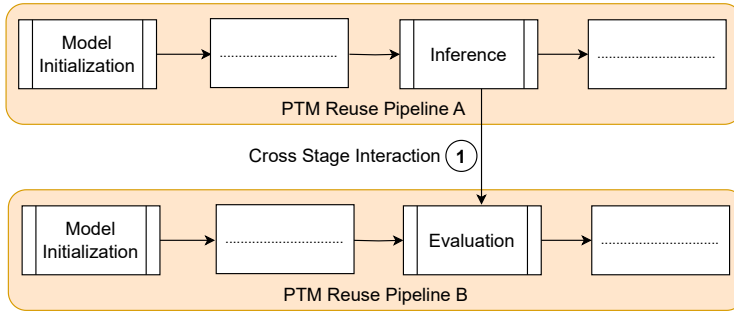


Fig. 11: Post-Processing Refinement: The PTM A performs *inference* to generate outputs that are used (①) to evaluate PTM B’s outputs during its *evaluation* stage.

Category 4: Post-Processing Refinement. In this interaction type, a PTM receives the *original output* from another pipeline and performs inference to filter, rerank, or refine it during that pipeline’s *post-processing stage*. The PTM does not contribute to generation or learning directly but serves as an auxiliary module that improves output quality or safety (Figure 12). A common example is the use of a “safety checker” PTM in Stable Diffusion pipelines, which filters generated images based on content moderation constraints.⁹ Similarly, in image captioning or text generation tasks, pretrained BERT models are sometimes used to rerank multiple candidate outputs based on fluency or semantic consistency.

Structural and Modular Characteristics of Interaction Types. To gain deeper insights and compare the four interaction types, we qualitatively inspect a subset of examples from each category. Specifically, we review 20 Feature Handoff examples, 20 Feedback Guidance examples, 4 Evaluation examples,

⁹ For example, see <https://github.com/IrisRainbowNeko/DreamArtist-stable-diffusion>

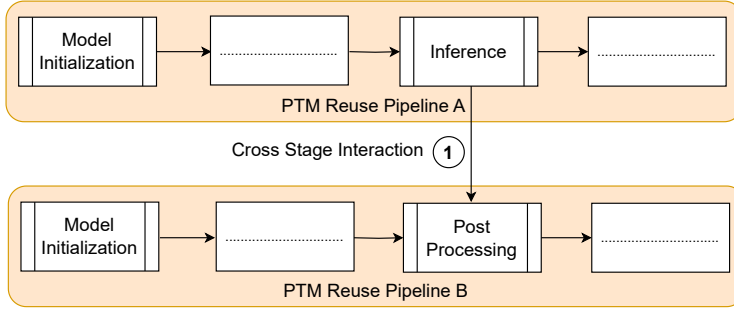


Fig. 12: Post-Processing Refinement. The PTM A performs *inference* to generate outputs that are used (①) to refine PTM B’s outputs during its *postprocessing* stage.

and 4 Post-Processing Refinement examples. We analyzed all categories across three dimensions

- **Graph Structure:** Topological arrangement of models;
- **Interaction Style:** The qualitative form of information exchange (*e.g.*, sequential handoff, feedback loop, or evaluative filtering). While related to stage-level directionality, which specifies whether data flows into, out of, or through a PTM, interaction style provides a higher-level description of the overall pattern.
- **Modularity:** Degree of coupling between models.

These dimensions are chosen because together they capture how models are arranged, how information flows, and how strongly components depend on each other. From this inspection, we observe several key findings. *Feature Handoff*, one of the most structurally diverse categories, can be further subdivided into three structures:

- 1a. Hierarchical Processing** – PTMs stacked as feature extractors and downstream models (*e.g.*, encoder-decoder pipelines);
- 1b. Sequential Processing** – Sequential pipelines where one model’s output feeds into the next (*e.g.*, T2I pipelines, QA systems);
- 1c. Parallel Collaborative Processing** – Multiple PTMs operate in parallel on different modalities or aspects, with outputs fused later (*e.g.*, audio-text fusion).

These structural patterns differ in modularity: hierarchical processing (1a) shows tighter coupling due to stacked components, while sequential (1b) and parallel (1c) setups emphasize clean interfaces or modality-specific branches, promoting modularity. *Feedback Guidance* interactions (Type 2) involve backward-propagated supervisory signals during training, where the PTM may either provide only guidance or be trainable (co-updating with the target model), resulting in stronger coupling and lower modularity. In contrast, *Evaluation* (Type 3) and *Post-Processing* (Type 4) interactions are loosely coupled, operating independently of the core inference flow, making them highly modular

and interchangeable. These findings highlight the functional and structural diversity of pretrained model reuse in OSS pipelines. Table 6 summarizes the structural, interaction style, and modularity characteristics of each type. Overall, these categories capture recurring architectural idioms used by OSS developers and reveal different PTM reuse modalities.

Table 6: Structural, interaction style, and modularity characteristics of multi-model interactions in PTM reuse pipelines. Feature Handoff (Types 1a–1c) exhibits structural diversity, whereas other interaction types follow more consistent patterns.

Interaction Type	Graph Structure	Interaction Style	Modularity
1a. Hierarchical Processing	Stacked modules forming deep pipelines (<i>e.g.</i> , encoder-decoder)	Tightly coupled feature passing across layers	Medium – stages are dependent and can be co-trained
1b. Sequential Processing	Directed acyclic flow across distinct pipeline stages	Stage-wise transformation; downstream consumes upstream output	High – clean interfaces enable reuse
1c. Parallel Collaborative Processing	Independent branches fused at a later stage	Parallel inference with late fusion	High – loosely coupled for multimodal or ensemble use
2. Feedback Guidance	Forward supervisory signals from PTM; optional backward flow if PTM is trainable	Supervisory signals propagate to downstream model during training; gradients may flow back if PTM is trainable	Medium-Low – strong coupling during co-training
3. Evaluation	No runtime coupling; outputs assessed post hoc	Passive metric reporting or evaluation by external module	High – completely decoupled
4. Post-Processing Refinement	Sequential append; refinement of existing outputs	Asymmetric reranking or validation without upstream access	High – plug-in style modules, loosely integrated

RQ3: How do PTMs interact with other learned components?

We identified four types of interaction between PTMs and other learned components. The most prevalent pattern is *Feature Handoff*, where PTMs pass intermediate outputs to another model in hierarchical, sequential, or parallel structures. Additionally, PTMs are used in *Feedback Guidance* roles, providing non-trainable supervisory signals during training, as well as for *Evaluation*, where PTMs act purely as metric calculators for another model. Finally, some PTMs serve in *Post-Processing Refinement*, validating or modifying the outputs of other models. These interactions reveal a rich ecosystem in which multiple models collaborate under different levels of modularity, influencing the ways PTMs are reused.

5 Discussion and Implications

This section reflects on our study’s findings from three perspectives. First, we discuss the broader conceptual implications for software dependencies, highlighting the paradigm shift from Software Dependencies 1.0 to Software Dependencies 2.0. Next, we examine the maintenance challenges that arise from

Table 7: Comparison of Software Dependencies 1.0 (code-centric) and Software Dependencies 2.0 (model-centric, PTMs).

Aspect	Software Dependencies 1.0 (Code-Centric)	Software Dependencies 2.0 (Model-Centric, PTMs)
Dependency Structure	Static, uniform edges; "depends on," captured in manifests (Witern et al., 2016).	Semantic edges; PTM→project (fine-tuning, adapters), PTM↔PTM (hand-off, feedback). Meaning emerges from reuse pipelines and runtime context (§4.2, §4.3).
Ease of Integration	Simple; typically an <code>init()</code> function or small configuration file (Decan et al., 2019).	High configuration cost; involves code API + model artifacts (§4.1), multiple parameters, adapter/head selection (§4.2), and multi-model coordination (§4.3).
Interchangeability & Complementarity	Rigid APIs (Brito et al., 2018); substitution rare.	Substitution feasible within PTM families (§4.1); PTMs often combined across tasks/modalities, generating complex graphs (§4.3).
Behavior	Predictable, deterministic (controlled randomness) (Fowler, 2002).	Context-sensitive, emergent; outcomes shaped by reuse pipelines (§4.2), provenance, and cross-PTM interactions (§4.3).
Risk & Vulnerability	Code-level: CVEs, API breaks, version conflicts (Decan et al., 2019; Sammak et al., 2023).	Model-level: contamination, adversarial risk, unsafe fine-tuning, license conflicts, attack transferability (Vassilev, 2024; Gao et al., 2025).
Traceability	Centralized, explicit manifests (Decan et al., 2019).	Scattered, implicit; often hidden in configurations or runtime; no standard declaration (§4.1).

PTM dependencies, pipeline complexity, and multi-model interactions in ML-enabled systems. Finally, we outline actionable implications for key ML stakeholders, including researchers, developers, PTM hub providers, and MLOps platform providers.

5.1 Software Dependencies 1.0 vs. 2.0

Our analysis highlights a fundamental, qualitative shift between conventional software dependencies (*Software Dependencies 1.0*) and the paradigm of model-centric dependencies (*Software Dependencies 2.0*). Our measurements echo another recent work by Banyongrakkul et al. (2025), which emphasizes that integrating PTMs into downstream applications introduces unique challenges. We believe these challenges arise from a shift from code-centric to model-centric artifacts, motivating our introduction of the term Software Dependencies 2.0. Table 7 summarizes these distinctions based on our findings. While Software Dependencies 1.0 are grounded in code-centric artifacts, the reuse of PTMs in ML-enabled systems introduces model-centric components whose behavior is shaped by the learned PTM, their reuse pipelines and interactions with other

models. This evolution redefines the unit of dependency management from a simple *library + version* to a more complex composite: *model + provenance + reuse pipeline + interaction*.

From Structural Edges to Semantic Edges

In Software Dependencies 1.0, dependency graphs are static and uniform. Nodes represent libraries or packages, and edges denote a simple, purely structural “depends on” relation, typically declared in manifests such as `requirements.txt` or `pom.xml` (Wittern et al., 2016). These edges are context-agnostic: they indicate that one unit cannot compile or run without another, but they do not alter program semantics. The graph’s meaning is fully determined by code and manifests.

By contrast, Software Dependencies 2.0 introduce semantic edges that carry meaning beyond simple structural linkage. For example, `PTM→project` edges can take different forms depending on how the model is used: one edge type denotes that a PTM has been fine-tuned within the reuse pipeline, while another indicates that task-specific heads have been added (Table 4). Similarly, `PTM↔PTM` edges can take different forms depending on the interaction pattern between two models: for example, one edge type denotes the handover of features, while another represents a feedback loop (Table 2). These edges arise from reuse pipelines and runtime configurations, actively shaping system behavior, risks, and reproducibility rather than merely recording dependency existence.

Ease of Integration

In Software Dependencies 1.0, code libraries often require minimal setup, typically a simple `init()` function or a small configuration file. In contrast, Software Dependencies 2.0 involve both code APIs and model artifacts (weights, configurations, adapters, etc.). PTM reuse requires managing multiple parameters, specifying model names with versions (Table 7), selecting heads or adapters, adjusting configurations (Table 4), and coordinating multi-model pipelines (Table 6). This configuration complexity highlights that PTM dependencies are far more complex to integrate than code-centric dependencies.

Interchangeability and Complementarity in PTM Reuse

In Software Dependencies 1.0, code-centric dependencies are largely independent. Substituting one dependency for another is rare (Brito et al., 2018), and combining packages rarely produces emergent behavior. Interactions between dependencies are minimal.

In contrast, Software Dependencies 2.0 exhibit both interchangeability and complementarity in PTM reuse (Table 6). Within the same family (e.g., BERT variants), models can often be substituted with minimal code changes, reflecting a model-level Liskov substitution principle (Liskov and Wing, 1994). At the

same time, PTMs are frequently combined across tasks or modalities, where one model’s output serves as the other’s input (Table 6). These interactions generate complex graphs spanning code, data, and models, highlighting that 2.0 dependencies are qualitatively different from 1.0.

From Functional Interfaces to Behavioral Dynamics

In Software Dependencies 1.0, system behavior is predictable and deterministic, fully determined by code semantics and versioned APIs (Decan et al., 2019; Sammak et al., 2023). Randomness is controlled and reproducible, for example via seeded random number generators.

By comparison, Software Dependencies 2.0 exhibit fluid, context-dependent behavior. Outcomes rely on reuse pipelines (Table 3), fine-tuning, provenance, and interactions with other PTMs (Table 5). Emergent behaviors arise from the combinations of multiple PTMs, producing properties not present in individual models. Correctness, reproducibility, and safety of applications built on PTMs are therefore tied to how dependencies are composed within the ecosystem (Gao et al., 2025).

Beyond Code Vulnerabilities: Model-Specific Risks

This one is our synthesis of other literature, but does not show up in our data. Software Dependencies 1.0 focus on code-level risks such as CVEs, API breaks, and version conflicts. In contrast, Software Dependencies 2.0 introduce model-specific vulnerabilities, such as data contamination, adversarial susceptibility, unsafe fine-tuning, license conflicts (Decan et al., 2019; Sammak et al., 2023), and attack transferability. These risks propagate not only via code but also through reuse pipelines and interaction edges, requiring security analysis that extends to models and their provenance.

Engineering Gaps: Traceability and Management

Traceability in Software Dependencies 1.0 is straightforward: manifests provide explicit, centralized dependency declarations (Decan et al., 2019). By comparison, in Software Dependencies 2.0, PTM usage is often implicit, hidden in configuration files, environment variables, or runtime calls (Figure 7). Model hubs like Hugging Face serve as repositories but do not provide reproducible manifests or resolve a model’s internal dependencies. This opacity presents a pressing challenge for the discovery, governance, and integration of PTM dependencies.

5.2 PTM-Centric Maintenance Challenges in ML-Enabled Systems

While prior work has examined technical debt in ML systems (Sculley et al., 2015; Bogner et al., 2021; Gesi et al., 2022; Recupito et al., 2024), our study

Table 8: Conjectured technical debt in PTM reuse, illustrating maintenance challenges and example patterns observed in our study. These challenges mirror existing software engineering concerns in conventional ML systems, such as configuration sprawl, but extend them in the context of PTM reuse.

Challenge Category	Conventional ML (Prior Work)	PTM Reuse (This Study)
Dependency Management	Undeclared consumer dependencies (Sculley et al., 2015)	Informal PTM linking; missing version identifiers (<i>dependency debt</i>)
	Scattered parameters, configuration sprawl (Bogner et al., 2021)	Uncontrolled distribution of PTM settings (<i>e.g.</i> , model name, version metadata) across files and scripts; absence of centralized tracking (<i>configuration debt</i>)
	Untracked seeds, environment drift (Sculley et al., 2015)	Missing metadata, model versions, or logs of PTM modifications (<i>reproducibility debt</i>)
Adaptation	Data drift, model evolution (Gesi et al., 2022)	Custom model variants (<i>e.g.</i> , head swapping, adapters) without tooling or version tracking (<i>adaptation debt</i>); silent model changes degrading downstream behavior (<i>model drift debt</i>)
Pipeline Complexity	Glue code, pipeline jungle (Sculley et al., 2015; Bogner et al., 2021)	Mixed generative/discriminative stages, diverse pipeline structures (<i>pipeline debt</i>)
Model-Data Entanglement	—	Outputs of one model serve as inputs to another; small changes in output format or content can break interacting pipelines (<i>model-data entanglement</i>)
Multi-Model Coupling	Interface fragility, implicit coupling (Bogner et al., 2021)	PTMs coordinate without clear handoff rules (<i>interaction debt</i>)
Testing and Observability	Limited runtime observability, test brittleness (Recupito et al., 2024)	Missing version-aware validation or debuggable intermediate outputs

highlights new challenges that arise from the shift from training models from scratch to reusing PTMs or combining PTMs with scratch-trained models. In Table 8, we map the challenges categorized in our study to those reported in prior research on technical debt and other engineering challenges in ML-enabled systems. We then elaborate on each challenge category, linking it to our empirical findings.

Dependency Management. Accurate and consistent PTM referencing is essential for effective dependency tracking, especially given that 52.6% of projects

in our dataset utilize multiple PTMs rather than a single one. In practice, however, PTM references are often scattered across source code, documentation, and configuration files, with only 21.2% of projects declaring all PTMs outside the codebase (§4.1). Additionally, only 12% of projects specify the version of PTM. This decentralized and informal linking with missing version identifiers results in incomplete provenance metadata, creating *dependency debt* that complicates the long-term management of model dependencies. PTM reuse also suffers from *configuration debt*, *i.e.*, the uncontrolled scattering of model metadata across multiple scripts, configuration files, and code blocks (§4.1), and from *reproducibility debt*, as downstream behavior can change unexpectedly when upstream models are updated due to the absence of structured metadata such as model names and versions. These findings align with prior work on undeclared consumer dependencies in ML systems (Sculley et al., 2015)

Adaptation. PTM reuse also involves diverse adaptation strategies, such as adding task-specific heads, swapping or pruning layers, and integrating adapters (§4.2). These modifications are frequently performed without formal tooling, documentation, or version tracking, leading to *adaptation debt* that hinders rollback and validation. Silent updates to pretrained models, such as architectural changes or retraining with different data, can further degrade downstream performance over time, resulting in *model drift debt*. Together, these issues underscore that PTM reuse is rarely plug-and-play and requires systematic change management practices.

Pipeline Complexity. PTM reuse pipelines often span multiple stages and can involve several distinct pipelines that interact or overlap, frequently chaining PTMs across feature extraction, generative, and discriminative tasks. Such cross-stage coordination amplifies architectural complexity, producing *pipeline debt*. These pipelines exhibit diverse graph structures, including hierarchical stacks, sequential flows, and parallel branches (Table 6). Hierarchical pipelines create deep, interdependent module chains, sequential pipelines enforce strict stage-wise dependencies, and parallel branches require careful fusion or synchronization of multiple outputs. These structural patterns complicate testing and maintenance, mirroring prior reports of glue code and “pipeline jungles” (Sculley et al., 2015; Bogner et al., 2021), but are further amplified in systems that use PTMs, where models serve simultaneously as data processors and code modules.

Model–Data Entanglement. Multiple forms of interaction between PTMs and other models within ML pipelines—such as feature handoff, feedback, evaluation, and post-processing refinement (§4.3). Downstream data depends directly on the outputs of upstream models. These dependencies create *model–data entanglement*, where minor changes in upstream output structure or content can silently break downstream components.

Multi-Model Coupling. PTMs participate in diverse multi-model coordination patterns with varying graph structures, signal flows, and degrees of modularity (§4.3). Hierarchical feature handoffs exhibit strong coupling; sequential and parallel handoffs are more modular; feedback loops introduce bidirectional dependencies that can erode modularity; and evaluation or post-processing stages remain loosely coupled but often interchangeable. However, these multi-model assemblies are implicit and lack representation schemas, leading to *interaction debt* that reduces composability and hinders safe evolution.

Testing and Observability. While we did not systematically study testing, our analysis suggests that PTM reuse across multiple pipelines (§4.2) and cross-stage interactions (§4.3) exacerbate monitoring and debugging difficulties. Such complexity makes root cause analysis challenging and contributes to a form of technical debt in observability, where multi-pipeline coordination increases brittleness and reduces transparency.

The above maintenance challenges suggest a need to revisit traditional software engineering abstractions, such as modules, interfaces, and configuration boundaries, in the context of PTM-integrated ML systems. PTM reuse pipelines exhibit dynamic integrations that blur boundaries between data, code, and models. These factors challenge established principles of modular design, testing, and interface stability, especially as models evolve outside direct developer control. The rise of multi-model, PTM-based architectures introduces novel sources of complexity, coupling, and debt.

5.3 Implications

Our study of PTM reuse pipelines reveals growing complexity in the engineering of ML-enabled systems that incorporate PTMs. Based on findings from RQ1–RQ3, we outline implications for four key groups: researchers, developers, PTM hub providers, and MLOps platform providers.

Researchers. Our study contributes new knowledge and taxonomies derived from prior literature and qualitative analysis of real-world software projects that reuse PTMs. These findings reveal multiple opportunities for advancing methods and architectures to better support ML-enabled systems in practice.

PTM reuse introduces multiple forms of technical debt (§5.2), including dependency, configuration, adaptation, and pipeline debt. These debts highlight gaps where future SE research can make a tangible impact. One priority is developing robust dependency management approaches tailored for PTMs, such as integrating ML-specific metadata into software bill-of-materials (SBOM) standards (Bennet et al., 2024), enabling traceable records of model versions, fine-tuning settings, and lineage. Standardized model lock files and reproducible build procedures are also critical for supporting reproducibility, vulnerability tracing, and risk assessment (Stalnaker et al., 2025). For Software

Dependencies 2.0, vulnerabilities propagate differently from code flaws (Vasilev, 2024), and current vulnerability databases for models are limited or outdated (MITRE; AVID). Our findings indicate that vulnerabilities or attacks in PTMs can transfer downstream through reuse pipelines and multi-model interactions, highlighting the need for systematic methods to detect, evaluate, and mitigate these risks across cross-stage model pipelines.

Even in traditional systems, dependencies can be nuanced, distinguishing between included, forked, or patched code (Cybersecurity and Infrastructure Security Agency, 2025). PTMs amplify this complexity: fine-tuned or adapted models introduce derived relationships that are not explicitly tracked, creating challenges for provenance, versioning, and reproducibility. This complexity is further illustrated by tools and frameworks (Jiang et al., 2023a; Duan et al., 2024), which attempt to capture lineage and relationships among models. Together, these examples show that while conventional dependencies already involve subtle interconnections, PTM reuse significantly magnifies these challenges, underscoring the need for systematic metadata, tooling, and process support to manage Software Dependencies 2.0.

Another important direction is extending software quality frameworks (Gesi et al., 2022; Studer et al., 2021) to account for the unique PTM lifecycle. Attributes such as fairness, interpretability, and robustness can evolve as PTMs are reused in pipelines (Bender et al., 2021). Systematic measurement and management of these qualities will enable new evaluation methodologies and engineering practices. Additionally, Software Dependencies 2.0 (§4.1) highlights future research opportunities in managing interchangeable and complementary PTM dependencies, including safe model substitution, coordination across heterogeneous models, and designing frameworks that support both substitution and composition in complex pipelines.

Finally, our results suggest complementary opportunities for ML research, including methods for fine-tuning with clear provenance, model-editing strategies, and metrics for multimodel pipeline evaluation. Together, these directions provide an empirically grounded agenda for both SE and ML research communities, promoting more sustainable, reproducible, and trustworthy reuse of pretrained models in software systems. We provide a foundational base, while future work should investigate data-model-code entanglement across cross-stage model interactions.

Future work should also examine PTMs accessed via model-centric platforms (MCPs) (Krishnan, 2025), agent hubs (Ehtesham et al., 2025), and commercial APIs (OpenAI, 2023b). These sources may exhibit different dependency and reuse patterns compared to open-source hubs, and analyzing them could help generalize our findings across broader ML software ecosystems.

Developers. Our analysis highlights maintenance challenges that arise when PTMs are integrated into projects. Developers should adopt structured practices to manage this integration. For dependency tracking and versioning (§4.1), models should be consistently declared, version-pinned, and treated as

evolving software components. Across pipeline stages (§4.2), adaptations such as task-specific head additions or layer modifications should be documented, and automated tools could help generate such documentation (*e.g.*, visualizations of model changes, integration points, and interfaces with other components) based on PTM reuse patterns and source code. Integration tests should be included in CI/CD pipelines to ensure reliability and consistency. For multi-model interactions (§4.3), outputs should be monitored to prevent downstream failures. Standardized tooling for dependency management, pipeline testing, and performance monitoring can further support reproducibility and stability in PTM-based systems.

PTM Hub Providers. Our study highlights gaps in managing Software Dependencies 2.0. Traditional package managers and dependency graphs are insufficient for PTM reuse, and existing PTM “managers”, such as Hugging Face, offer only partial support: they lack standardized manifest files, reproducible builds, and complete visibility into model versions or third-party library dependencies, leaving downstream projects with incomplete dependency information. To help dependency management, (§4.1), hubs can provide immutable, versioned snapshots, structured changelogs, and rich metadata capturing model provenance. RQ2 (§4.2) showed diverse adaptation stages across three pipeline types, emphasizing that PTM reuse is rarely plug-and-play. Hubs can support developers by offering tools to visualize or compare model differences, highlight adaptation changes, and track compatibility across versions, and allow downloads of model components. Integration with CI/CD can help with automated testing of adapted models, dependency checks, and safe deployment of PTM updates. Finally, RQ3 (§4.3) demonstrated frequent cross-stage interactions. Hubs can provide metadata or APIs exposing interaction patterns, helping developers anticipate and manage potential incompatibilities in complex, multi-model pipelines. Together, these observations highlight that dedicated tooling for PTM dependency management should be developed.

MLOps Platform Providers. MLOps systems must become PTM-aware, treating the pipeline itself as a first-class component, extracting, tracking, and validating model metadata during execution—including version, adaptation and fine-tuning history. To manage pipeline complexity (§4.2), platforms can provide metrics for interaction quality, such as reuse intensity, adaptation overlap, and dependency distance. Observability mechanisms help track and validate PTMs within complex pipelines, making it easier to detect issues when models interact or when downstream data depends on upstream outputs (Pineau et al., 2021). Integrating these checks into CI/CD workflows will allow automatic downstream validation whenever a PTM is swapped or updated, supporting more robust and maintainable multi-PTM pipelines and cross-stage interactions (§4.3). Such automated workflow enforcement resonates with challenges reported in Workflows as Code systems, where defining, executing, and monitoring complex pipelines also require systematic observability and validation practices (Yasmin et al., 2024).

6 Threats to Validity

6.1 Construct Validity

Construct validity concerns whether the measurements and procedures used in the study accurately reflect the theoretical concepts being investigated.

In our study, we examine patterns of PTM reuse in open-source software. To represent this concept, we used an existing and previously validated dataset, which includes OSS projects known to incorporate PTMs from Hugging Face and PyTorch Hub. The use of a curated dataset improves construct validity by relying on definitions and inclusion criteria already accepted in the research community.

However, we acknowledge that any dataset, regardless of its acceptance, embeds certain assumptions. For example, it may focus on specific types of PTMs, code structures, or documentation practices, potentially overlooking more implicit or unconventional forms of reuse. While our use of this dataset supports consistency and reproducibility, it may still omit edge cases or emerging practices not captured at the time of its creation.

6.2 Internal Validity

Internal validity refers to the degree to which the observed results can be attributed to the methods used rather than to other factors.

Our study involved a manual analysis of OSS projects from Hugging Face and PyTorch Hubs to identify patterns in PTM usage. To mitigate the risk of sampling bias, we used a systematic sampling strategy from the PeaTMOSS dataset (§3.2), ensuring coverage across multiple domains, languages, and project sizes. Manual annotation introduces the possibility of bias, but we addressed this by employing inter-rater agreement to ensure consistency and reliability in the annotations.

Although `git grep` is a fast and effective way to locate references, it can produce false positives (*e.g.*, matches in comments or unrelated variables) and false negatives (*e.g.*, due to aliasing, indirection, or dynamic constructs) (§3.2). To mitigate these issues, we manually verify matches for correctness and extend our inspection to common usage patterns of PTM loading and related API calls. While this improves coverage, some dynamic or heavily abstracted usages may still be missed, which we acknowledge as a limitation.

6.3 External Validity

External validity concerns the extent to which our findings generalize to other contexts beyond the studied sample.

A primary consideration is our reliance on the PeaTMOSS dataset, which includes OSS projects created up until July 2023, with our analysis based

on the February 2024 snapshot. The dataset predominantly uses PTMs from Hugging Face and PyTorch Hub. While these hubs represent the largest open repositories of PTMs at the time, they do not fully capture the reuse of other important families of models distributed via commercial APIs (*e.g.*, OpenAI, Anthropic) and specialized model registries (*e.g.*, NVIDIA NGC). In particular, our data set underrepresents PTMs that are distributed through closed, commercial, or restricted access registries, which may follow different reuse practices than the open source hubs captured in PeaTMOSS.

We chose PeaTMOSS because it provides a curated, large-scale, and publicly accessible dataset, enabling reproducible analysis. Since PTM technology and usage patterns evolve rapidly—with advances in architecture, training methods, and dependency practices—our findings may become outdated. However, because our study focuses on general patterns of PTM reuse, it is not domain-specific and captures design principles applicable across diverse software projects, making the results broadly generalizable. Future studies should revisit these trends over time and extend the analysis to newer projects, additional domains, and different stages of software development to assess stability and generality.

7 Related Work

The widespread adoption of PTMs has created a complex software ecosystem, which researchers are beginning to analyze as a PTM supply chain (Jiang et al., 2022; Stalnaker et al., 2025), starting from upstream model hubs and packages and extending to their adaptation and integration within downstream software projects. While our work focuses on the downstream side of this chain, we review both perspectives to situate our contribution. We acknowledged some prior work in §2, and revisit relevant lines of research here, focusing first on hub-oriented (“upstream”) perspectives before turning to open-source ML-enabled systems (“downstream”) studies.

7.1 Model Hubs and Upstream Perspectives

A growing body of research examines the distribution, dependencies, and management of PTMs via model hubs, with a focus on the upstream aspects (Jiang et al., 2022; Taraghi et al., 2024; Castano and et al., 2023; Taraghi et al., 2024; Ajibode et al., 2025; Jones et al., 2024). Jiang *et al.* (Jiang et al., 2022, 2024) conducted pioneering work by empirically examining security vulnerabilities in popular model hubs and curating large-scale datasets to enable further research on PTM dependencies. Additional studies have investigated Hugging Face as a central hub, exploring evolution (Castano and et al., 2023), challenges (Taraghi et al., 2024), naming practices (Jiang et al., 2023a), semantic versioning (Ajibode et al., 2025), licensing landscapes (Stalnaker et al., 2025), and systematically comparing qualitative and quantitative characteristics of

PTMs (Jones et al., 2024). Beyond hub-focused research, work has also examined upstream practices at the package level, analyzing how PTLMs are trained, packaged, and released, providing insights into the preparation and dissemination of models before they reach hub platforms (Adekunle et al., 2025).

However, these works primarily focus on upstream packages and hubs and do not investigate downstream source code integration, adaptation, or practical usage within real software projects. Our work addresses this gap by moving beyond hub-centric analysis to empirically characterize downstream PTM reuse patterns, examining how models are integrated, adapted, and interacted with in actual software systems.

7.2 Model Integration in ML-Enabled Systems

Recent research has analyzed integration and usage trends of ML models in open-source systems, often considering all ML models rather than focusing on PTMs (Sens et al., 2024; Nahar et al., 2025). For instance, Sens *et al.* (Sens et al., 2024) analyzed 2,928 ML-enabled systems on GitHub, finding that ML is primarily used for technical tasks rather than end-user functionality. Over half of the projects were ML libraries, with only 18% targeting end users. Extensive model reuse was observed, often via code duplication across repositories, introducing dependency challenges. However, the manual qualitative analysis was limited to 26 sampled systems, restricting the generalizability of insights into model reuse and model interactions. Importantly, the dataset was not curated specifically for PTM reuse. Another study curated 262 open-source ML products and analyzed 30 representative cases (Nahar et al., 2025), revealing distinctive architectural patterns, limited involvement of data scientists, and minimal adherence to best practices such as testing, monitoring, and pipeline automation. While these findings provide insights into production-oriented ML products, they do not focus on PTMs or cross-stage model reuse. Our distinct focus allowed us to examine PTM-specific reuse, addressing gaps in prior work.

A growing line of research has examined the reuse of PTM specifically in downstream software projects (Jiang et al., 2024; Duan et al., 2024; Banyongrakkul et al., 2025). For instance, a recent work has examined PTM reuse specifically in downstream software projects by analyzing GitHub issues and pull requests (Banyongrakkul et al., 2025). The taxonomies derived from this study identified challenges in model usage, adaptation, configuration, and resource management, showing that PTM-related issues take longer to resolve than non-PTM issues. While these studies highlight barriers, they do not capture systematic PTM integration within software systems. Other research has documented metadata for 281,638 PTM packages and 28,575 downstream repositories, including license information, revealing that 0.24% of licenses between PTMs and their dependent projects are inconsistent (Jiang et al., 2024). Tools like ModelGo complement this by assessing license conflicts, improper license choices, and obligations across software, datasets, and PTMs (Duan

et al., 2024). These findings highlight the gaps in understanding downstream adoption and reuse of PTM that we address in this work.

Unlike prior small-scale mixed-model datasets—covering both traditional ML models and PTMs (Sens et al., 2024; Nahar et al., 2025), PeaTMOSS (Jiang et al., 2024) enables detailed analysis of PTM dependencies, supporting structured insights into PTM integration. Based on this dataset, our work aims at PTM-specific reuse, combining large-scale mining with qualitative analysis to systematically categorize reuse types (RQ1), map pipeline stage utilization (RQ2), and investigate cross-stage model interactions (RQ3). This approach fills a critical gap in the literature by focusing exclusively on PTM reuse, rather than general ML model usage, offering actionable insights for improving reproducibility, maintainability, and design of ML-enabled systems.

Recent work on the LLM supply chain highlights the downstream application ecosystem as a critical stage where pre-trained models are operationalized in real-world applications (Wang et al., 2025; Hu et al., 2025). While these contributions provide conceptual insights, they remain largely visionary and non-empirical. In contrast, our work focuses on systematic, empirical analysis of PTM reuse and integration in downstream software projects, addressing real-world adoption patterns, pipeline stage usage, and cross-stage model dependencies, thereby complementing and grounding the conceptual findings in prior LLM supply chain research.

8 Conclusion

This study provides the first large-scale empirical characterization of pre-trained models (PTMs) as a new form of software dependency, which we term **Software Dependencies 2.0**. By analyzing a representative sample of 401 GitHub projects, we examined how PTMs are managed and integrated into real-world software. Our results show that PTM dependencies are often inconsistently specified across code, documentation, and configuration files, and adaptation is common, ranging from as-is reuse to architectural modification. We identified three dominant PTM reuse pipeline types—feature extraction, generative, and discriminative—and observed frequent interactions among PTMs and with other models, introducing significant architectural complexity.

These findings highlight the technical challenges of managing Software Dependencies 2.0, including maintainability, reproducibility, and system reliability. By conceptualizing PTMs as first-class, modular components, our work informs the development of improved tools, standards, and best practices to support reliable integration and long-term maintenance. Future research should investigate automated support for PTM dependency management, examine reuse and adaptation in industrial-scale ML systems, and further explore multi-model interactions to advance understanding and engineering of Software Dependencies 2.0.

9 Data Availability

Our artifact is publicly available at <https://github.com/RISElabQueens/PTMReuseInOSS>. It contains the dataset of PTM usage with annotated labels and scripts for analysis, figures and plots.

Acknowledgement

We acknowledge the support of the Natural Sciences and Engineering Research Council of Canada (NSERC) [funding reference number: RGPIN-2019-05071] and a gift from Socket, Inc.

References

- Abdel-Hamid, O., Mohamed, A.r., Jiang, H., Deng, L., Penn, G., Yu, D., 2014. Convolutional neural networks for speech recognition. *IEEE/ACM Transactions on audio, speech, and language processing* 22, 1533–1545.
- Adekunle, A., Bangash, A.A., Adams, B., Hassan, A.E., 2025. On the synchronization between hugging face pre-trained language models and their upstream github repository. *arXiv preprint arXiv:2508.10157* .
- Ajibode, A., Bangash, A.A., Cogo, F.R., Adams, B., Hassan, A.E., 2025. Towards semantic versioning of open pre-trained language model releases on hugging face. *Empirical Software Engineering* 30, 1–63.
- Ale, N.K., Yarram, R., 2024. Enhancing test automation with deep learning: Techniques, challenges and future prospects, in: *CS & IT Conference Proceedings*, CS & IT Conference Proceedings.
- Amershi, S., Begel, A., Bird, C., DeLine, R., Gall, H., Kamar, E., Nagappan, N., Nushi, B., Zimmermann, T., 2019. Software engineering for machine learning: A case study, in: *2019 IEEE/ACM 41st International Conference on Software Engineering: Software Engineering in Practice (ICSE-SEIP)*, IEEE. pp. 291–300.
- AVID, . Avidml: Ai vulnerability database. <https://avidml.org/>. Last updated 2023, Accessed: 2025-08-31.
- Banyongrakkul, P., Zahedi, M., Thongtanunam, P., Treude, C., Gao, H., 2025. From release to adoption: Challenges in reusing pre-trained ai models for downstream developers. *arXiv preprint arXiv:2506.23234* .
- Bender, E.M., Gebru, T., McMillan-Major, A., Shmitchell, S., 2021. On the dangers of stochastic parrots: Can language models be too big?, in: *Proceedings of the 2021 ACM conference on fairness, accountability, and transparency*, pp. 610–623.
- Bennet, K., Krishnan Rajbahadur, G., Suriyawongkul, A., Stewart, K., 2024. Implementing AI Bill of Materials (AI BOM) with SPDX 3.0: A Comprehensive Guide to Creating AI and Dataset Bill of Materials. URL: <http://dx.doi.org/10.70828/RNED4427>, doi:10.70828/rned4427.
- Biswas, S., Wardat, M., Rajan, H., 2022. The art and practice of data science pipelines: A comprehensive study of data science pipelines in theory, in-the-small, and in-the-large, in: *Proceedings of the 44th International Conference on Software Engineering*, pp. 2091–2103.
- Bogner, J., Verdecchia, R., Gerostathopoulos, I., 2021. Characterizing technical debt and antipatterns in ai-based systems: A systematic mapping study, in: *2021 IEEE/ACM International Conference on Technical Debt (TechDebt)*, IEEE. pp. 64–73.
- Bommasani, R., Hudson, D.A., Adeli, E., et al., 2021. On the opportunities and risks of foundation models. *arXiv preprint arXiv:2108.07258* .
- Borges, H., Valente, M.T., 2018. What’s in a github star? understanding repository starring practices in a social coding platform. *Journal of Systems and Software* 146, 112–129.

- Brito, A., Xavier, L., Hora, A., Valente, M.T., 2018. Why and how java developers break apis, in: 2018 IEEE 25th International Conference on Software Analysis, Evolution and Reengineering (SANER), IEEE. pp. 255–265.
- Brown, T., et al., 2020. Language models are few-shot learners. *NeurIPS* .
- Castano, F., et al., 2023. Model hubs and reusable pretrained models: Challenges and opportunities. *IEEE Transactions on Software Engineering* .
- Castano, J., Martínez-Fernández, S., Franch, X., Bogner, J., 2023. Exploring the carbon footprint of hugging face’s ml models: A repository mining study, in: 2023 ACM/IEEE International Symposium on Empirical Software Engineering and Measurement (ESEM), IEEE. pp. 1–12.
- Chen, A., Liu, Y., Sun, Q., et al., 2023. A survey of multimodal large language models. *arXiv preprint arXiv:2311.03907* .
- Chen, X., Hu, X., Huang, Y., Jiang, H., Ji, W., Jiang, Y., Jiang, Y., Liu, B., Liu, H., Li, X., et al., 2025. Deep learning-based software engineering: progress, challenges, and opportunities. *Science China Information Sciences* 68, 111102.
- Clements, P.C., Northrop, L., 2002. *Software product lines*. Addison-wesley.
- Collobert, R., Weston, J., 2008. A unified architecture for natural language processing: Deep neural networks with multitask learning, in: *Proceedings of the 25th International Conference on Machine Learning*, pp. 160–167.
- Cybersecurity and Infrastructure Security Agency, 2025. 2025 minimum elements for a software bill of materials (sbom) public comment draft. <https://www.cisa.gov/resources-tools/resources/2025-minimum-elements-software-bill-materials-sbom>. U.S. Department of Homeland Security.
- Davies, A., Nguyen, E., Simeone, M., Johnston, E., Gubri, M., 2024. Social science is necessary for operationalizing socially responsible foundation models. *arXiv preprint arXiv:2412.16355* .
- Decan, A., Mens, T., Grosjean, P., 2019. An empirical comparison of dependency network evolution in seven software packaging ecosystems. *Empirical Software Engineering* 24, 381–416.
- Duan, M., Li, Q., He, B., 2024. Modelgo: A practical tool for machine learning license analysis, in: *Proceedings of the ACM Web Conference 2024*, pp. 1158–1169.
- Ehtesham, A., Singh, A., Gupta, G.K., Kumar, S., 2025. A survey of agent interoperability protocols: Model context protocol (mcp), agent communication protocol (acp), agent-to-agent protocol (a2a), and agent network protocol (anp). *arXiv preprint arXiv:2505.02279* .
- Fitsilis, P., Damasiotis, V., Kyriatzis, V., Tsoutsas, P., 2024. Dollmc: Devops for large language model customization. *arXiv preprint arXiv:2405.11581* .
- Fowler, M., 2002. *Patterns of Enterprise Application Architecture*. Addison-Wesley Professional, Boston, MA.
- Gaikwad, S.K., Gawali, B.W., Yannawar, P., 2010. A review on speech recognition technique. *International Journal of Computer Applications* 10, 16–24.
- Gao, H., Zahedi, M., Jiang, W., Lin, H.Y., Davis, J., Treude, C., 2025. Ai safety in the eyes of the downstream developer: A first look at concerns,

- practices, and challenges. arXiv preprint arXiv:2503.19444 .
- Garlan, D., 2000. Software architecture: a roadmap, in: Proceedings of the Conference on the Future of Software Engineering, pp. 91–101.
- Geiping, J., Goldstein, T., 2023. Cramming: Training a language model on a single gpu in one day, in: International Conference on Machine Learning, pp. 11117–11143.
- Gesi, J., Liu, S., Li, J., Ahmed, I., Nagappan, N., Lo, D., de Almeida, E.S., Kochhar, P.S., Bao, L., 2022. Code smells in machine learning systems. arXiv preprint arXiv:2203.00803 .
- González, A., Franch, X., Lo, D., Martínez-Fernández, S., 2025. How do pre-trained models support software engineering? an empirical study in hugging face. arXiv preprint arXiv:2506.03013 .
- Grand View Research, Inc., 2025. Artificial intelligence market to reach \$1,811.75 billion by 2030. Press release, Grand View Research, Inc. Retrieved from Grand View Research website.
- Guo, S., Xie, C., Li, J., Lyu, L., Zhang, T., 2022. Threats to pre-trained language models: Survey and taxonomy. arXiv preprint arXiv:2202.06862 .
- Han, J., Deng, S., Xia, X., Wang, D., Yin, J., 2019. Characterization and prediction of popular projects on github, in: 2019 IEEE 43rd annual computer software and applications conference (COMPSAC), IEEE. pp. 21–26.
- Han, X., Zhang, Z., Ding, N., Gu, Y., Liu, X., Huo, Y., Qiu, J., Yao, Y., Zhang, A., Zhang, L., et al., 2021. Pre-trained models: Past, present and future. *AI Open* 2, 225–250.
- Hao, W., Mendoza, D., Da Silva, R., Narayanan, D., Phanishaye, A., 2023. Mgit: A model versioning and management system. arXiv preprint arXiv:2307.07507 .
- He, H., Yang, H., Burckhardt, P., Kapravelos, A., Vasilescu, B., Kästner, C., 2024. 4.5 million (suspected) fake stars in github: A growing spiral of popularity contests, scams, and malware. arXiv preprint arXiv:2412.13459 .
- Hu, Q., Xie, X., Chen, S., Quan, L., Ma, L., 2025. Large language model supply chain: Open problems from the security perspective, in: Proceedings of the 34th ACM SIGSOFT International Symposium on Software Testing and Analysis, pp. 169–173.
- Hugging Face, 2021. Hugging face - the ai community building the future. URL: <https://huggingface.co>.
- Hugging Face, 2024. Open source ai year in review 2024. <https://huggingface.co/spaces/huggingface/open-source-ai-year-in-review-2024?day=4>. Accessed: 2025-08-12.
- Jiang, W., Cheung, C., Kim, M., Kim, H., Thiruvathukal, G.K., Davis, J.C., 2023a. Naming practices of pre-trained models in hugging face. arXiv preprint arXiv:2310.01642 .
- Jiang, W., Kim, M., Cheung, C., Kim, H., Thiruvathukal, G.K., Davis, J.C., 2025. “i see models being a whole other thing”: an empirical study of pre-trained model naming conventions and a tool for enhancing naming consistency. *Empirical Software Engineering* 30, 1–62.

- Jiang, W., Synovic, N., Hyatt, M., Schorlemmer, T.R., Sethi, R., Lu, Y.H., Thiruvathukal, G.K., Davis, J.C., 2023b. An empirical study of pre-trained model reuse in the hugging face deep learning model registry, in: 2023 IEEE/ACM 45th International Conference on Software Engineering (ICSE), IEEE. pp. 2463–2475.
- Jiang, W., Synovic, N., Sethi, R., Indarapu, A., Hyatt, M., Schorlemmer, T.R., Thiruvathukal, G.K., Davis, J.C., 2022. An empirical study of artifacts and security risks in the pre-trained model supply chain, in: Proceedings of the 2022 ACM Workshop on Software Supply Chain Offensive Research and Ecosystem Defenses, pp. 105–114.
- Jiang, W., Yasmin, J., Jones, J., Synovic, N., Kuo, J., Bielanski, N., Tian, Y., Thiruvathukal, G.K., Davis, J.C., 2024. Peatmoss: A dataset and initial analysis of pre-trained models in open-source software, in: 2024 IEEE/ACM 21st International Conference on Mining Software Repositories (MSR), IEEE. pp. 431–443.
- Jones, J., Jiang, W., Synovic, N., Thiruvathukal, G., Davis, J., 2024. What do we know about hugging face? a systematic literature review and quantitative validation of qualitative claims, in: Proceedings of the 18th ACM/IEEE international symposium on empirical software engineering and measurement, pp. 13–24.
- Karpathy, A., 2017. Software 2.0. <https://karpathy.medium.com/software-2-0-a64152b37c35>. Accessed: 2025-08-22.
- Kathikar, A., Nair, A., Lazarine, B., Sachdeva, A., Samtani, S., 2023. Assessing the vulnerabilities of the open-source artificial intelligence (ai) landscape: A large-scale analysis of the hugging face platform, in: 2023 IEEE International Conference on Intelligence and Security Informatics (ISI), IEEE. pp. 1–6.
- Khan, S., Naseer, M., Hayat, M., et al., 2022. Transformers in vision: A survey. *ACM Computing Surveys (CSUR)* .
- Krishnan, N., 2025. Advancing multi-agent systems through model context protocol: Architecture, implementation, and applications. *arXiv preprint arXiv:2504.21030* .
- Le, T.H., Chen, H., Babar, M.A., 2020. Deep learning for source code modeling and generation: Models, applications, and challenges. *ACM Computing Surveys (CSUR)* 53, 1–38.
- Li, Y., Chen, H., Zhao, J., et al., 2024. A complete survey on generative ai (aigc): Is chatgpt from gpt-4 to gpt-5 all you need? *arXiv preprint arXiv:2401.04763* .
- Liang, Y., Wen, H., Nie, Y., Jiang, Y., Jin, M., Song, D., Pan, S., Wen, Q., 2024. Foundation models for time series analysis: A tutorial and survey, in: Proceedings of the 30th ACM SIGKDD conference on knowledge discovery and data mining, pp. 6555–6565.
- Liskov, B.H., Wing, J.M., 1994. A behavioral notion of subtyping. *ACM Transactions on Programming Languages and Systems (TOPLAS)* 16, 1811–1841.
- Liu, Y., Ott, M., Goyal, N., Du, J., Joshi, M., Chen, D., Levy, O., Lewis, M., Zettlemoyer, L., Stoyanov, V., 2019. Roberta: A robustly optimized bert

- pretraining approach. arXiv preprint arXiv:1907.11692 .
- Marcelino, P., 2018. Transfer learning from pre-trained models. *Towards data science* 10, 23.
- Mitchell, M., Wu, S., Zaldivar, A., Barnes, P., Vasserman, L., Hutchinson, B., Spitzer, E., Raji, I.D., Gebru, T., 2019. Model cards for model reporting, in: *Proceedings of the Conference on Fairness, Accountability, and Transparency*, pp. 220–229.
- MITRE, . Mitre att&ck for ai. <https://attack.mitre.org/>. Accessed: 2025-08-31.
- Nahar, N., Zhang, H., Lewis, G., Zhou, S., Kastner, C., 2025. The Product Beyond the Model - An Empirical Study of Repositories of Open-Source ML Products, in: *2025 IEEE/ACM 47th International Conference on Software Engineering (ICSE)*, IEEE Computer Society, Los Alamitos, CA, USA. pp. 1540–1552. URL: <https://doi.ieeecomputersociety.org/10.1109/ICSE55347.2025.00006>, doi:10.1109/ICSE55347.2025.00006.
- Nakano, R., Hilton, J., Balaji, S., Wu, J., Long, O., Kim, C., Hesse, C., Jain, S., Kosaraju, V., Saunders, W., Jiang, X., Cobbe, K., Eloundou, T., Krueger, G., Button, K., Knight, M., Chess, B., Schulman, J., 2021. Webgpt: Browser-assisted question-answering with human feedback. *ArXiv abs/2112.09332*. URL: <https://api.semanticscholar.org/CorpusID:245329531>.
- Namysl, M., Konya, I., 2019. Efficient, lexicon-free ocr using deep learning, in: *2019 International Conference on Document Analysis and Recognition (ICDAR)*, IEEE. pp. 295–301.
- Narayanan, D., Harlap, A., Phanishayee, A., Seshadri, V., Devanur, N.R., Ganger, G.R., Gibbons, P.B., Zaharia, M., 2019. Pipedream: Generalized pipeline parallelism for dnn training, in: *Proceedings of the 27th ACM symposium on operating systems principles*, pp. 1–15.
- Nassif, A.B., Shahin, I., Attili, I., Azzeh, M., Shaalan, K., 2019. Speech recognition using deep neural networks: A systematic review. *IEEE access* 7, 19143–19165.
- NVIDIA, 2023. Ngc catalog - gpu-optimized ai, machine learning, & hpc software. <https://catalog.ngc.nvidia.com>.
- Okafor, C., Schorlemmer, T.R., Torres-Arias, S., Davis, J.C., 2022. Sok: Analysis of software supply chain security by establishing secure design properties, in: *Proceedings of the 2022 ACM Workshop on Software Supply Chain Offensive Research and Ecosystem Defenses*, pp. 15–24.
- OpenAI, 2023a. GPT-4 Technical Report. Technical Report. OpenAI. <https://openai.com/research/gpt-4>.
- OpenAI, 2023b. Gpt-4 technical report. arXiv preprint arXiv:2303.08774 .
- Oussidi, A., Elhassouny, A., 2018. Deep generative models: Survey, in: *2018 International conference on intelligent systems and computer vision (ISCV)*, IEEE. pp. 1–8.
- Pashchenko, I., Vu, D.L., Massacci, F., 2020. A qualitative study of dependency management and its security implications, in: *Proceedings of the 2020 ACM SIGSAC conference on computer and communications security*, pp. 1513–1531.

- Peng, Z., Yang, J., Chen, T.H., Ma, L., 2020. A first look at the integration of machine learning models in complex autonomous driving systems: a case study on apollo, in: Proceedings of the 28th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering, pp. 1240–1250.
- Petersen, K., Feldt, R., Mujtaba, S., Mattsson, M., 2008. Systematic mapping studies in software engineering, in: 12th international conference on evaluation and assessment in software engineering (EASE), BCS Learning & Development.
- Pineau, J., Vincent-Lamarre, P., Sinha, K., Larivière, V., Beygelzimer, A., d'Alché Buc, F., Fox, E., Larochelle, H., 2021. Improving reproducibility in machine learning research (a report from the neurips 2019 reproducibility program). *Journal of machine learning research* 22, 1–20.
- PyTorch, 2023. Pytorch hub. URL: <https://pytorch.org/hub/>.
- Qualcomm, 2023. Qualcomm ai hub - the platform for on-device ai. <https://aihub.qualcomm.com/>.
- Ramachandran, R., 2023. Will ai foundation models transform scientific research?, in: FBI Data Analytics Support Hub (DASH) Conference.
- Ran, D., Wu, M., Yang, W., Xie, T., 2025. Foundation model engineering: engineering foundation models just as engineering software. *ACM Transactions on Software Engineering and Methodology* 34, 1–18.
- Recupito, G., Pecorelli, F., Catolino, G., Lenarduzzi, V., Taibi, D., Di Nucci, D., Palomba, F., 2024. Technical debt in ai-enabled systems: On the prevalence, severity, impact, and management strategies for code and architecture. *Journal of Systems and Software* 216, 112151.
- Rombach, R., Blattmann, A., Lorenz, D., Esser, P., Ommer, B., 2022a. High-resolution image synthesis with latent diffusion models. *CVPR* .
- Rombach, R., et al., 2022b. High-resolution image synthesis with latent diffusion models. *CVPR* .
- Sammak, R., Rotthaler, A.L., Ramulu, H.S., Wermke, D., Acar, Y., 2023. Developers' approaches to software supply chain security: An interview study, in: Proceedings of the 2024 Workshop on Software Supply Chain Offensive Research and Ecosystem Defenses, pp. 56–66.
- Sanh, V., Debut, L., Chaumond, J., Wolf, T., 2019. Distilbert, a distilled version of bert: smaller, faster, cheaper and lighter. *arXiv preprint arXiv:1910.01108* .
- Sculley, D., Holt, G., Golovin, D., Davydov, E., Phillips, T., Ebner, D., Chaudhary, V., Young, M., Crespo, J.F., Dennison, D., 2015. Hidden technical debt in machine learning systems. *Advances in Neural Information Processing Systems* 28.
- Seaman, C.B., 1999. Qualitative methods in empirical studies of software engineering. *IEEE Transactions on software engineering* 25, 557–572.
- Sens, Y., Knopp, H., Peldszus, S., Berger, T., 2024. A large-scale study of model integration in ml-enabled software systems. *arXiv preprint arXiv:2408.06226* .

- Shaw, M., Garlan, D., 1996. Software architecture: Perspectives on an emerging discipline. Prentice-Hall .
- Sonatype, Inc., 2024. 10th Annual State of the Software Supply Chain Report. URL: <https://www.sonatype.com/state-of-the-software-supply-chain/introduction>. open source components now comprise up to 90% of a modern software application.
- Stalnaker, T., Wintersgill, N., Chaparro, O., Heymann, L.A., Di Penta, M., German, D.M., Poshyvanyk, D., 2025. The ml supply chain in the era of software 2.0: Lessons learned from hugging face. arXiv preprint arXiv:2502.04484 .
- Studer, S., Bui, T.B., Drescher, C., Hanuschkin, A., Winkler, L., Peters, S., Müller, K.R., 2021. Towards crisp-ml (q): a machine learning process model with quality assurance methodology. Machine learning and knowledge extraction 3, 392–413.
- Taraghi, M., Dorcelus, G., Foundjem, A., Tambon, F., Khomh, F., 2024. Deep learning model reuse in the huggingface community: Challenges, benefit and trends, in: 2024 IEEE International Conference on Software Analysis, Evolution and Reengineering (SANER), IEEE. pp. 512–523.
- Vassilev, A., 2024. Ai risk and threat taxonomy. https://csrc.nist.gov/csrc/media/Presentations/2024/ai-risk-and-threat-taxonomy/Vassilev-Day1-AI_Risk_and_Threat_Taxonomy.pdf. Accessed: 2025-08-31.
- Viera, A.J., Garrett, J.M., et al., 2005. Understanding interobserver agreement: the kappa statistic. Fam med 37, 360–363.
- Wang, J., Li, L., Zeller, A., 2021. Restoring execution environments of jupyter notebooks, in: 2021 IEEE/ACM 43rd International Conference on Software Engineering (ICSE), IEEE. pp. 1622–1633.
- Wang, S., Zhao, Y., Hou, X., Wang, H., 2025. Large language model supply chain: A research agenda. ACM Transactions on Software Engineering and Methodology 34, 1–46.
- Wang, Y., Zhang, X., et al., 2024. A comprehensive survey on deep learning multi-modal fusion. Information Fusion .
- Wittern, E., Suter, P., Rajagopalan, S., 2016. A look at the dynamics of the javascript package ecosystem, in: Proceedings of the 13th international conference on mining software repositories, pp. 351–361.
- Xia, B., Lu, Q., Zhu, L., Lee, S.U., Liu, Y., Xing, Z., 2024. Towards a responsible ai metrics catalogue: A collection of metrics for ai accountability, in: Proceedings of the IEEE/ACM 3rd International Conference on AI Engineering-Software Engineering for AI, pp. 100–111.
- Yasmin, J., Wang, J., Tian, Y., Adams, B., 2024. An empirical study of developers’ challenges in implementing workflows as code: A case study on apache airflow. arxiv abs/2406.00180 (2024).
- Yin, Y., Zhang, W., Hong, S., Yang, J., Xiong, J., Gui, G., 2019. Deep learning-aided ocr techniques for chinese uppercase characters in the application of internet of things. IEEE Access 7, 47043–47049.

-
- Zhou, Y., 2022. Natural language processing with improved deep learning neural networks. *Scientific Programming* 2022, 6028693.
- Zhu, J., et al., 2023. Multimodal image synthesis and editing: A survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence* .