

Large Language Models as Virtual Survey Respondents: Evaluating Sociodemographic Response Generation

JIANPENG ZHAO, University of Macau, China

CHENYU YUAN, University of Macau, China

WEIMING LUO, University of Macau, China

HAOLING XIE, The Chinese University of Hong Kong, China

GUANGWEI ZHANG, City University of Hong Kong, China

STEVEN JIGE QUAN, Seoul National University, South Korea

ZIXUAN YUAN, The Hong Kong University of Science and Technology (Guangzhou), China

PENGYANG WANG, University of Macau, China

DENGHUI ZHANG, Stevens Institute of Technology, USA

Questionnaire-based surveys are foundational to social science research and public policymaking, yet traditional survey methods remain costly, time-consuming, and often limited in scale. This paper explores a new paradigm: simulating virtual survey respondents using Large Language Models (LLMs). We introduce two novel simulation settings, namely Partial Attribute Simulation (PAS) and Full Attribute Simulation (FAS), to systematically evaluate the ability of LLMs to generate accurate and demographically coherent responses. In PAS, the model predicts missing attributes based on partial respondent profiles, whereas FAS involves generating complete synthetic datasets under both zero-context and context-enhanced conditions. We curate a comprehensive benchmark suite, **LLM-S³** (Large Language Model-based Sociodemographic Survey Simulation), that spans 11 real-world public datasets across four sociological domains. Our evaluation of multiple mainstream LLMs (GPT-3.5/4 Turbo, LLaMA 3.0/3.1-8B) reveals consistent trends in prediction performance, highlights failure modes, and demonstrates how context and prompt design impact simulation fidelity. This work establishes a rigorous foundation for LLM-driven survey simulations, offering scalable and cost-effective tools for sociological research and policy evaluation. Our code and dataset are available at: <https://github.com/dart-lab-research/LLM-S-Cube-Benchmark>.

CCS Concepts: • **Applied computing** → **Sociology**; • **Computing methodologies** → **Simulation evaluation**.

Additional Key Words and Phrases: Large Language Model, Survey Simulation, Sociodemographic

ACM Reference Format:

Jianpeng Zhao, Chenyu Yuan, Weiming Luo, Haoling Xie, Guangwei Zhang, Steven Jige Quan, Zixuan Yuan, Pengyang Wang, and Denghui Zhang. 2018. Large Language Models as Virtual Survey Respondents: Evaluating Sociodemographic Response Generation.

Authors' Contact Information: Jianpeng Zhao, University of Macau, Macau, China, zhaopianpengcs@gmail.com; Chenyu Yuan, University of Macau, Macau, China; Weiming Luo, University of Macau, Macau, China; Haoling Xie, The Chinese University of Hong Kong, Hong Kong, China; Guangwei Zhang, City University of Hong Kong, Hong Kong, China; Steven Jige Quan, Seoul National University, Seoul, South Korea; Zixuan Yuan, The Hong Kong University of Science and Technology (Guangzhou), Guangzhou, Guangdong, China; Pengyang Wang, University of Macau, Macau, China; Denghui Zhang, Stevens Institute of Technology, Hoboken, New Jersey, USA.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

© 2018 Copyright held by the owner/author(s). Publication rights licensed to ACM.

Manuscript submitted to ACM

Manuscript submitted to ACM

1

In *Proceedings of Make sure to enter the correct conference title from your rights confirmation email (Conference acronym 'XX)*. ACM, New York, NY, USA, 24 pages. <https://doi.org/XXXXXXX.XXXXXXX>

1 Introduction

Questionnaire-based surveys serve as critical instruments for understanding public sentiment, tracking social dynamics, and guiding evidence-based policymaking. However, the traditional survey pipeline faces mounting challenges: high operational costs, lengthy data collection timelines, and declining response rates [19]. These limitations hinder the timely delivery of insights essential for responsive policy formulation. To address these issues, we propose and systematically investigate a novel approach: leveraging Large Language Models (LLMs) to simulate virtual survey respondents.

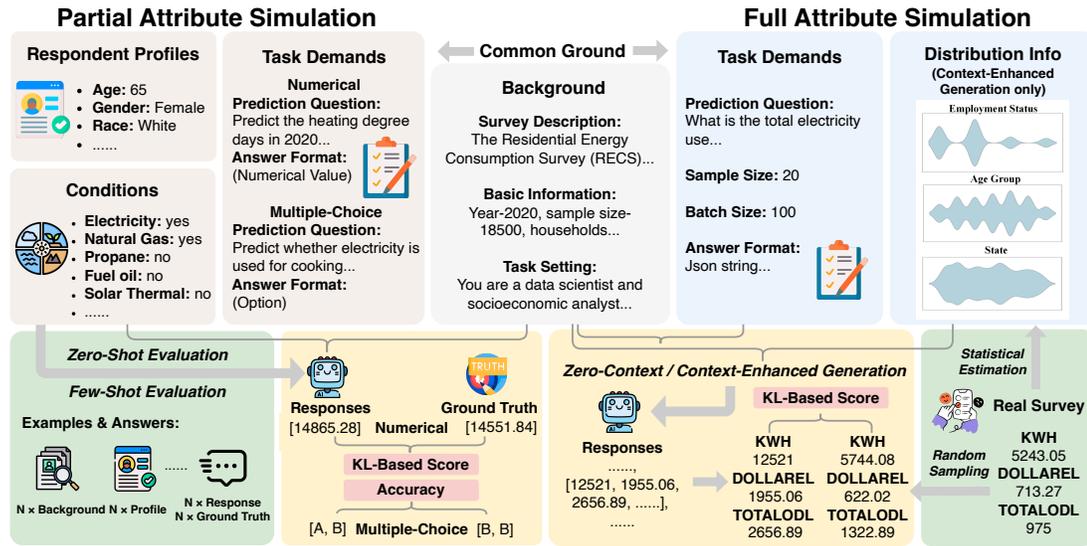


Fig. 1. An Overview of Partial Attribute Simulation (left) and Full Attribute Simulation (right).

Recent advances in LLMs have demonstrated remarkable generalization capabilities in tasks ranging from question answering to synthetic text generation [4, 12, 33]. Despite growing interest in LLM-driven simulations [9, 15, 17], existing research often suffers from three limitations that our work addresses: (1) narrow task coverage, where prior studies frequently focus on a limited number of survey items or demographic traits, restricting their generalizability across diverse tasks [3, 32, 38, 42]; (2) domain-specific constraints, as most existing works are tailored to particular sociological themes (e.g., politics or consumer behavior), which impedes comprehensive cross-domain evaluation [3, 5, 6, 34, 40]; and (3) inadequate benchmarking, primarily due to reliance on synthetic or overly simplified datasets that fail to reflect the complexity or scale of real-world survey distributions [3, 5, 28, 43]. Our research bridges these gaps by introducing a systematic and extensible framework for evaluating LLMs in survey response generation.

To this end, we introduce two distinct and novel simulation paradigms: **Partial Attribute Simulation (PAS)**, where LLMs predict missing demographic or behavioral attributes from incomplete respondent profiles, and **Full Attribute Simulation (FAS)**, where LLMs generate synthetic datasets under varying degrees of contextual constraint. These

paradigms are designed to reflect practical scenarios in applied research, from imputing nonresponse in existing surveys to simulating synthetic populations for complex policy experiments.

To support reproducibility and broad applicability, we curate a cross-domain benchmark suite, **LLM-S³** (**L**arge **L**anguage **M**odel-based **S**ociodemographic **S**urvey **S**imulation), composed of eleven public datasets across four sociological areas: Social and Public Affairs, Work and Income, Household and Behavioral Patterns, and Health and Lifestyle. We evaluate four representative LLMs (GPT-3.5 Turbo, GPT-4 Turbo, LLaMA 3.0-8B, LLaMA 3.1-8B) on both numerical and categorical prediction tasks under zero-shot and few-shot settings. Our extensive experiments yield several key findings: (i) LLMs exhibit reliable and consistent performance trends across various model families and task types; (ii) prompt design and contextual augmentation significantly impact simulation fidelity, highlighting their crucial role; and (iii) failure cases in structured output generation remain a major bottleneck, particularly evident in the Full Attribute Simulation (FAS) scenario. These insights not only advance our fundamental understanding of LLMs in survey applications but also provide practical design principles for future research and deployment in this emerging field.

In sum, to the best of our knowledge, this work offers the first large-scale, systematic exploration of LLMs as virtual survey respondents, contributing both a novel simulation methodology and a robust, multi-domain benchmark to drive future advances in LLM-assisted social research.

2 Related Work

2.1 LLM Role-Playing and Personalization

Recent advancements in LLMs have improved the realism and contextual relevance of agent behaviors across domains. A key focus has been on persona-driven role-playing, where maintaining coherent persona traits and consistent decision-making is essential [25, 35, 37]. To enhance personalization further, user-specific information such as traits and profiles has been incorporated into dialogue agents, enabling responses that better reflect individual users [31, 41]. However, integrating such personalized data with large language models remains challenging, which highlights ongoing opportunities for improving adaptability [7]. Complementary efforts have developed evaluation frameworks such as ECHO to measure how well LLMs replicate human-like personalized responses, thereby advancing the authenticity and naturalness of agent interactions [18, 20].

2.2 Using LLMs for Sociological Simulation

LLMs have shown promise in simulating complex social behaviors and demographic patterns, especially in public opinion dynamics and demographic predictions. For example, prior work has simulated large-scale opinion dynamics through modeling interactions among over 1,000 virtual citizens [24] and applied multi-agent reasoning for election predictions [40]. In parallel, other methods employ demographic-conditioned sampling to simulate subgroup opinions; however, validation against longitudinal survey data remains limited [3]. Some studies focus on simulating group-level statistics using conditional sampling techniques, while others predict individual-level attributes such as emotions or personality traits based on psychological metrics [14, 23, 36]. Applications also include inferring psychological dispositions from textual traces and predicting social attributes through prompt engineering [6, 11, 29, 42].

3 Partial Attribute Simulation (PAS)

In numerous real-world survey scenarios, researchers frequently possess foundational demographic information about respondents (e.g., age, gender, occupation) but lack specific insights into individual opinions or preferences on particular

topics. This inherent data sparsity poses a significant challenge for accurately simulating survey responses under such constraints. To address this, we introduce the Partial Attribute Simulation (PAS) setting, a novel framework designed to evaluate LLMs’ ability to predict missing sociodemographic attributes. As illustrated in Figure 1, PAS operates by providing LLMs with only fundamental demographic data and selected conditional attributes, without access to an individual’s complete historical response profile. The LLMs are then tasked with generating plausible responses, effectively simulating how individuals with specific partial characteristics might answer survey questions. This paradigm offers valuable insights into the influence of partial information on survey responses, enabling the simulation of realistic survey scenarios across diverse sociological contexts.

3.1 Formulation

Within the Partial Attribute Simulation (PAS) framework, survey respondents are conceptualized as virtual agents, each characterized by a predefined set of attributes. Let $\mathcal{D} = \{\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_N\}$ denote a survey dataset of N samples, where each $\mathbf{x}_i \in \mathbb{R}^M$ consists of M attributes from the attribute set \mathcal{A} . The set \mathcal{A} is partitioned into two distinct subsets: the input attribute set, $\mathcal{A}_{\text{prior}}$, which are provided to the Large Language Model (LLM) via prompts, and the target attribute set, $\mathcal{A}_{\text{target}}$, that the LLM is required to infer. Formally, we define:

$$\mathcal{A}_{\text{prior}} \subseteq \mathcal{A}, \mathcal{A}_{\text{target}} = \mathcal{A} \setminus \mathcal{A}_{\text{prior}}. \quad (1)$$

Each virtual agent is then tasked with predicting the target attributes $\mathbf{A}_{\text{target}} \in \mathcal{A}_{\text{target}}$ conditioned on the given input attributes $\mathbf{A}_{\text{prior}} \in \mathcal{A}_{\text{prior}}$. This is formalized as modeling the conditional probability distribution parameterized by θ :

$$\mathbf{A}_{\text{target}} \sim P_{\theta}(\mathbf{A}_{\text{target}} | \mathbf{A}_{\text{prior}}). \quad (2)$$

In the PAS scenario, each respondent is simulated as an independent virtual agent using an LLM, which is required to generate a distribution over the possible values of $\mathbf{A}_{\text{target}}$ conditioned on $\mathbf{A}_{\text{prior}}$.

Numerical Prediction Tasks: When predicting numerical attributes, the primary objective is to estimate the population-level distribution of the target attribute set $\mathcal{A}_{\text{target}}$, rather than predicting specific values for individual respondents. Performance is assessed using a KL-based score (see Appendix A.2.2), a monotonic decreasing transformation of the Kullback–Leibler (KL) divergence, where higher values indicate better alignment between predicted and ground-truth distributions.

Multiple-Choice Prediction Tasks: For categorical attributes, the focus shifts from modeling distributions to determining the correct category for each individual respondent. In this context, the LLM’s performance is evaluated based on the accuracy of its predictions for each respondent’s target attribute, with the average accuracy across all respondents being reported. This metric directly assesses the model’s classification capability.

3.2 Evaluation Strategies in PAS

In the PAS scenario, two primary evaluation strategies are employed to assess LLM performance: **Zero-Shot Evaluation** and **Few-Shot Evaluation**.

In the **Zero-Shot Evaluation**, the model generates predictions solely based on its pre-trained parametric knowledge, without any prior examples. The prompt, detailed in Figure 10 in Appendix A, is structured around five key components:

- **Background:** Consists of a survey description (purpose and structure of the questionnaire), basic information (outlining context such as year, region, domain, etc.) and a task setting description (instructions guiding the LLM to simulate a specific respondent).
- **Respondent Profiles:** Includes demographic information (e.g., age, gender) to tailor predictions to individual characteristics.
- **Conditions:** Provides conditional attributes (e.g., electricity usage, health factors) to guide predictions based on specific circumstances.
- **Task Demands:** Specifies the prediction task type (e.g., numerical or multiple-choice).
- **Answer Format:** Defines the output format (e.g., numerical/option lists, or JSON strings).

In the **Few-Shot Evaluation**, the model refines its predictions of \mathcal{A}_{target} by learning from a small set of in-context examples [10]. These exemplars act as demonstrations, helping the model recognize the expected response format and improve predictive accuracy without explicit task-specific training. In this study, the LLM receives five illustrative examples, providing structural guidance and reinforcing expected patterns. See Figure 10 in Appendix A for a prompt example.

Experimental Setup: Based on these two evaluation strategies, we evaluated public datasets from four domains (see Table 4) with key attributes selected for prediction (see Table 5). Numerical attributes were evaluated using a KL-based performance score (refer to Appendix A.2.2 for calculation details), while multiple-choice tasks were assessed by accuracy. Performance across both tasks, evaluated using OpenAI’s GPT-3.5 Turbo, GPT-4 Turbo [4], and Meta’s LLaMA 3.0 and 3.1 (8B) models [12], is presented in Table 1 and 2. GPT models were accessed via their official API¹, and LLaMA models were deployed locally using the Ollama platform² on an NVIDIA A6000 GPU, with default hyperparameters applied for unbiased comparisons.

Table 1. LLM performance on numerical prediction in PAS. The KL-based scores (\uparrow) are reported as *avg. \pm std.*: bold for the best and underlined for the second-best.

Dataset	Zero-Shot Evaluation				Few-Shot Evaluation			
	GPT-3.5 Turbo	GPT-4 Turbo	LLaMA 3.0	LLaMA 3.1	GPT-3.5 Turbo	GPT-4 Turbo	LLaMA 3.0	LLaMA 3.1
ANES	0.5735 ± 0.0529	<u>0.5576</u> ± 0.0293	0.4875 ± 0.0533	0.4768 ± 0.0755	0.5568 ± 0.0072	<u>0.5460</u> ± 0.0494	0.4646 ± 0.0575	0.4683 ± 0.0334
GSS	0.6983 ± 0.0120	0.7082 ± 0.0129	<u>0.6990</u> ± 0.0198	0.6818 ± 0.0062	0.6766 ± 0.0086	0.7054 ± 0.0164	<u>0.6879</u> ± 0.0142	0.6800 ± 0.0308
BIS	0.6204 ± 0.0462	0.5119 ± 0.0129	<u>0.5777</u> ± 0.0458	0.5730 ± 0.0378	0.6207 ± 0.0417	0.5299 ± 0.0337	<u>0.5640</u> ± 0.0486	0.5622 ± 0.0476
RECS	0.6554 ± 0.0162	<u>0.5648</u> ± 0.0568	0.3114 ± 0.0801	0.2669 ± 0.0197	<u>0.5293</u> ± 0.1865	0.5489 ± 0.0920	0.3088 ± 0.0874	0.2365 ± 0.0226
ACS	0.5159 ± 0.1283	<u>0.4722</u> ± 0.1859	0.6056 ± 0.0983	<u>0.5766</u> ± 0.1239	0.4791 ± 0.1106	0.3636 ± 0.0410	0.6054 ± 0.1047	<u>0.5969</u> ± 0.1112
Trell SMU	0.3523 ± 0.0340	0.4301 ± 0.0033	0.5612 ± 0.0003	<u>0.5361</u> ± 0.0064	0.4274 ± 0.0499	<u>0.5197</u> ± 0.0670	0.5462 ± 0.0189	0.4685 ± 0.0147
NHTS	0.4010 ± 0.0066	0.3125 ± 0.0842	<u>0.4927</u> ± 0.1769	0.6079 ± 0.1036	0.3568 ± 0.0997	0.3102 ± 0.1499	<u>0.4908</u> ± 0.1058	0.5799 ± 0.0760

3.3 PAS Performance Analysis

To better understand how model series and evaluation strategies affect performance across different task types, we examine aggregate trends in the PAS scenario. As shown in Figure 2, the GPT series generally outperforms LLaMA on multiple-choice tasks (46.82% vs. 43.04%), while LLaMA achieves slightly better results on numerical prediction (0.5255

¹<https://openai.com/api/>

²<https://ollama.ai/>

Table 2. LLM performance on multiple-choice prediction in PAS. Accuracy (\uparrow) is reported as avg. \pm std.: bold for the best and underlined for the second-best. Cell color reflects relative performance change compared to random-choice accuracy: greener for greater improvement and redder for greater degradation.

Dataset	Zero-Shot Evaluation				Few-Shot Evaluation			
	GPT-3.5 Turbo	GPT-4 Turbo	LLaMA 3.0	LLaMA 3.1	GPT-3.5 Turbo	GPT-4 Turbo	LLaMA 3.0	LLaMA 3.1
ANES	0.7854 \pm 0.0598	0.8358 \pm 0.0324	0.7827 \pm 0.0487	0.7525 \pm 0.0372	0.7796 \pm 0.0447	0.8219 \pm 0.0395	0.7686 \pm 0.0382	0.7355 \pm 0.0491
GSS	<u>0.5588</u> \pm 0.1359	0.6313 \pm 0.0340	0.5289 \pm 0.0583	0.4969 \pm 0.0326	0.4948 \pm 0.0430	0.6223 \pm 0.0349	0.4933 \pm 0.0895	0.4129 \pm 0.0778
BIS	0.1865 \pm 0.0032	0.2165 \pm 0.0022	<u>0.2629</u> \pm 0.0600	0.2848 \pm 0.0217	0.1465 \pm 0.0164	0.2169 \pm 0.0045	0.2261 \pm 0.0233	0.2077 \pm 0.0044
RECS	0.6208 \pm 0.1116	0.8598 \pm 0.0793	<u>0.7257</u> \pm 0.0144	0.6540 \pm 0.0730	0.6386 \pm 0.0257	0.9113 \pm 0.0165	<u>0.7483</u> \pm 0.2132	0.6742 \pm 0.0623
EmpS	<u>0.2191</u> \pm 0.0293	0.2171 \pm 0.0017	0.2302 \pm 0.0259	0.2188 \pm 0.0183	0.2267 \pm 0.0092	0.2116 \pm 0.0105	0.2147 \pm 0.0230	0.2143 \pm 0.0045
NHTS	0.7314 \pm 0.0077	<u>0.7231</u> \pm 0.0003	0.5732 \pm 0.0126	0.6507 \pm 0.0453	<u>0.7246</u> \pm 0.0322	0.7300 \pm 0.0057	0.6409 \pm 0.0797	0.5987 \pm 0.0270
Trell SMU	<u>0.6415</u> \pm 0.0105	0.6525 \pm 0.0050	0.3865 \pm 0.0138	0.5028 \pm 0.0134	<u>0.7228</u> \pm 0.0357	0.6601 \pm 0.0057	0.7099 \pm 0.0051	0.7309 \pm 0.0176
MxMH	0.1283 \pm 0.0380	<u>0.1021</u> \pm 0.0018	0.0901 \pm 0.0129	0.0933 \pm 0.0151	0.1542 \pm 0.0517	<u>0.0977</u> \pm 0.0093	0.0920 \pm 0.0103	0.0860 \pm 0.0120
YPS	0.2729 \pm 0.0074	0.2559 \pm 0.0038	0.3083 \pm 0.0479	<u>0.2787</u> \pm 0.0426	<u>0.2916</u> \pm 0.0283	0.2968 \pm 0.0471	0.2768 \pm 0.0175	0.1990 \pm 0.0418
MHD	0.3377 \pm 0.0058	0.3375 \pm 0.0045	<u>0.3390</u> \pm 0.0068	0.3434 \pm 0.0070	0.3314 \pm 0.0198	0.3339 \pm 0.0079	<u>0.3403</u> \pm 0.0094	0.3437 \pm 0.0063

vs. 0.5194). Few-shot evaluation tends to improve performance on multiple-choice tasks (45.32% vs. 44.54%), whereas zero-shot proves more effective for numerical tasks (0.5296 vs. 0.5154). These divergent patterns highlight the need for a more granular, task-specific analysis.

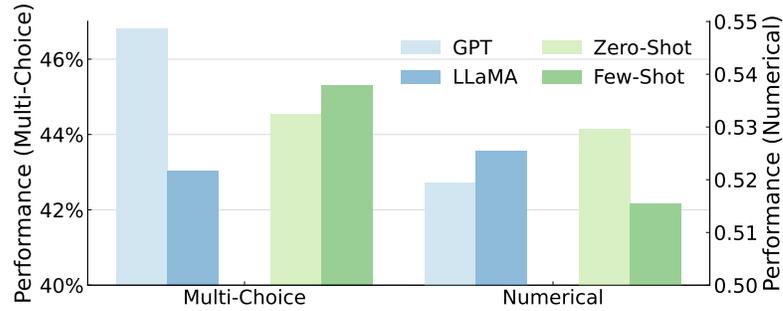


Fig. 2. Average PAS performance (\uparrow) across two tasks, grouped by model series and evaluation strategy.

Numerical Prediction Tasks: Table 1 reveals that GPT models achieve the best performance on four datasets, while LLaMA leads on three. Although model series exhibit consistent performance trends, the effect of evaluation strategy is more variable. Few-shot settings improve performance in some cases (e.g., GPT-4 Turbo on Trell SMU), but degrade it in others (e.g., on ACS), underscoring its sensitivity to dataset properties and prompt design (as further discussed in Section 5.3).

Multiple-Choice Prediction Tasks: As presented in Table 2, the majority of models outperform the random-choice accuracy, with particularly pronounced improvements observed on the NHTS and Trell SMU datasets. GPT models, particularly GPT-4 Turbo, generally attain the highest accuracy across most datasets, with LLaMA outperforming them on a few datasets. Consistent with numerical tasks, our few-shot evaluation exhibits variable improvements in this prediction task as well.

4 Full Attribute Simulation (FAS)

Large-scale sociological analysis frequently necessitates understanding population-level trends and aggregate distributions, beyond individual-level responses. While the PAS scenario predicts specific attributes for individual agents, the Full Attribute Simulation (FAS) tackles a more complex challenge: generating comprehensive synthetic datasets that accurately preserve demographic distributions while inferring unobserved attributes. As illustrated in Figure 1, this capability is critical for policy formulation when only aggregated statistics (*e.g.*, age/gender distributions) are available, but granular, domain-specific insights (*e.g.*, opinions on urban development) remain unobserved. FAS presents a compelling paradigm for synthesizing complete, statistically representative populations, offering a robust foundation for sophisticated analytical tasks in social science research and evidence-based policy design.

4.1 Formulation

The Full Attribute Simulation (FAS) formalizes the generation of multi-attribute survey samples through two complementary paradigms, each addressing distinct methodological requirements. Let $\mathcal{D}_{\text{syn}} = \{\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_N\}$ denote the synthetic dataset containing N instances, where each $\mathbf{x}_i \in \mathbb{R}^M$ comprises M attributes spanning demographic, behavioral, and contextual dimensions. FAS aims to approximate the joint distribution $P(\mathbf{X}_1, \mathbf{X}_2, \dots, \mathbf{X}_M)$ adhering to predefined constraints, implemented via two operational modes: **zero-context** and **context-enhanced** generation.

Zero-Context Generation: The zero-context generation operates under the assumption that LLMs can probabilistically reconstruct plausible multivariate distributions solely from their parametric knowledge [2, 5]. Formally, the synthetic instances are sampled as:

$$\mathbf{x} \sim P_{\theta}(\mathbf{X}|\mathbf{C}, \mathbf{S}), \quad (3)$$

where \mathbf{C} encapsulates contextual metadata (*e.g.*, U.S. households in 2022), \mathbf{S} defines schema constraints (*e.g.*, attribute types, value ranges), and θ represents the LLM’s parameters encoding implicit sociodemographic patterns. This paradigm eliminates external distributional guidance, relying entirely on the model’s emergent understanding of attribute correlations. For instance, when simulating energy consumption (RECS dataset), the schema specifies permissible ranges for *annual kWh usage* (500–15,000) and *employment status* (categorical options: employed/retired), while the LLM autonomously infers relationships between income brackets and electricity expenditure.

Context-Enhanced Generation: In contrast, context-enhanced generation explicitly conditions the synthesis process on empirical priors, such as population-level statistics or attribute distributions, to better align synthetic generations with real-world patterns. Synthetic instances are sampled as:

$$\mathbf{x} \sim P_{\theta}(\mathbf{X}|\mathbf{C}, \mathbf{S}, P(\mathbf{A}_{\text{prior}})), \quad (4)$$

where $P(\mathbf{A}_{\text{prior}})$ injects known marginal or conditional distributions (*e.g.*, age-gender cohorts by state, education-income correlations). This integration occurs through structured prompting. For example, appending U.S. Census-derived age distributions ($\mu = 45.2, \sigma = 18.3$) and party affiliation rates (Democrat: 43%, Republican: 37%) when simulating political surveys (ANES). LLMs then perform constrained sampling, iteratively refining proposals to align with provided prior distributions, akin to a learned rejection sampling algorithm.

To validate the performance of LLMs in the FAS scenario under the two generation modes, we select four representative datasets, maintaining the same LLMs and experimental conditions used in the PAS scenario. The evaluation is performed

using the KL-based score (see Appendix A.2.2), which assesses the alignment between the generated and ground-truth distributions.

Table 3. LLM performance in FAS. The KL-based scores (\uparrow) are reported as *avg. \pm std.*: bold for the best and underlined for the second-best. Color percentage indicates relative performance change from zero-context to context-enhanced generation: green for improvement and red for degradation.

Dataset	Zero-Context Generation				Context-Enhanced Generation			
	GPT-3.5 Turbo	GPT-4 Turbo	LLaMA 3.0	LLaMA 3.1	GPT-3.5 Turbo	GPT-4 Turbo	LLaMA 3.0	LLaMA 3.1
GSS	<u>0.6490</u>	0.6490	0.6508	0.6520	0.6569 \uparrow 1.22%	0.6862 \uparrow 5.73%	0.6571 \uparrow 0.98%	<u>0.6726</u> \uparrow 3.16%
Trell SMU	<u>0.3170</u>	0.3320	0.2353	0.2992	<u>0.3410</u> \uparrow 7.57%	0.3617 \uparrow 8.95%	0.2557 \uparrow 8.68%	0.2792 \downarrow 6.67%
YPS	<u>0.6674</u>	0.7008	0.6567	0.6549	<u>0.6764</u> \uparrow 1.35%	0.7210 \uparrow 2.89%	0.6569 \uparrow 0.04%	0.6539 \downarrow 0.16%
RECS	<u>0.6334</u>	0.6384	0.5597	0.3826	<u>0.6092</u> \downarrow 3.81%	0.6403 \uparrow 0.30%	0.5883 \uparrow 5.12%	0.5529 \uparrow 44.51%

4.2 FAS Performance Analysis

Table 3 presents the FAS performance of various LLMs, providing valuable insights into their ability to adapt to different generation paradigms, especially when additional context is provided. In general, GPT-4 Turbo demonstrates superior performance across all datasets and generation paradigms. This overall superiority is likely due to the larger parameter scale of GPT models, which enables them to better handle complex reasoning and inference tasks. The increased scale allows GPT-4 Turbo to process and integrate additional context more effectively than the 8B versions of LLaMA models selected here, contributing to its superior performance in the FAS scenario. In addition, we observe that the top-performing and second-best LLMs (marked with bold and underlined) generally belong to the same LLM series, showing consistency across datasets.

On the other hand, the context-enhanced generation generally achieves better results than the zero-context generation, with most models showing performance improvements when given additional context. Notably, GPT-4 Turbo demonstrates greater contextual utilization than its GPT-3.5 counterpart, achieving larger performance gains across datasets. This implies that integrated context helps models refine decisions through latent knowledge activation for the FAS scenario. Nevertheless, some models exhibit slight performance declines (*e.g.*, GPT-3.5 Turbo on RECS; LLaMA 3.1 on Trell SMU and YPS). These exceptions indicate that context effectiveness remains dataset- and model-dependent, with variations in contextual processing capabilities across architectures.

4.3 FAS Failure Phenomenon

A major challenge in the FAS scenario is the occurrence of FAS failures, where a significant proportion of generated outputs do not meet our requirements, leading to a loss of usable samples. We identify the following two failure modes, with representative examples shown in Figure 3:

- **Case 1: Insufficient Output Sample**

In certain cases, the model fails to produce the required number of samples, leading to an incomplete representation of the underlying statistical distribution.

- **Case 2: Completely Irrelevant Output**

The model generates non-structured outputs, such as textual descriptions, instead of the expected structured data table, making it unsuitable for quantitative analysis.

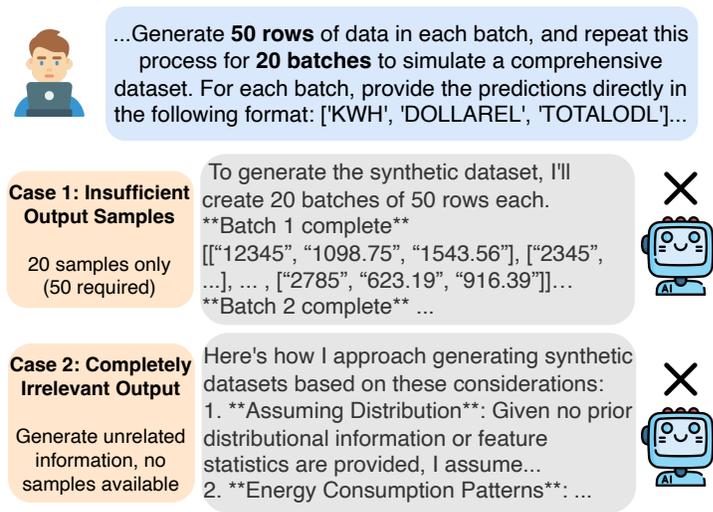


Fig. 3. Representative error cases in FAS.

Experimental results in Figure 4 reveal significant performance disparities: LLaMA variants exhibit 15–58% failure rates across all datasets. In contrast, GPT models maintain near-zero failure rates on simpler tasks (e.g., GSS and Trell SMU), but show moderate errors on more complex datasets. This divergence principally originates from two architectural advantages in the GPT series. (i) **Model Size**: their superior parametric capacity (175B vs. 8B) enables precise modeling of complex conditional distributions, which is a critical requirement for attribute simulation [4, 16]. (ii) **Alignment Optimization**: GPT models benefit from advanced alignment strategies such as Reinforcement Learning from Human Feedback (RLHF) [1, 22], which enhance their ability to follow instructions and maintain structured output fidelity. In contrast, LLaMA 3 employs a lighter alignment pipeline comprising Supervised Fine-Tuning (SFT), Direct Preference Optimization (DPO), and rejection sampling [12, 26], which improves efficiency and training scalability but may underperform on tasks requiring strict format adherence [39].

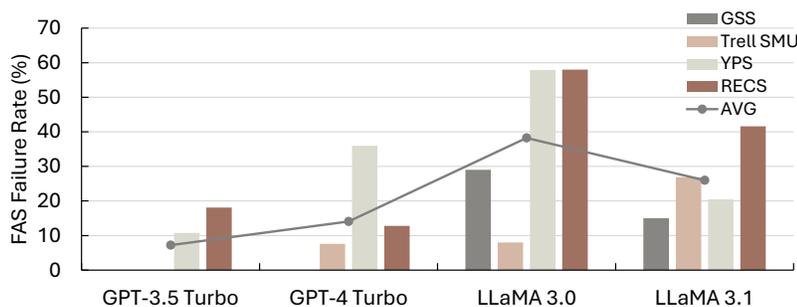


Fig. 4. Statistical analysis of failure rates across different attributes in FAS.

5 Discussions

Our experiments reveal critical insights into optimizing LLMs for survey simulation across three dimensions: reasoning-oriented distilled models, contextual modulation, and in-context learning dynamics. These findings provide actionable guidelines for deploying LLMs in sociological research while highlighting remaining challenges.

5.1 Leveraging Reasoning-Oriented Distilled Models

As survey simulation requires nontrivial reasoning over attributes, we investigate distilled LLMs explicitly optimized for reasoning, such as those from the DeepSeek-R1-Distill family [13]. To evaluate their effectiveness, we compare sociodemographic response generation in the PAS scenario on the YPS dataset between standard LLaMA models (3.1-8B and 3.3-70B) and their reasoning-optimized distilled counterparts (DeepSeek-R1-Distill-Llama-8B and -70B). Figure 5 reveals that the reasoning-oriented distillation leads to a notable performance improvement for the 8B LLaMA model, yielding a relative increase of 40.6% and indicating enhanced response generation capabilities. However, for the 70B LLaMA model, the distillation does not provide a significant advantage, instead resulting in a relative decrease of 22.9%.

These findings suggest that while the reasoning-oriented distillation effectively boosts the performance of smaller models, its benefits diminish in larger models under the PAS setting. One possible explanation is that larger models, with their extensive parameter space, already possess the capacity to generate high-quality responses without requiring distillation [16], and applying further reasoning-oriented distillation may induce excessive internal deliberation in complex tasks, potentially impairing output accuracy or coherence [8]. In contrast, smaller models, limited by fewer parameters, benefit more from the distillation as it helps streamline their processing and enhances their ability to simulate accurate sociodemographic responses [27].

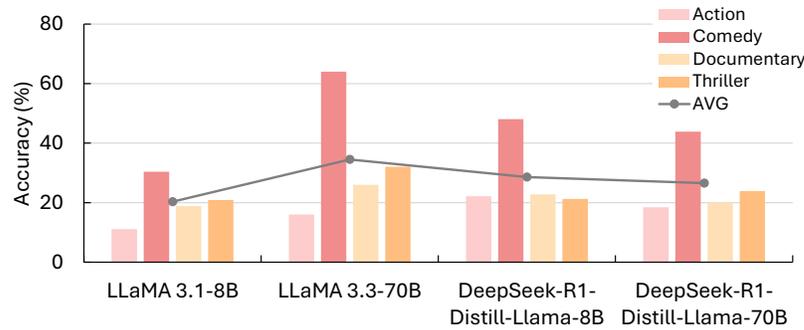


Fig. 5. Performance Comparison between LLaMA models and their DeepSeek-R1-Distill counterparts.

5.2 Context-Aware Prediction Enhancement

To demonstrate the impact of integrating prompt-based contextual information, we show that embedding precise contextual cues, such as explicit references to domains, timeframes, or real-world policy frameworks, significantly enhances prediction accuracy in sociodemographic response generation. Our experiments with the LLaMA 3.1-8B model reveal that the contextual information enables the model to activate latent knowledge and produce predictions that are more closely aligned with empirical scenarios. To evaluate the effectiveness of context-aware prediction, we concentrated on four key domains of public opinion concerning government spending in the GSS dataset. Contextual

information was introduced to guide the model’s response generation. For example, the prompt “*Considering the environmental policies of the United States in 2022*” was used to provide contextual grounding in the environmental domain.

Incorporating contextual prompts led to improved prediction performance across the four domains, namely environmental protection (*natenvir*), big city issues (*natcity*), welfare programs (*natfare*), and social security (*natsoc*), with relative gains ranging from 6.67% to 23.62% (see Figure 6). These results establish context integration as a critical requirement for survey simulation systems, governed by two synergistic mechanisms: **first**, contextual anchoring overrides LLMs’ tendency for shallow pattern matching when addressing complex societal issues; **second**, domain-specific knowledge activation closes the abstraction gap between model outputs and tangible policy dynamics [30]. Crucially, these findings mandate a paradigm shift reframing context-aware scaffolding not as an optional add-on, but as a necessary component to be systematically implemented in high-stakes applications. This shift ensures that LLMs evolve from mere statistical pattern extractors into contextually grounded reasoning systems capable of supporting societal decision modeling.

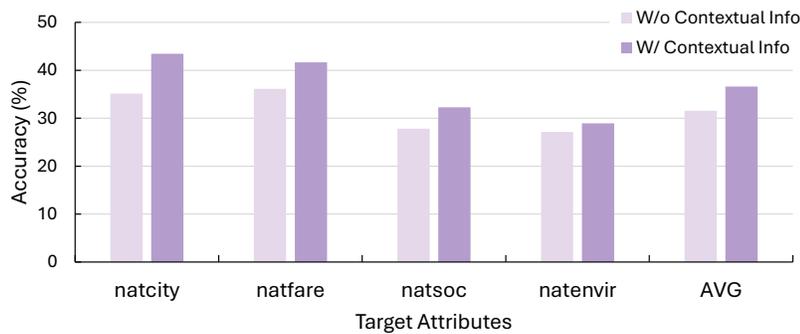


Fig. 6. Impact of contextual prompts on predictive accuracy in multiple-choice tasks.

5.3 Mitigating In-Context Learning Bias

Prior research demonstrates that few-shot learning exhibits predictive bias under class-imbalanced example distributions [21], advocating balanced sampling to mitigate bias and enhance modeling validity. Building on this insight, we examine our setting focused on respondents’ travel mode on travel days (i.e., *TRPTRANS*) in the NHTS dataset, and observe significant accuracy fluctuations driven by different example distributions.

We manipulated example distributions using three configurations and analyzed their output distributions, highlighting the ratio of option 2: (i) **all option 2** (82.38%), (ii) **no option 2** (57.76%), and (iii) **random selection** (80.01%). Notably, configuration (ii) caused a 24.62 percentage point decline compared to (i) (see Figure 7), underscoring the strong influence of embedded input distributions on model outputs. Statistical evidence from our experiments reveals a strong dependency between example balance and predictive robustness in our few-shot evaluation, directly motivating our adoption of strict example balancing measures. Crucially, these findings ground our operational decision to enforce balanced few-shot demonstrations in standardized prompts, ensuring counterfeit-resistant predictions aligned with real-world policy dynamics.

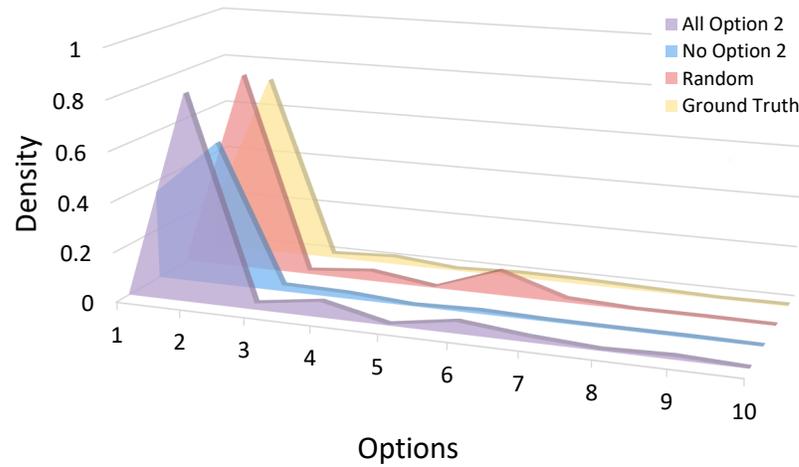


Fig. 7. Comparison of output distributions under different few-shot example configurations.

6 Conclusion

To evaluate large language models in sociodemographic response generation, we propose two paradigms: Partial Attribute Simulation (PAS) and Full Attribute Simulation (FAS), each targeting distinct levels of inference and data availability. PAS addresses individual-level attribute inference under incomplete profiles, while FAS targets population-level synthesis from limited demographic signals, supporting analyses in data-sparse settings. On this basis, we further introduce **LLM-S³** (**L**arge **L**anguage **M**odel-based **S**ociodemographic **S**urvey **S**imulation), a comprehensive benchmark suite spanning eleven datasets across four domains. Our evaluation reveals systematic differences across model series and prompting strategies, establishing a foundation for rigorous LLM assessment and advancing trustworthy survey simulations in computational social science.

References

- [1] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, et al. 2023. Gpt-4 technical report. [arXiv preprint arXiv:2303.08774](https://arxiv.org/abs/2303.08774) (2023).
- [2] Jacy Reese Anthis, Ryan Liu, Sean M Richardson, Austin C Kozlowski, Bernard Koch, James Evans, Erik Brynjolfsson, and Michael Bernstein. 2025. Llm social simulations are a promising research method. [arXiv preprint arXiv:2504.02234](https://arxiv.org/abs/2504.02234) (2025).
- [3] Lisa P. Argyle, Ethan C. Busby, Nancy Fulda, Joshua Gubler, Christopher Michael Rytting, and David Wingate. 2022. Out of One, Many: Using Language Models to Simulate Human Samples. [CoRR abs/2209.06899](https://arxiv.org/abs/2209.06899) (2022). [arXiv:2209.06899](https://arxiv.org/abs/2209.06899) [doi:10.48550/ARXIV.2209.06899](https://doi.org/10.48550/ARXIV.2209.06899)
- [4] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. [Advances in neural information processing systems](https://arxiv.org/abs/2005.14167) 33 (2020), 1877–1901.
- [5] Yong Cao, Haijiang Liu, Arnav Arora, Isabelle Augenstein, Paul Röttger, and Daniel Hershcovich. 2025. Specializing Large Language Models to Simulate Survey Response Distributions for Global Populations. In [Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies \(Volume 1: Long Papers\)](https://arxiv.org/abs/2504.02234), Luis Chiruzzo, Alan Ritter, and Lu Wang (Eds.). Association for Computational Linguistics, Albuquerque, New Mexico, 3141–3154. [doi:10.18653/v1/2025.naacl-long.162](https://doi.org/10.18653/v1/2025.naacl-long.162)
- [6] Yaqub Chaudhary and Jonnie Penn. 2024. Large Language Models as Instruments of Power: New Regimes of Autonomous Manipulation and Control. [arXiv preprint arXiv:2405.03813](https://arxiv.org/abs/2405.03813) (2024).
- [7] Jin Chen, Zheng Liu, Xu Huang, Chenwang Wu, Qi Liu, Gangwei Jiang, Yuanhao Pu, Yuxuan Lei, Xiaolong Chen, Xingmei Wang, Kai Zheng, Defu Lian, and Enhong Chen. 2024. When large language models meet personalization: perspectives of challenges and opportunities. [World Wide Web \(WWW\)](https://arxiv.org/abs/2405.03813) 27, 4 (2024), 42. [doi:10.1007/S11280-024-01276-1](https://doi.org/10.1007/S11280-024-01276-1)
- [8] Alejandro Cuadron, Dacheng Li, Wenjie Ma, Xingyao Wang, Yichuan Wang, Siyuan Zhuang, Shu Liu, Luis Gaspar Schroeder, Tian Xia, Huanzhi Mao, et al. 2025. The danger of overthinking: Examining the reasoning-action dilemma in agentic tasks. [arXiv preprint arXiv:2502.08235](https://arxiv.org/abs/2502.08235) (2025).

- [9] Danica Dillion, Niket Tandon, Yuling Gu, and Kurt Gray. 2023. Can AI language models replace human participants? *Trends in Cognitive Sciences* 27, 7 (2023), 597–600.
- [10] Qingxiu Dong, Lei Li, Damai Dai, Ce Zheng, Jingyuan Ma, Rui Li, Heming Xia, Jingjing Xu, Zhiyong Wu, Baobao Chang, Xu Sun, Lei Li, and Zhifang Sui. 2024. A Survey on In-context Learning. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen (Eds.). Association for Computational Linguistics, Miami, Florida, USA, 1107–1128. doi:10.18653/v1/2024.emnlp-main.64
- [11] Naoki Egami, Musashi Hinck, Brandon M Stewart, and Hanying Wei. 2024. Using Large Language Model Annotations for the Social Sciences: A General Framework of Using Predicted Variables in Downstream Analyses. (2024).
- [12] Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, et al. 2024. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783* (2024).
- [13] Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyi Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, et al. 2025. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948* (2025).
- [14] Jen-tse Huang, Man Ho Lam, Eric John Li, Shujie Ren, Wenxuan Wang, Wenxiang Jiao, Zhaopeng Tu, and Michael R Lyu. 2023. Emotionally numb or empathetic? evaluating how llms feel using emotionbench. *arXiv preprint arXiv:2308.03656* (2023).
- [15] Bernard J Jansen, Soon-gyo Jung, and Joni Salminen. 2023. Employing large language models in survey research. *Natural Language Processing Journal* 4 (2023), 100020.
- [16] Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. 2020. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361* (2020).
- [17] Junsol Kim and Byungkyu Lee. 2023. AI-Augmented Surveys: Leveraging Large Language Models and Surveys for Opinion Prediction. *arXiv preprint arXiv:2305.09620* (2023).
- [18] Ehsan Lotfi, Maxime De Bruyn, Jeska Buhmann, and Walter Daelemans. 2024. PersonalityChat: Conversation Distillation for Personalized Dialog Modeling with Facts and Traits. *CoRR abs/2401.07363* (2024). arXiv:2401.07363 doi:10.48550/ARXIV.2401.07363
- [19] Xinyi Mou, Xuanwen Ding, Qi He, Liang Wang, Jingcong Liang, Xinnong Zhang, Libo Sun, Jiayu Lin, Jie Zhou, Xuanjing Huang, and Zhongyu Wei. 2024. From Individual to Society: A Survey on Social Simulation Driven by Large Language Model-based Agents. *CoRR abs/2412.03563* (2024). arXiv:2412.03563 doi:10.48550/ARXIV.2412.03563
- [20] Man Tik Ng, Hui Tung Tse, Jen-tse Huang, Jingjing Li, Wenxuan Wang, and Michael R. Lyu. 2024. How Well Can LLMs Echo Us? Evaluating AI Chatbots’ Role-Play Ability with ECHO. *CoRR abs/2404.13957* (2024). arXiv:2404.13957 doi:10.48550/ARXIV.2404.13957
- [21] Mateusz Ochal, Massimiliano Patacchiola, Jose Vazquez, Amos Storkey, and Sen Wang. 2023. Few-Shot Learning With Class Imbalance. *IEEE Transactions on Artificial Intelligence* 4, 5 (2023), 1348–1358. doi:10.1109/TAI.2023.3298303
- [22] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. 2022. Training language models to follow instructions with human feedback. *Advances in neural information processing systems* 35 (2022), 27730–27744.
- [23] Keyu Pan and Yawen Zeng. 2023. Do llms possess a personality? making the mbti test an amazing evaluation for large language models. *arXiv preprint arXiv:2307.16180* (2023).
- [24] Joon Sung Park, Carolyn Q. Zou, Aaron Shaw, Benjamin Mako Hill, Carrie J. Cai, Meredith Ringel Morris, Robb Willer, Percy Liang, and Michael S. Bernstein. 2024. Generative Agent Simulations of 1,000 People. *CoRR abs/2411.10109* (2024). arXiv:2411.10109 doi:10.48550/ARXIV.2411.10109
- [25] Letian Peng and Jingbo Shang. 2024. Quantifying and Optimizing Global Faithfulness in Persona-driven Role-playing. *arXiv preprint arXiv:2405.07726* (2024).
- [26] Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D Manning, Stefano Ermon, and Chelsea Finn. 2023. Direct preference optimization: Your language model is secretly a reward model. *Advances in neural information processing systems* 36 (2023), 53728–53741.
- [27] Suhas Kamasetty Ramesh, Ayan Sengupta, and Tanmoy Chakraborty. 2025. On the Generalization vs Fidelity Paradox in Knowledge Distillation. *arXiv preprint arXiv:2505.15442* (2025).
- [28] Yuanyi Ren, Haoran Ye, Hanjun Fang, Xin Zhang, and Guojie Song. 2024. ValueBench: Towards Comprehensively Evaluating Value Orientations and Understanding of Large Language Models. *arXiv preprint arXiv:2406.04214* (2024).
- [29] Hannes Rosenbusch, Claire E Stevenson, and Han LJ van der Maas. 2023. How accurate are GPT-3’s hypotheses about social science phenomena? *Digital Society* 2, 2 (2023), 26.
- [30] Pranab Sahoo, Ayush Kumar Singh, Sriparna Saha, Vinija Jain, Samrat Mondal, and Aman Chadha. 2024. A Systematic Survey of Prompt Engineering in Large Language Models: Techniques and Applications. *CoRR abs/2402.07927* (2024). arXiv:2402.07927 doi:10.48550/ARXIV.2402.07927
- [31] Alireza Salemi, Sheshera Mysore, Michael Bendersky, and Hamed Zamani. 2024. LaMP: When Large Language Models Meet Personalization. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, ACL 2024, Bangkok, Thailand, August 11-16, 2024, Lun-Wei Ku, Andre Martins, and Vivek Srikumar (Eds.). Association for Computational Linguistics, 7370–7392. doi:10.18653/V1/2024.ACL-LONG.399
- [32] Seungjong Sun, Eungu Lee, Dongyan Nan, Xiangying Zhao, Wonbyung Lee, Bernard J. Jansen, and Jang-Hyun Kim. 2024. Random Silicon Sampling: Simulating Human Sub-Population Opinion Using a Large Language Model Based on Group-Level Demographic Information. *CoRR abs/2402.18144* (2024). arXiv:2402.18144 doi:10.48550/ARXIV.2402.18144

- [33] Petter Törnberg. 2023. Chatgpt-4 outperforms experts and crowd workers in annotating political twitter messages with zero-shot learning. [arXiv preprint arXiv:2304.06588](#) (2023).
- [34] Petter Törnberg, Diliara Valeeva, Justus Uitermark, and Christopher Bail. 2023. Simulating social media using large language models to evaluate alternative news feed algorithms. [arXiv preprint arXiv:2310.05984](#) (2023).
- [35] Xintao Wang, Yunze Xiao, Jen-tse Huang, Siyu Yuan, Rui Xu, Haoran Guo, Quan Tu, Yaying Fei, Ziang Leng, Wei Wang, et al. 2024. Incharacter: Evaluating personality fidelity in role-playing agents through psychological interviews. In [Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics \(Volume 1: Long Papers\)](#). 1840–1873.
- [36] Qiujie Xie, Qiming Feng, Tianqi Zhang, Qingqiu Li, Linyi Yang, Yuejie Zhang, Rui Feng, Liang He, Shang Gao, and Yue Zhang. 2025. Human Simulacra: Benchmarking the Personification of Large Language Models. In [The Thirteenth International Conference on Learning Representations](#). <https://openreview.net/forum?id=BCP5nAHXqs>
- [37] Rui Xu, Xintao Wang, Jiangjie Chen, Siyu Yuan, Xinfeng Yuan, Jiaqing Liang, Zulong Chen, Xiaoqing Dong, and Yanghua Xiao. 2024. Character is Destiny: Can Large Language Models Simulate Persona-Driven Decisions in Role-Playing? [arXiv preprint arXiv:2404.12138](#) (2024).
- [38] Kaiqi Yang, Hang Li, Hongzhi Wen, Tai-Quan Peng, Jiliang Tang, and Hui Liu. 2024. Are Large Language Models (LLMs) Good Social Predictors?. In [Findings of the Association for Computational Linguistics: EMNLP 2024](#), Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen (Eds.). Association for Computational Linguistics, Miami, Florida, USA, 2718–2730. doi:10.18653/v1/2024.findings-emnlp.153
- [39] Jiashu Yao, Heyan Huang, Zeming Liu, Haoyu Wen, Wei Su, Boao Qian, and Yuhang Guo. 2025. ReFF: Reinforcing Format Faithfulness in Language Models Across Varied Tasks. In [Proceedings of the AAAI Conference on Artificial Intelligence](#), Vol. 39. 25660–25668.
- [40] Chenxiao Yu, Zhaotian Weng, Zheng Li, Xiyang Hu, and Yue Zhao. 2024. Will Trump Win in 2024? Predicting the US Presidential Election via Multi-step Reasoning with Large Language Models. [arXiv preprint arXiv:2411.03321](#) (2024).
- [41] Saizheng Zhang, Emily Dinan, Jack Urbanek, Arthur Szlam, Douwe Kiela, and Jason Weston. 2018. Personalizing Dialogue Agents: I have a dog, do you have pets too?. In [Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics \(Volume 1: Long Papers\)](#), Iryna Gurevych and Yusuke Miyao (Eds.). Association for Computational Linguistics, Melbourne, Australia, 2204–2213. doi:10.18653/v1/P18-1205
- [42] Muzhi Zhou, Lu Yu, Xiaomin Geng, and Lan Luo. 2024. ChatGPT vs Social Surveys: Probing the Objective and Subjective Human Society. [CoRR abs/2409.02601](#) (2024). [arXiv:2409.02601](#) doi:10.48550/ARXIV.2409.02601
- [43] Caleb Ziems, William Held, Omar Shaikh, Jiaao Chen, Zhehao Zhang, and Diyi Yang. 2024. Can large language models transform computational social science? [Computational Linguistics](#) 50, 1 (2024), 237–291.

A Experimental Details

A.1 Details of Survey Datasets from Different Domains

In this study, we undertake a comprehensive evaluation of large language models (LLMs) by leveraging a diverse array of public survey datasets across four distinct domains: **Social and Public Affairs**, **Work and Income**, **Household and Behavioral Patterns**, and **Health and Lifestyle**. By utilizing datasets such as the American National Election Studies (ANES), General Social Survey (GSS), and the Residential Energy Consumption Survey (RECS), we ensure a multifaceted approach that captures a wide range of sociocultural factors and individual experiences. This extensive selection of datasets not only enhances the robustness of our benchmark but also allows for a nuanced understanding of how LLMs can simulate responses reflective of varied demographic backgrounds and social contexts. Through this work, we aim to contribute valuable insights into the capabilities of LLMs as virtual survey respondents, highlighting their potential in generating contextually relevant and representative sociological data. Table 4 lists details of each dataset.

Table 4. Summary of the survey datasets utilized in constructing the benchmark for this study. The numbers of cases and attributes represent the total sample size and variable count in each raw dataset, respectively.

Domain	Survey Name	Abbr.	Year	Description	# Cases	# Attrs.
Social and Public Affairs	American National Election Studies	ANES	2020	Individual’s views on certain social and political issues.	3080 individuals	470
	General Social Survey	GSS	2022	Individual’s attitudes towards work and elections.	4150 individuals	1156
	Basic Income Survey	BIS	2016-2017 spring	A survey about Europeans’ opinions toward basic income.	9649 individuals	15
Work and Income	Employee Survey	EmpS	Not specified	A survey about employee life experience and job satisfaction.	3025 individuals	23
	American Community Survey	ACS	Not specified	The ACS dataset offers a nuanced exploration of socioeconomic dynamics in the United States.	2000 individuals	13
Household and Behavioral Patterns	Residential Energy Consumption Survey	RECS	2020	Household survey, energy supplier data, and consumption/expenditure estimates.	18496 households	799
	National Household Travel Survey	NHTS	2017	Household’s mobility choices and daily travel behavior.	923572 queries	229
	Trell Social Media Usage Data	Trell SMU	2020	Social media user’s viewing/uploading/commenting habits towards a certain video website.	488877 individuals	26
Health and Lifestyle	Music & Mental Health Survey Results	MxMH	2022	Individual’s music preferences and mental health correlations.	736 individuals	33
	Young People Survey	YPS	2013	Individual’s preferences, habits, and personality traits.	1011 individuals	150
	Mental Health Dataset	MHD	2014-2016	Survey results on music taste and self-reported mental health.	292364 individuals	17

A.2 Evaluation Metrics

To assess the performance of the models across different tasks, we utilize distinct evaluation metrics tailored to the nature of each task.

A.2.1 Multiple-Choice Prediction Tasks. For multiple-choice prediction tasks, each dataset comprises several discrete target attributes, each treated as a classification problem with a fixed number of answer options. Model performance score S is evaluated using standard accuracy, defined for the j -th attribute as:

$$S_j = \frac{1}{M_j} \sum_{i=1}^{M_j} \mathbb{I}(\hat{y}_i^{(j)} = y_i^{(j)}), \quad (5)$$

where M_j is the number of instances for attribute j , and $\mathbb{I}(\cdot)$ is the indicator function. This metric quantifies the proportion of correct predictions.

A.2.2 Numerical Prediction Tasks. For numerical prediction tasks, each dataset may contain multiple continuous target attributes (e.g., travel duration and distance on the travel days). The goal is to approximate the overall distribution of these attributes rather than predict individual values. To evaluate how well the model’s predicted distribution aligns with the ground truth, we first compute the Kullback–Leibler (KL) divergence for each target attribute:

$$D_{\text{KL}}(P \parallel Q) = \sum_{i=1}^K P_i \log \frac{P_i}{Q_i}, \quad (6)$$

where P denotes the predicted distribution and Q denotes the ground-truth distribution. To improve interpretability and facilitate comparisons across models and datasets, we define a performance score S as the normalized reciprocal of KL divergence:

$$S_j = \frac{\ln \left(1 + \frac{1}{D_j} \right)}{1 + \ln \left(1 + \frac{1}{D_j} \right)}, \quad (7)$$

which smoothly maps the divergence value $D_j \in (0, +\infty)$ to a bounded interval $(0, 1)$, where higher values indicate better alignment between the predicted and true distributions. Lower KL divergence values yield higher scores (better performance), whereas larger values result in scores closer to 0 (poorer performance). For both prediction tasks, we evaluate performance separately for each target attribute, and the final score reported in Tables 1 and 2 corresponds to the average performance S_{avg} across all target attributes within each dataset:

$$S_{\text{avg}} = \frac{1}{N} \sum_{j=1}^N S_j, \quad (8)$$

where N is the number of target attributes and S_j denotes the performance score for the j -th attribute. A higher average score indicates better overall performance across all attributes.

A.3 Attribute Configuration & Detailed Performance

Given the extensive number of attributes present in the original surveys, we collaborated with domain experts to identify a subset of representative and vital attributes that are crucial for our tasks. This selection process ensures that the chosen attributes not only encapsulate the complexity of the respondents’ experiences but also enhance the relevance and effectiveness of the generated responses. For the predictive attributes, we focused on those that accurately reflect the respondents’ lifestyle habits, thereby providing deeper insights into their behaviors and preferences. By employing this targeted approach, our research aims to evaluate the performance of large language models in generating contextually appropriate and meaningful responses, ultimately advancing the methodology of virtual survey respondents across multiple sociocultural domains. Based on this attribute selection principle, we designed the following prediction tasks:

PAS: Table 5 summarizes the attribute configuration used for prediction tasks in the PAS scenario, preserving the original survey attribute names. Attributes in the “Input Attributes” column that appear with underscores are withheld when serving as prediction targets. Italicized entries indicate grouped attribute sets not shown in full. Tables 6 (multiple-choice) and 7 (numerical) report the corresponding results, with performance (\uparrow) presented as mean \pm std. over repeated runs and bold highlighting the best result.

Table 5. Attribute selection for prediction tasks in the PAS scenario. A subset of variables was chosen as target attributes based on domain expertise, with input attributes selected to ensure scientific rigor, and original survey attribute names retained. Attributes marked with an underscore in the “Input Attributes” column are excluded when serving as targets, while italicized entries denote attribute sets not listed in detail. Prediction tasks are classified as Multi-Choice or Numerical.

Dataset	Simulation Objectives	Input Attributes	Target Attributes	
			Multi-Choice	Numerical
ANES	Participation in political activities. The level of support for the candidate.	age, home_ownership, income, vote20turnoutjob, particip_count, <u>meeting</u> , <u>online</u> , <u>moneyorg</u> , protest, persuade, button, ftmikepence1, ftrubio1, fthomas1, ffauci1, <u>fobama1</u> , <u>ftump1</u> , <u>fbiden1</u>	2-Options: meeting, online, moneyorg	fobama1, fbiden1, ftump1
GSS	The attitude towards relieving work pressure. Public opinions.	age, sex, racecen1, sibs, marital, childs, region, educ, relig, income, wrkstat, occ10, hhtype1, hompop, polviews, natenvir, natheal, natcity, <u>natcrime</u> , <u>nateduc</u> , <u>natarms</u> , <u>natfare</u> , <u>natsoe</u>	5-Options: strngtsup, allorglevel	nateduc, natcrime
BIS	Vote for basic income. / Support basic income or not (reasons).	country_code, age, gender, rural, dem_education_level, dem_full_time_job, dem_has_children, question_bbi_2016wave4_basicincome_awareness / <u>vote</u> / effect / <u>argumentsfor</u> / <u>argumentsagainst</u>	5-Options: vote	argumentsfor
RECS	Household fuel usage.	HHSEX, HHAGE, EMPLOYHH, state_postal, EDUCATION, HOUSEHOLDER_RACE, NHSLDMEM, ATHOME, MONEYPY, UGASHERE, USEEL, USENG, USELP, USEFO, USESOLAR, USEWOOD, ALLELEC	2-Options: UGASHERE	KWH
ACS	The working hours or income.	age, race, gender, birth_qtr, citizen, lang, edu, married, disability, employment, time_to_work	-	hrs_work, income
Trell SMU	Video watching habit. / Total number of videos watched (normalized).	age_group, gender, city-tier, avgCompletion, avgTimeSpent, avgDuration, avgComments, creations, <u>content_views</u> , num_of_comments, <u>weekends_trails_watched_per_day</u> , <u>weekdays_trails_watched_per_day</u>	6-Options: weekdays_trails_watched_per_day	content_views
EmpS	Levels of satisfaction with the job (5 levels).	WorkEnv, EmpID, Age, Gender, MaritalStatu, JobLevel, Dept, EmpType, CommuteMode, EduLevel, haveOT, JobSatisfaction, Experience, PhysicalActivityHours, SleepHours, CommuteDistance, NumCompanies, TeamSize, NumReports, EduLevel, TrainingHoursPerYear	5-Options: WLB, WorkEnv, Workload, Stress, JobSatisfaction	-
NHTS	Trip model, trip duration, trip distance.	HHFAMINC, HOMEOWN, URBAN, HH_CBSA, DRIVER, EDUC, R_RACE, R_SEX_IMP, WORKER, TRAVDAY, <u>TRPTRANS</u> , GASPRICE, TRAVDAY, TDAYDATE	10-Options: TRPTRANS	TRPMILES, TRVLCMIN
MxMH	Mental health situation.	Timestamp, Age, Fav genre, Hours per day, While working, Instrumentalist, Composer, Exploratory, Classical, Country, EDM, Folk, Gospel, Hip hop, Jazz, K pop, Latin, Lofi, Metal, Pop, R&B, Rap, Rock, Video game music	11-Options: Anxiety, Depression, Insomnia, OCD	-
YPS	Degree of interests of movies and music.	Music, Slow songs or fast songs, Dance, Folk, Country, Classical music, Musical, Pop, Rock, Metal or Hardrock, Punk, Hiphop, Rap, Reggae, Ska, Swing, Jazz, Rock n roll, Alternative, Latino, Techno, Trance, Opera, Movies, Horror, Romantic, Sci-fi, War, Fantasy/Fairy tales, Animated	5-Options: Action, Documentary, Thriller, Comedy	-
MHD	Feeling the level of repression. Coping_Struggles only yes or no selection, others are three selections.	<i>History of mental condition</i> , Timestamp, Gender, Country, Occupation, self_employed, family_history, treatment, Days_Indoors, Changes_Habits, Mental_Health_History, mental_health_interview, care_options, Work_Interest	Growing_Stress, Mood_Swings, Social_Weakness	-

FAS: Table 8 details the attribute selection for prediction tasks in the FAS scenario. Attributes marked with an underscore in the “Input Attributes” column are treated as optional, excluded in the zero-context generation, and included in the context-enhanced generation. Italicized entries refer to descriptive textual labels rather than specific attributes. Table 9 reports the performance for each target attribute, with bold values as the best.

To provide a clearer and more intuitive overview for comparing model performance across datasets, prediction tasks, and evaluation strategies in PAS and FAS, Figure 8 (PAS) and Figure 9 (FAS) display radar plots with axis values normalized within each dataset, facilitating clearer visualization of relative performance differences across models and tasks. Across both scenarios, prediction tasks are divided into two types: multi-choice (with several options) and numerical (involving continuous value estimation). Evaluation metrics include accuracy for multi-choice tasks and a normalized reciprocal (i.e., monotonic transformation) of KL divergence for numerical tasks. Together, these metrics provide a quantitative basis for comparing model performance across diverse tasks. For detailed definitions and computational procedures, please refer to Section A.2.

Table 6. Performance of LLMs on multiple-choice prediction tasks in the PAS scenario.

Dataset	Target Attributes	Zero-Shot Evaluation				Few-Shot Evaluation			
		GPT-3.5 Turbo	GPT-4 Turbo	LLaMA 3.0	LLaMA 3.1	GPT-3.5 Turbo	GPT-4 Turbo	LLaMA 3.0	LLaMA 3.1
ANES	meeting	0.7898 \pm 0.0650	0.8440 \pm 0.0239	0.8314 \pm 0.0602	0.7619 \pm 0.0099	0.8002 \pm 0.0527	0.8353 \pm 0.0223	0.7803 \pm 0.0829	0.7388 \pm 0.0536
	online	0.7431 \pm 0.0876	0.8069 \pm 0.0618	0.7120 \pm 0.0262	0.6980 \pm 0.0296	0.7334 \pm 0.0523	0.8059 \pm 0.0541	0.7134 \pm 0.0215	0.6789 \pm 0.0354
	moneyorg	0.8233 \pm 0.0267	0.8566 \pm 0.0116	0.8047 \pm 0.0597	0.7975 \pm 0.0721	0.8051 \pm 0.0290	0.8244 \pm 0.0422	0.8122 \pm 0.0101	0.7887 \pm 0.0584
GSS	strmgtsup	0.5225 \pm 0.0777	0.5893 \pm 0.0064	0.5563 \pm 0.0826	0.5793 \pm 0.0064	0.4625 \pm 0.0356	0.6016 \pm 0.0264	0.5289 \pm 0.1266	0.4868 \pm 0.1217
	allorglevel	0.5950 \pm 0.1940	0.6732 \pm 0.0615	0.5016 \pm 0.0339	0.4145 \pm 0.0588	0.5270 \pm 0.0503	0.6429 \pm 0.0433	0.4577 \pm 0.0523	0.3389 \pm 0.0338
BIS	vote	0.1865 \pm 0.0032	0.2165 \pm 0.0022	0.2629 \pm 0.0600	0.2848 \pm 0.0217	0.1465 \pm 0.0164	0.2169 \pm 0.0045	0.2261 \pm 0.0233	0.2077 \pm 0.0044
RECS	UGASHERE	0.6208 \pm 0.1116	0.8598 \pm 0.0793	0.7257 \pm 0.0144	0.6540 \pm 0.0730	0.6386 \pm 0.0257	0.9113 \pm 0.0165	0.7483 \pm 0.2132	0.6742 \pm 0.0623
Trell SMU	weekdays_trails_...	0.6415 \pm 0.0105	0.6525 \pm 0.0050	0.3865 \pm 0.0138	0.5028 \pm 0.0134	0.7228 \pm 0.0357	0.6601 \pm 0.0057	0.7099 \pm 0.0051	0.7309 \pm 0.0176
EmpS	WLB	0.1849 \pm 0.0114	0.1959 \pm 0.0016	0.1951 \pm 0.0228	0.1804 \pm 0.0027	0.1728 \pm 0.0073	0.1913 \pm 0.0070	0.1945 \pm 0.0147	0.1898 \pm 0.0026
	WorkEnv	0.1943 \pm 0.0036	0.1949 \pm 0.0029	0.2080 \pm 0.0032	0.1985 \pm 0.0061	0.1868 \pm 0.0048	0.1825 \pm 0.0173	0.2052 \pm 0.0019	0.2071 \pm 0.0050
	Workload	0.2036 \pm 0.0058	0.1973 \pm 0.0023	0.2035 \pm 0.0007	0.2136 \pm 0.0191	0.1940 \pm 0.0106	0.1952 \pm 0.0125	0.2001 \pm 0.0099	0.1995 \pm 0.0070
	Stress	0.1278 \pm 0.0824	0.1268 \pm 0.0015	0.1847 \pm 0.0247	0.1667 \pm 0.0021	0.1787 \pm 0.0116	0.1043 \pm 0.0129	0.1483 \pm 0.0190	0.2425 \pm 0.0028
	JobSatisfaction	0.3852 \pm 0.0434	0.3706 \pm 0.0004	0.3598 \pm 0.0779	0.3348 \pm 0.0614	0.4013 \pm 0.0118	0.3848 \pm 0.0029	0.3252 \pm 0.0696	0.2327 \pm 0.0049
NHTS	TRPTRANS	0.7314 \pm 0.0077	0.7231 \pm 0.0003	0.5732 \pm 0.0126	0.6507 \pm 0.0453	0.7246 \pm 0.0322	0.7300 \pm 0.0057	0.6409 \pm 0.0797	0.5987 \pm 0.0270
MxMH	Anxiety	0.0650 \pm 0.0036	0.0957 \pm 0.0000	0.0704 \pm 0.0083	0.0898 \pm 0.0175	0.1027 \pm 0.0332	0.0888 \pm 0.0065	0.0695 \pm 0.0104	0.0771 \pm 0.0105
	Depression	0.0966 \pm 0.0414	0.1049 \pm 0.0010	0.0892 \pm 0.0144	0.0972 \pm 0.0167	0.0977 \pm 0.0169	0.0889 \pm 0.0158	0.0963 \pm 0.0067	0.0970 \pm 0.0175
	Insomnia	0.1040 \pm 0.0702	0.0903 \pm 0.0010	0.0828 \pm 0.0113	0.0876 \pm 0.0123	0.1784 \pm 0.0618	0.0968 \pm 0.0056	0.0897 \pm 0.0090	0.0709 \pm 0.0080
	OCD	0.2476 \pm 0.0367	0.1174 \pm 0.0052	0.1179 \pm 0.0177	0.0986 \pm 0.0137	0.2379 \pm 0.0948	0.1165 \pm 0.0091	0.1125 \pm 0.0150	0.0992 \pm 0.0120
YPS	Action	0.2388 \pm 0.0074	0.2191 \pm 0.0016	0.2203 \pm 0.0686	0.2068 \pm 0.0483	0.2465 \pm 0.0204	0.2939 \pm 0.0681	0.1602 \pm 0.0001	0.1073 \pm 0.0081
	Documentary	0.2952 \pm 0.0026	0.2698 \pm 0.0018	0.2731 \pm 0.0157	0.2885 \pm 0.0232	0.2948 \pm 0.0119	0.2758 \pm 0.0303	0.2809 \pm 0.0186	0.2092 \pm 0.0823
	Thriller	0.2462 \pm 0.0093	0.3482 \pm 0.0058	0.3033 \pm 0.0191	0.2637 \pm 0.0286	0.3214 \pm 0.0213	0.3132 \pm 0.0493	0.2592 \pm 0.0268	0.2078 \pm 0.0171
	Comedy	0.3115 \pm 0.0104	0.1865 \pm 0.0059	0.4366 \pm 0.0880	0.3557 \pm 0.0702	0.3035 \pm 0.0597	0.3044 \pm 0.0405	0.4068 \pm 0.0243	0.2716 \pm 0.0596
MHD	Growing_Stress	0.3231 \pm 0.0034	0.3454 \pm 0.0088	0.3461 \pm 0.0103	0.3374 \pm 0.0026	0.3349 \pm 0.0166	0.3416 \pm 0.0072	0.3420 \pm 0.0083	0.3369 \pm 0.0018
	Mood_Swings	0.3446 \pm 0.0050	0.3225 \pm 0.0026	0.3362 \pm 0.0037	0.3466 \pm 0.0078	0.3322 \pm 0.0161	0.3185 \pm 0.0103	0.3428 \pm 0.0114	0.3482 \pm 0.0062
	Social_Weakness	0.3454 \pm 0.0089	0.3445 \pm 0.0021	0.3348 \pm 0.0063	0.3461 \pm 0.0107	0.3272 \pm 0.0266	0.3417 \pm 0.0063	0.3361 \pm 0.0084	0.3460 \pm 0.0108

To ensure the robustness and reproducibility of our findings, each evaluation trial in the PAS scenario was conducted with three independent runs under the same conditions. The reported results present both the average values and standard deviations across repetitions, which helps assess the stability and reliability of model performance. In contrast, FAS adopts a design where each run consists of multiple prompt batches. Each batch generates several data outputs, and the aggregation of these outputs across all batches forms the basis for the final performance evaluation. This structure yields many data samples within a single run, offering sufficient variation for a stable and representative assessment. Hence, additional independent runs were unnecessary for FAS, as internal variability already offers a reliable performance basis.

A.4 Prompt Instances

A.4.1 PAS. In the PAS scenario, two evaluation strategies are employed: zero-shot evaluation and few-shot evaluation. The key distinction lies in that the few-shot setting offers several example attribute-answer pairs as demonstrations, Manuscript submitted to ACM

Table 7. Detailed Performance of LLMs on numerical prediction tasks in the PAS scenario.

Dataset	Target Attributes	Zero-Shot Evaluation				Few-Shot Evaluation			
		GPT-3.5 Turbo	GPT-4 Turbo	LLaMA 3.0	LLaMA 3.1	GPT-3.5 Turbo	GPT-4 Turbo	LLaMA 3.0	LLaMA 3.1
ANES	ftobama1	0.5974 \pm 0.0218	0.5888 \pm 0.0163	0.4745 \pm 0.0813	0.4660 \pm 0.1026	0.6208 \pm 0.0008	0.5499 \pm 0.0754	0.4631 \pm 0.0949	0.4823 \pm 0.0822
	ftbiden1	0.5788 \pm 0.0376	0.5378 \pm 0.0540	0.4909 \pm 0.0666	0.4823 \pm 0.1231	0.5666 \pm 0.0148	0.5688 \pm 0.0583	0.4654 \pm 0.0724	0.4529 \pm 0.0173
	fttrump1	0.5444 \pm 0.0994	0.5461 \pm 0.0177	0.4971 \pm 0.0119	0.4820 \pm 0.0007	0.4829 \pm 0.0061	0.5191 \pm 0.0144	0.4654 \pm 0.0053	0.4697 \pm 0.0006
GSS	nateduc	0.7062 \pm 0.0138	0.7139 \pm 0.0041	0.6983 \pm 0.0221	0.6798 \pm 0.0089	0.6988 \pm 0.0060	0.7034 \pm 0.0276	0.6959 \pm 0.0118	0.6753 \pm 0.0366
	natcrime	0.6904 \pm 0.0101	0.7024 \pm 0.0216	0.6997 \pm 0.0175	0.6838 \pm 0.0035	0.6545 \pm 0.0112	0.7073 \pm 0.0052	0.6798 \pm 0.0165	0.6848 \pm 0.0250
BIS	argumentsfor	0.6204 \pm 0.0462	0.5119 \pm 0.0129	0.5777 \pm 0.0458	0.5730 \pm 0.0378	0.6207 \pm 0.0417	0.5299 \pm 0.0337	0.5640 \pm 0.0486	0.5622 \pm 0.0476
RECS	KWH	0.6554 \pm 0.0162	0.5648 \pm 0.0568	0.3114 \pm 0.0801	0.2669 \pm 0.0197	0.5293 \pm 0.1865	0.5489 \pm 0.0920	0.3088 \pm 0.0874	0.2365 \pm 0.0226
ACS	hrs_work	0.5482 \pm 0.1910	0.4997 \pm 0.2572	0.6461 \pm 0.1041	0.5807 \pm 0.1182	0.5265 \pm 0.1232	0.3259 \pm 0.0281	0.6506 \pm 0.1043	0.6201 \pm 0.0971
	income	0.4835 \pm 0.0655	0.4447 \pm 0.1146	0.5650 \pm 0.0925	0.5725 \pm 0.1295	0.4317 \pm 0.0980	0.4013 \pm 0.0539	0.5603 \pm 0.1051	0.5738 \pm 0.1252
Trell SMU	content_views	0.3523 \pm 0.0340	0.4301 \pm 0.0033	0.5612 \pm 0.0003	0.5361 \pm 0.0064	0.4274 \pm 0.0499	0.5197 \pm 0.0670	0.5462 \pm 0.0189	0.4685 \pm 0.0147
NHHS	TRPMILES	0.5969 \pm 0.0027	0.4403 \pm 0.1400	0.5983 \pm 0.1516	0.6851 \pm 0.0481	0.5507 \pm 0.1309	0.4194 \pm 0.2138	0.6435 \pm 0.1228	0.5615 \pm 0.0715
	TRVLCMIN	0.2050 \pm 0.0104	0.1847 \pm 0.0283	0.3871 \pm 0.2022	0.5307 \pm 0.1590	0.1629 \pm 0.0684	0.2011 \pm 0.0860	0.3381 \pm 0.0887	0.5982 \pm 0.0805

Table 8. Attribute selection details for prediction tasks in the FAS scenario. Attributes with an underscore in the “Input Attributes” column are optional, excluded in the zero-context paradigm and included in the context-enhanced paradigm. Italicized terms refer to textual descriptions rather than specific attributes.

Dataset	Simulation Objectives	Input Attributes	Target Attributes
GSS	Public Opinions	<i>background</i> , sample size, batch size, <u>distribution (military, crime, education)</u>	natenvir, natheal, natcity
Trell SMU	Media Usage Habit	<i>background</i> , sample size, batch size, <u>distribution (age group, city tier, duration, creation, averageCompletion)</u>	content_views weekends_trails_watched_per_day weekdays_trails_watched_per_day
YPS	Music & Movie Preferences	<i>background</i> , sample size, batch size, <u>distribution (Music, Slow songs or fast songs, Dance, Folk, Country, Classical music, Musical, Pop, Rock, Metal or Hardrock, Punk, Hiphop, Rap, Reggae, Ska, Swing, Jazz, Rock n roll, Alternative, Latino, Techno, Trance, Opera, Movies, Horror, Romantic, Sci-fi, War, Fantasy/Fairy tales, Animated)</u>	Action, Documentary, Thriller, Comedy
RECS	Household Fuel Usage	<i>background</i> , sample size, batch size, <u>distribution (Gender (HHSEX), Age Range, Employment Status, State (State-Postal))</u>	KWH, TOTALDOL

intending to enhance the LLM’s understanding and improve its predictive performance. As shown in Figure 10, the example prompt distinction highlights the shift in the amount of information provided to the model.

A.4.2 FAS. In the FAS scenario, we aim to generate group-level data that reflects the distribution of attributes within a specified population. This scenario employs two generation paradigms: zero-context and context-enhanced generation. In the zero-context generation, the model generates data without any additional context about the specific population. In contrast, the context-enhanced generation incorporates distributional information, such as the proportions of gender, age, and other attributes within the dataset, which helps the model generate more realistic and representative data. Figure 11 illustrates an example of these two generation paradigms, showing how the prompt structure changes depending on whether context is provided or not.

Table 9. Detailed Performance of LLMs on prediction tasks in the FAS scenario.

Dataset	Target Attribute	Zero-Context Generation				Context-Enhanced Generation			
		GPT-3.5 Turbo	GPT-4 Turbo	LLaMA 3.0	LLaMA 3.1	GPT-3.5 Turbo	GPT-4 Turbo	LLaMA 3.0	LLaMA 3.1
GSS	natenvir	0.6555	0.6495	0.6449	0.6487	0.6504	0.7005	0.6649	0.6812
	natheal	0.6526	0.6517	0.6477	0.6533	0.6683	0.6955	0.6635	0.6777
	natcity	0.6388	0.6457	0.6596	0.6540	0.6520	0.6624	0.6430	0.6589
Trell SMU	content_views	0.2992	0.3455	0.2772	0.3330	0.4160	0.4276	0.3219	0.3066
	weekends_trails_...	0.2848	0.2822	0.1823	0.2921	0.2797	0.2732	0.2025	0.2497
	weekdays_trails_...	0.3669	0.3683	0.2463	0.2724	0.3272	0.3844	0.2426	0.2814
YPS	Action	0.6525	0.6968	0.6478	0.6368	0.6526	0.6968	0.6478	0.6368
	Documentary	0.6472	0.6968	0.6599	0.6542	0.6472	0.6968	0.6599	0.6542
	Thriller	0.6650	0.7045	0.6385	0.6407	0.6650	0.7045	0.6385	0.6407
	Comedy	0.7409	0.7859	0.6815	0.6837	0.7409	0.7859	0.6815	0.6837
RECS	KWH	0.6208	0.6267	0.5484	0.3753	0.5976	0.6302	0.5763	0.5113
	TOTALDOL	0.6460	0.6501	0.5709	0.3900	0.6209	0.6504	0.6003	0.5946

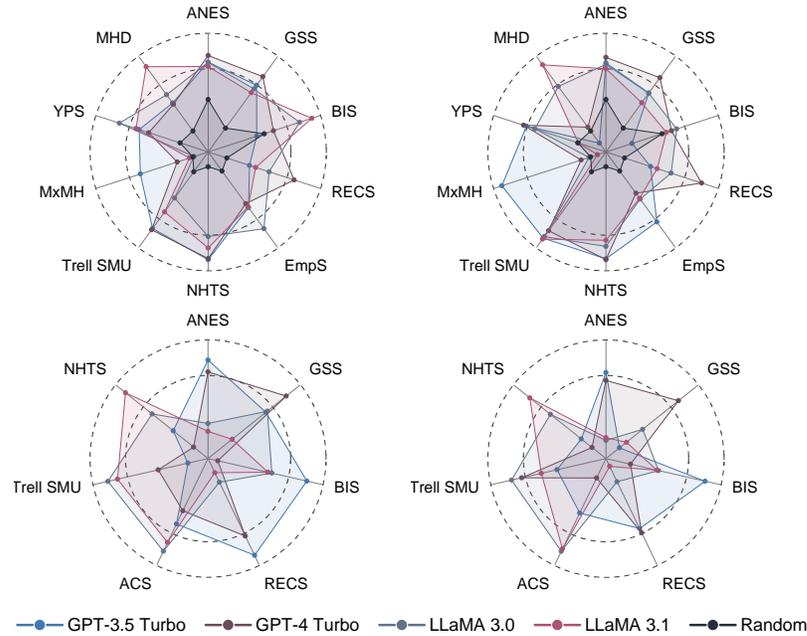


Fig. 8. Radar plots illustrating model performance on the PAS scenario across datasets (each axis is individually scaled per dataset to enhance the visibility of relative differences). The top row shows multiple-choice tasks, and the bottom row shows numerical prediction, under zero-shot evaluation (left) and few-shot evaluation (right). Higher values indicate better performance.

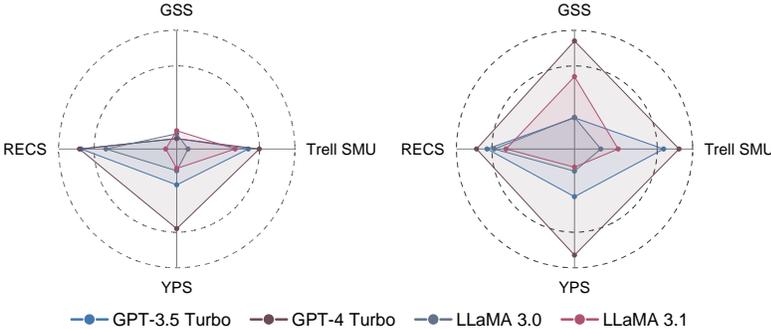


Fig. 9. Radar plots illustrating model performance on the FAS scenario across datasets (each axis is individually scaled per dataset to enhance the visibility of relative differences). Results are shown under zero-context generation (left) and context-enhanced generation (right). Higher values indicate better performance.

Partial Attribute Simulation

Background Description

The survey content was shaped to a significant degree by ideas offered by the ANES user community through public solicitations and by members of the ANES National Advisory Board. Additional questions were included to capture changes in the political environment and recent developments in social science research. The questionnaire includes questions about voting behavior, candidate traits, political engagement, ideological orientations, racial identity and stereotyping, and many topical issues, including #MeToo, immigration, impeachment, and the coronavirus pandemic.

Respondent Profiles

This person is 40 years old, a homeowner, and has an income between \$5,000 and \$9,999. He has a voting tendency to select someone to vote for, but their summarized participation score is 0.

Conditions

This person's participation in political activities is as follows:

- *Has not attended a meeting to discuss political or social concerns.*
- *Has not donated to an organization focused on a political or social issue.*
- *Has not joined a protest march, rally, or demonstration.*
- *Has not posted messages or comments online about political issues or campaigns.*
- *Has not tried to persuade anyone to vote in any direction.*
- *Has not worn a campaign button, placed a sticker on their car, or displayed a sign in their window or yard.*
- *Has a cold or unfavorable feeling (score 15.0, in the range of [0,20]) towards Mike Pence and Andrew Yang.*
- *Has a cold or unfavorable feeling (score 0.0, in the range of [0,20]) towards Nancy Pelosi, Marco Rubio, Alexandria Ocasio-Cortez, and Nikki Haley.*

Task Demands

The data come from the American National Election Studies 2020 (ANES2020). As a sociologist and political scientist, you need to analyze the public opinion of citizens in this dataset and predict their possible election attitudes. Based on the information provided, can you help decide how this person would rate Clarence Thomas?

Few-Shot Examples (Zero-Shot Not Used)

Here are some examples and corresponding answers:

Example 1:

- *This person is 69 years old.*
- *This person is a homeowner.*
- *This person has an income between \$10,000 and \$14,999.*
- *This person probably would not vote.*
- *This person has a summarized participation score of 0.*
- *This person has a neutral feeling (score 60.0, in the range of [40, 60]) towards Mike Pence, Andrew Yang, Dr. Anthony Fauci, Joe Biden, and Donald Trump.*
- *The answer is 60.*

Example 2: ...

Example 3: ...

Answer Format

Your response should consist of just one number between [0, 100] to reflect the person's attitude, without any additional text, explanation, or even a space character. Here is an example of the required response format that you should follow:

- *If you think this person has a slightly warm or favorable feeling, you should respond with JUST an integer number, such as 62.*
- *For more or less favorable feelings, the number may be larger or smaller.*
- *So your response should be like: 62.*

Fig. 10. A representative prompt utilized in zero-shot and few-shot evaluation conducted on the ANES dataset within the PAS scenario.

Full Attribute Simulation

Background Description

The Residential Energy Consumption Survey (RECS), conducted by the U.S. Energy Information Administration (EIA), is a nationally representative study designed to collect detailed information on household energy usage, expenditures, and related demographics. Since its inception in 1978, RECS has played a vital role in providing insights into energy consumption patterns across various housing units in the United States. The 2015 RECS dataset, for instance, surveyed over 5,600 households, representing approximately 118.2 million primary residences. The survey encompasses data on energy sources such as electricity, natural gas, propane, and fuel oil, along with expenditure estimates for heating, cooling, and other end uses. This dataset has been instrumental in energy policy analysis, efficiency improvements, and forecasting future consumption trends, making it a cornerstone of energy research in the residential sector.

Zero-Context Generation

You are a data scientist and socioeconomic analyst. Your task is to generate a synthetic dataset simulating residential energy consumption and household characteristics based on general knowledge and logical assumptions. No prior distributional information or feature statistics will be provided. Use your expertise to model realistic energy usage patterns, household demographics, and expenditure data for a nationally representative set of housing units.

Prediction Question

Based on your understanding, prior knowledge, and general reasoning, predict the following for a household:

- What is the total electricity use (*KWH*) of this household in 2020?
- What is the total electricity cost (*DOLLAREL*) of this household in 2020?
- What is the total energy cost (*TOTALDOL*) of this household in 2020?

Sample Size, Batch Size, and Answer Format

Generate 20 rows of data in each batch, and repeat this process for 100 batches to simulate a comprehensive dataset. For each batch, provide the predictions directly in the following format: [*KWH*, *DOLLAREL*, *TOTALDOL*]. After completing a batch, explicitly indicate the batch number before moving to the next batch (e.g., "Batch 1 complete"). Continue this process until all 100 batches are generated. The format must be a JSON string representing a three-dimensional array. Also, make sure that it is an array of arrays with no objects, like in a spreadsheet. After generating, only show the data you generated without additional words. Remember, the records should closely reflect the RECS dataset.

Context-Enhanced Generation

You are a data scientist and socioeconomic analyst. I will provide you with the demographic distribution of a population, including the proportions of gender (*HHSEX*), age groups (*HHAGE*), employment status (*EMPLOYHH*), and state location (*state_postal*). Based on these distributions, your task is to generate a synthetic dataset that reflects the specified demographic structure. The generated dataset should include plausible and consistent combinations of features that align with the given proportions, simulating a realistic social survey dataset. Ensure that the dataset captures meaningful patterns and relationships between features commonly observed in real-world surveys.

Distribution Information

You may be provided with the following distribution data:

- *HHSEX* (*sex*): [Female: 0.5408, Male: 0.4592]
- *HHAGE* (*age group*): [18-30: 0.0868, 31-40: 0.1503, 41-50: 0.1496, 51-60: 0.1848, 61-70: 0.2087, 71-80: 0.1574, 81-90: 0.0623]
- *EMPLOYHH* (*employment status*): [Employed full-time: 0.4706, Employed part-time: 0.0868, Not employed: 0.1166, Retired: 0.3261]
- *state_postal* (*state location*): [Alabama: 0.0131, Alaska: 0.0168, Arkansas: 0.0145, California: 0.0623, Colorado: 0.0195, Connecticut: 0.0159, Delaware: 0.0077, ..., Wisconsin: 0.0193, Wyoming: 0.0103]

Prediction Question

Based on the provided distributions of gender (*HHSEX*), age range (*HHAGE*), employment status (*EMPLOYHH*), and state location (*state_postal*), predict the total electricity use (*KWH*), the total electricity cost (*DOLLAREL*), and the total energy cost (*TOTALDOL*) for each household in 2020.

Sample Size, Batch Size, and Answer Format

(Same as Zero-Context Generation)

Fig. 11. A representative prompt utilized in zero-context and context-enhanced generation conducted on the RECS dataset within the FAS scenario.

Received 20 February 2007; revised 12 March 2009; accepted 5 June 2009