

A Systematic Survey on Large Language Models for Evolutionary Optimization: From Modeling to Solving

Yisong Zhang, Ran Cheng, Guoxing Yi, and Kay Chen Tan

Abstract—Large Language Models (LLMs), with their strong understanding and reasoning capabilities, are increasingly being explored for tackling optimization problems, especially in synergy with evolutionary computation¹. Despite rapid progress, however, the field still lacks a unified synthesis and a systematic taxonomy. This survey addresses this gap by providing a comprehensive review of recent developments and organizing them within a structured framework. We classify existing research into two main stages: LLMs for optimization modeling and LLMs for optimization solving². The latter is further divided into three paradigms according to the role of LLMs in the optimization workflow: LLMs as stand-alone optimizers, low-level LLMs embedded within optimization algorithms, and high-level LLMs for algorithm selection and generation. For each category, we analyze representative methods, distill technical challenges, and examine their interplay with traditional approaches. We also review interdisciplinary applications spanning the natural sciences, engineering, and machine learning. By contrasting LLM-driven and conventional methods, we highlight key limitations and research gaps, and point toward future directions for developing self-evolving agentic ecosystems for optimization. An up-to-date collection of related literature is maintained at <https://github.com/ishmael233/LLM4OPT>.

Index Terms—Large Language Models, Evolutionary Algorithms, Optimization Modeling, Optimization Solving.

I. INTRODUCTION

Optimization techniques have become indispensable for addressing complex problems across diverse domains, including engineering design [1], economic planning [2], and scientific discovery [3]. In practice, real-world challenges are typically abstracted into mathematical optimization models, which are then solved by optimization algorithms. Broadly, these algorithms can be divided into two categories: exact methods and approximate methods [4]. Exact methods, while theoretically capable of guaranteeing global optimality, often suffer from exponential growth in computational complexity, rendering them impractical for large-scale problems. In contrast, approximate methods, such as heuristics [4], can efficiently tackle large and complex problems, though without convergence guarantees. Moreover, the No Free Lunch (NFL) theorem [5] dictates that no single optimization algorithm can consistently

outperform others across all problem classes. Consequently, the practical deployment of optimization algorithms typically demands substantial expertise for configuration [6], selection [7], and even customized design [8]. This heavy reliance on domain knowledge remains a critical barrier to transferring optimization technology from theory to practice.

Against this backdrop, machine learning has emerged as a promising approach to alleviate the complexity of algorithm configuration and reduce dependence on expert knowledge. Among these methods, Reinforcement Learning (RL) [9], [10], with its flexible decision-making framework, has been widely applied at multiple levels of optimization algorithms [11]. At the internal structural level, RL has been employed for population initialization [12], fitness evaluation [13], operator selection [14], and parameter control [15]. At the higher strategic level, RL has enabled automated algorithm selection [16] and even algorithm generation [17]. However, a persistent limitation is that most RL-based approaches are trained on narrowly defined problem sets, which severely restricts their generalization. When confronted with new problems, retraining is often costly and time-consuming. These limitations motivate the exploration of Large Language Models (LLMs) [18], whose powerful semantic understanding, reasoning, and generalization capabilities open new opportunities for optimization research.

The rapid advancements of LLMs are fundamentally reshaping research paradigms across disciplines. Trained on vast corpora, LLMs exhibit strong capabilities in language understanding [19], complex logical reasoning [20], and open-ended knowledge generalization [21]. Their influence extends far beyond Natural Language Processing (NLP) [22], demonstrating transformative potential in high-value domains such as medicine [23] and finance [24]. For example, Huawei’s PanGu Drug Model [25] accelerates drug discovery pipelines, while BloombergGPT [26] integrates diverse financial data to provide domain-specific insights. Within optimization, the semantic and reasoning strengths of LLMs open unique opportunities: on the modeling side, they can translate natural language descriptions into mathematical optimization models [27], thereby advancing the automation and intelligence of the entire optimization workflow; on the solving side, they can function as stand-alone optimizers [28] or collaborate with existing algorithms to enhance performance; .

Despite their significant potential, the use of LLMs in optimization is still at an early stage. Existing studies have already revealed important limitations. For example, LLMs as

Yisong Zhang and Ran Cheng contributed equally to this work.

¹This survey primarily focuses on *evolutionary optimization*, i.e., optimization based on evolutionary computation. For brevity, we use the term *optimization* throughout to denote this scope.

²In this survey, the terms *optimization modeling* and *optimization solving* are used as concise forms of *optimization problem modeling* and *optimization problem solving*, respectively.

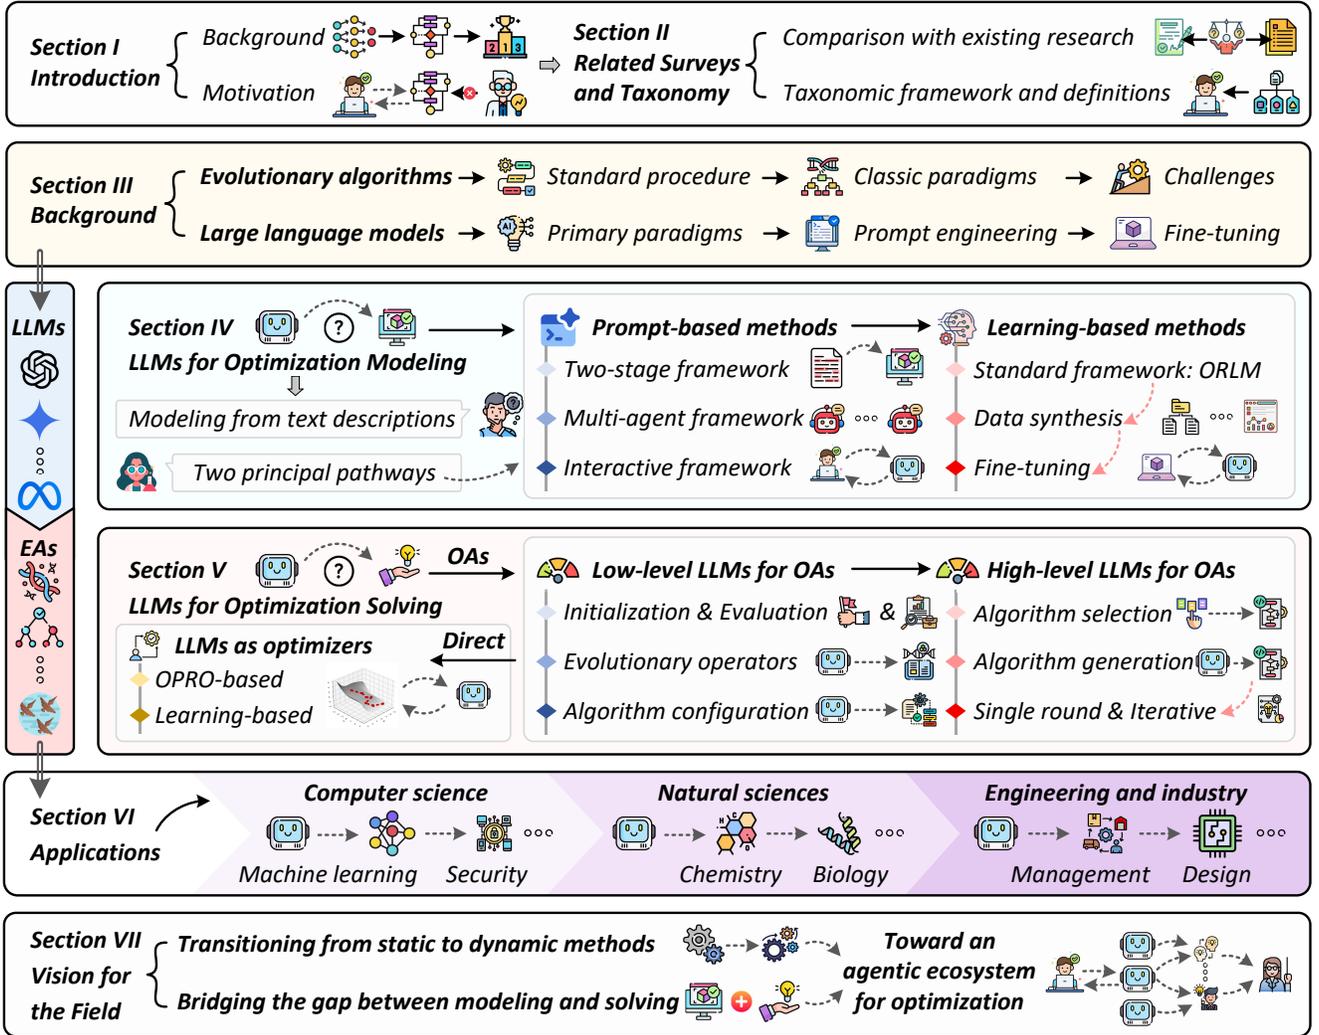


Fig. 1. Overall organization of this survey.

standalone optimizers often fail to surpass classical algorithms in performance [29], and although fine-tuning with domain-specific data can enhance task outcomes, constructing such datasets remains costly and expertise-intensive [27]. Against this backdrop, this survey provides a systematic analysis and guide for this emerging interdisciplinary field. The main contributions are summarized as follows:

- We present a comprehensive literature review of research on LLMs for optimization, systematically summarizing recent advances, representative methods, and key applications.
- We propose a structured taxonomy that categorizes existing work into optimization modeling and optimization solving, with the latter further divided into three paradigms: LLMs as optimizers, low-level LLMs embedded in algorithms, and high-level LLMs for algorithm selection and generation. This taxonomy offers a unified framework for understanding and organizing the research landscape.
- We contrast LLM-driven approaches with traditional methods to identify fundamental challenges and research

gaps, and outline promising future directions toward building an intelligent optimization ecosystem.

The overall structure of this survey is illustrated in Fig. 1. Section II reviews related surveys and introduces our taxonomy, followed by Section III, which provides the necessary background on key technologies. Sections IV and V form the core of this work, focusing on LLMs for optimization modeling and solving, respectively. Section VI then examines interdisciplinary applications of these approaches. Section VII outlines future research directions, and Section VIII concludes with a summary of key findings.

II. RELATED SURVEYS AND TAXONOMY

Several surveys and reviews have examined the use of LLMs in optimization. Table I summarizes their scope and contrasts them with our study. Wu *et al.* [30] and Huang *et al.* [31] reviewed the field from a bidirectional perspective, considering both LLM-enhanced optimization algorithms and optimization algorithm-enhanced LLMs. However, in the former direction, their discussions remained limited to scenarios where LLMs serve as solvers or for algorithm generation, without analyzing

TABLE I

COMPARISON OF RELATED SURVEYS ON LLMs FOR OPTIMIZATION. OUR WORK PROVIDES THE FIRST SYSTEMATIC COVERAGE OF ALL FOUR CATEGORIES: LLMs FOR MODELING (LM), LLMs AS OPTIMIZERS (LO), LOW-LEVEL LLMs FOR OPTIMIZATION ALGORITHMS (LL), AND HIGH-LEVEL LLMs FOR OPTIMIZATION ALGORITHMS (HL).

Ref.	Venue	LM	LO	LL	HL
Wu <i>et al.</i> [30]	TEVC, 2024		✓		✓
Huang <i>et al.</i> [31]	SWEVO, 2024		✓		✓
Chao <i>et al.</i> [32]	Research, 2024			✓	
Yu <i>et al.</i> [33]	arXiv, 2024		✓	✓	✓
Liu <i>et al.</i> [34]	arXiv, 2024		✓	✓	✓
Ma <i>et al.</i> [35]	TEVC, 2024		✓		✓
Our work	arXiv, 2025	✓	✓	✓	✓

their broader relationship to the optimization process. Yu *et al.* [33] adopted a similar classification and proposed a general framework for LLM-assisted optimization. Chao *et al.* [32] focused specifically on Evolutionary Algorithms (EAs) [36], [37], highlighting component-level analogies between EAs and LLMs to suggest bidirectional knowledge transfer, but their coverage was restricted to cases where LLMs act as operators. Other related works took slightly different perspectives. For instance, Liu *et al.* [34] provided a broad overview of LLMs in algorithm design, categorizing their roles as optimizers, predictors, extractors, and designers. Ma *et al.* [35] surveyed meta-black-box optimization, which mentioned LLMs but primarily emphasized conventional reinforcement learning approaches. Overall, existing reviews have concentrated mainly on the solving stage of optimization, with limited attention to the modeling stage. Even in [34], modeling was only briefly introduced as a minor application.

In contrast to existing surveys, this paper provides a systematic review of the entire modeling-to-solving workflow of LLMs for optimization. We propose a new taxonomy that articulates the relationship between LLMs and the optimization process. Specifically, we divide the field into two main categories: LLMs for optimization modeling and LLMs for optimization solving. The latter is further subdivided into three paradigms: LLMs as optimizers, low-level LLM-assisted optimization algorithms, and high-level LLM-assisted optimization algorithms. The definitions of these categories are as follows:

- **LLMs for Optimization Modeling** aims to automatically transform unstructured natural language descriptions of problems into mathematical optimization models that can be interpreted and solved by machines. This area represents the foundational step toward a fully LLM-driven optimization workflow, with the central challenge being the transition from ambiguous natural language to precise mathematical formulations. Existing approaches are mainly divided into prompt-based and learning-based methods. Prompt-based approaches typically rely on carefully designed prompting strategies or multi-agent collaboration, offering fast deployment without additional training. In contrast, learning-based approaches often require data synthesis and fine-tuning, which incur training

costs but can significantly improve reliability in complex scenarios.

- **LLMs as Optimizers** treat LLMs themselves as general-purpose optimizers that solve optimization problems through iterative natural language interaction, independent of traditional algorithmic frameworks. This paradigm leverages the in-context learning and reasoning abilities of LLMs to explore optimization trajectories and generate promising candidate solutions. Although this approach faces challenges such as model dependency and scalability, it represents the earliest and most direct attempt to connect large models with optimization tasks, highlighting its pioneering significance.
- **Low-level LLM-assisted Optimization Algorithms** embed LLMs as intelligent components within traditional optimization algorithms to enhance specific operations. Unlike the standalone optimizer paradigm, this approach integrates LLMs tightly with established frameworks, exploiting their analytical and domain knowledge to improve performance. Typical applications include population initialization, operator design, parameter control, configuration, and fitness evaluation. By empowering traditional components to adapt more intelligently to diverse problem characteristics and search states, this paradigm improves both efficiency and solution quality at the algorithmic core.
- **High-level LLM-assisted Optimization Algorithms** focus on top-level orchestration rather than internal components. They generally fall into two subcategories: algorithm selection and algorithm generation. Algorithm selection leverages LLMs to choose the most suitable algorithm from a pool for different problem instances, while algorithm generation goes further by enabling LLMs to autonomously design new algorithms tailored to specific tasks. By granting LLMs a global perspective over the entire optimization workflow, this paradigm elevates their role from internal assistant to top-level designer.

III. BACKGROUND

Given that current research on LLMs for internal component control, high-level orchestration, and algorithm generation is predominantly centered on EAs, we first provide the necessary background. Section III-A introduces the framework and core paradigms of EAs, while Section III-B outlines the underlying architectures and key technologies of LLMs.

A. Evolutionary Algorithms

EAs are a class of population-based, gradient-free optimization methods inspired by the principles of biological evolution. As illustrated in Fig. 2, the general framework of an EA begins with the initialization of a population of candidate solutions, whose representations can range from numerical vectors to neural networks. Within each iteration, individuals are evaluated using a fitness function. Parent individuals are then selected to produce offspring through genetic operators such as crossover and mutation. A new population is formed

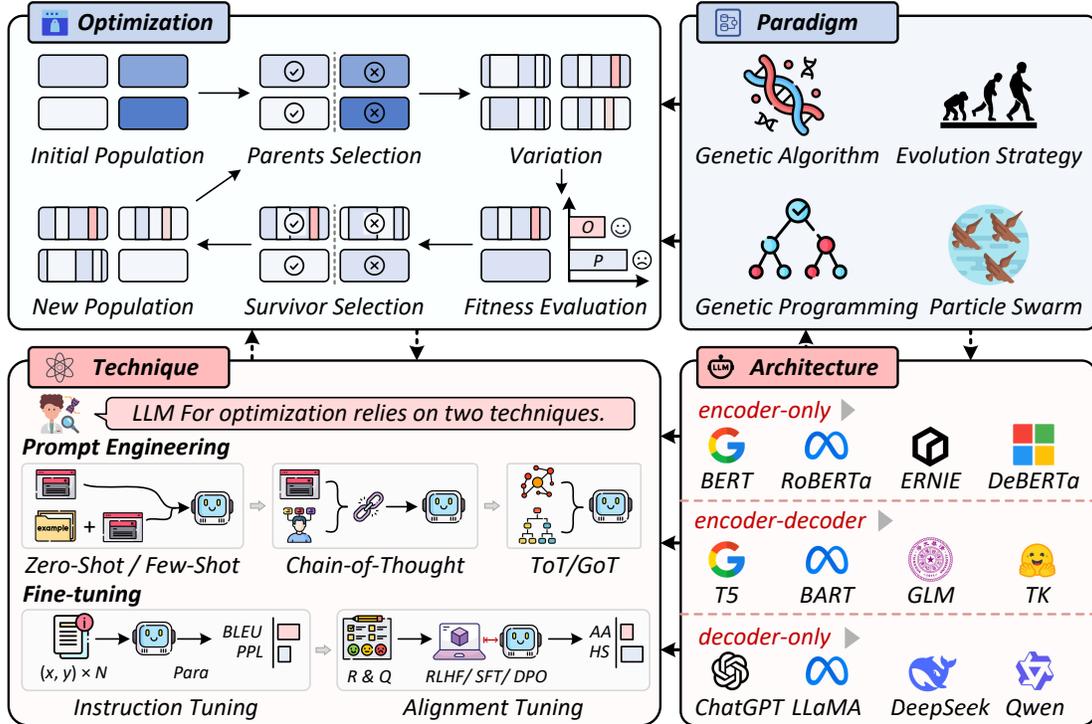


Fig. 2. Technological dependencies of LLMs for optimization, including EA paradigm and workflow, LLM architecture, and related enabling technologies.

by selecting the fittest individuals from both parents and offspring. This evolutionary cycle repeats until a termination criterion is reached, at which point the best-performing individual is returned as the final solution.

Over decades of development, researchers have proposed a diverse set of classical paradigms [38], [39]. Prominent examples include Genetic Algorithms (GAs) [40], Genetic Programming (GP) [41], Differential Evolution (DE) [42], and Particle Swarm Optimization (PSO) [43]. Although these algorithms share the population-based iterative framework, they differ in search mechanisms and application domains. For instance, GAs simulate natural selection and genetic operators, making them well-suited for discrete and combinatorial problems; DE and PSO excel in continuous optimization tasks through distinctive mutation and information-sharing strategies; while GP, with its tree-structured encoding, has been widely applied to automatic programming and symbolic regression. Collectively, these paradigms established the theoretical foundation of evolutionary optimization and provided diverse strategies for tackling increasingly complex problems.

Compared to traditional exact optimization methods, EAs offer significant advantages in handling non-convex, multimodal, and noisy problems. Their applications span a wide range of domains, including aerospace design [44] and hyperparameter tuning in deep learning [45]. Nonetheless, in line with the NFL theorem, no single EA can achieve universal superiority across all problems at low computational cost. As a result, practitioners often need to devote substantial effort to selecting, configuring, or designing suitable EA variants. To address these challenges, recent research has increasingly integrated EAs with machine learning methods [46]. Notably,

reinforcement learning has been combined with evolutionary frameworks, giving rise to approaches such as MOEA/D-QN [47] and SYMBOL [17]. With the emergence of LLMs, cutting-edge studies are further exploring how LLMs can empower EAs [30], extending from problem formulation [27] to automated algorithm design [34].

B. Large Language Models

The foundation of LLMs lies in the Transformer architecture [48], which captures global input-output dependencies through self-attention. Building on this architecture, researchers have developed three primary paradigms: encoder-decoder, encoder-only, and decoder-only models [49]. Encoder-decoder models, exemplified by BART [50] and T5 [51], follow the original Transformer design and excel at sequence-to-sequence tasks. Encoder-only models, such as BERT [52], focus on contextual representation learning for semantic understanding. Decoder-only models, including ChatGPT [53] and DeepSeek [54], leverage autoregressive generation for open-domain tasks and currently dominate LLM-for-Optimization research due to their strong generative and reasoning capabilities. Relevant applications mainly employ two pathways: prompt engineering [55] and fine-tuning [56].

Prompt engineering steers LLM outputs by carefully designed instructions without modifying model parameters. Early forms include zero-shot and few-shot prompting [57], which exploit pre-trained knowledge directly or via limited in-context examples. More advanced approaches incorporate structured reasoning, such as Chain-of-Thought (CoT) [20], which enhances performance on complex reasoning tasks by eliciting step-by-step logical inference. CoT has since expanded into

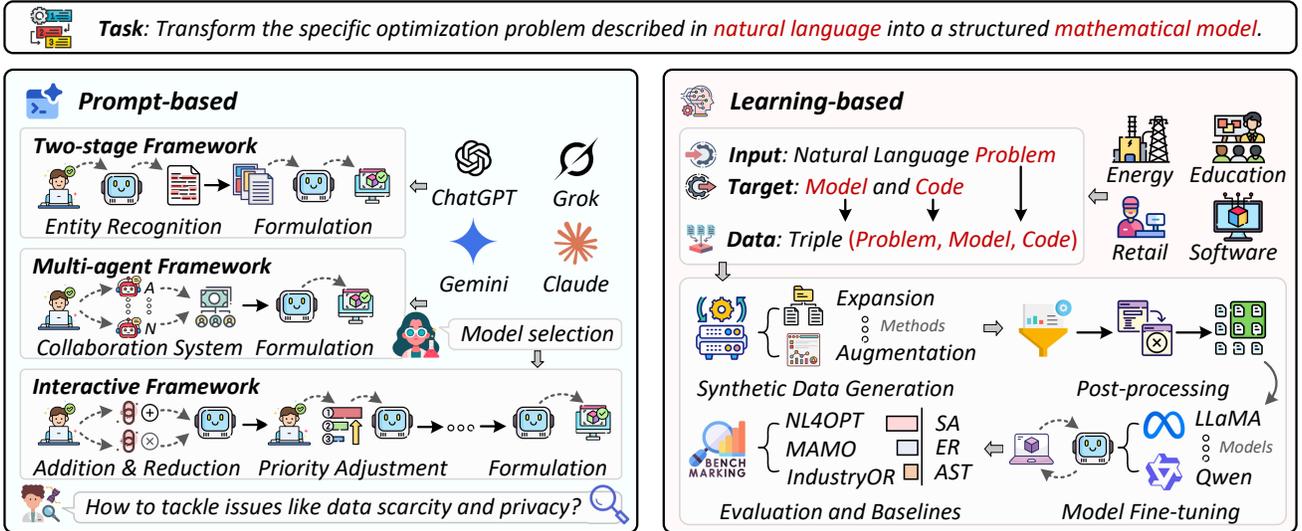


Fig. 3. Illustration of LLMs for optimization modeling. Approaches can be broadly divided into two categories: (i) prompt-based methods, typically implemented via two-stage prompting, multi-agent collaboration, or interactive frameworks; and (ii) learning-based methods, which generally follow a workflow of data synthesis, model fine-tuning, and evaluation.

richer paradigms like Tree-of-Thought (ToT) [58], Graph-of-Thought (GoT) [59], and domain-specific variants such as Chain-of-Code (CoC) [60] and Chain-of-Knowledge (CoK) [61].

Fine-tuning, in contrast, updates model parameters on task-specific data, enabling deeper adaptation at the cost of labeled data and computational resources. Two strategies are particularly relevant. Instruction fine-tuning [62] reformulates diverse tasks into instruction–input–output triplets, unifying them under an instruction-following paradigm. This significantly improves zero-shot generalization, as demonstrated by Flan-T5 [63]. Alignment fine-tuning ensures model behavior aligns with human intentions and values. Reinforcement Learning with Human Feedback (RLHF) [64] achieves this by optimizing a reward model built from human preferences, while Direct Preference Optimization (DPO) [65] simplifies the process by directly optimizing for preferred outputs. Together, these techniques are central to building safe, reliable, and useful LLMs.

IV. LLMs FOR OPTIMIZATION MODELING

Optimization modeling is a crucial step in the optimization workflow but traditionally relies heavily on expert knowledge and experience. Recently, LLMs have opened new opportunities for automated optimization modeling. In this section, we introduce two core paradigms: prompt-based methods and learning-based methods. Prompt-based methods (Section IV-A) guide LLMs through carefully designed instructions, often implemented via two-stage workflows, multi-agent collaboration, or interactive prompting. Learning-based methods (Section IV-B), in contrast, fine-tune LLMs to directly generate mathematical formulations, typically requiring large-scale synthetic data for training but offering greater reliability in complex tasks. Finally, we discuss open challenges in this field (Section IV-C). Representative studies are summarized in Table II, while the main paradigms are illustrated in Fig. 3.

A. Prompt-based Methods

Automated optimization modeling, which aims to formalize real-world challenges into mathematical models, has recently emerged as a significant research direction. To mitigate the reliance on expert experience during this process, researchers have explored various approaches. For instance, Pawlak *et al.* preliminarily demonstrated the feasibility of automated modeling by analyzing feasible solution samples [96] or employing evolutionary algorithms [97] to generate constraints. However, these methods were often constrained by sample quality and limited in scope [69], primarily focusing on constraint generation rather than a direct conversion from natural language descriptions to complete mathematical models.

To address this research gap, Ramamonjison *et al.* proposed OptGen [98], the first method to convert unstructured natural language problem descriptions into mathematical optimization models, and subsequently catalyzed the field’s growth with the NL4OPT competition [99]. This competition decomposed the task into two core stages: first, using Named Entity Recognition (NER) to extract key entities such as variables, parameters, and constraints from the problem text, and then generating a complete mathematical model from the entity-annotated description. However, these earlier works largely relied on lightweight pre-trained models like BERT [100], [101] and BART [102], [103]. In contrast, with the advent of LLMs, B. Almonacid *et al.* were the first to attempt automated modeling using powerful LLMs such as GPT-3.5 [67]. They employed a single-step modeling approach, directly prompting the LLM to output the mathematical model corresponding to a problem description and verifying its correctness with a solver. Nevertheless, while this single-step method proves effective for simple problems, its accuracy and robustness are generally insufficient for meeting the high standards required for complex optimization modeling.

Inspired by the aforementioned studies, researchers have

TABLE II
 REPRESENTATIVE WORKS ON LLMs FOR OPTIMIZATION MODELING, CATEGORIZED INTO PROMPT-BASED AND LEARNING-BASED METHODS.

	Method	Venue	Type	Technical Summary
Prompt-based Methods	Ner4OPT [66]	CPAIOR, 2023	Two-stage	Fine-tune models for named entity recognition by incorporating traditional NLP methods.
	AOMG [67]	GECCO, 2023	Direct	Directly leverage LLMs to generate mathematical models.
	HG 2.0 [68]	arXiv, 2023	Two-stage	Embed LLMs within the two-stage framework.
	AMGPT [69]	arXiv, 2023	Two-stage	Employ fine-tuned models for constraint classification.
	CoE [70]	ICLR, 2023	Multi-agent	Construct dynamic reasoning chains using 11 expert agents.
	OptiMUS [71]	ICML, 2023	Multi-agent	Develop a conductor agent to coordinate modeling, programming, and evaluation processes.
	MAMS [72]	INFOR, 2024	Multi-agent	Develop inter-agent cross-validation to replace solver-dependent verification.
	EC [73]	SGC, 2024	Two-stage	Apply the two-stage framework to energy management systems.
	CAFA [74]	NeurIPS, 2024	Two-stage	Enhance modeling performance through code-based formalization.
	MAMO [75]	NAACL, 2024	Two-stage	Develop the MAMO benchmark with ordinary differential equation extensions.
	NL2OR [76]	arXiv, 2024	Two-stage	Predefine abstract structural constraints to regulate the LLM outputs.
	TRIP-PAL [77]	arXiv, 2024	Two-stage	Apply the two-stage framework to travel planning.
	OptLLM [78]	arXiv, 2024	Interactive	Support both single-input and interactive-input modes.
	OptiMUS-0.3 [79]	arXiv, 2024	Multi-agent	Introduce self-corrective prompts and structure-aware modeling based on OptiMUS.
	MeetMate [80]	TiiS, 2024	Interactive	Develop an interactive system for user input processing with five selectable task options.
	VL [81]	CUI, 2025	Interactive	Convert user priorities into optimization constraints during dialog interactions.
	LLM-MCTS [82]	arXiv, 2025	Two-stage	Conduct hierarchical Monte Carlo tree search over the hypothesis space.
EquivaMap [83]	arXiv, 2025	Two-stage	Generate variable mapping functions via LLMs with lightweight verification.	
MAP [84]	arXiv, 2025	Multi-agent	Deploy multiple independent reviewers to evaluate modeling results.	
ORMind [85]	arXiv, 2025	Multi-agent	Replace the conductor agent with structured, predictable workflows.	
Learning-based Methods	LM4OPT [86]	INFOR, 2024	Fine-tuning	Progressively fine-tune models on the NL4OPT dataset.
	ORLM [27]	OR, 2024	Data synthesis	Synthesize data through expansion and augmentation and fine-tune open-source models.
	ReSocratic [87]	ICLR, 2024	Data synthesis	Propose inverse data synthesis methodology and construct the OPTIBENCH benchmark.
	LLMOPT [88]	ICLR, 2024	Fine-tuning	Introduce model alignment and self-correction mechanisms to mitigate hallucination phenomena.
	BPP-Search [89]	arXiv, 2024	Data synthesis	Solve the problem of missing detailed in data synthesis.
	OptMATH [90]	arXiv, 2025	Data synthesis	Develop a scalable bidirectional data synthesis approach.
	LLMBO [91]	arXiv, 2025	Data synthesis	Propose a method for fine-tuning cost-effective LLMs to tackle specific business challenges.
	SIRL [92]	arXiv, 2025	Fine-tuning	Integrate external optimization solvers as verifiable reward validators for reinforcement learning.
	Step-Opt [93]	arXiv, 2025	Data synthesis	Increase problem complexity through an iterative problem generation approach.
	DPLM [94]	arXiv, 2025	Data synthesis	Combine the diversity of forward generation and the reliability of inverse generation.
OptiTrust [95]	arXiv, 2025	Data synthesis	Develop a verifiable synthetic data generation pipeline.	

progressively adopted large language models for a two-stage approach involving NER and automated modeling in the NL4OPT task. The Holy Grail 2.0 framework [68] proposed by Tsouros *et al.*, for instance, recommends using specialized models like Ner4OPT for the NER stage. It then further decomposes the automated modeling task into three sub-tasks: first, identifying relationships between entities; second, formalizing the problem into an optimization model using these entities and their relationships; and finally, generating code for testing and execution. Building upon this idea, Li *et al.* [69] proposed a framework specifically for Mixed-Integer Linear Programming (MILP). In their approach, they employed a fine-tuned model to classify constraints to handle logical constraints and binary variables, which were less explored in previous works. Furthermore, this two-stage method has been successfully applied in various specialized domains. For example, [73] applied it to the field of energy management, requiring the LLM to first extract the five most critical parameters from the problem description before proceeding with automated modeling. Another study [77] applied this approach to travel planning, where the LLM was responsible for extracting user preferences and associated costs, building a complete model, and utilizing a solver to find the optimal travel plan.

Beyond the two-stage framework, researchers have actively

explored other prompt-based paradigms to further enhance the performance of large language models in optimization modeling. Two of the most representative paradigms are the multi-agent framework and the interactive framework. The former decomposes the automated modeling task into a series of collaborative expert sub-tasks, which are then completed jointly by multiple LLMs. The latter, on the other hand, aims to alleviate the user’s input burden by not requiring a complete problem description upfront. Instead, the optimization model is progressively refined through human-computer interaction, allowing for incremental additions or removals of constraints, priority adjustments, and other modifications.

In the domain of multi-agent frameworks, the Chain-of-Experts [70] framework proposed by Xiao *et al.* is a foundational work. They initialized 11 types of experts, including a terminology expert, a modeling expert, a programming expert, and a code review expert, which were coordinated by a conductor agent. This framework dynamically and iteratively selects experts to construct a forward chain-of-thought and incorporates a backward reflection mechanism to handle errors and inconsistencies during the modeling process. Building upon this, subsequent studies have further explored diverse multi-agent collaboration modes. For instance, AhmadiTeshnizi *et al.* introduced OptiMUS [71] and OptiMUS-0.3 [79], which also use a conductor agent to coordinate modeling,

programming, and evaluation tasks. However, this manager reviews the content of each conversational step before assigning the corresponding task to the next agent. However, Wan *et al.* pointed out that this conductor-orchestrated framework could lead to issues such as an unpredictable workflow and insufficient mathematical accuracy. Therefore, they proposed a cognitively-inspired framework named ORMind [85], which aims to improve the reliability and transparency of solutions while reducing API calls by mimicking the human cognitive process and adopting a structured, predictable workflow alongside a counterfactual reasoning mechanism. Additionally, Mostajabdaveh *et al.* [72] focused more on the evaluation phase of modeling, replacing the time-consuming process of traditional solver-based verification with peer verification among agents. Similarly, Talebi *et al.* [84] also centered their research on the evaluation phase, specifically for stochastic optimization problems, by setting up multiple independent reviewer agents to score the modeling results, thereby aiming for a comprehensive assessment of modeling quality.

Both the two-stage and multi-agent frameworks require users to provide a complete problem description before the framework is initiated. However, for many real-world optimization problems, such as conference scheduling and travel planning, user preferences can change dynamically, which necessitates a paradigm that supports continuous interaction between the user and the model. To address this, Zhang *et al.* proposed the OptLLM [78] framework, which supports both single-shot and interactive inputs. This framework uses an interactive refinement module to help users progressively refine the problem description, while a converter module and a response module handle the subsequent modeling and verification tasks. Lawless *et al.* [80] further advanced this interactive framework by requiring the LLM to choose from five tasks, such as adding or removing constraints and adjusting priorities, after each user input. Their MeetMeta system not only provides a solution but also explains why certain preferences cannot be met and allows users to make modifications, creating a continuous feedback loop. Subsequent research [81] has focused more on how to translate user priorities into optimization constraints during a dialogue, thereby enabling users to explore trade-offs in tasks like ridesharing coordination.

As research into prompt-based methods has deepened, researchers have begun exploring different avenues to address various existing challenges in LLM-based automated modeling. On the modeling generation side, to tackle the vast and problem-dependent hypothesis space faced by LLMs, researchers have adopted distinct strategies. For instance, Astorga *et al.* [82] combined LLMs with Monte Carlo Tree Search (MCTS) to efficiently explore this hierarchical and immense hypothesis space, further enhancing search efficiency through symbolic pruning and LLM-based evaluation. In contrast to this search-first strategy, Li *et al.* [76] employed a generation-first approach. They constrained the LLM’s output using predefined structures, thereby directly avoiding blind searches within the huge hypothesis space. This was complemented by a post-processing verification and correction mechanism to ensure the generated models could be correctly parsed by solvers. On the model verification side, to improve

the effectiveness and broaden the scope of validation, Huang *et al.* [75] proposed an automated evaluation framework based on solver outputs. They also constructed the MAMO benchmark, which extends the NL4OPT benchmark by including systems of ordinary differential equations as well as more complex LP and MILP problems. Conversely, Wang *et al.* [104] took a different approach, employing a modified Weisfeiler-Lehman (WL) graph isomorphism algorithm to verify model equivalence by transforming optimization models into a bipartite graph structure. They also created the OptiBench benchmark, which contains a large number of LP and MILP problems designed to effectively reflect the performance boundaries of LLMs. Similarly, Zhai *et al.* [83] introduced the Quasi-Karp equivalence theoretical framework and developed the EquivaMap system, achieving a scalable method for automated equivalence detection through LLM-generated variable mapping functions and lightweight verification.

Despite the significant potential demonstrated by prompt-based frameworks in automated optimization modeling, their technical boundaries remain constrained by the core capabilities of the underlying LLMs. Current mainstream approaches, which rely on closed-source models like the GPT series, face a dual challenge [27]: on one hand, the scarcity of high-quality training data in the optimization modeling domain severely restricts the models’ performance ceiling; on the other hand, using API calls to commercial models may lead to the leakage of sensitive information, posing security risks in high-stakes scenarios such as medical scheduling and defense planning. These fundamental limitations, coupled with the unique formal rigor required for optimization problems, are driving a paradigm shift in research from prompt engineering to learning-based methods. The latter, through fine-tuning open-source models, can achieve more precise mathematical expression generation, more controllable data privacy protection, and more efficient injection of domain knowledge.

B. Learning-based Methods

Learning-based methods fundamentally overcome the inherent limitations of prompt engineering by fine-tuning model parameters to internalize optimization modeling knowledge within large language models. In early research, several studies attempted to fine-tune models to enhance specific aspects of automated modeling. For instance, the work [66] combined traditional NLP methods with LLMs to obtain the Ner4OPT model, which is specialized for the NER task. Additionally, Li *et al.* [69] utilized a fine-tuned model to classify constraints to uncover complex relationships between entities. While these works involved model fine-tuning, their core idea was to serve as auxiliary components within prompt-based two-stage frameworks. Subsequently, the LM4OPT [86] framework proposed by Ahmed *et al.* significantly improved the optimization modeling capabilities of Llama-2-7b [105] through progressive fine-tuning. However, due to its fine-tuning data being confined to the NL4OPT dataset, its modeling performance still exhibited a substantial gap compared to closed-source models like GPT-4 [106].

Building upon these studies, Huang *et al.* proposed ORLM [27], a framework featuring a two-stage data synthesis strategy

comprising expansion and augmentation. This strategy systematically prepares structured data for model fine-tuning, encompassing three critical components: natural language problem descriptions, formal mathematical models, and executable solver code. Specifically, the expansion stage leverages a small set of seed data and uses GPT-4 to iteratively generate new samples with diverse scenarios and difficulties. The augmentation stage, in turn, further enhances sample variety by employing strategies such as modifying objective functions, altering constraints, and rephrasing problems. During the iterative data synthesis process, the framework also employs regular match correction function to address minor grammatical errors in the code and removes duplicate problems to ensure the integrity and purity of the dataset. Subsequently, they fine-tuned a series of open-source models, such as Mistral-7B [107] and Deepseek-Math-7B-Base [108], using Instruction-Tuning. Comparative tests revealed that the fine-tuned open-source models not only consistently outperformed single-step GPT-4 modeling but also yielded significant performance improvements over classic prompt-based methods like Chain-of-Experts [70] and OptiMUS [71]. The data synthesis-model fine-tuning-evaluation workflow has been widely adopted by subsequent research, with some studies focusing on proposing new data synthesis methods, while others prioritize optimizing the fine-tuning stage.

A subset of learning-based research focuses on the data synthesis component, aiming to address the challenge of data scarcity in optimization modeling. The ReSocratic framework [87] developed by Yang *et al.* aims to synthesize data in an inverse manner, first synthesizing optimization examples with mathematical formulas and then translating them in reverse into natural language problems, thereby creating a large-scale dataset. Similarly, the OptMATH framework [90] proposed by Lu *et al.* is a scalable bidirectional data synthesis framework that automatically generates problems with controllable complexity from seed data and uses a forward modeling and rejection sampling mechanism to verify the accuracy of the data pairs. Zhou *et al.* combined the diversity of forward generation and the reliability of inverse generation from the aforementioned studies to design the DualReflect synthetic data pipeline [94], which is specifically tailored for dynamic programming problems. Beyond focusing on the synthesis methods themselves, other researchers have conducted in-depth studies on the quality of the synthesized content. Wang *et al.* argued that the data paradigm of methods like ORLM has too large a span from natural language to mathematical models. To address this, they constructed the StructuredOR dataset [89], which aims to solve the problem of missing detailed modeling process annotations (such as variable definitions) in existing datasets, providing more comprehensive annotation information for model learning. Wu *et al.* focused on generating more complex optimization problems. Their Step-Opt framework [93] systematically increases problem complexity through an iterative problem generation approach and employs a stepwise validation mechanism to ensure data rigor.

Apart from data synthesis, another line of research focuses on fine-tuning methods. Jiang *et al.* [88] enhanced the model’s

accuracy and generalization in problem formalization and solver code generation through multi-instruction fine-tuning, while also introducing model alignment and self-correction mechanisms to mitigate hallucination phenomena. Chen *et al.* proposed the SIRL framework [92] by incorporating reinforcement learning, which utilizes an external optimization solver as a validator to provide verifiable reward signals for the reinforcement learning process. This approach effectively addresses the hallucination problem in LLM generation, thereby improving the factual correctness and trustworthiness of the generated content. Furthermore, Amarasinghe *et al.* [91] proposed a method for fine-tuning cost-effective LLMs to tackle specific business challenges such as production scheduling, which demonstrated superior performance in real-world applications.

C. Challenges

With the growing application of LLMs in optimization, increasing efforts have been made to bridge natural language descriptions of optimization problems with formal mathematical models. Frameworks such as Chain-of-Experts [70] and ORLM [27] demonstrate that LLMs can not only complete modeling tasks efficiently but also uncover implicit constraints that may be overlooked by human experts, thus introducing a new paradigm for optimization modeling. Nevertheless, existing research still faces several key challenges:

- **Prompt-based methods** are widely adopted due to their ease of deployment and the absence of large annotated datasets. However, their reliance on closed-source LLM APIs raises serious concerns regarding data security and privacy, especially in industrial settings involving sensitive information. Moreover, even advanced models such as GPT-4 exhibit limitations in mathematical reasoning, leading to issues of accuracy and robustness on fundamental modeling tasks [27]. Hence, enhancing the intrinsic reasoning capability of LLMs remains a primary challenge for this paradigm.
- **Learning-based methods** such as ReSocratic [87] and OptMATH [90] have investigated synthetic data generation to construct large-scale optimization datasets. Yet, studies suggest that comparable performance can sometimes be achieved using only a fraction of the dataset, pointing to diminishing returns from data scaling [109]. Consequently, an open problem is how to efficiently generate high-quality, representative datasets that maximize learning efficiency. Furthermore, as this line of research is still at an early stage, the number of existing studies remains limited, and broader exploration is needed to fully exploit the potential of learning-based modeling.

V. LLMs FOR OPTIMIZATION SOLVING

Optimization solving is a core stage of the optimization workflow, and decades of research have produced a wide range of high-quality algorithms. In recent years, machine learning methods have been increasingly integrated into optimization to improve performance, and the advent of LLMs has further propelled this research into a new phase. In this section, we

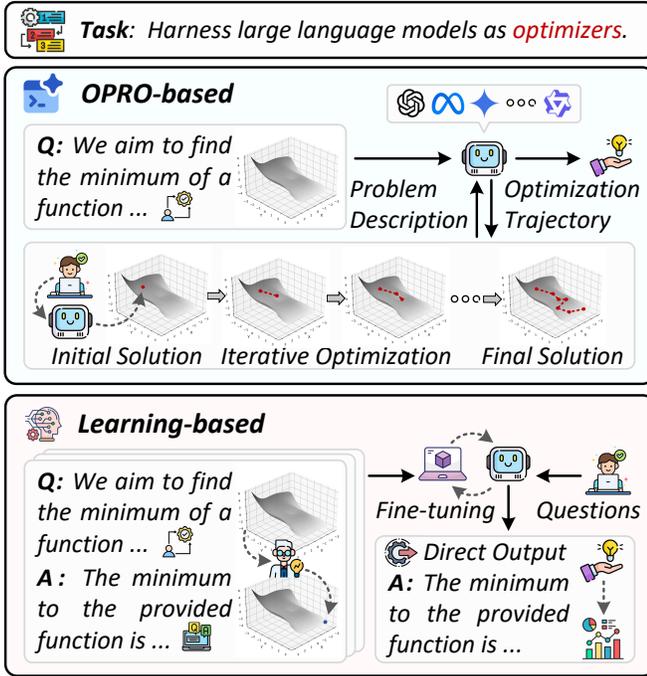


Fig. 4. Illustration of LLMs as optimizers. This paradigm primarily relies on interactive prompting for optimization, with a few studies incorporating fine-tuning and pre-training for enhanced performance.

categorize existing work into three paradigms: LLMs as optimizers, low-level LLM-assisted optimization algorithms, and high-level LLM-assisted optimization algorithms. Section V-A introduces LLMs as optimizers, which directly employ LLMs to solve problems without relying on traditional frameworks (see Fig. 4). Sections V-B and V-C discuss how LLMs can enhance optimization algorithms at the component level and at the orchestration/design level, respectively (illustrated in Figs. 5 and 6). Section V-D then outlines the key challenges in this area. Representative studies are summarized in Table III.

A. LLMs as Optimizers

LLMs possess strong in-context learning capabilities, enabling them to solve optimization problems through iterative prompting. A pioneering work in this direction is the OPRO framework proposed by Yang *et al.* [28], which formulates optimization tasks in natural language and iteratively refines solutions based on historical trajectories. By progressively improving solution quality, OPRO was the first to demonstrate the feasibility of using LLMs as general-purpose optimizers, inspiring subsequent research across diverse domains. Building on this paradigm, Guo *et al.* [110] benchmarked LLMs on four classical optimization tasks i.e., gradient descent, hill climbing, grid search, and black-box optimization, where the model iteratively generated and evaluated solutions through interactive prompting. To ensure fair and consistent evaluation, they also introduced three task-agnostic metrics designed to reduce sensitivity to test sample variations. Beyond benchmarking, OPRO has been extended to multiple application domains. Jiang *et al.* [120] applied it to combinatorial optimization for

structural matrix ordering; Qiu *et al.* [121] developed LMCO for wireless network design; Ghose *et al.* [123] employed it for parameter tuning in open-source hardware workflows; and Jiang *et al.* [118] adapted the paradigm to jailbreak attack analysis, treating optimizable suffixes and harmfulness scores as part of the optimization trajectory.

In contrast to OPRO’s direct use of solution–feedback trajectories, subsequent research has explored alternative forms of iteration to guide LLMs in optimization tasks. Lange *et al.* [111] sorted discretized candidate solutions from best to worst and provided the ordered sequence as context to the LLM. This reframes the task from pure solution generation to sequence recognition and reasoning, leveraging the model’s ability to capture ordering patterns. Cheng *et al.* [114] proposed the OPTO framework, which feeds LLMs with structured execution traces (e.g., intermediate variable values, function calls, and runtime outputs) to simulate backpropagation-like optimization and improve task understanding. Beyond textual iteration, multimodal extensions have further broadened the paradigm by incorporating visual information. Huang *et al.* [112] addressed vehicle routing problems using both textual descriptions and map images to mimic human spatial cognition. Elhenawy *et al.* [115] solved the classic traveling salesman problem by combining scatter plot inputs with a multi-agent collaboration mechanism for path search. Zhao *et al.* [122] extended this idea to graph-structured problems by converting abstract graphs into visual images, enabling multimodal LLMs to capture topological features in a manner more akin to human reasoning. Collectively, these studies demonstrate that extending OPRO with sequence-based, trace-based, or multimodal inputs can substantially enrich the optimization capabilities of LLMs.

Despite the progress of using LLMs directly as optimizers, several inherent drawbacks have been identified. Zhang *et al.* [116] highlighted the strong model dependency of OPRO, noting that smaller models, with limited reasoning capacity, struggle to exploit iterative histories and generate high-quality solutions. Huang *et al.* [29] systematically evaluated LLMs on both discrete and continuous black-box optimization problems, confirming their strengths in symbolic and text-based discrete tasks but also exposing their weaknesses in purely numerical settings, such as continuous optimization.

Based on these limitations, researchers have begun to explore alternative avenues for applying LLMs in optimization. One line of work attributes the drawbacks to prompt engineering and the inherent constraints of current models, and thus seeks to improve optimization capability through fine-tuning or training. Abgaryan *et al.* [117] fine-tuned an LLM to output solutions in a single step, bypassing multi-round iteration by training on instruction–solution pairs. Li *et al.* [113] introduced POM, a pretrained optimizer model that generalizes across black-box problems in a zero-shot manner. Chen *et al.* [119] proposed LLOME, a two-level optimization framework that incorporates preference learning to generate biologically valid sequences under complex biophysical constraints. Meanwhile, an increasing body of research suggests that LLMs may be more effective when used to assist rather than replace traditional optimization algorithms.

TABLE III
 REPRESENTATIVE WORKS ON LLMs FOR OPTIMIZATION SOLVING, CATEGORIZED INTO LLMs AS OPTIMIZERS, LOW-LEVEL LLMs FOR OPTIMIZATION ALGORITHMS AND HIGH-LEVEL LLMs FOR OPTIMIZATION ALGORITHMS.

	Method	Venue	Type	Technical Summary
LLMs as Optimizers	OPRO [28]	ICLR, 2023	Prompt-based	Iteratively refine through optimization trajectories and problem descriptions.
	toLLM [110]	KDD, 2023	Prompt-based	Design four canonical tasks to evaluate the performance boundaries of LLMs.
	EvoLLM [111]	GECCO, 2024	Prompt-based	Replace traditional optimization trajectories with candidate solution quality ranking.
	MLLMO [112]	MCII, 2024	Prompt-based	Utilize MLLMs to jointly process problem descriptions and map visualizations for CVRPs.
	POM [113]	NeurIPS, 2024	Learning-based	Pre-train a general-purpose, zero-shot black-box optimization foundation model.
	OPTO [114]	NeurIPS, 2024	Prompt-based	Replace traditional optimization trajectories with rich, structured execution traces.
	VRMA [115]	arXiv, 2024	Prompt-based	Utilize MLLMs to process 2D planar point distribution maps as input.
	ROPRO [116]	ACL, 2024	Prompt-based	Discuss the model dependency of OPRO and identify its limitations on small-scale models.
	BBOLLM [29]	arXiv, 2024	Prompt-based	Conduct evaluation of LLMs on both discrete and continuous black-box optimization problems.
	LLMS [117]	arXiv, 2024	Learning-based	Fine-tune LLMs with instruction-solution pairs for scheduling problems.
	ECLIPSE [118]	NAACL, 2024	Prompt-based	Apply iterative optimization to jailbreaking attack strategies.
	LLOME [119]	arXiv, 2024	Learning-based	Integrate preference learning to train LLMs for satisfying complex biophysical constraints.
	LLMDSM [120]	arXiv, 2024	Prompt-based	Apply iterative optimization to design structure matrix sequencing.
	LMCO [121]	WCL, 2024	Prompt-based	Apply iterative optimization to wireless network design.
MGSCO [122]	arXiv, 2025	Prompt-based	Process visual representations of abstract graph structures using MLLMs.	
ORFS [123]	arXiv, 2025	Prompt-based	Apply iterative optimization to automated parameter tuning in chip design.	
Low-level LLMs for Optimization Algorithms	LMX [124]	TELO, 2023	Operators	Leverage LLMs as intelligent operators for textual genome crossover and recombination.
	GPT-NAS [125]	arXiv, 2023	Initialization	Utilize LLMs for NAS initialization with prior knowledge.
	LMEA [126]	CEC, 2023	Operators	Employ LLMs as crossover, mutation, and selection operators to guide EAs.
	LLM-PP [127]	arXiv, 2023	Initialization	Utilize LLMs as performance predictors to assist initialization processes.
	LMOEA [128]	EMO, 2023	Operators	Empower MOEA/D with LLMs through zero-shot prompting as search operators in multi-objective optimization.
	OFPLLM [129]	AI, 2023	Initialization	Assist non-expert users in initializing financial plans.
	LEO [130]	Neucom, 2024	Operators	Utilize LLMs to guide individuals from dual pools for exploration and exploitation.
	LLM-GA [131]	BiB, 2024	Initialization	Initialize genetic algorithms with LLMs to generate high-quality mutant pools for enzyme design.
	GE [132]	GECCO, 2024	Operators	Enhance the creativity and diversity of the LLM by introducing different role-based prompts for NAS.
	LLMAES [133]	ICIC, 2024	Operators	Generate minimal solutions within populations using LLMs to reduce interaction costs.
	LLMTES [134]	arXiv, 2024	Configuration	Apply LLM-based feedback loops to sequentially optimize evolution strategies through static tuning.
	LAEA [135]	SWEVO, 2024	Evaluation	Transform model-assisted selection tasks into classification and regression problems.
	LICO [136]	arXiv, 2024	Evaluation	Apply LLMs as surrogate models in molecular science applications.
	LLMSM [137]	CAI, 2024	Evaluation	Develop a collaborative framework using LLMs for model selection and training in engineering optimization.
	LLMCES [138]	GECCO, 2024	Configuration	Implement step-size control for evolution strategies using OPRO-like mechanisms.
	AKFLLM [139]	arXiv, 2024	Operators	Utilize LLMs to assist mutation and other generative stages in evolutionary multi-task optimization.
	LLMAMO [140]	arXiv, 2024	Operators	Invoke LLMs for elite solution generation only upon insufficient population improvement.
	LTC [141]	ESANN, 2024	Configuration	Apply LLM-based feedback loops to sequentially optimize CMA-ES through dynamic control.
	LLMEVO [142]	arXiv, 2025	Operators	Validate LLM effectiveness in selection, crossover, and mutation phases while noting limitations in initialization.
LLM-GE [143]	GECCO, 2025	Operators	Utilize LLMs as crossover and mutation operators to optimize YOLO architectures for object detection.	
LAOS [144]	GECCO, 2025	Configuration	Utilize state features to replace optimization trajectories for guiding LLM-based operator selection.	
PAIR [145]	arXiv, 2025	Operators	Focus on utilizing LLMs as selection operators to enhance LMEA.	
LLMMS [146]	arXiv, 2025	Evaluation	Utilize LLMs as meta-Surrogates to facilitate cross-task knowledge sharing through token sequence representations.	
LMPSO [147]	arXiv, 2025	Operators	Simulate PSO evolutionary processes using LLMs and refine LMEA for specific algorithms.	
LLM-SAEA [148]	arXiv, 2025	Evaluation	Dynamically select appropriate proxy models and infill sampling criteria using LLMs.	
High-level LLMs for Optimization Algorithms	LLMGM [149]	GECCO, 2023	Single-step	Decompose and recombine six existing metaheuristic algorithms to generate novel hybrid algorithms in single rounds.
	FunSearch [150]	Nature, 2023	Iterative	Generate novel code snippets via LLMs and guide EAs to search through function space.
	AEL [151]	arXiv, 2023	Iterative	Enhance FunSearch by integrating heuristic principles, demonstrating significant improvements on TSP instances.
	AS-LLM [152]	IJCAI, 2023	Selection	Automatically extract high-dimensional algorithm features from code or descriptive text to facilitate algorithm selection.
	EoH [153]	ICML, 2024	Iterative	Implement heuristic-code coevolution via preset prompt pairs for algorithm crossover and mutation.
	ReEvo [154]	NeurIPS, 2024	Iterative	Utilize LLMs as hyper-heuristic algorithms with reflective evolution mechanisms to guide search processes.
	AutoSAT [155]	arXiv, 2024	Iterative	Employ multiple heuristic strategies to guide LLMs in algorithm generation.
	LLaMEA [156]	TEVC, 2024	Iterative	Utilize LLMs to guide EAs in mutation, selection, and other operations for generating advanced heuristics.
	L-AutoDA [157]	GECCO, 2024	Iterative	Apply AEL to generate adversarial attack algorithms in cybersecurity.
	MOELLM [158]	TEVC, 2024	Iterative	Introduce robust testing modules and dynamic selection strategies to generate multi-objective optimization algorithms.
	LLMEPS [159]	PPSN, 2024	Iterative	Develop a baseline algorithm for automated algorithm design using EoH and ReEvo methodologies.
	EvoCAF [160]	PPSN, 2024	Iterative	Apply EoH to evolve and generate cost-aware acquisition functions for Bayesian optimization.
	TS-EoH [161]	arXiv, 2024	Iterative	Apply EoH to generate algorithms for edge server task scheduling.
	MEoH [162]	AAAI, 2024	Iterative	Extend EoH to multi-objective versions, incorporating other metrics for comprehensive algorithm evaluation.
	LLaMEA-HPO [163]	TELO, 2024	Iterative	Integrate hyperparameter optimization into LLaMEA's iterative cycle to enhance overall efficiency.
	CMLLM [164]	EvoApps, 2024	Iterative	Develop dynamic prompt mechanisms to control LLM mutation for enhancing LLaMEA performance.
	HSEvo [165]	AAAI, 2024	Iterative	Combine harmony search with GAs and optimize algorithm portfolio quality/diversity through diversity metrics.
	LLM4AD [166]	arXiv, 2024	Iterative	Develop an EoH-based platform to accelerate heuristic algorithm design.
	MCTS-AHD [167]	arXiv, 2025	Iterative	Employ MCTS to explore heuristic spaces, organizing generated heuristics into tree structures.
	CEG [168]	GECCO, 2025	Iterative	Develop methodologies to analyze LLM-generated code and its evolutionary patterns during optimization processes.
	OPSLAD [169]	GECCO, 2025	Iterative	Apply LLaMEA to photonic structure optimization in industrial design.
	BLADE [170]	GECCO, 2025	Iterative	Establish a standardized and reproducible evaluation framework for LLM-driven algorithm generation methods.
	AutoHD [171]	arXiv, 2025	Iterative	Propose an LLM-guided heuristic discovery strategy for complex planning tasks.
LAMA [172]	TEVC, 2025	Iterative	Propose an automatic memetic algorithm enhanced by a heuristic designed with the assistance of LLMs.	
LAS [173]	arXiv, 2025	Iterative	Analyze fitness landscapes of LLM-assisted algorithm search processes.	
LLaMEA-BO [174]	arXiv, 2025	Iterative	Apply LLaMEA to automatically generate Bayesian optimization algorithms.	
InstSpecHH [175]	arXiv, 2025	Selection	Leverage LLMs' semantic comprehension and reasoning capabilities for context-aware algorithm selection.	
BSALMD [176]	arXiv, 2025	Iterative	Conduct behavioral space analysis to examine algorithmic evolution trajectories and behaviors.	
FLAAD [177]	arXiv, 2025	Iterative	Fine-tune LLMs with diversity-aware ranked sampling for algorithm generation.	
EoH-S [178]	arXiv, 2025	Iterative	Extend EoH to evolve and generate complementary algorithm portfolios.	

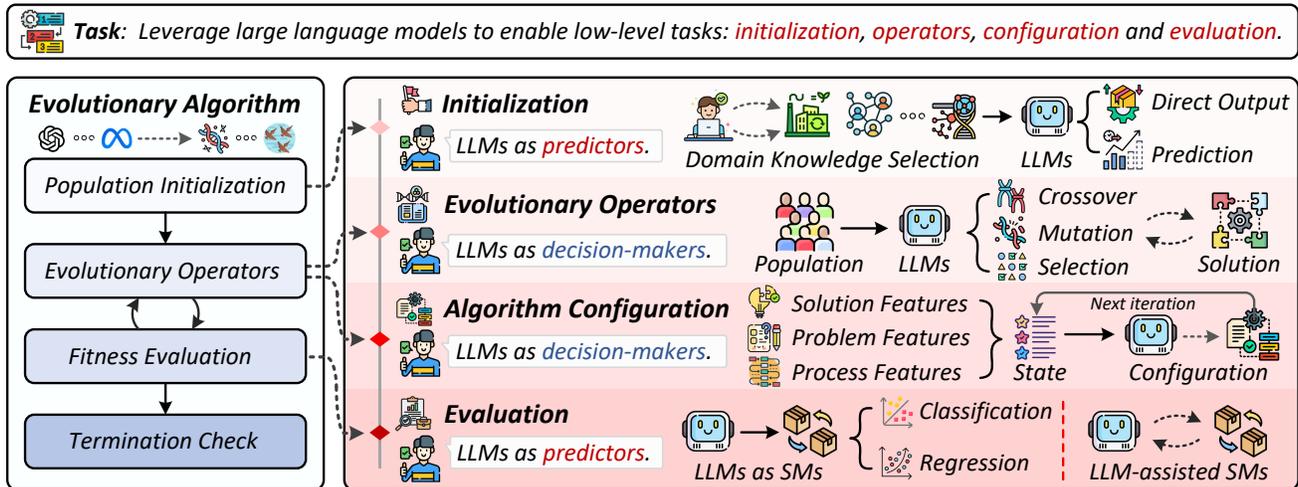


Fig. 5. Illustration of low-level LLMs for optimization algorithms. LLMs can be applied at various stages within EAs, including initialization, evolutionary operators, algorithm configuration, and fitness evaluation.

This perspective motivates the next paradigm of *low-level LLM-assisted optimization*, where LLMs are embedded into existing frameworks to enhance their performance.

B. Low-level LLMs for Optimization Algorithms

There is a natural complementarity between the collective intelligence of EAs and the knowledge-driven reasoning of LLMs [32]. While EAs excel at heuristic exploration through population-based search, LLMs contribute powerful semantic understanding and generative capabilities that can guide this process, thereby improving both efficiency and solution quality. This collaborative paradigm, which embeds LLMs as components within EAs, defines the direction of *low-level assistance* in optimization. In the following, we systematically review research in this area, focusing on four key stages of EAs where LLMs have been applied: initialization, evolutionary operators, algorithm configuration, and evaluation.

1) **Initialization:** In the optimization process, the quality of the initial solution strongly influences both convergence efficiency and final performance. By leveraging their rich background knowledge, LLMs can provide high-quality initial solutions that embed prior information, thereby narrowing the search space and establishing a stronger foundation for subsequent iterations. Representative applications have demonstrated this potential across diverse domains. In Neural Architecture Search (NAS), Yu *et al.* [125] employed LLMs to propose plausible architectural components, introducing valuable prior knowledge before the search began. Jawahar *et al.* [127] used LLMs as predictors to guide the initialization phase of NAS more efficiently. Beyond NAS, Teukam *et al.* [131] applied LLM-based initialization in genetic algorithms for bioengineering, generating high-quality mutant libraries to accelerate enzyme design. In financial planning, De *et al.* [129] demonstrated that LLMs can generate viable initial portfolios for optimization tasks. Despite these advances, challenges remain. Zhao *et al.* [142] highlighted the high computational cost of using LLMs for initialization, as well as their difficulty in consistently satisfying strict constraints and generating

feasible solutions, particularly in large-scale or highly complex problem settings.

2) **Evolutionary Operators:** Evolutionary operators are the core drivers of EAs. Before the advent of LLMs, researchers explored the use of neural networks, such as attention mechanisms and feed-forward networks [179], to simulate the behavior of individual operators or even entire algorithms. With the rise of iterative prompting approaches such as OPRO [28], attention has shifted toward employing LLMs directly to simulate operator behavior. This paradigm enables more adaptive search during optimization, as LLMs can exploit problem and solution characteristics without additional training, thereby surpassing the performance of conventional operators in some settings.

Several frameworks exemplify this direction. The LMX framework proposed by Meyerson *et al.* [124] employs few-shot prompting to use LLMs as intelligent operators for crossover and recombination of text-based genomes, generating semantically coherent variants without training. Liu *et al.* [126] extended this idea through the LMEA framework, where LLMs perform selection, crossover, and mutation under prompt guidance, coupled with a temperature self-adaptive mechanism to balance exploration and exploitation. Other studies have targeted specific operators or algorithms: PAIR [145] focuses on selection, LMPSO [147] adapts LLMs to PSO, and LEO [130] explores LLM-driven strategies for balancing exploration and exploitation.

This line of work has also expanded into multi-objective optimization. Liu *et al.* [128] were the first to empower MOEA/D [180] with zero-shot prompting, allowing LLMs to act as search operators and inspiring the design of more efficient white-box operators. To reduce interaction costs, Wang *et al.* [133] proposed a hybrid scheme in which LLMs generate only 10% of the population, while the rest are produced by traditional operators. Similarly, Liu *et al.* [140] called upon LLMs only when population improvement was insufficient, while relying on NSGA-II [181] otherwise. These hybrid approaches highlight the potential of selectively integrating

LLMs to balance performance gains with computational efficiency.

3) **Algorithm Configuration:** The performance of EAs is strongly influenced by hyperparameter and operator configurations. Traditionally, configuration has been studied through static tuning [182] and dynamic control [183]. In recent years, dynamic configuration has become particularly prominent, largely driven by RL methods [184]–[186], given the natural alignment between the Markov Decision Process (MDP) framework [187] and adaptive configuration. However, RL-based approaches usually require problem-specific training, leading to high computational costs and limited generalization. Leveraging their reasoning abilities, LLMs provide a promising alternative by analyzing optimization features and recommending adaptive configurations without extensive retraining.

Several representative works illustrate this direction. Kramer *et al.* introduced an LLM-based feedback loop for both static tuning [134] and dynamic control [141] of evolutionary strategies. Custode *et al.* [138] applied an OPRO-based mechanism, feeding optimization trajectories back to the LLM for step-size control, and additionally prompted the model to justify its parameter updates. Zhang *et al.* [144] addressed the redundancy of trajectory-based feedback by proposing a meta-prompt built on features from the solution space, decision space, and optimization process. They further integrated traditional adaptive control and prior optimization experience to enable LLM-guided adaptive operator selection.

It is worth noting that some algorithm generation frameworks also involve hyperparameter tuning. For example, EoH [153] employs prompt templates for parameter tuning during heuristic mutation, while LLaMEA [156] integrates hyperparameter optimization to reduce iteration costs. However, the primary contribution of these works lies in algorithm generation rather than EA configuration, and thus they fall outside the strict scope of configuration research.

4) **Evaluation:** In computationally expensive optimization problems, surrogate models are widely used to approximate costly real-world evaluations and alleviate computational bottlenecks. Recently, LLMs have been explored as powerful tools for surrogate modeling, leveraging their pattern recognition and reasoning capabilities to improve evaluation efficiency.

A pioneering study by Hao *et al.* [135] introduced an LLM-based surrogate that reframes model-assisted selection as classification and regression, enabling evaluation of new solutions from historical data without additional training. Building on this idea, Nguyen *et al.* [136] developed the LICO framework to address data scarcity in domains such as molecular optimization, where direct LLM application is challenging. Beyond acting as surrogates, LLMs have also been employed for managing surrogate-assisted algorithms. Rios *et al.* [137] incorporated LLMs into the selection and training of surrogate models for engineering optimization. Xie *et al.* [148] further proposed LLM-SAEA, a framework that uses collaborative experts to dynamically select surrogate models and infill criteria, reducing reliance on extensive domain expertise.

More recently, Zhang *et al.* [146] extended this line of

research to multi-task optimization, treating LLMs as meta-surrogates capable of facilitating knowledge transfer across tasks through unified token sequence representations. These studies collectively highlight the potential of LLMs not only as direct surrogates but also as adaptive coordinators in surrogate-assisted optimization, though further work is required to assess their robustness and scalability in large-scale applications.

C. High-level LLMs for Optimization Algorithms

In contrast to low-level assistance, which targets micro-level interventions within EAs, high-level assistance operates at the macro level. Its goal is to enhance solving performance by leveraging LLMs to intelligently select among existing algorithms or to generate entirely new ones, thereby exploiting performance synergies across methods. In the following, we systematically examine two major forms of high-level assistance: *algorithm selection* and *algorithm generation*.

1) **Algorithm Selection:** The goal of algorithm selection is to identify the most suitable algorithm from a portfolio for each problem instance. This problem arises from the significant performance disparities among algorithms, which often exhibit different optimization behaviors and application domains [7]. Traditionally, algorithm selection is formulated as a machine learning task, where a selector is trained on problem instances and their features to predict the best algorithm for unseen cases [188]. The process typically involves two stages: feature extraction and selector construction. The quality of extracted features directly affects the quality of training samples and thus the performance of the selector. Commonly used features include basic statistical descriptors of the problem [189] as well as optimization characteristics obtained from algorithm runs [190]. Selector construction can then be approached through classification [191], regression [192], or hybrid models [193], offering a wide range of technical solutions for this task.

Based on this workflow, recent studies have applied LLMs to both feature extraction and selector construction. Wu *et al.* introduced the AS-LLM framework [152], the first to bring LLMs into algorithm selection. AS-LLM leverages the code understanding capabilities of LLMs to automatically extract high-dimensional algorithm features from code or descriptive text. Its core representation module combines LLM-extracted features with a feature selection mechanism to identify the most relevant subset. The resulting algorithm features and problem features are then processed in separate networks to avoid premature interaction, and a similarity calculation module determines the final choice by evaluating the match between problems and algorithms. In contrast, Zhang *et al.* proposed InstSpecHH [175], which emphasizes selector construction. After a Euclidean distance-based pre-selection step narrows the candidate algorithms, the natural language description of the problem instance and the pre-selected algorithms are fed into the LLM. This approach exploits the LLM’s semantic reasoning ability to achieve more context-aware selection. It is worth noting that some related works involve solver selection [71], [79], where LLMs are integrated into broader workflows such as optimization modeling or end-to-end pipeline design. While relevant, these works differ from

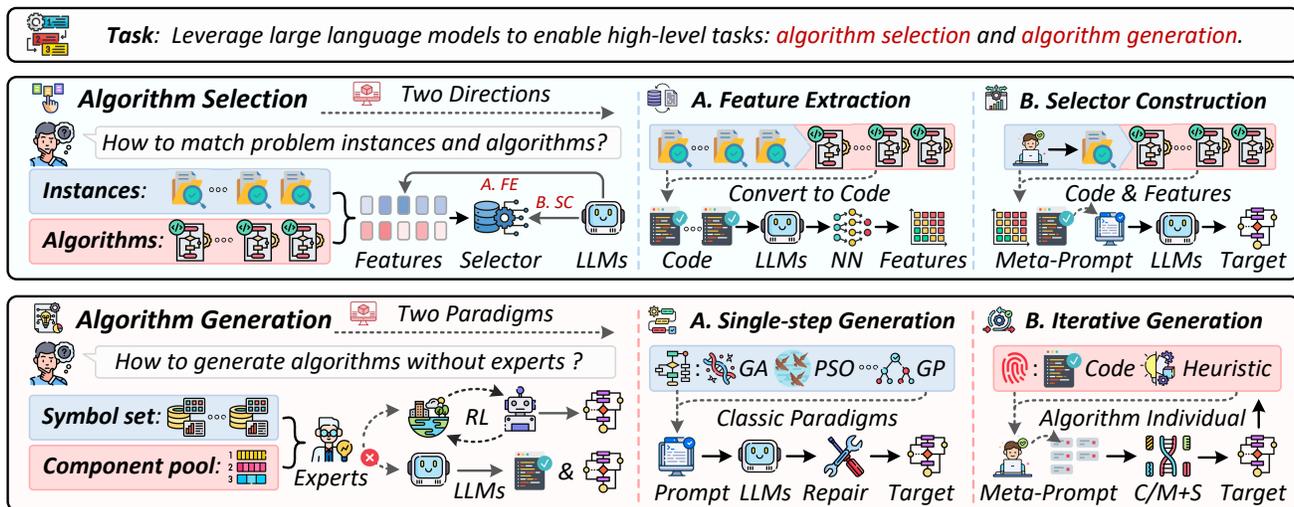


Fig. 6. Illustration of high-level LLM-assisted optimization algorithms. Algorithm selection involves two key stages: feature extraction and selector construction. Algorithm generation has evolved from single-step to iterative generation, reflecting the shift toward more adaptive and context-aware design.

the classical definition of algorithm selection and are generally not categorized as such.

2) **Algorithm Generation:** In contrast to algorithm configuration and selection, algorithm generation aims to automatically design optimization algorithms from problem characteristics without relying on pre-defined component or algorithm pools. Reinforcement learning-based approaches have made progress in this direction, but they still depend on manually specified component or symbol sets [35]. For instance, the GSF framework [194] can generate algorithms within a generic EA template, yet each component pool must be pre-specified. Chen *et al.* proposed SYMBOL [17], which removed the component pool constraint but continued to rely on a manually defined symbol set. LLMs, with their broad knowledge bases and strong generative capabilities, offer a promising way to overcome these limitations. By directly producing algorithmic structures and logic, LLMs bypass the need for pre-specified pools, making algorithm generation one of the most active branches of LLM-assisted optimization. Research in this area has evolved from early single-step generation toward more advanced iterative generation frameworks [152].

Single-step generation represents the initial exploration of this field. Pluhacek *et al.* [149] used GPT-4 to decompose and recombine six metaheuristic algorithms, creating new hybrid variants. Zhong *et al.* [195] combined GPT-3.5 with a prompt engineering framework to generate ZSO, a novel metaheuristic, in a single step. These studies demonstrated the feasibility of LLM-driven algorithm generation but also revealed the limitations of single-step methods, which depend heavily on the model’s inherent capabilities. Consequently, current research has shifted toward iterative generation approaches, which provide greater adaptability and robustness.

Iterative generation has since become the dominant paradigm, with research progressing rapidly from foundational studies to real-world applications. A pioneering work in this direction is Funsearch [150], which integrates LLMs with evolutionary algorithms to iteratively generate program snippets

in function space. Building on this idea, Liu *et al.* proposed AEL [151] and EoH [153], where heuristic concepts co-evolve with code, achieving superior performance on combinatorial optimization benchmarks. To support this line of work, they developed the LLM4AD platform [166] and analyzed the multimodal and rugged fitness landscape of LLM-assisted algorithm search [173]. More recently, they fine-tuned LLMs specifically for algorithm design, introducing diversity-aware ranking, sampling strategies, and direct preference optimization, demonstrating that fine-tuned models can significantly outperform generic ones [177]. The EoH framework has since been extended into MEoH [162] for multi-objective heuristic search and EoH-S [178] for co-evolving complementary sets of algorithms, with applications in edge server task scheduling [161], Bayesian optimization [160], and adversarial attack design [157].

In parallel, Van Stein and Bäck developed the LLaMEA series [156], [196], which integrates LLMs into evolutionary algorithms for tasks such as mutation and selection, enabling the generation of advanced heuristics. To better characterize the generation process, they introduced code evolution graphs [168] and behavior space analysis [176], and built the BLADE framework [170] to provide standardized evaluation for LLM-driven algorithm generation. Extensions such as LLaMEA-HPO [163] incorporated hyperparameter optimization to improve efficiency, while applications have spanned Bayesian optimization [174] and photonic structure design [169].

Beyond these two main lines, several studies have explored novel search paradigms. Ye *et al.* proposed ReEvo [154], which treats the LLM as a hyper-heuristic and introduces a reflective evolution mechanism. Zheng *et al.* developed MCTS-AHD [167], employing Monte Carlo Tree Search to explore heuristic space more thoroughly and avoid local optima. Pham *et al.* proposed HSEvo [165], combining harmony search with genetic algorithms and introducing diversity metrics to balance exploration and exploitation. Together, these efforts highlight the shift from single-step demonstrations toward robust it-

erative frameworks that can adaptively generate increasingly sophisticated optimization algorithms.

D. Challenges

When applying LLMs to optimization solving, methods at different levels exhibit distinct characteristics. The direct use of LLMs as optimizers, exemplified by OPRO [28], marked the initial integration of LLMs with optimization. Low-level approaches, such as LMEA [126] and LMX [124], have been deployed in domains like NAS and molecular discovery. High-level methods for algorithm generation, including EoH [153] and LLaMEA [156], currently represent the most active research frontier. While these studies have advanced the synergy between LLMs and optimization, several bottlenecks remain:

- **LLMs as Optimizers:** Direct, trajectory-based optimization with LLMs often struggles to outperform classical algorithms [29] and performs poorly with smaller models that lack sufficient reasoning ability [116]. Moreover, trajectory-based iteration is difficult to extend to population-based optimization, since the explosion of trajectory data easily exceeds the LLM’s context capacity. Future work should explore alternative iterative forms that replace raw trajectories with more structured representations of optimization history.
- **Low-level LLMs for Optimization Algorithms:** While the use of LLMs as evolutionary operators has shown promise in engineering, biology, and chemistry, research on initialization and algorithm configuration remains nascent. LLMs are difficult to apply to data-intensive tasks like large-scale initialization [142], and they often display conservative behavior in parameter control [138], failing to provide sufficient exploration. The underlying challenge is the vastness of the decision space. Future directions should focus on reducing decision-making pressure while preserving accuracy.
- **High-level LLMs for Optimization Algorithms:** Major issues arise in both computational cost and innovation. Frameworks such as EoH [153] and LLaMEA [156] treat algorithms as individuals in an EA, which requires frequent LLM calls and costly evaluations during evolution. In terms of innovation, current methods mainly recombine existing strategies and remain limited in generating fundamentally novel approaches. Achieving scalable, low-cost search and fostering true algorithmic creativity are key open challenges for this line of research.

VI. APPLICATIONS

Beyond classical numerical and combinatorial optimization problems, LLMs have been applied to optimization tasks across diverse interdisciplinary domains. This section highlights representative applications in computer science, natural sciences, and engineering. Section VI-A discusses applications in machine learning and computer security. Section VI-B covers applications in chemistry, biology, and physics. Section VI-C focuses on modern engineering and industrial use cases.

A. Computer Science

In computer science, LLM-assisted optimization has been explored in multiple areas, with neural architecture search [197] and computer security [157] standing out as representative examples. Other emerging applications [198] further illustrate the breadth of this direction.

NAS is a core problem in machine learning, where EAs have been widely applied [199]. Integrating LLMs offers new opportunities. While a few studies have attempted to treat LLMs as direct optimizers [200], most research emphasizes low-level assistance. Chen *et al.* [197] pioneered the use of LLMs as crossover and mutation operators within EAs, where crossover generates new architectures through few-shot prompting and mutation introduces diversity via mixed-temperature sampling. Building on this, Nasir [201] applied the approach to Quality-Diversity algorithms, achieving more efficient exploration with a dual-archive mechanism. Morris *et al.* [132] enhanced search diversity using role-based prompts, while Mo *et al.* [202] extended the paradigm to graph neural networks. In addition, LLMs have been explored for initialization: Yu *et al.* [125] leveraged pre-training, and Jawahar *et al.* [127] employed few-shot learning to provide high-quality initial suggestions.

In security-related optimization, LLMs have been used both as standalone optimizers and as auxiliary operators. Jiang *et al.* [118] applied LLMs directly to iteratively generate jailbreak attack suffixes with self-reflection. Complementary work explored low-level assistance [203], [204], where LLMs act as heuristic operators to guide jailbreak prompt optimization, improving both efficiency and transferability. Guo *et al.* [157] investigated LLM-enabled optimization of the generation function responsible for producing adversarial samples, supporting continuous innovation and evaluation of attack strategies.

Beyond NAS and security, LLM-based optimization has also been applied to emerging tasks. Wang *et al.* [198] treated data augmentation as an optimization problem, representing augmentation strategies as editable natural language instructions. By simulating crossover and mutation, LLMs intelligently explored strategies tailored to long-tailed distributions. Li *et al.* [205] focused on GPU computing, where LLMs iteratively generated and optimized CUDA kernel code, achieving systematic performance improvement without human intervention.

B. Natural Sciences

In the natural sciences, including chemistry [206], biology [207], and physics [208], many fundamental problems can be cast as complex optimization tasks. These problems are often characterized by high-dimensional search spaces, implicit domain knowledge, and computationally expensive simulations. The reasoning and generative capabilities of LLMs provide a novel approach to addressing these challenges.

In chemistry, LLM-assisted optimization has been widely explored in molecular discovery [206]. Most studies emphasize low-level methods that embed LLMs into EAs. For example, Wang *et al.* [209] integrated LLMs enhanced with chemical knowledge to perform crossover and mutation, guiding

molecular design more effectively. Guevorguian *et al.* [210] replaced genetic operators with fine-tuned LLMs and introduced a prophetic model to avoid stagnation, later extending this idea to multi-objective optimization for molecular discovery [211]. Beyond operator-level assistance, some works explored surrogate modeling, such as Nguyen *et al.* [136], who applied LLMs to mitigate data scarcity in molecular optimization.

Similar to chemistry, biological applications often adopt low-level paradigms. The LLM-GA framework [207] uses LLMs for population initialization, generating high-quality mutant libraries for enzyme design. Tran *et al.* [212] and Wang *et al.* [213] employed LLMs as intelligent mutation or crossover operators for protein design. Beyond operator-level integration, Chen *et al.* [119], [214] developed a two-level optimizer that iteratively modifies biological sequences, while Lv *et al.* [215] proposed a workflow spanning modeling and solving, translating natural language descriptions into protein function predictions and optimizing sequences iteratively.

Applications in physics are more diverse, spanning fluid dynamics [208], [216], semiconductor physics [217], and statistical physics [218], [219]. At the modeling level, Du *et al.* [218] used GPT-3.5 to derive partial differential equations from data, while Zhang *et al.* [208] applied LLMs to turbulence closure modeling. Ma *et al.* [220] proposed a holistic workflow that integrates both modeling and solving. At the solving level, Li *et al.* [217] incorporated LLMs into optimization workflows to generate and debug code for optimizing laser parameters, while Zhang *et al.* [216] directly used LLMs as optimizers to generate parameter combinations for fluid dynamics.

C. Engineering and Industry

In engineering and industry, LLMs are increasingly applied to complex optimization problems. Representative domains include wireless networks and communications [121], industrial design [169], and edge computing and scheduling [161], with wireless networks and industrial design being the most active areas.

In wireless networks, LLMs have been employed across the full workflow from modeling to solving. On the modeling side, Peng *et al.* proposed LLM-OptiRA [221], which automatically detects non-convex components in wireless resource allocation problems and reformulates them into solvable forms. Wen *et al.* [222] further introduced Retrieval-Augmented Generation (RAG) to incorporate external expert knowledge, improving modeling accuracy. On the solving side, Qiu *et al.* [121] directly used LLMs as optimizers for combinatorial tasks such as access point placement, with subsequent work extending this paradigm to resource allocation [223], power control [224], and multi-UAV deployment [225]. Li *et al.* [226] explored low-level assistance by embedding LLMs into a multi-objective optimization framework for ISAC systems in UAV networks. More recently, Hou *et al.* proposed the LHS framework [227], combining heuristic recommendation, enhanced initialization, and iterative refinement.

In industrial design, LLMs have been used for both algorithm configuration and generation. Ghose *et al.* [123] designed an LLM-based agent for chip design, enabling parameter tuning to optimize performance, power, and area. Jiang

et al. [120] applied LLMs as optimizers for design structure matrices, capturing interdependencies within engineering systems. Yin *et al.* [169] explored algorithm generation in optical design, applying the LLaMEA framework [156] to discover novel algorithms for photonic structure design. These examples highlight how LLMs introduce fundamentally new approaches to long-standing industrial optimization problems.

Beyond networks and design, LLMs are also applied in edge computing and scheduling. For instance, Yatong *et al.* [161] leveraged LLMs for task scheduling in edge server environments, demonstrating their utility in distributed system optimization.

VII. VISION FOR THE FIELD

The rapid emergence of LLMs for optimization has produced diverse methods across modeling, solving, and application domains. Yet, despite remarkable progress, the field is still in its infancy. Looking forward, we highlight three paradigm shifts that will shape its next stage of development: bridging modeling and solving, transitioning from static to dynamic methods, and building a broader agentic optimization ecosystem.

A. Bridging Modeling and Solving

Although LLMs have been successfully applied to both optimization modeling and solving, these domains remain largely disjoint. Frameworks such as OptiMUS [71], [79] and ORLM [27] begin to connect the pipeline: OptiMUS employs an agent-based conductor for modeling and programming, while ORLM fine-tunes LLMs to generate mathematical models and solver code. Yet in all cases, the crucial solving step still depends on external, traditional solvers. This confines LLMs to the front-end, without incorporating advances in LLM-assisted solving such as adaptive configuration, selection, or algorithm generation.

A critical future direction is to close this gap by constructing *end-to-end LLM-driven workflows*, where problem understanding, model formulation, algorithm design, execution, and evaluation form a self-sufficient loop. Such integration would move beyond reliance on external solvers, harnessing the generative and reasoning power of LLMs to create holistic, closed-loop optimization frameworks capable of autonomously tackling complex problems.

B. Transitioning from Static to Dynamic Methods

Current research in LLMs for optimization spans tasks such as optimization modeling, algorithm configuration, selection, and generation. Yet most approaches remain *static*, relying on fixed prompts, predefined operators, or single-shot algorithm designs. By contrast, the reinforcement learning community has developed rich paradigms for *dynamic* configuration [47], [228], selection [229], and generation [17], where algorithm behavior adapts continuously to real-time optimization features. For example, dynamic selection methods can exploit the complementary strengths of multiple algorithms through adaptive scheduling, while dynamic generation can synthesize novel operators tailored to evolving search states.

In LLM-based optimization, only a handful of works explore dynamic behavior, such as interactive modeling [80] or adaptive parameter control [138], [144]. Critically, dynamic algorithm selection and generation remain almost untouched. We envision a decisive shift toward methods that not only adapt in real time but also enable the *self-evolution of algorithms*: frameworks in which LLMs can continually refine, recombine, and reinvent optimization strategies based on feedback from the search process itself. Such *self-evolving systems* would transform LLMs from passive assistants into adaptive entities capable of lifelong learning, bridging optimization with open-ended algorithmic innovation.

C. Toward an Agentic Ecosystem for Optimization

The role of LLMs in optimization should ultimately be conceived not as isolated engines, but as autonomous agents within a broader *agentic ecosystem* for optimization. In such systems, LLMs function as specialized agents collaborating with others (e.g., human experts, domain-specific solvers, and simulators) through communication, negotiation, and coordination. Early studies already suggest this potential: LLMs can capture tacit expertise, such as driver knowledge in routing [230], domain constraints in scheduling [231], and user preferences in traveling [232], making it actionable within optimization workflows [70], [80], [233]. Similarly, agentic interfaces have enhanced accessibility and trust, where LLM-based agents diagnose infeasibility in natural language [234], explain the details of decision making [235], [236], or interpret optimization processes and outcomes for end users [237]–[239].

Looking ahead, optimization can be reimaged as a multi-agent process, where LLMs assume complementary roles (e.g., problem formulation agents, solver orchestration agents, explanation agents, and evaluation agents) working together in dynamic teams. Such ecosystems would not only integrate soft knowledge that is difficult to formalize mathematically but also maintain transparency and interpretability for human collaborators. By evolving toward agentic ecosystems, the field can transcend the limitations of single-model pipelines, achieving adaptive, collaborative, and human-aligned optimization in complex real-world environments.

VIII. CONCLUSION

This survey has presented a comprehensive and systematic review of the emerging field of LLMs for optimization. As an interdisciplinary synthesis of LLMs and optimization methods, this field is reshaping the foundations of optimization research, bringing new perspectives to long-standing challenges and inspiring a series of novel paradigms. By structuring the discussion from *modeling* to *solving*, we have aimed to clarify how LLMs can participate in, and ultimately transform, the entire optimization workflow.

On the modeling side, we examined how LLMs translate unstructured natural language into formal mathematical formulations, outlining the main workflows and highlighting the shift from prompt-based to learning-based methods. On the solving side, we proposed a three-level taxonomy grounded in

the interaction between LLMs and evolutionary algorithms: (i) LLMs as stand-alone optimizers, (ii) low-level LLMs embedded into algorithmic components, and (iii) high-level LLMs serving as orchestrators for algorithm selection and generation. Beyond these methodological perspectives, we discussed how LLMs for optimization are being applied across computer science, the natural sciences, and engineering and industry. Representative applications such as neural architecture search, protein and molecular design, and wireless communication optimization demonstrate both the versatility of the field and its potential for real-world impact.

Looking forward, we envision LLMs for optimization evolving from isolated tools into dynamic, self-evolving, and agentic systems that can close the loop between modeling and solving, adapt continuously to real-time feedback, and collaborate with humans and other agents in complex environments. By outlining these trajectories, we hope this survey will serve not only as a systematic map of current progress but also as a catalyst for deeper exploration and innovation in this rapidly expanding domain.

REFERENCES

- [1] T. Chai, Y. Jin, and S. Bernhard, “Evolutionary complex engineering optimization: opportunities and challenges,” *IEEE Computational Intelligence Magazine*, vol. 8, no. 3, pp. 12–15, 2013.
- [2] A. Mahor, V. Prasad, and S. Rangnekar, “Economic dispatch using particle swarm optimization: A review,” *Renewable and Sustainable Energy Reviews*, vol. 13, no. 8, pp. 2134–2141, 2009.
- [3] K. Terayama, M. Sumita, R. Tamura, and K. Tsuda, “Black-box optimization for automated discovery,” *Accounts of Chemical Research*, vol. 54, no. 6, pp. 1334–1346, 2021.
- [4] P. Festa, “A brief introduction to exact, approximation, and heuristic algorithms for solving hard combinatorial optimization problems,” in *Proceedings of the International Conference on Transparent Optical Networks*, 2014, pp. 1–20.
- [5] D. H. Wolpert and W. G. Macready, “No free lunch theorems for optimization,” *IEEE Transactions on Evolutionary Computation*, vol. 1, no. 1, pp. 67–82, 2002.
- [6] F. Hutter, H. H. Hoos, K. Leyton-Brown, and T. Stützle, “Paramils: An automatic algorithm configuration framework,” *Journal of Artificial Intelligence Research*, vol. 36, pp. 267–306, 2009.
- [7] P. Kerschke, H. H. Hoos, F. Neumann, and H. Trautmann, “Automated algorithm selection: Survey and perspectives,” *Evolutionary Computation*, vol. 27, no. 1, pp. 3–45, 2019.
- [8] H. Müller-Merbach, “Heuristics and their design: A survey,” *European Journal of Operational Research*, vol. 8, no. 1, pp. 1–23, 1981.
- [9] L. P. Kaelbling, M. L. Littman, and A. W. Moore, “Reinforcement learning: A survey,” *Journal of Artificial Intelligence Research*, vol. 4, pp. 237–285, 1996.
- [10] Y. Li, “Deep reinforcement learning: An overview,” *arXiv preprint arXiv:1701.07274*, 2017.
- [11] N. Mazyavkina, S. Sviridov, S. Ivanov, and E. Burnaev, “Reinforcement learning for combinatorial optimization: A survey,” *Computers & Operations Research*, vol. 134, p. 105400, 2021.
- [12] T. N. Mundhenk, M. Landajuela, R. Glatt, C. P. Santiago, D. M. Faissol, and B. K. Petersen, “Symbolic regression via neural-guided genetic programming population seeding,” *arXiv preprint arXiv:2111.00053*, 2021.
- [13] Y. Wang, T. Zhang, Y. Chang, X. Wang, B. Liang, and B. Yuan, “A surrogate-assisted controller for expensive evolutionary reinforcement learning,” *Information Sciences*, vol. 616, pp. 539–557, 2022.
- [14] J. E. Pettinger and R. M. Everson, “Controlling genetic algorithms with reinforcement learning,” in *Proceedings of the Genetic and Evolutionary Computation Conference*, 2002, pp. 692–692.
- [15] A. Eiben, M. Horvath, W. Kowalczyk, and M. C. Schut, “Reinforcement learning for online control of evolutionary algorithms,” in *Proceedings of the International Workshop on Engineering Self-Organising Applications*, 2006, pp. 151–160.

- [16] M. G. Lagoudakis and M. L. Littman, "Algorithm selection using reinforcement learning," in *Proceedings of the International Conference on Machine Learning*, 2000, pp. 511–518.
- [17] J. Chen, Z. Ma, H. Guo, Y. Ma, J. Zhang, and y. Gong, "Symbol: Generating flexible black-box optimizers through symbolic equation learning," *arXiv preprint arXiv:2402.02355*, 2024.
- [18] W. X. Zhao, K. Zhou, J. Li, T. Tang, X. Wang, Y. Hou, Y. Min, B. Zhang, J. Zhang, Z. Dong, Y. Du, C. Yang, Y. Chen, Z. Chen, J. Jiang, R. Ren, Y. Li, X. Tang, Z. Liu, P. Liu, J. Nie, and J. Wen, "A survey of large language models," *arXiv preprint arXiv:2303.18223*, 2023.
- [19] R. Patil and V. Gudivada, "A review of current trends, techniques, and challenges in large language models (llms)," *Applied Sciences*, vol. 14, no. 5, p. 2074, 2024.
- [20] J. Wei, X. Wang, D. Schuurmans, M. Bosma, I. Brian, F. Xia, E. Chi, Q. V. Le, and D. Zhou, "Chain-of-thought prompting elicits reasoning in large language models," *Advances in Neural Information Processing Systems*, vol. 35, pp. 24 824–24 837, 2022.
- [21] S. Feng, W. Shi, Y. Wang, W. Ding, V. Balachandran, and Y. Tsvetkov, "Don't hallucinate, abstain: Identifying llm knowledge gaps via multi-llm collaboration," *arXiv preprint arXiv:2402.00367*, 2024.
- [22] B. Min, H. Ross, E. Sulem, A. P. B. Veysheh, T. H. Nguyen, O. Sainz, E. Agirre, I. Heintz, and D. Roth, "Recent advances in natural language processing via large pre-trained language models: A survey," *ACM Computing Surveys*, vol. 56, no. 2, pp. 1–40, 2023.
- [23] A. J. Thirunavukarasu, D. S. J. Ting, K. Elangovan, L. Gutierrez, T. F. Tan, and D. S. W. Ting, "Large language models in medicine," *Nature Medicine*, vol. 29, no. 8, pp. 1930–1940, 2023.
- [24] Y. Li, S. Wang, H. Ding, and H. Chen, "Large language models in finance: a survey," in *Proceedings of the ACM International Conference on AI in Finance*, 2023, pp. 374–382.
- [25] F. Mi, Y. Li, Y. Zeng, J. Zhou, Y. Wang, C. Xu, L. Shang, X. Jiang, S. Zhao, and Q. Liu, "Pangu-bot: efficient generative dialogue pre-training from pre-trained language model," *arXiv preprint arXiv:2203.17090*, 2022.
- [26] S. Wu, O. Irsoy, S. Lu, V. Dabrovolski, M. Dredze, S. Gehrmann, P. Kambadur, D. Rosenberg, and G. Mann, "Bloomberggpt: A large language model for finance," *arXiv preprint arXiv:2303.17564*, 2023.
- [27] C. Huang, Z. Tang, S. Hu, R. Jiang, X. Zheng, D. Ge, B. Wang, and Z. Wang, "Orlm: A customizable framework in training large models for automated optimization modeling," *Operations Research*, 2025.
- [28] C. Yang, X. Wang, Y. Lu, H. Liu, Q. V. Le, D. Zhou, and X. Chen, "Large language models as optimizers," in *Proceedings of the International Conference on Learning Representations*, 2023, pp. 1–10.
- [29] B. Huang, X. Wu, Y. Zhou, J. Wu, L. Feng, R. Cheng, and K. C. Tan, "Exploring the true potential: Evaluating the black-box optimization capability of large language models," *arXiv preprint arXiv:2404.06290*, 2024.
- [30] X. Wu, S. Wu, J. Wu, L. Feng, and K. C. Tan, "Evolutionary computation in the era of large language model: survey and roadmap," *IEEE Transactions on Evolutionary Computation*, vol. 29, no. 2, pp. 534–554, 2025.
- [31] S. Huang, K. Yang, S. Qi, and R. Wang, "When large language model meets optimization," *Swarm and Evolutionary Computation*, vol. 90, p. 101663, 2024.
- [32] W. Chao, J. Zhao, L. Jiao, L. Li, F. Liu, and S. Yang, "When large language models meet evolutionary algorithms," *arXiv preprint arXiv:2401.10510*, 2024.
- [33] H. Yu and J. Liu, "Deep insights into automated optimization with large language models and evolutionary algorithms," *arXiv preprint arXiv:2410.20848*, 2024.
- [34] F. Liu, Y. Yao, P. Guo, Z. Yang, Z. Zhao, X. Lin, X. Tong, M. Yuan, Z. Lu, Z. Wang, and Q. Zhang, "A systematic survey on large language models for algorithm design," *arXiv preprint arXiv:2410.14716*, 2024.
- [35] Z. Ma, H. Guo, Y. Gong, J. Zhang, and K. C. Tan, "Toward automated algorithm design: A survey and practical guide to meta-black-box-optimization," *IEEE Transactions on Evolutionary Computation*, 2025.
- [36] T. Bartz-Beielstein, J. Branke, J. Mehnen, and O. Mersmann, "Evolutionary algorithms," *Wiley Interdisciplinary Reviews: Data Mining and Knowledge Discovery*, vol. 4, no. 3, pp. 178–195, 2014.
- [37] C. M. Fonseca and P. J. Fleming, "An overview of evolutionary algorithms in multiobjective optimization," *Evolutionary Computation*, vol. 3, no. 1, pp. 1–16, 1995.
- [38] R. Cheng and Y. Jin, "A competitive swarm optimizer for large scale optimization," *IEEE Transactions on Cybernetics*, vol. 45, no. 2, pp. 191–204, 2014.
- [39] Y. Tian, R. Cheng, X. Zhang, and Y. Jin, "Platemo: A matlab platform for evolutionary multi-objective optimization [educational forum]," *IEEE Computational Intelligence Magazine*, vol. 12, no. 4, pp. 73–87, 2017.
- [40] J. H. Holland, "Genetic algorithms," *Scientific American*, vol. 267, no. 1, pp. 66–73, 1992.
- [41] J. R. Koza, "Genetic programming as a means for programming computers by natural selection," *Statistics and Computing*, vol. 4, no. 2, pp. 87–112, 1994.
- [42] S. Das and P. N. Suganthan, "Differential evolution: A survey of the state-of-the-art," *IEEE Transactions on Evolutionary Computation*, vol. 15, no. 1, pp. 4–31, 2010.
- [43] J. Kennedy and R. Eberhart, "Particle swarm optimization," in *Proceedings of the International Conference on Neural Networks*, vol. 4, 1995, pp. 1942–1948.
- [44] A. Arias-Montano, C. A. C. Coello, and E. Mezura-Montes, "Multiobjective evolutionary algorithms in aeronautical and aerospace engineering," *IEEE Transactions on Evolutionary Computation*, vol. 16, no. 5, pp. 662–694, 2012.
- [45] T. Elsken, J. H. Metzen, and F. Hutter, "Neural architecture search: A survey," *Journal of Machine Learning Research*, vol. 20, no. 55, pp. 1–21, 2019.
- [46] E.-G. Talbi, "Machine learning into metaheuristics: A survey and taxonomy," *ACM Computing Surveys*, vol. 54, no. 6, pp. 1–32, 2021.
- [47] Y. Tian, X. Li, H. Ma, X. Zhang, K. C. Tan, and Y. Jin, "Deep reinforcement learning based adaptive operator selection for evolutionary multi-objective optimization," *IEEE Transactions on Emerging Topics in Computational Intelligence*, vol. 7, no. 4, pp. 1051–1064, 2022.
- [48] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, and I. Polosukhin, "Attention is all you need," *Advances in Neural Information Processing Systems*, vol. 30, 2017.
- [49] P. Cai, Y. Fan, and F. Leu, "Compare encoder-decoder, encoder-only, and decoder-only architectures for text generation on low-resource datasets," in *Proceedings of the International Conference on Broadband and Wireless Computing, Communication and Applications*, 2021, pp. 216–225.
- [50] M. Lewis, Y. Liu, N. Goyal, M. Ghazvininejad, A. Mohamed, O. Levy, V. Stoyanov, and L. Zettlemoyer, "Bart: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension," *arXiv preprint arXiv:1910.13461*, 2019.
- [51] C. Raffel, N. Shazeer, A. Roberts, K. Lee, S. Narang, M. Matena, Y. Zhou, W. Li, and P. J. Liu, "Exploring the limits of transfer learning with a unified text-to-text transformer," *Journal of Machine Learning Research*, vol. 21, no. 1, pp. 5485–5551, 2020.
- [52] J. Devlin, M. Chang, K. Lee, and K. Toutanova, "Bert: pre-training of deep bidirectional transformers for language understanding," in *Proceedings of the Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, 2019, pp. 4171–4186.
- [53] L. Floridi and M. Chiriatti, "Gpt-3: its nature, scope, limits, and consequences," *Minds and Machines*, vol. 30, no. 4, pp. 681–694, 2020.
- [54] D. Guo, Q. Zhu, D. Yang, Z. Xie, K. Dong, W. Zhang, G. Chen, X. Bi, Y. Wu, Y. K. Li, F. Luo, Y. Xiong, and W. Liang, "Deepseek-coder: when the large language model meets programming—the rise of code intelligence," *arXiv preprint arXiv:2401.14196*, 2024.
- [55] J. White, Q. Fu, S. Hays, M. Sandborn, C. Olea, H. Gilbert, A. El-nashar, J. Spencer-Smith, and D. C. Schmidt, "A prompt pattern catalog to enhance prompt engineering with chatgpt," *arXiv preprint arXiv:2302.11382*, 2023.
- [56] Z. Han, C. Gao, J. Liu, J. Zhang, and S. Q. Zhang, "Parameter-efficient fine-tuning for large models: A comprehensive survey," *arXiv preprint arXiv:2403.14608*, 2024.
- [57] T. Kojima, S. S. Gu, M. Reid, Y. Matsuo, and Y. Iwasawa, "Large language models are zero-shot reasoners," *Advances in Neural Information Processing Systems*, vol. 35, pp. 22 199–22 213, 2022.
- [58] S. Yao, D. Yu, J. Zhao, I. Shafraan, T. Griffiths, Y. Cao, and K. Narasimhan, "Tree of thoughts: Deliberate problem solving with large language models," *Advances in Neural Information Processing Systems*, vol. 36, pp. 11 809–11 822, 2023.
- [59] M. Besta, N. Blach, A. Kubicek, R. Gerstenberger, M. Podstawski, L. Gianinazzi, J. Gajda, T. Lehmann, H. Niewiadomski, P. Nyczyk, and T. Hoefler, "Graph of thoughts: solving elaborate problems with large language models," in *Proceedings of the AAAI Conference on Artificial Intelligence*, 2024, pp. 17 682–17 690.
- [60] C. Li, J. Liang, A. Zeng, X. Chen, K. Hausman, D. Sadigh, S. Levine, L. Fei-Fei, F. Xia, and B. Ichter, "Chain of code: Reasoning

- with a language model-augmented code emulator,” *arXiv preprint arXiv:2312.04474*, 2023.
- [61] X. Li, R. Zhao, Y. K. Chia, B. Ding, S. Joty, S. Poria, and L. Bing, “Chain-of-knowledge: Grounding large language models via dynamic knowledge adapting over heterogeneous sources,” *arXiv preprint arXiv:2305.13269*, 2023.
- [62] H. Liu, C. Li, Q. Wu, and Y. J. Lee, “Visual instruction tuning,” *Advances in Neural Information Processing Systems*, vol. 36, pp. 34 892–34 916, 2023.
- [63] H. W. Chung, L. Hou, S. Longpre, B. Zoph, Y. Tay, W. Fedus, Y. Li, X. Wang, M. Dehghani, S. Brahma, A. Webson, S. S. Gu, Z. Dai, M. Suzgun, X. Chen, A. Chowdhery, A. Castro-Ros, M. Pellat, K. Robinson, D. Valter, S. Narang, G. Mishra, A. Yu, V. Zhao, Y. Huang, A. Dai, H. Yu, S. Petrov, E. H. Chi, J. Dean, J. Devlin, A. Roberts, D. Zhou, Q. V. Le, and J. Wei, “Scaling instruction-finetuned language models,” *Journal of Machine Learning Research*, vol. 25, no. 70, pp. 1–53, 2024.
- [64] L. Ouyang, J. Wu, X. Jiang, D. Almeida, C. Wainwright, P. Mishkin, C. Zhang, S. Agarwal, K. Slama, A. Ray, J. Schulman, J. Hilton, F. Kelton, L. Miller, M. Simens, A. Askell, P. Welinder, P. F. Christiano, J. Leike, and R. Lowe, “Training language models to follow instructions with human feedback,” *Advances in Neural Information Processing Systems*, vol. 35, pp. 27 730–27 744, 2022.
- [65] R. Rafailov, A. Sharma, E. Mitchell, C. D. Manning, S. Ermon, and C. Finn, “Direct preference optimization: Your language model is secretly a reward model,” *Advances in Neural Information Processing Systems*, vol. 36, pp. 53 728–53 741, 2023.
- [66] P. P. Dakle, S. Kadioğlu, K. Uppuluri, R. Politi, P. Raghavan, S. Rallabandi, and R. Srinivasamurthy, “Ner4opt: Named entity recognition for optimization modelling from natural language,” in *Proceedings of the International Conference on Integration of Constraint Programming, Artificial Intelligence, and Operations Research*, 2023, pp. 299–319.
- [67] B. Almonacid, “Towards an automatic optimisation model generator assisted with generative pre-trained transformer,” *arXiv preprint arXiv:2305.05811*, 2023.
- [68] D. Tsouros, H. Verhaeghe, S. Kadioğlu, and T. Guns, “Holy grail 2.0: From natural language to constraint models,” *arXiv preprint arXiv:2308.01589*, 2023.
- [69] Q. Li, L. Zhang, and V. Mak-Hau, “Synthesizing mixed-integer linear programming models from natural language descriptions,” *arXiv preprint arXiv:2311.15271*, 2023.
- [70] Z. Xiao, D. Zhang, Y. Wu, L. Xu, Y. J. Wang, X. Han, X. Fu, T. Zhong, J. Zeng, and M. Song, “Chain-of-experts: When llms meet complex operations research problems,” in *Proceedings of the International Conference on Learning Representations*, 2023.
- [71] A. AhmadiTeshnizi, W. Gao, and M. Udell, “Optimus: Scalable optimization modeling with (mi) lp solvers and large language models,” *arXiv preprint arXiv:2402.10172*, 2024.
- [72] M. Mostajabdeh, T. T. Yu, R. Ramamonjison, G. Carenini, Z. Zhou, and Y. Zhang, “Optimization modeling and verification from problem specifications using a multi-agent multi-stage llm framework,” *Infor: Information Systems and Operational Research*, vol. 62, no. 4, pp. 599–617, 2024.
- [73] M. Jin, B. Sel, F. Hardeep, and W. Yin, “Democratizing energy management with llm-assisted optimization autoformalism,” in *Proceedings of the International Conference on Communications, Control, and Computing Technologies for Smart Grids*, 2024, pp. 258–263.
- [74] H. Deng, B. Zheng, Y. Jiang, and T. H. Tran, “Cafa: Coding as auto-formulation can boost large language models in solving linear programming problem,” in *Proceedings of the Workshop on Mathematical Reasoning and Artificial Intelligence at the Conference on Neural Information Processing Systems*, 2024.
- [75] X. Huang, Q. Shen, Y. Hu, A. Gao, and B. Wang, “Llms for mathematical modeling: Towards bridging the gap between natural and mathematical languages,” *arXiv preprint arXiv:2405.13144*, 2024.
- [76] J. Li, R. Wickman, S. Bhatnagar, R. K. Maity, and A. Mukherjee, “Abstract operations research modeling using natural language inputs,” *Information*, vol. 16, no. 2, p. 128, 2025.
- [77] T. de la Rosa, S. Gopalakrishnan, A. Pozanco, Z. Zeng, and D. Borrajo, “Trip-pal: Travel planning with guarantees by combining large language models and automated planners,” *arXiv preprint arXiv:2406.10196*, 2024.
- [78] J. Zhang, W. Wang, S. Guo, L. Wang, F. Lin, C. Yang, and W. Yin, “Solving general natural-language-description optimization problems with large language models,” *arXiv preprint arXiv:2407.07924*, 2024.
- [79] A. AhmadiTeshnizi, W. Gao, H. Brunborg, S. Talaei, C. Lawless, and M. Udell, “Optimus-0.3: Using large language models to model and solve optimization problems at scale,” *arXiv preprint arXiv:2407.19633*, 2024.
- [80] C. Lawless, J. Schoeffler, L. Le, K. Rowan, S. Sen, C. St. Hill, J. Suh, and B. Sarrafzadeh, “I want it that way: Enabling interactive decision support using large language models and constraint programming,” *ACM Transactions on Interactive Intelligent Systems*, vol. 14, no. 3, pp. 1–33, 2024.
- [81] L. Gomez Tobon and E. Law, “Values in the loop: Designing interactive optimization with conversational feedback,” in *Proceedings of the ACM Conference on Conversational User Interfaces*, 2025, pp. 1–5.
- [82] N. Astorga, T. Liu, Y. Xiao, and M. van der Schaar, “Autoformulation of mathematical optimization models using llms,” *arXiv preprint arXiv:2411.01679*, 2024.
- [83] H. Zhai, C. Lawless, E. Vitercik, and L. Leqi, “Equivamap: Leveraging llms for automatic equivalence checking of optimization formulations,” *arXiv preprint arXiv:2502.14760*, 2025.
- [84] A. Talebi, “Large language model-based automatic formulation for stochastic optimization models,” *arXiv preprint arXiv:2508.17200*, 2025.
- [85] Z. Wang, B. Chen, Y. Huang, Q. Cao, M. He, J. Fan, and X. Liang, “Ormind: A cognitive-inspired end-to-end reasoning framework for operations research,” *arXiv preprint arXiv:2506.01326*, 2025.
- [86] T. Ahmed and S. Choudhury, “Lm4opt: Unveiling the potential of large language models in formulating mathematical optimization problems,” *INFOR: Information Systems and Operational Research*, vol. 62, no. 4, pp. 559–572, 2024.
- [87] Z. Yang, Y. Wang, Y. Huang, Z. Guo, W. Shi, X. Han, L. Feng, L. Song, X. Liang, and J. Tang, “Optibench meets resocratic: Measure and improve llms for optimization modeling,” *arXiv preprint arXiv:2407.09887*, 2024.
- [88] C. Jiang, X. Shu, H. Qian, X. Lu, J. Zhou, A. Zhou, and Y. Yu, “Llmopt: Learning to define and solve general optimization problems from scratch,” *arXiv preprint arXiv:2410.13213*, 2024.
- [89] T. Wang, W. Yu, Z. He, Z. Liu, H. Gong, H. Wu, X. Han, W. Shi, R. She, F. Zhu, and T. Zhong, “Bpp-search: Enhancing tree of thought reasoning for mathematical modeling problem solving,” *arXiv preprint arXiv:2411.17404*, 2024.
- [90] H. Lu, Z. Xie, Y. Wu, C. Ren, Y. Chen, and Z. Wen, “Optmath: A scalable bidirectional data synthesis framework for optimization modeling,” *arXiv preprint arXiv:2502.11102*, 2025.
- [91] P. T. Amarasinghe, S. Nguyen, Y. Sun, and D. Alahakoon, “Ai-copilot for business optimisation: A framework and a case study in production scheduling,” *arXiv preprint arXiv:2309.13218*, 2023.
- [92] Y. Chen, J. Xia, S. Shao, D. Ge, and Y. Ye, “Solver-informed rl: Grounding large language models for authentic optimization modeling,” *arXiv preprint arXiv:2505.11792*, 2025.
- [93] Y. Wu, Y. Zhang, Y. Wu, Y. Wang, J. Zhang, and J. Cheng, “Step-opt: Boosting optimization modeling in llms through iterative data synthesis and structured validation,” *arXiv preprint arXiv:2506.17637*, 2025.
- [94] C. Zhou, J. Yang, L. Xin, Y. Chen, Z. He, and D. Ge, “Auto-formulating dynamic programming problems with large language models,” *arXiv preprint arXiv:2507.11737*, 2025.
- [95] V. Lima, D. T. Phan, J. Kalaganam, D. Patel, and N. Zhou, “Toward a trustworthy optimization modeling agent via verifiable synthetic data generation,” *arXiv preprint arXiv:2508.03117*, 2025.
- [96] T. P. Pawlak and K. Krawiec, “Automatic synthesis of constraints from examples using mixed integer linear programming,” *European Journal of Operational Research*, vol. 261, no. 3, pp. 1141–1157, 2017.
- [97] T. P. Pawlak and M. O’Neill, “Grammatical evolution for constraint synthesis for mixed-integer linear programming,” *Swarm and Evolutionary Computation*, vol. 64, p. 100896, 2021.
- [98] R. Ramamonjison, H. Li, T. T. Yu, S. He, V. Rengan, A. Banitalebi-Dehkordi, Z. Zhou, and Y. Zhang, “Augmenting operations research with auto-formulation of optimization models from problem descriptions,” *arXiv preprint arXiv:2209.15565*, 2022.
- [99] R. Ramamonjison, T. Yu, R. Li, H. Li, G. Carenini, B. Ghaddar, S. He, M. Mostajabdeh, A. Banitalebi-Dehkordi, Z. Zhou, and Y. Zhang, “Nl4opt competition: Formulating optimization problems based on their natural language descriptions,” in *Proceedings of the Neural Information Processing Systems Competition Track*, 2023, pp. 189–203.
- [100] K. Wang, Z. Chen, and J. Zheng, “Opd@ nl4opt: An ensemble approach for the ner task of the optimization problem,” *arXiv preprint arXiv:2301.02459*, 2023.
- [101] X. Doan, “Vtcc-nlp at nl4opt competition subtask 1: An ensemble pre-trained language models for named entity recognition,” *arXiv preprint arXiv:2212.07219*, 2022.

- [102] N. Gangwar and N. Kani, "Highlighting named entities in input for auto-formulation of optimization problems," in *Proceedings of the International Conference on Intelligent Computer Mathematics*, 2023, pp. 130–141.
- [103] Y. Ning, J. Liu, L. Qin, T. Xiao, S. Xue, Z. Huang, Q. Liu, E. Chen, and J. Wu, "A novel approach for auto-formulation of optimization problems," *arXiv preprint arXiv:2302.04643*, 2023.
- [104] Z. Wang, Z. Zhu, Y. Han, Y. Lin, Z. Lin, R. Sun, and T. Ding, "Optibench: Benchmarking large language models in optimization modeling with equivalence-detection evaluation," 2024.
- [105] H. Touvron, T. Lavril, G. Izacard, X. Martinet, M.-A. Lachaux, T. Lacroix, B. Rozière, N. Goyal, E. Hambro, F. Azhar, A. Rodriguez, A. Joulin, E. Grave, and G. Lample, "Llama: Open and efficient foundation language models," *arXiv preprint arXiv:2302.13971*, 2023.
- [106] OpenAI, "Gpt-4 technical report," *arXiv preprint ArXiv:2303.08774*, 2023.
- [107] A. Q. Jiang, A. Sablayrolles, A. Mensch, C. Bamford, D. S. Chaplot, D. de Las Casas, F. Bressand, G. Lengyel, G. Lample, L. Saulnier, L. R. Lavaud, M.-A. Lachaux, P. Stock, T. L. Scao, T. Lavril, T. Wang, T. Lacroix, and W. E. Sayed, "Mistral 7b," *CoRR*, vol. abs/2310.06825, 2023.
- [108] Z. Shao, P. Wang, Q. Zhu, R. Xu, J. Song, X. Bi, H. Zhang, M. Zhang, Y. Li, Y. Wu, and D. Guo, "Deepseekmath: Pushing the limits of mathematical reasoning in open language models," *arXiv preprint arXiv:2402.03300*, 2024.
- [109] H. Chen, Y. Zhang, Q. Zhang, H. Yang, X. Hu, X. Ma, Y. Yanggong, and J. Zhao, "Maybe only 0.5% data is needed: A preliminary exploration of low training data instruction tuning," *arXiv preprint arXiv:2305.09246*, 2023.
- [110] P. Guo, Y. Chen, Y. Tsai, and S. Lin, "Towards optimizing with large language models," *arXiv preprint ArXiv:2310.05204*, 2023.
- [111] R. T. Lange, Y. Tian, and Y. Tang, "Large language models as evolution strategies," *arXiv preprint arXiv:2402.18381*, 2024.
- [112] Y. Huang, W. Zhang, L. Feng, X. Wu, and K. C. Tan, "How multimodal integration boost the performance of llm for optimization: Case study on capacitated vehicle routing problems," in *Proceedings of the IEEE Symposium for Multidisciplinary Computational Intelligence Incubators*, 2025, pp. 1–7.
- [113] X. Li, K. Wu, X. Zhang, H. Wang, J. Liu, and Y. B. Li, "Pretrained optimization model for zero-shot black box optimization," *Advances in Neural Information Processing Systems*, vol. 37, pp. 14 283–14 324, 2024.
- [114] C. Cheng, A. Nie, and A. Swaminathan, "Trace is the next autodiff: Generative optimization with rich feedback, execution traces, and llms," *Advances in Neural Information Processing Systems*, vol. 37, pp. 71 596–71 642, 2024.
- [115] M. Elhenawy, A. Abutahoun, T. I. Alhadidi, A. Jaber, H. I. Ashqar, S. Jaradat, A. Abdelhay, S. Glaser, and A. Rakotonirainy, "Visual reasoning and multi-agent approach in multimodal large language models (mllms): Solving tsp and mtsp combinatorial challenges," *arXiv preprint arXiv:2407.00092*, 2024.
- [116] T. Zhang, J. Yuan, and S. Avestimehr, "Revisiting opro: The limitations of small-scale llms as optimizers," *arXiv preprint arXiv:2405.10276*, 2024.
- [117] H. Abgaryan, A. Harutyunyan, and T. Cazenave, "Llms can schedule," *arXiv preprint arXiv:2408.06993*, 2024.
- [118] W. Jiang, Z. Wang, J. Zhai, S. Ma, Z. Zhao, and C. Shen, "An optimizable suffix is worth a thousand templates: Efficient black-box jailbreaking without affirmative phrases via llm as optimizer," *arXiv preprint arXiv:2408.11313*, 2024.
- [119] A. Chen, S. D. Stanton, F. Ding, R. G. Alberstein, A. M. Watkins, R. Bonneau, V. Gligorijević, K. Cho, and N. C. Frey, "Generalists vs. specialists: Evaluating llms on highly-constrained biophysical sequence optimization tasks," *arXiv preprint arXiv:2410.22296*, 2024.
- [120] S. Jiang, M. Xie, and J. Luo, "Large language models for combinatorial optimization of design structure matrix," *arXiv preprint arXiv:2411.12571*, 2024.
- [121] K. Qiu, S. Bakirtzis, I. Wassell, H. Song, J. Zhang, and K. Wang, "Large language model-based wireless network design," *IEEE Wireless Communications Letters*, vol. 13, no. 12, pp. 3340–3344, 2024.
- [122] J. Zhao, K. H. Cheong, and W. Pedrycz, "Bridging visualization and optimization: Multimodal large language models on graph-structured combinatorial optimization," *arXiv preprint arXiv:2501.11968*, 2025.
- [123] A. Ghose, A. B. Kahng, S. Kundu, and Z. Wang, "Orfs-agent: Tool-using agents for chip design optimization," *arXiv preprint arXiv:2506.08332*, 2025.
- [124] E. Meyerson, M. J. Nelson, H. Bradley, A. Gaier, A. Moradi, A. K. Hoover, and J. Lehman, "Language model crossover: Variation through few-shot prompting," *ACM Transactions on Evolutionary Learning*, vol. 4, no. 4, pp. 1–40, 2024.
- [125] C. Yu, X. Liu, Y. Wang, Y. Liu, W. Feng, X. Deng, C. Tang, and J. Lv, "Gpt-nas: Evolutionary neural architecture search with the generative pre-trained model," *arXiv preprint arXiv:2305.05351*, 2023.
- [126] S. Liu, C. Chen, X. Qu, K. Tang, and Y. S. Ong, "Large language models as evolutionary optimizers," in *Proceedings of the IEEE Congress on Evolutionary Computation*, 2024, pp. 1–8.
- [127] G. Jawahar, M. Abdul-Mageed, L. V. Lakshmanan, and D. Ding, "Llm performance predictors are good initializers for architecture search," *arXiv preprint arXiv:2310.16712*, 2023.
- [128] F. Liu, X. Lin, S. Yao, Z. Wang, X. Tong, M. Yuan, and Q. Zhang, "Large language model for multiobjective evolutionary optimization," in *Proceedings of the International Conference on Evolutionary Multi-Criterion Optimization*, 2025, pp. 178–191.
- [129] I. De Zarlà, J. De Curtò, G. Roig, and C. T. Calafate, "Optimized financial planning: Integrating individual and cooperative budgeting models with llm recommendations," *AI*, vol. 5, no. 1, pp. 91–114, 2023.
- [130] S. Brahmachary, S. M. Joshi, A. Panda, K. Koneripalli, A. K. Sagotra, H. Patel, A. Sharma, A. D. Jagtap, and K. Kalyanaraman, "Large language model-based evolutionary optimizer: Reasoning with elitism," *Neurocomputing*, vol. 622, p. 129272, 2025.
- [131] Y. G. N. Teukam, F. Zipoli, T. Laino, E. Criscuolo, F. Grisoni, and M. Manica, "Integrating genetic algorithms and language models for enhanced enzyme design," *arXiv preprint*, 2024.
- [132] C. Morris, M. Jurado, and J. Zutty, "Llm guided evolution-the automation of models advancing models," in *Proceedings of the Genetic and Evolutionary Computation Conference*, 2024, pp. 377–384.
- [133] Z. Wang, S. Liu, J. Chen, and K. C. Tan, "Large language model-aided evolutionary search for constrained multiobjective optimization," in *Proceedings of the International Conference on Intelligent Computing*, 2024, pp. 218–230.
- [134] O. Kramer, "Large language models for tuning evolution strategies," *arXiv preprint arXiv:2405.10999*, 2024.
- [135] H. Hao, X. Zhang, and A. Zhou, "Large language models as surrogate models in evolutionary algorithms: A preliminary study," *Swarm and Evolutionary Computation*, vol. 91, p. 101741, 2024.
- [136] T. Nguyen and A. Grover, "Lico: Large language models for in-context molecular optimization," *arXiv preprint arXiv:2406.18851*, 2024.
- [137] T. Rios, F. Lanfermann, and S. Menzel, "Large language model-assisted surrogate modelling for engineering optimization," in *Proceedings of the IEEE Conference on Artificial Intelligence*, 2024, pp. 796–803.
- [138] L. L. Custode, F. Caraffini, A. Yaman, and G. Iacca, "An investigation on the use of large language models for hyperparameter tuning in evolutionary algorithms," in *Proceedings of the Genetic and Evolutionary Computation Conference Companion*, 2024, pp. 1838–1845.
- [139] Y. Huang, X. Lv, S. Wu, J. Wu, L. Feng, and K. C. Tan, "Advancing automated knowledge transfer in evolutionary multitasking via large language models," *arXiv preprint arXiv:2409.04270*, 2024.
- [140] W. Liu, L. Chen, and Z. Tang, "Large language model aided multi-objective evolutionary algorithm: A low-cost adaptive approach," *arXiv preprint arXiv:2410.02301*, 2024.
- [141] O. Kramer, "Llama tunes cma-es," in *Proceedings of the European Symposium on Artificial Neural Networks*, 2024.
- [142] J. Zhao, T. Wen, and K. H. Cheong, "Can large language models be trusted as evolutionary optimizers for network-structured combinatorial problems?" *IEEE Transactions on Network Science and Engineering*, pp. 1–17, 2025.
- [143] Y. Yu and J. Zutty, "Llm-guided evolution: An autonomous model optimization for object detection," in *Proceedings of the Genetic and Evolutionary Computation Conference Companion*, 2025, pp. 2363–2370.
- [144] Y. Zhang and G. Yi, "Laos: Large language model-driven adaptive operator selection for evolutionary algorithms," in *Proceedings of the Genetic and Evolutionary Computation Conference*, 2025, pp. 517–526.
- [145] S. Ali, M. Ashraf, S. Hegazy, F. Salem, H. Mokhtar, M. M. Gaber, and M. T. Alrefaie, "Pair: A novel large language model-guided selection strategy for evolutionary algorithms," *arXiv preprint arXiv:2503.03239*, 2025.
- [146] X. Zhang, Y. Gong, and J. Zhang, "Large language model as meta-surrogate for data-driven many-task optimization: A proof-of-principle study," *arXiv preprint arXiv:2503.08301*, 2025.
- [147] Y. Shinohara, J. Xu, T. Li, and H. Iba, "Large language models as particle swarm optimizers," *arXiv preprint arXiv:2504.09247*, 2025.

- [148] L. Xie, G. Li, Z. Wang, E. Chung, and M. Gong, "Large language model-driven surrogate-assisted evolutionary algorithm for expensive optimization," *arXiv preprint arXiv:2507.02892*, 2025.
- [149] M. Pluhacek, A. Kazikova, T. Kadavy, A. Viktorin, and R. Senkerik, "Leveraging large language models for the generation of novel meta-heuristic optimization algorithms," in *Proceedings of the Companion Conference on Genetic and Evolutionary Computation*, 2023, pp. 1812–1820.
- [150] B. Romera-Paredes, M. Barekatin, A. Novikov, M. Balog, M. P. Kumar, E. Dupont, F. J. R. Ruiz, J. S. Ellenberg, P. Wang, O. Fawzi, P. Kohli, and A. Fawzi, "Mathematical discoveries from program search with large language models," *Nature*, vol. 625, no. 7995, pp. 468–475, 2024.
- [151] F. Liu, X. Tong, M. Yuan, and Q. Zhang, "Algorithm evolution using large language model," *arXiv preprint arXiv:2311.15249*, 2023.
- [152] X. Wu, Y. Zhong, J. Wu, B. Jiang, and K. C. Tan, "Large language model-enhanced algorithm selection: Towards comprehensive algorithm representation," *arXiv preprint arXiv:2311.13184*, 2023.
- [153] F. Liu, X. Tong, M. Yuan, X. Lin, F. Luo, Z. Wang, Z. Lu, and Q. Zhang, "Evolution of heuristics: Towards efficient automatic algorithm design using large language model," *arXiv preprint arXiv:2401.02051*, 2024.
- [154] H. Ye, J. Wang, Z. Cao, F. Berto, C. Hua, H. Kim, J. Park, and G. Song, "Reevo: Large language models as hyper-heuristics with reflective evolution," *Advances in Neural Information Processing Systems*, vol. 37, pp. 43 571–43 608, 2024.
- [155] Y. Sun, F. Ye, X. Zhang, S. Huang, B. Zhang, K. Wei, and S. Cai, "Autosat: Automatically optimize sat solvers via large language models," *arXiv preprint arXiv:2402.10705*, 2024.
- [156] N. van Stein and T. Bäck, "Llamea: A large language model evolutionary algorithm for automatically generating metaheuristics," *IEEE Transactions on Evolutionary Computation*, vol. 29, no. 2, pp. 331–345, 2024.
- [157] P. Guo, F. Liu, X. Lin, Q. Zhao, and Q. Zhang, "L-autoda: Large language models for automatically evolving decision-based adversarial attacks," in *Proceedings of the Genetic and Evolutionary Computation Conference Companion*, 2024, pp. 1846–1854.
- [158] Y. Huang, S. Wu, W. Zhang, J. Wu, L. Feng, and K. C. Tan, "Autonomous multi-objective optimization using large language model," *IEEE Transactions on Evolutionary Computation*, 2025.
- [159] R. Zhang, F. Liu, X. Lin, Z. Wang, Z. Lu, and Q. Zhang, "Understanding the importance of evolutionary search in automated heuristic design with large language models," in *Proceedings of the International Conference on Parallel Problem Solving from Nature*, 2024, pp. 185–202.
- [160] Y. Yao, F. Liu, J. Cheng, and Q. Zhang, "Evolve cost-aware acquisition functions using large language models," in *Proceedings of the International Conference on Parallel Problem Solving from Nature*, 2024, pp. 374–390.
- [161] W. Yatong, P. Yuchen, and Z. Yuqi, "Ts-eoh: An edge server task scheduling algorithm based on evolution of heuristic," *arXiv preprint arXiv:2409.09063*, 2024.
- [162] S. Yao, F. Liu, X. Lin, Z. Lu, Z. Wang, and Q. Zhang, "Multi-objective evolution of heuristic using large language model," in *Proceedings of the AAAI Conference on Artificial Intelligence*, 2025, pp. 27 144–27 152.
- [163] N. van Stein, D. Vermetten, and T. Bäck, "In-the-loop hyper-parameter optimization for llm-based automated design of heuristics," *ACM Transactions on Evolutionary Learning*, 2024.
- [164] H. Yin, A. V. Kononova, T. Bäck, and N. van Stein, "Controlling the mutation in large language models for the efficient evolution of algorithms," in *Proceedings of the International Conference on the Applications of Evolutionary Computation*, 2025, pp. 403–417.
- [165] P. V. T. Dat, L. Doan, and H. T. T. Binh, "Hsevo: Elevating automatic heuristic design with diversity-driven harmony search and genetic algorithm using llms," in *Proceedings of the AAAI Conference on Artificial Intelligence*, 2025, pp. 26 931–26 938.
- [166] F. Liu, R. Zhang, Z. Xie, R. Sun, K. Li, X. Lin, Z. Wang, Z. Lu, and Q. Zhang, "Llm4ad: A platform for algorithm design with large language model," *arXiv preprint arXiv:2412.17287*, 2024.
- [167] Z. Zheng, Z. Xie, Z. Wang, and B. Hooi, "Monte carlo tree search for comprehensive exploration in llm-based automatic heuristic design," *arXiv preprint arXiv:2501.08603*, 2025.
- [168] N. van Stein, A. V. Kononova, L. Kotthoff, and T. Bäck, "Code evolution graphs: Understanding large language model driven design of algorithms," in *Proceedings of the Genetic and Evolutionary Computation Conference*, 2025, pp. 943–951.
- [169] H. Yin, A. V. Kononova, T. Bäck, and N. van Stein, "Optimizing photonic structures with large language model driven algorithm discovery," in *Proceedings of the Genetic and Evolutionary Computation Conference Companion*, 2025, pp. 2354–2362.
- [170] N. van Stein, A. V. Kononova, H. Yin, and T. Bäck, "Blade: Benchmark suite for llm-driven automated design and evolution of iterative optimisation heuristics," in *Proceedings of the Genetic and Evolutionary Computation Conference Companion*, 2025, pp. 2336–2344.
- [171] H. Ling, S. Parashar, S. Khurana, B. Olson, A. Basu, G. Sinha, Z. Tu, J. Caverlee, and S. Ji, "Complex llm planning via automated heuristics discovery," *arXiv preprint arXiv:2502.19295*, 2025.
- [172] R. Li, L. Wang, H. Sang, L. Yao, and L. Pan, "Llm-assisted automatic memetic algorithm for lot-streaming hybrid job shop scheduling with variable sublots," *IEEE Transactions on Evolutionary Computation*, 2025.
- [173] F. Liu, Q. Zhang, X. Tong, K. Mao, and M. Yuan, "Fitness landscape of large language model-assisted automated algorithm search," *arXiv preprint arXiv:2504.19636*, 2025.
- [174] W. Li, N. van Stein, T. Bäck, and E. Raponi, "Llamea-bo: A large language model evolutionary algorithm for automatically generating bayesian optimization algorithms," *arXiv preprint arXiv:2505.21034*, 2025.
- [175] S. Zhang, S. Liu, N. Lu, J. Wu, J. Liu, Y. S. Ong, and K. Tang, "Llm-driven instance-specific heuristic generation and selection," *arXiv preprint arXiv:2506.00490*, 2025.
- [176] N. van Stein, H. Yin, A. V. Kononova, T. Bäck, and G. Ochoa, "Behaviour space analysis of llm-driven meta-heuristic discovery," *arXiv preprint arXiv:2507.03605*, 2025.
- [177] F. Liu, R. Zhang, X. Lin, Z. Lu, and Q. Zhang, "Fine-tuning large language model for automated algorithm design," *arXiv preprint arXiv:2507.10614*, 2025.
- [178] F. Liu, Y. Liu, Q. Zhang, X. Tong, and M. Yuan, "Eoh-s: Evolution of heuristic set using llms for automated heuristic design," *arXiv preprint arXiv:2508.03082*, 2025.
- [179] R. Lange, Y. Tian, and Y. Tang, "Evolution transformer: In-context evolutionary optimization," in *Proceedings of the Genetic and Evolutionary Computation Conference Companion*, 2024, pp. 575–578.
- [180] Q. Zhang and H. Li, "Moead/d: A multiobjective evolutionary algorithm based on decomposition," *IEEE Transactions on Evolutionary Computation*, vol. 11, no. 6, pp. 712–731, 2007.
- [181] K. Deb, A. Pratap, S. Agarwal, and T. Meyarivan, "A fast and elitist multiobjective genetic algorithm: Nsga-ii," *IEEE Transactions on Evolutionary Computation*, vol. 6, no. 2, pp. 182–197, 2002.
- [182] C. Huang, Y. Li, and X. Yao, "A survey of automatic parameter tuning methods for metaheuristics," *IEEE Transactions on Evolutionary Computation*, vol. 24, no. 2, pp. 201–216, 2019.
- [183] G. Karafotias, M. Hoogendoorn, and Á. E. Eiben, "Parameter control in evolutionary algorithms: Trends and challenges," *IEEE Transactions on Evolutionary Computation*, vol. 19, no. 2, pp. 167–187, 2014.
- [184] R. Chen, B. Yang, S. Li, and S. Wang, "A self-learning genetic algorithm based on reinforcement learning for flexible job-shop scheduling problem," *Computers & Industrial Engineering*, vol. 149, p. 106778, 2020.
- [185] J. Pei, J. Liu, and Y. Mei, "Learning from offline and online experiences: A hybrid adaptive operator selection framework," in *Proceedings of the Genetic and Evolutionary Computation Conference*, 2024, pp. 1017–1025.
- [186] Y. Zhang, G. Yi, H. Wang, Y. Cheng, Y. Chen, and Z. Wei, "An improved abc algorithm based on deep reinforcement learning for multi-uav target assignment," in *Proceedings of the China Automation Congress*, 2024, pp. 4921–4926.
- [187] M. L. Puterman, "Markov decision processes," *Handbooks in Operations Research and Management Science*, vol. 2, pp. 331–434, 1990.
- [188] X. Wu, J. Wu, Y. Zhou, L. Feng, and K. C. Tan, "Towards robustness and explainability of automatic algorithm selection," in *Proceedings of the International Conference on Machine Learning*, 2025.
- [189] F. Hutter, L. Xu, H. H. Hoos, and K. Leyton-Brown, "Algorithm runtime prediction: Methods & evaluation," *Artificial Intelligence*, vol. 206, pp. 79–111, 2014.
- [190] E. Nudelman, K. Leyton-Brown, H. H. Hoos, A. Devkar, and Y. Shoham, "Understanding random sat: Beyond the clauses-to-variables ratio," in *Proceedings of the Principles and Practice of Constraint Programming*, 2004, pp. 438–452.
- [191] S. M. Abdulrahman, P. Brazdil, J. N. Van Rijn, and J. Vanschoren, "Speeding up algorithm selection using average ranking and active testing by introducing runtime," *Machine Learning*, vol. 107, no. 1, pp. 79–108, 2018.

- [192] L. Xu, F. Hutter, H. H. Hoos, and K. Leyton-Brown, "Satzilla: Portfolio-based algorithm selection for sat," *Journal of Artificial Intelligence Research*, vol. 32, pp. 565–606, 2008.
- [193] L. Fehring, J. Hanselle, and A. Tornede, "Harris: Hybrid ranking and regression forests for algorithm selection," *arXiv preprint arXiv:2210.17341*, 2022.
- [194] W. Yi, R. Qu, L. Jiao, and B. Niu, "Automated design of metaheuristics using reinforcement learning within a novel general search framework," *IEEE Transactions on Evolutionary Computation*, vol. 27, no. 4, pp. 1072–1084, 2022.
- [195] R. Zhong, Y. Xu, C. Zhang, and J. Yu, "Leveraging large language model to generate a novel metaheuristic algorithm with crisper framework," *Cluster Computing*, vol. 27, no. 10, pp. 13 835–13 869, 2024.
- [196] N. van Stein and T. Bäck, "Llamae: Automatically generating metaheuristics with large language models," in *Proceedings of the Genetic and Evolutionary Computation Conference Companion*, 2025, pp. 81–82.
- [197] A. Chen, D. Dohan, and D. So, "Evoprompting: Language models for code-level neural architecture search," *Advances in Neural Information Processing Systems*, vol. 36, pp. 7787–7817, 2023.
- [198] P. Wang, Z. Zhao, H. Wen, F. Wang, B. Wang, Q. Zhang, and Y. Wang, "Llm-autoda: Large language model-driven automatic data augmentation for long-tailed problems," *Advances in Neural Information Processing Systems*, vol. 37, pp. 64 915–64 941, 2024.
- [199] Y. Liu, Y. Sun, B. Xue, M. Zhang, G. G. Yen, and K. C. Tan, "A survey on evolutionary neural architecture search," *IEEE Transactions on Neural Networks and Learning Systems*, vol. 34, no. 2, pp. 550–570, 2021.
- [200] R. Zhong, Y. Cao, J. Yu, and M. Munetomo, "Large language model assisted adversarial robustness neural architecture search," in *Proceedings of the International Conference on Data-driven Optimization of Complex Systems*, 2024, pp. 433–437.
- [201] M. U. Nasir, S. Earle, J. Togelius, S. James, and C. Cleghorn, "Llmatic: Neural architecture search via large language models and quality diversity optimization," in *Proceedings of the Genetic and Evolutionary Computation Conference*, 2024, pp. 1110–1118.
- [202] S. Mo, K. Wu, Q. Gao, X. Teng, and J. Liu, "Autosgnn: Automatic propagation mechanism discovery for spectral graph neural networks," in *Proceedings of the AAAI Conference on Artificial Intelligence*, 2025, pp. 19 493–19 502.
- [203] X. Li, C. Zhang, J. Wang, F. Wu, Y. Li, and X. Jin, "Efficient and stealthy jailbreak attacks via adversarial prompt distillation from llms to slms," *arXiv preprint arXiv:2506.17231*, 2025.
- [204] M. Yu, J. Fang, Y. Zhou, X. Fan, K. Wang, S. Pan, and Q. Wen, "Llm-virus: Evolutionary jailbreak attack on large language models," *arXiv preprint arXiv:2501.00055*, 2024.
- [205] X. Li, X. Sun, A. Wang, J. Li, and C. Shum, "Cuda-ll: Improving cuda optimization via contrastive reinforcement learning," *arXiv preprint arXiv:2507.14111*, 2025.
- [206] Z. Wang, K. Zhang, Z. Zhao, Y. Wen, A. Pandey, H. Liu, and K. Ding, "A survey of large language models for text-guided molecular discovery: From molecule generation to optimization," *arXiv preprint arXiv:2505.16094*, 2025.
- [207] Y. G. Nana Teukam, F. Zipoli, T. Laino, E. Crisculo, F. Grisoni, and M. Manica, "Integrating genetic algorithms and language models for enhanced enzyme design," *Briefings in Bioinformatics*, vol. 26, no. 1, p. bbae675, 2025.
- [208] Y. Zhang, K. Zheng, F. Liu, Q. Zhang, and Z. Wang, "Autoturb: Using large language models for automatic algebraic turbulence model discovery," *Physics of Fluids*, vol. 37, no. 1, 2025.
- [209] H. Wang, M. Skreta, C.-T. Ser, W. Gao, L. Kong, F. Strieth-Kalthoff, C. Duan, Y. Zhuang, Y. Yu, Y. Zhu, Y. Du, A. Aspuru-Guzik, K. Neklyudov, and C. Zhang, "Efficient evolutionary search over chemical space with large language models," *arXiv preprint arXiv:2406.16976*, 2024.
- [210] P. Guevorguian, M. Bedrosian, T. Fahradyan, G. Chilingaryan, H. Khachatryan, and A. Aghajanyan, "Small molecule optimization with large language models," *arXiv preprint arXiv:2407.18897*, 2024.
- [211] N. Ran, Y. Wang, and R. Allmendinger, "Mollm: Multi-objective large language model for molecular design—optimizing with experts," *arXiv preprint arXiv:2502.12845*, 2025.
- [212] T. V. Tran and T. S. Hy, "Protein design by directed evolution guided by large language models," *IEEE Transactions on Evolutionary Computation*, vol. 29, no. 2, pp. 418–428, 2024.
- [213] Y. Wang, J. He, Y. Du, X. Chen, J. C. Li, L. Liu, X. Xu, and S. Hassoun, "Large language model is secretly a protein sequence optimizer," *arXiv preprint arXiv:2501.09274*, 2025.
- [214] A. Chen, S. D. Stanton, R. G. Alberstein, A. M. Watkins, R. Bonneau, V. Gligorijevic, K. Cho, and N. C. Frey, "Llms are highly-constrained biophysical sequence optimizers," in *Proceedings of the Workshop on AI for New Drug Modalities at the Conference on Neural Information Processing Systems*, 2024.
- [215] L. Lv, Z. Lin, H. Li, Y. Liu, J. Cui, C. Y.-C. Chen, L. Yuan, and Y. Tian, "Prollama: A protein large language model for multi-task protein language processing," *IEEE Transactions on Artificial Intelligence*, 2025.
- [216] X. Zhang, Z. Xu, G. Zhu, C. M. J. Tay, Y. Cui, B. C. Khoo, and L. Zhu, "Using large language models for parametric shape optimization," *Physics of Fluids*, vol. 37, no. 8, 2025.
- [217] R. Li, C. Zhang, S. Mao, H. Huang, M. Zhong, Y. Cui, X. Zhou, F. Yin, S. Theodoridis, and Z. Zhang, "From english to pcel: Llm helps design and optimize photonic crystal surface emitting lasers," 2023.
- [218] M. Du, Y. Chen, Z. Wang, L. Nie, and D. Zhang, "Large language models for automatic equation discovery of nonlinear dynamics," *Physics of Fluids*, vol. 36, no. 9, 2024.
- [219] R. Sun, C. Chen, F. Guo, and K. Liu, "Integrating llms and evolutionary algorithms for spin glass optimization," in *Proceedings of the International Conference on Artificial Intelligence and Industrial Technology Applications*, 2025, pp. 1271–1274.
- [220] P. Ma, T.-H. Wang, M. Guo, Z. Sun, J. B. Tenenbaum, D. Rus, C. Gan, and W. Matusik, "Llm and simulation as bilevel optimizers: A new paradigm to advance physical scientific discovery," *arXiv preprint arXiv:2405.09783*, 2024.
- [221] X. Peng, Y. Liu, Y. Cang, C. Cao, and M. Chen, "Llm-optira: Llm-driven optimization of resource allocation for non-convex problems in wireless communications," *arXiv preprint arXiv:2505.02091*, 2025.
- [222] J. Wen, C. Su, J. Kang, J. Nie, Y. Zhang, J. Tang, D. Niyato, and C. Yuen, "Hybridrag-based llm agents for low-carbon optimization in low-altitude economy networks," *arXiv preprint arXiv:2506.15947*, 2025.
- [223] W. Lee and J. Park, "Llm-empowered resource allocation in wireless communications systems," *arXiv preprint arXiv:2408.02944*, 2024.
- [224] H. Zhou, C. Hu, D. Yuan, Y. Yuan, D. Wu, X. Liu, and C. Zhang, "Large language model (llm)-enabled in-context learning for wireless network optimization: A case study of power control," *arXiv preprint arXiv:2408.00214*, 2024.
- [225] Y. Wang, J. Farooq, H. Ghazzai, and G. Setti, "Multi-uav placement for integrated access and backhauling using llm-driven optimization," in *Proceedings of the IEEE Wireless Communications and Networking Conference*, 2025, pp. 1–6.
- [226] H. Li, M. Xiao, K. Wang, D. I. Kim, and M. Debbah, "Large language model based multi-objective optimization for integrated sensing and communications in uav networks," *IEEE Wireless Communications Letters*, vol. 14, no. 4, pp. 979–983, 2025.
- [227] J. Hou, K. Qiu, Z. Zhang, Y. Yu, K. Wang, S. Capolongo, J. Zhang, Z. Li, and J. Zhang, "Wireless-friendly window position optimization for ris-aided outdoor-to-indoor networks based on multi-modal large language model," *arXiv preprint arXiv:2410.20691*, 2024.
- [228] M. Sharma, A. Komninos, M. López-Ibáñez, and D. Kazakov, "Deep reinforcement learning based parameter control in differential evolution," in *Proceedings of the Genetic and Evolutionary Computation Conference*, 2019, pp. 709–717.
- [229] H. Guo, Y. Ma, Z. Ma, J. Chen, X. Zhang, Z. Cao, J. Zhang, and Y. Gong, "Deep reinforcement learning for dynamic algorithm selection: A proof-of-principle study on differential evolution," *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, vol. 54, no. 7, pp. 4247–4259, 2024.
- [230] Y. Liu, F. Wu, Z. Liu, K. Wang, F. Wang, and X. Qu, "Can language models be used for real-world urban-delivery route optimization?" *The Innovation*, vol. 4, no. 6, 2023.
- [231] D. Jobson and Y. Li, "Investigating the potential of using large language models for scheduling," in *Proceedings of the ACM International Conference on AI-Powered Software*, 2024, pp. 170–171.
- [232] B. Li, K. Zhang, Y. Sun, and J. Zou, "Research on travel route planning optimization based on large language model," in *Proceedings of the International Conference on Data-driven Optimization of Complex Systems*, 2024, pp. 352–357.
- [233] C. Li, R. Yang, T. Li, M. Bafarassat, K. Sharifi, D. Bergemann, and Z. Yang, "Stride: A tool-assisted llm agent framework for strategic and interactive decision-making," *arXiv preprint arXiv:2405.16376*, 2024.
- [234] H. Chen, G. E. Constante-Flores, and C. Li, "Diagnosing infeasible optimization problems using large language models," *INFOR: Information Systems and Operational Research*, vol. 62, no. 4, pp. 573–587, 2024.

- [235] D. Kikuta, H. Ikeuchi, K. Tajiri, and Y. Nakano, "Routeexplainer: An explanation framework for vehicle routing problem," in *Proceedings of the Pacific-Asia Conference on Knowledge Discovery and Data Mining*, 2024, pp. 30–42.
- [236] S. Wasserkrug, L. Boussioux, D. d. Hertog, F. Mirzazadeh, I. Birbil, J. Kurtz, and D. Maragno, "From large language models and optimization to decision optimization copilot: A research manifesto," *arXiv preprint arXiv:2402.16269*, 2024.
- [237] G. Singh and K. K. Bali, "Enhancing decision-making in optimization through llm-assisted inference: A neural networks perspective," in *Proceedings of the International Joint Conference on Neural Networks*, 2024, pp. 1–7.
- [238] C. Chacón Sartori, C. Blum, and G. Ochoa, "Large language models for the automated analysis of optimization algorithms," in *Proceedings of the Genetic and Evolutionary Computation Conference*, 2024, pp. 160–168.
- [239] P. Maddigan, A. Lensen, and B. Xue, "Explaining genetic programming trees using large language models," *arXiv preprint arXiv:2403.03397*, 2024.