

# SignClip: Leveraging Mouthing Cues for Sign Language Translation by Multimodal Contrastive Fusion

Wenfang Wu<sup>1,2</sup>, Tingting Yuan<sup>3</sup>, Yupeng Li<sup>4</sup>, Daling Wang<sup>2</sup>, Xiaoming Fu<sup>1</sup>

<sup>1</sup>Georg-August Universität Göttingen, Germany

<sup>2</sup>Northeastern University, Shenyang, China

<sup>2</sup>Fachhochschulstudiengänge Krems IMC, Austria

<sup>3</sup>Hong Kong Baptist University, Hong Kong, China

## Abstract

Sign language translation (SLT) aims to translate natural language from sign language videos, serving as a vital bridge for inclusive communication. While recent advances leverage powerful visual backbones and large language models, most approaches mainly focus on manual signals (hand gestures) and tend to overlook non-manual cues like mouthing. In fact, mouthing conveys essential linguistic information in sign languages and plays a crucial role in disambiguating visually similar signs. In this paper, we propose SignClip, a novel framework to improve the accuracy of sign language translation. It fuses manual and non-manual cues, specifically spatial gesture and mouthing features. Besides, SignClip introduces a hierarchical contrastive learning framework with multi-level alignment objectives, ensuring semantic consistency across spatial-mouthing and visual-text modalities. Extensive experiments on two benchmark datasets, PHOENIX14T and How2Sign, demonstrate the superiority of our approach. For example, on PHOENIX14T, in the Gloss-free setting, SignClip surpasses the previous state-of-the-art model SpaMo, improving BLEU-4 from 24.32 to 24.71, and ROUGE from 46.57 to 48.38.<sup>1</sup>

## Introduction

Sign languages (Núñez-Marcos, Perez-de Viñaspre, and Labaka 2023; Rastgoo et al. 2024) are fully developed visual languages conveyed through hand gestures, body movements, and facial expressions. They serve as the primary means of communication for individuals who are Deaf, hard of hearing, or unable to speak. Translating sign language into natural language, a task known as Sign Language Translation (SLT) (Camgoz et al. 2018), is essential for promoting accessibility and facilitating communication between signers and non-signers. SLT presents a complex cross-modal challenge that involves aligning high-dimensional visual inputs with natural language outputs.

With the advancement of Large Language Models (LLMs), visual signals can now be more effectively translated into natural language. This progress has enabled significant improvements in SLT (Wong, Camgoz, and Bowden 2024; Hwang et al. 2025; Gong et al. 2024), making it possible to generate fluent and accurate spoken or written sentences directly from sign language videos. However, existing



Figure 1: The sample of the similar signs in SLT.

works primarily rely on manual cues (i.e., hand gestures), which are often visually similar and challenging to differentiate. For example, as illustrated in Figure 1, the signs for “chair” and “sit” share the same hand configuration but differ in their accompanying mouth shapes. Incorporating non-manual signals, such as mouthing, is crucial for effective disambiguation and improved translation performance. Beyond disambiguation, mouthing also conveys important syntactic and semantic information. It can indicate grammatical properties such as tense, modality, and emphasis, as well as encode function words and particles, which are particularly challenging to capture in gloss-free translation settings where no intermediate annotations are provided.

Integrating mouthing information into SLT systems poses several unique challenges. First, mouthing and hand gestures differ significantly in their spatial focus. While hand gestures involve broad body movements, mouthing is confined to subtle changes in the lower face region. Without appropriate preprocessing to isolate the mouth region, raw video inputs may introduce substantial noise, making it difficult for the model to extract useful mouthing features. Second, when multiple visual streams (hand features and lip movements) are combined, effective cross-modal alignment be-

<sup>1</sup>The code will be made public after the paper is published.

comes essential. Misalignment between modalities can degrade translation performance, especially in gloss-free SLT settings where no intermediate supervision is available to guide the fusion process.

To address these challenges, we propose SignClip, a novel multimodal contrastive fusion framework for SLT that jointly captures manual signals, such as hand gestures, and non-manual cues, particularly mouthing. Our approach adopts a dual-stream architecture that independently encodes the visual input of the full frame and the localized mouth region, followed by a flexible fusion module with gated mechanisms to integrate the two modalities. To encourage effective cross-modal interaction, we introduce two contrastive learning objectives: one enforces consistency between hand gesture and mouthing representations, while the other aligns visual features with corresponding textual semantics. This multi-level supervision enhances modality alignment and enables the model to better disambiguate visually similar signs, ultimately improving translation quality in gloss-free settings. We conduct extensive experiments on two benchmark datasets: PHOENIX14T and How2Sign. Our model consistently outperforms existing SLT baselines, particularly in scenarios where mouthing plays a key disambiguation role. Moreover, ablation studies demonstrate the effectiveness of mouthing integration and contrastive objectives.

Our main contributions are summarized as follows:

- We propose SignCLIP, a multimodal contrastive fusion framework for SLT that jointly models manual (hand gestures) and non-manual (mouthing) cues, effectively addressing sign ambiguity in gloss-free translation settings.
- We design a dual-stream architecture with gated fusion and introduce multi-level contrastive objectives to align hand gestures with mouthing and visual features with target text, enhancing cross-modal representation learning.
- Our approach achieves consistent improvements on PHOENIX-2014T (+0.39 BLEU-4) and How2Sign (+0.64 BLEU-4) over strong baselines, validating the effectiveness of mouthing integration and contrastive learning.

## Related Work

### Gloss-based Sign Language Translation

Gloss-based methods decompose the SLT task into two stages: Sign Language Recognition (SLR), which converts sign videos into gloss sequences (a structured written representation of sign units), followed by Neural Machine Translation (NMT) to transform glosses into natural language text (Boháček and Hružík 2022; Chen et al. 2022a; Zhou et al. 2021; Chen et al. 2022b). Early work such as Camgoz et al. (2018) adopted this framework, achieving strong results on benchmarks like PHOENIX-2014T. Later advances incorporated powerful language models MMTLB (Chen et al. 2022a), multi-stream visual encoders TS-SLT (Chen et al. 2022b), and joint sign-related task training frameworks SLTUNet (Zhang, Müller, and Sennrich 2023). However, gloss-based methods depend on costly, language-specific

gloss annotations, limiting their scalability and generalization in real-world applications.

### Gloss-free Sign Language Translation

To overcome the reliance on costly gloss annotations in traditional SLT pipelines, gloss-free approaches have emerged that directly translate sign language videos into spoken language without intermediate supervision. GFSLT-VLP (Zhou et al. 2023) aligns sign video features with spoken sentences through visual-linguistic pretraining, improving compatibility with LLMs. Sign2GPT (Wong, Camgoz, and Bowden 2024) further enriches representation learning by aligning visual features with pseudo-glosses and POS-tagged words. SpaMo (Hwang et al. 2025) decouples spatial and motion features using off-the-shelf visual encoders and feeds them into LLMs with language prompts. These advances highlight the potential of gloss-free SLT when combined with multimodal fusion and LLM-based reasoning.

Despite recent progress, SLT remains challenging due to the complexity of sign languages. Most existing methods rely solely on manual cues (i.e., hand gestures). These cues are important, but they are often visually similar and insufficient for disambiguation. Building on prior analysis (Wadhawan and Kumar 2021; Koller, Ney, and Bowden 2015), we observe that facial information, particularly mouthing, conveys important linguistic cues for sign language understanding. However, such non-manual features are often overlooked in existing SLT approaches.

## Method

### Overview

Given a sign language video  $X = \{x_i\}_{i=1}^T$ , where each frame  $x_i \in \mathbb{R}^{H \times W}$  represents a single RGB frame, the objective of Sign Language Translation (SLT) is to generate a natural language sentence  $Y = \{y_j\}_{j=1}^U$ , consisting of  $U$  words. Prior gloss-free SLT approaches (Zhou et al. 2023; Wong, Camgoz, and Bowden 2024; Hwang et al. 2025) have focused on extracting visual representations from signers’ gestures and feeding them into sequence-to-sequence architectures. However, these methods often rely solely on manual signals (hand gestures) and overlook the rich linguistic cues provided by non-manual features, particularly mouthing.

As illustrated in Figure 2, our proposed framework introduces a dual-stream encoder that processes both sign gesture cues and mouthing information. First, a spatial encoder extracts fine-grained manual features  $Z_s$  from each cropped sign frame. Simultaneously, we isolate the mouth region using facial landmark detection and construct a mouthing video, from which a frozen lip-reading encoder derives the non-manual feature stream  $Z_m$ .

To effectively combine both modalities, we introduce a flexible fusion module, which integrates  $Z_s$  and  $Z_m$  via gated fusion, resulting in a unified representation  $Z_{fused}$ . This fused representation is projected into the embedding space of the LLM (Flan-T5), guided by a task-specific prompt.

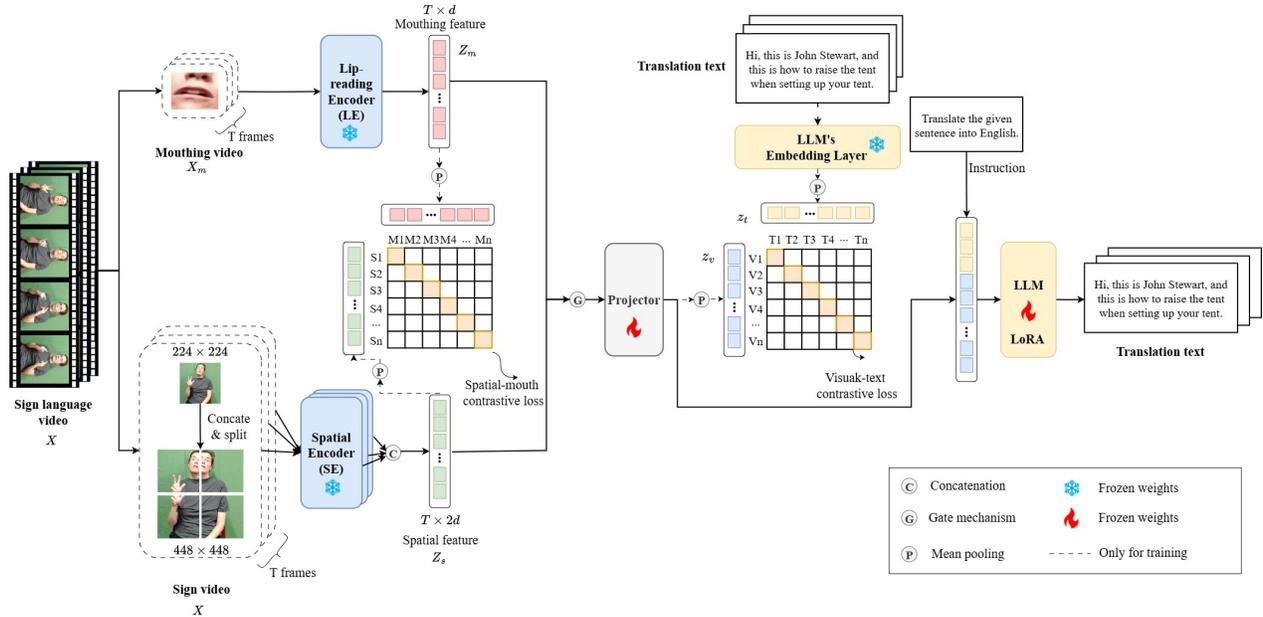


Figure 2: The SignClip framework consists of four main components: (1) a spatial encoder (SE) based on Vision Transformer (ViT) to capture spatial representations of hand gestures; (2) a lip-reading encoder (LE) to model mouthing shape dynamics that complement gesture semantics; (3) a multimodal contrastive fusion module that introduces a hierarchical contrastive learning strategy to align and integrate gesture, mouthing, and textual features; and (4) a LLM that takes the fused visual features along with language-instructive prompts and performs sign-to-text translation, fine-tuned with Low-Rank Adaptation (LoRA). C represents concatenate; G is gate mechanism; P is mean pooling.

To further strengthen the interaction between modalities and improve generalization, we incorporate multi-level contrastive learning objectives: one encourages alignment between visual and mouthing features to disambiguate visually similar gestures; the other aligns sign features with textual embeddings from the LLM to ensure semantic consistency. This training scheme promotes robust multimodal integration and enables the model to generate more accurate and fluent translations, even in challenging gloss-free settings.

### Gesture Feature Extraction

Following SpaMo (Hwang et al. 2025), we aim to capture the spatial configuration of each sign frame, such as hand-shape and position, using a frozen image encoder (e.g., CLIP ViT-L/14) as our Spatial Encoder (SE). To enhance spatial representations without fine-tuning the pre-trained backbone, we adopt *Scaling on Scales* ( $S^2$ ), a parameter-free multi-scale feature enrichment strategy.

Specifically, each sign frame  $x_i \in \mathbb{R}^{H \times W \times 3}$  is resized to multiple resolutions, including  $224 \times 224$  and  $448 \times 448$ . For the higher resolution input (e.g.,  $448 \times 448$ ), we divide it into four non-overlapping  $224 \times 224$  patches. Each patch, along with the original  $224 \times 224$  image, is independently encoded by the frozen image encoder to obtain patch-level embeddings. These embeddings are then aggregated, typically via mean pooling, and concatenated with the original frame embedding to yield a multi-scale spatial feature:

$$z_s^{\text{frame}} = \text{concat} \left( f(x_i^{224}), \text{pool} \left( f(x_{i,1}^{448}), \dots, f(x_{i,K}^{448}) \right) \right),$$

where  $f(\cdot)$  denotes the frozen image encoder and  $K$  is the number of sub-patches (e.g.,  $K = 4$ ).

The spatial embeddings across the entire video sequence  $X = \{x_i\}_{i=1}^T$  form a temporal sequence:

$$Z_s = \{z_s^{\text{frame}1}, z_s^{\text{frame}2}, \dots, z_s^{\text{frame}T}\} \in \mathbb{R}^{T \times 2d},$$

where  $2d$  is the dimensionality of the concatenated features. This design allows the SE to jointly capture fine-grained local details and global spatial context.

### Mouthing Feature Extraction

Lip-reading Encoder (LE) derives phonological features from the original sign video  $X$  by focusing on the mouth region. Similar to the SE, we employ a pre-trained model Av-HuBERT (Shi et al. 2022), which remains frozen during training to ensure stable and robust feature extraction.

To isolate the mouth region, we use the IBUG face alignment toolkit, which employs a 2D facial landmark detector based on the FAN architecture (Bulat and Tzimiropoulos 2017). Given a full-frame video, the detector predicts 68 facial landmarks. We extract the subset corresponding to the mouth region and compute a bounding box to crop the mouth area, shown in Figure 3. The resulting mouth frames are spatially aligned and temporally stacked to construct the mouthing sequence, denoted as  $X_m$ .

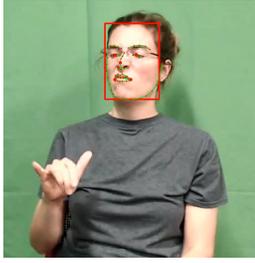


Figure 3: The sample of detected face region.

The mouthing sequence  $X_m$  is then passed through LE to extract phonological representations:

$$Z_m = \{z_m^{\text{frame}1}, z_m^{\text{frame}2}, \dots, z_m^{\text{frame}T}\} \in \mathbb{R}^{T \times d},$$

where  $T$  is the number of frames and  $d$  is the feature dimension. These features capture fine-grained articulation patterns and lip shapes, providing complementary non-manual cues to the manual sign features extracted by SE.

### Multimodal Contrastive Fusion

To effectively integrate complementary information from manual (hand gesture) and non-manual (mouthing) cues, we design a Multimodal Contrastive Fusion (MCF) module that leverages gated fusion followed by temporal modeling.

**Gated Fusion.** Let  $Z_s \in \mathbb{R}^{T \times 2d}$  and  $Z_m \in \mathbb{R}^{T \times d}$  denote the gesture and mouthing features extracted from the spatial encoder and lip-reading encoder, respectively. We first project  $Z_s$  to a lower-dimensional representation  $Z'_s \in \mathbb{R}^{T \times d}$  via a linear mapping. We then concatenate  $Z'_s$  and  $Z_m$ , and compute a gating vector:

$$\mathbf{g} = \sigma(\text{MLP}([Z'_s; Z_m])),$$

where  $\sigma$  denotes the sigmoid function. The fused representation is:

$$Z_{\text{fused}} = \mathbf{g} \odot Z'_s + (1 - \mathbf{g}) \odot Z_m.$$

**Temporal Modeling.** To capture temporal dependencies, we feed  $Z_{\text{fused}}$  into a 1D convolutional encoder (Projector in Figure 2):

$$Z_{\text{conv}} = \text{ConvID}(Z_{\text{fused}}^T),$$

where the input is transposed to shape  $[d, T]$  for convolution. The output is then transposed back to  $[T, d]$  and used as the visual input to the language model.

**Contrastive Supervision.** To encourage effective modality alignment, we introduce two contrastive objectives:

- **Visual-Text Contrastive Loss ( $\mathcal{L}_{\text{vt}}$ ):** This loss aligns the video-level visual representation with its corresponding textual description. Given a batch of  $N$  video-text pairs, we obtain a visual summary embedding  $z_v \in \mathbb{R}^d$  (e.g., via mean pooling over  $Z_{\text{conv}}$ ) and a sentence embedding  $z_t \in \mathbb{R}^d$  (from the Flan-T5 encoder). We adopt an InfoNCE-style contrastive loss:

$$\mathcal{L}_{\text{vt}} = -\frac{1}{N} \sum_{i=1}^N \log \frac{\exp(\text{sim}(\mathbf{z}_v^i, \mathbf{z}_t^i)/\tau)}{\sum_{j=1}^N \exp(\text{sim}(\mathbf{z}_v^i, \mathbf{z}_t^j)/\tau)},$$

where  $\text{sim}(\cdot, \cdot)$  denotes cosine similarity, and  $\tau$  is a temperature hyperparameter.

- **Spatial-mouthing Contrastive Loss ( $\mathcal{L}_{\text{sm}}$ ):** This loss encourages consistency between spatial and mouthing modalities at the video level. We summarize the gesture sequence  $Z_s$  and mouthing sequence  $Z_m$  into global embeddings  $z_s, z_m \in \mathbb{R}^d$  (e.g., via temporal pooling and projection). The loss is:

$$\mathcal{L}_{\text{sm}} = -\frac{1}{N} \sum_{i=1}^N \log \frac{\exp(\text{sim}(\mathbf{z}_s^i, \mathbf{z}_m^i)/\tau)}{\sum_{j=1}^N \exp(\text{sim}(\mathbf{z}_s^i, \mathbf{z}_m^j)/\tau)},$$

aligning spatial and mouthing features from the same video while pushing apart mismatched pairs.

### Training details

Our model is trained in an end-to-end fashion with joint supervision from the translation and contrastive objectives. The total loss is defined as:

$$\mathcal{L}_{\text{total}} = \mathcal{L}_{\text{trans}} + \alpha \mathcal{L}_{\text{vt}} + \beta \mathcal{L}_{\text{sm}},$$

where  $\mathcal{L}_{\text{trans}}$  is the cross-entropy loss for sign-to-text translation,  $\mathcal{L}_{\text{vt}}$  denotes the visual-text contrastive loss, and  $\mathcal{L}_{\text{sm}}$  represents the contrastive alignment between spatial and mouthing features. The weights  $\alpha$  and  $\beta$  control the importance of each auxiliary objective.

We utilize a pre-trained LLM Flan-T5 (Chung et al. 2024) as the decoder. To efficiently adapt the LLM to the SLT task, we apply Low-Rank Adaptation (LoRA) (Hu et al. 2022) to both the self-attention and feedforward layers. This approach allows us to fine-tune only a small number of parameters, significantly reducing memory and computation overhead.

## Experiment

### Implementation Details

We train our model on 2 NVIDIA A100 GPUs with a total batch size of 16. Flan-T5-XL is used as the language backbone and fine-tuned using LoRA for efficient adaptation. Spatial gesture and mouth-region features are projected into a shared embedding space and fused via a gated mechanism, followed by a 1D convolutional layer to capture temporal dynamics. The model is trained for 50 epochs without warm-up, using the AdamW optimizer with learning rates of  $5e-5$  for visual modules and  $1e-4$  for the language model. Mouth-region video clips are extracted using FAN-based 2D facial landmark detection. For the multimodal contrastive fusion part, we empirically set the weight  $\alpha = 1.0$  to emphasize alignment between visual features and textual semantics, and  $\beta = 0.2$  to encourage auxiliary consistency between hand gestures and mouthing.

### Datasets and Metrics

**Dataset** We evaluate our approach on two publicly available SLT datasets that vary in language, domain, and complexity (see details in Table 1): PHOENIX14T (Camgoz et al. 2018) and How2Sign (Duarte et al. 2021).

Dataset	Language	Video	Gloss	Vocab	Duration (h)	Samples	Train / Valid / Test	Signers	Domain
PHOENIX14T (Camgoz et al. 2018)	German	video	✓	2,887	10.96	8257	7,096 / 519 / 642	9	Weather
How2Sign (Duarte et al. 2021)	American	Multi-view video	✗	15,686	80	35,000	31,128 / 1,741 / 2,322	11	Instructional

Table 1: Statistics of two sign language datasets used in this work.

PHOENIX14T is a benchmark dataset for German Sign Language (DGS) translation, collected from weather forecast broadcasts. It represents a closed-domain setting and contains 8,257 sign language video clips. Each clip has an average of 116 frames, and the dataset provides aligned spoken German translations, making it suitable for evaluating sentence-level SLT models. How2Sign is a large-scale dataset for American Sign Language (ASL), covering a more diverse and open-domain instructional context, including cooking, crafting, and general tutorials. It contains over 13,000 sign language video clips captured from multiple camera views, with an average length of 173 frames per clip. This dataset poses greater challenges for SLT due to the wider range of vocabulary and variability in signing styles. As detailed in the Appendix, the dataset statistics include the distribution of different sample types, the size of the dataset, and other relevant information.

**Evaluation metrics** We assess the quality of sign language translation using a suite of widely adopted natural language generation metrics: BLEU-1 to BLEU-4 (Post 2018) and ROUGE-L (Lin and Och 2004). BLEU-1 to BLEU-4 evaluate n-gram precision between the predicted and reference sentences. We use the SacreBLEU implementation with 13a tokenization to ensure fair and reproducible comparison. ROUGE-L computes the longest common subsequence (LCS) between candidate and reference texts, focusing on sequence-level matching and recall.

## Baselines

**Gloss-Based SLT Methods.** MMTLB (Chen et al. 2022a) is a modular framework that first performs Sign Language Recognition (SLR) into glosses and then applies Neural Machine Translation (NMT). BN-TIN-Transf.+SignBT (Zhou et al. 2021) enhances SLT performance by introducing a sign back-translation strategy that synthesizes sign-text pairs from large-scale spoken texts via a text-to-gloss and gloss-to-sign pipeline. SLTU<sub>Net</sub> (Zhang, Müller, and Sennrich 2023) is a unified network jointly trained for SLR and NMT, leveraging multi-task learning to enhance gloss-based translation. TwoStream-SLT (Chen et al. 2022b) is a two-stream model that fuses RGB and keypoint features for robust gloss prediction.

**Gloss-Free SLT Methods.** These gloss-free SLT methods focus on different aspects of sign language translation. OpenSLT (Tarrés et al. 2023) and YT-ASL-SLT (Uthus, Tanzer, and Georg 2024) introduced new datasets or benchmarks for How2Sign and YouTube-ASL, which have helped standardize SLT research. Methods like GFSLT-VLP (Zhou et al. 2023), FLA-LLM (Chen et al. 2024), and SpaMo (Hwang et al. 2025) concentrate on extracting

gesture features, including spatial and motion characteristics, to improve sign language understanding and translation. Sign2GPT (Wong, Camgoz, and Bowden 2024), SignLLM (Gong et al. 2024), and GloFE-VN (Lin et al. 2023) focus on generating intermediate representations similar to gloss, bridging the gap between visual features and textual translation. Lastly, SSVp-SLT (Uthus, Tanzer, and Georg 2024) highlights the importance of privacy protection, addressing how to balance effective translation with data privacy concerns.

These baselines represent the state of the art in SLT across multiple paradigms. Our method distinguishes itself by introducing multi-level contrastive fusion of hand gestures and mouthing, improving translation quality, especially in gloss-free scenarios.

## Main Results

**Results on PHOENIX14T** We evaluate our proposed method, SignClip, on the PHOENIX14T dataset and compare it against both gloss-based and gloss-free sign language translation baselines (Table 2). In gloss-free setting, SignClip achieves better performance with a BLEU-4 score of 24.71, outperforming recent strong baselines such as SpaMo (Hwang et al. 2025) (24.32) and Sign2GPT (Wong, Camgoz, and Bowden 2024) (22.52), without requiring any visual feature fine-tuning. SignClip also achieves the highest BLEU-1 (50.37) and BLEU-3 (29.94) scores among all gloss-free methods, as well as a competitive ROUGE score of 48.38, second only to Sign2GPT. These results clearly demonstrate the effectiveness of introducing mouthing features, which provide critical disambiguation cues for visually similar signs and significantly improve translation performance in the gloss-free setting.

**Results on How2Sign** To further validate the generalization ability of our model, we evaluate SignClip on the How2Sign dataset and compare it against recent gloss-free and weakly gloss-free baselines (Table 3). SignClip achieves new state-of-the-art results across all metrics in the gloss-free setting, with a BLEU-4 score of 10.75, outperforming the best previous model SpaMo (Hwang et al. 2025) by +0.64 BLEU-4. In addition, SignClip reaches the highest BLEU-1 (33.88) and ROUGE (31.44) scores, further highlighting its superior translation quality.

## Ablation Study

**Effect of different components** Table 5 presents an ablation study of key components in our framework. Using only the spatial encoder (SE) yields strong baseline performance (BLEU-4: 19.87, ROUGE: 41.38), while relying solely on the lip encoder (LE) results in significantly lower scores

Setting	Methods	Vis. Fi	B1	B2	B3	B4	RL
Gloss-based	BN-TIN-Transf.+SignBT (Zhou et al. 2021)	✗	50.80	37.75	29.72	24.32	49.54
	MMTLB (Chen et al. 2022a)	✓	53.97	41.75	33.84	28.39	52.65
	TwoStream-SLT (Chen et al. 2022b)	✓	54.90	42.43	34.46	28.95	53.48
	SLTU <sub>NET</sub> (Zhang, Müller, and Sennrich 2023)	✓	52.92	41.76	33.99	28.47	52.11
Gloss-free	CSGCR (Zhao et al. 2021)	✗	36.71	25.40	18.86	15.18	–
	GFSLT-VLP (Zhou et al. 2023)	✓	43.71	33.18	26.11	21.44	42.29
	FLa-LLM (Chen et al. 2024)	✓	46.29	35.33	28.03	23.09	45.27
	Sign2GPT (Wong, Camgoz, and Bowden 2024)	✓	49.54	35.96	28.83	22.52	<b>48.90</b>
	SignLLM (Gong et al. 2024)	✓	45.21	34.78	28.05	23.40	44.49
	SpaMo (Hwang et al. 2025)	✗	<u>49.80</u>	<u>37.32</u>	<u>29.50</u>	<u>24.32</u>	46.57
	<b>SignClip (Ours)</b>	✗	<b><u>50.37</u></b>	<b><u>37.75</u></b>	<b><u>29.94</u></b>	<b><u>24.71</u></b>	<b><u>48.38</u></b>

Table 2: Comparison of model performance on the PHOENIX14T dataset. “Vis. Fi” specifies whether visual features are fine-tuned on sign language data. The best results are highlighted in bold, the second-best are underlined, and “–” indicates missing or unavailable values. B1-B4 refer to BLEU-1 to BLEU-4, and RL refers to RougeL.

Setting	Methods	Vis. Fi	B1	B2	B3	B4	RL
Weakly Gloss-free	GloFE-VN (Lin et al. 2023)	✓	14.94	7.27	3.93	2.24	12.61
	OpenSLT (Tarrés et al. 2023)	✓	34.01	19.30	12.18	8.03	-
Gloss-free	YT-ASL-SLT (Uthus, Tanzer, and Georg 2024)	✗	14.96	5.11	2.26	1.22	-
	SSVP-SLT (Rust et al. 2024)	✓	30.20	16.70	10.50	7.00	25.70
	FLa-LLM (Chen et al. 2024)	✓	29.81	18.99	13.27	9.66	27.81
	SpaMo (Hwang et al. 2025)	✗	<u>33.41</u>	<u>20.28</u>	<u>13.96</u>	<u>10.11</u>	<u>30.56</u>
	<b>SignClip (Ours)</b>	✗	<b><u>33.88</u></b>	<b><u>21.04</u></b>	<b><u>14.23</u></b>	<b><u>10.75</u></b>	<b><u>31.44</u></b>

Table 3: Comparison of model performance on the How2Sign dataset. “Vis. Fi” specifies whether visual features are fine-tuned on sign language data. The best results are highlighted in bold, the second-best are underlined, and “–” indicates missing or unavailable values. B1-B4 refer to BLEU-1 to BLEU-4, and RL refers to RougeL.

(BLEU-4: 12.73), indicating that mouthing features alone are insufficient.

Naively fusing SE and LE slightly degrades performance, highlighting the need for guided modality integration. Adding the Visual-Text Alignment (VT-Align) module to SE improves BLEU-4 to 20.72, demonstrating its effectiveness in bridging visual and textual semantics.

Combining SE and LE with VT-Align brings further improvements, confirming the complementarity of manual and non-manual features. The full model, integrating SE, LE, VT-Align, and Sign Modality Alignment (SM-Align), achieves the best results (BLEU-4: 24.71, ROUGE: 48.38), validating the effectiveness of our multi-level contrastive fusion strategy for gloss-free SLT.

**Impact of LLM** This experiment demonstrates that the selection of LLMs has a significant impact on downstream SLT tasks. Table 6 compares the performance of various models, including mT5-XL (Xue et al. 2020), Llama-3.2-3B (Dubey et al. 2024), Llama-3.1-8B (Dubey et al. 2024), and Flan-T5-XL (Chung et al. 2024). Compared to models trained solely with language modeling (e.g., mT5), those equipped with explicit instruction learning mechanisms, such as Flan-T5, are better suited for multimodal translation and achieve superior performance. Therefore, we adopt Flan-T5-XL as the default language decoder in this paper.

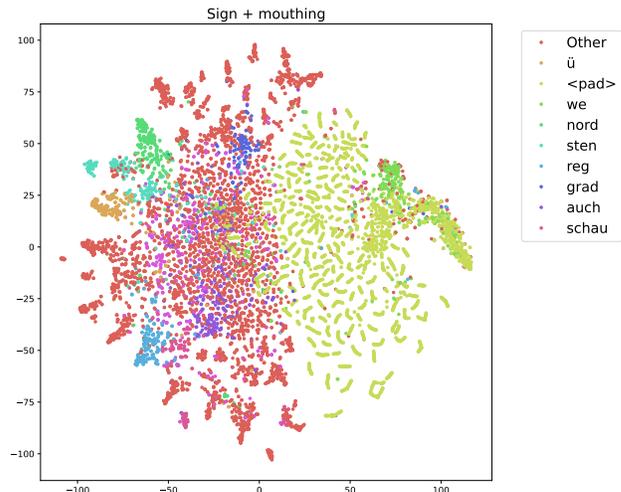


Figure 4: The t-SNE visualization of fused feature.

## Qualitative Analysis

**Qualitative translation examples** We qualitatively compare the outputs from spatial-only, lip-only, and fused (spatial+lip) models in Table 4 on PHOENIX14T dataset. The

Input Type	Output (German + English Translation)
Spatial Mouthing	am <b>montag</b> unbeständiges wetter stellenweise <b>auch</b> mal <b>sonne</b> . ( <i>On Monday, unsettled weather, occasionally some sun.</i> ) und nun die wettervorhersage für morgen mittwoch den neunten juli. ( <i>And now the weather forecast for tomorrow, Wednesday the ninth of July.</i> )
Fused	am <b>montag</b> und <b>dienstag</b> <b>wechselhaft hier und da zeigt sich auch</b> mal <b>die sonne</b> . ( <i>On Monday and Tuesday, changeable weather; here and there the sun also appears.</i> )
Target	montag und diensttag wechselhaft hier und da zeigt sich aber auch die sonne. ( <i>Monday and Tuesday, changeable weather; here and there the sun also appears.</i> )
Remark	<i>Fused model recovers temporal details (“Dienstag”) and improves fluency. Lip-only output is off-topic; spatial-only lacks completeness.</i>
Spatial Mouthing	<b>am nachmittag</b> wird es wieder <b>freundlicher</b> . ( <i>In the afternoon it becomes pleasant again.</i> ) ihnen einen schönen abend und machen sie es gut. ( <i>Have a nice evening and take care.</i> )
Fused	<b>am nachmittag</b> wird es <b>dann freundlicher</b> . ( <i>In the afternoon it then becomes pleasant.</i> )
Target	am nachmittag wird es dann freundlicher. ( <i>In the afternoon it then becomes pleasant.</i> )
Remark	<i>Fused result matches the target; “dann” is captured via lip cues.</i>
Spatial	<b>heute nacht elf grad an der</b> ostsee und <b>vier grad</b> im erzgebirge. ( <i>Tonight, eleven degrees on the Baltic Sea and four degrees in the Ore Mountains.</i> )
Mouthing	<b>heute nacht</b> sechzehn <b>grad</b> im vogtland und vierzehn <b>grad</b> am oberrhein. ( <i>Tonight, sixteen degrees in Vogtland and fourteen degrees on the Upper Rhine.</i> )
Fused	<b>heute nacht zwölf grad an der nordsee vier grad in der eifel</b> . ( <i>Tonight, twelve degrees on the North Sea and four degrees in the Eifel.</i> )
Target	heute nacht zwölf grad an der nordsee vier grad in der eifel. ( <i>Tonight, twelve degrees on the North Sea and four degrees in the Eifel.</i> )
Remark	<i>Only fused model captures correct numerals and location—demonstrates strong grounding.</i>

Table 4: Qualitative examples comparing outputs from spatial-only, lip-only, and fused models. The fused model consistently improves semantic correctness and fluency. Correctly translated 1-grams are shown in bold.

Component				Metric				
SE	LE	VT-Align	SM-Align	B1	B2	B3	B4	RG
✓				44.95	32.04	24.56	19.87	41.38
	✓			31.58	23.34	16.65	12.73	40.28
✓	✓			43.90	31.06	23.59	18.93	40.53
✓		✓		46.88	34.59	26.91	20.72	42.74
✓	✓	✓		46.80	34.26	26.82	22.33	43.78
✓	✓	✓	✓	<b>50.37</b>	<b>37.75</b>	<b>29.94</b>	<b>24.71</b>	<b>48.38</b>

Table 5: Ablation study of the different components on PHOENIX14T dataset. SE: Spatial encoder; LE: Lip-reading encoder; VT-Align: Visual-text alignment; SM-Align: Sign-mouthing alignment.

Models	Size	B1	B2	B3	B4	RG
mT5-XL	3.7B	20.76	10.15	7.68	6.47	15.33
Llama-3.2-3B	3M	33.87	20.03	13.52	9.92	27.59
Llama-3.1-8B	8M	37.52	23.47	16.58	12.75	31.93
Flan-T5-XL	3B	<b>50.37</b>	<b>37.75</b>	<b>29.94</b>	<b>24.71</b>	<b>48.38</b>

Table 6: Ablation study of the impact of LLM on PHOENIX14T dataset.

results show that while spatial features capture core sign semantics, they sometimes overlook connective words and fine-grained details. In contrast, mouthing-only predictions often drift semantically, lacking grounding in manual gestures. However, when combined, mouthing features provide valuable complementary cues—especially for functional words such as “dann” and temporal expressions like “Montag und Dienstag”, which are crucial for sentence flu-

ency and correctness.

These examples demonstrate that mouthing helps disambiguate signs and enhances temporal and syntactic understanding. The fused model produces more complete and accurate translations, particularly in capturing subtle but important elements such as numbers, days, or connectives. This validates the necessity of incorporating non-manual cues like mouthing to boost translation quality in gloss-free SLT systems.

**Feature Visualization** To better understand the impact of gesture and mouthing fusion, we perform t-SNE visualization on the extracted features. As shown in Figure 4, tokens like “we”, “nord”, and “grad” form distinct clusters in the joint embedding space, demonstrating that the model successfully captures meaningful semantic representations. The clear separation of non-linguistic tokens such as  $\langle pad \rangle$  and punctuation further validates the discriminative power

of our multimodal fusion approach.

## Conclusion

In this paper, we propose SignClip, a novel framework to improve SLT accuracy. It fuses manual and non-manual cues, specifically spatial gesture and mouthing shape features. Besides, SignClip introduces hierarchical contrastive learning with multi-level alignment objectives to ensure semantic consistency across sign-mouthing and visual-text modalities. We conduct extensive experiments on benchmark datasets, PHOENIX14T and How2Sign, demonstrating that SignClip achieves better performance in SLT.

## References

- Boháček, M.; and Hruz, M. 2022. Sign pose-based transformer for word-level sign language recognition. In *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, 182–191.
- Bulat, A.; and Tzimiropoulos, G. 2017. How far are we from solving the 2d & 3d face alignment problem?(and a dataset of 230,000 3d facial landmarks). In *Proceedings of the IEEE international conference on computer vision*, 1021–1030.
- Camgoz, N. C.; Hadfield, S.; Koller, O.; Ney, H.; and Bowden, R. 2018. Neural sign language translation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, 7784–7793.
- Chen, Y.; Wei, F.; Sun, X.; Wu, Z.; and Lin, S. 2022a. A simple multi-modality transfer learning baseline for sign language translation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 5120–5130.
- Chen, Y.; Zuo, R.; Wei, F.; Wu, Y.; Liu, S.; and Mak, B. 2022b. Two-stream network for sign language recognition and translation. *Advances in Neural Information Processing Systems*, 35: 17043–17056.
- Chen, Z.; Zhou, B.; Li, J.; Wan, J.; Lei, Z.; Jiang, N.; Lu, Q.; and Zhao, G. 2024. Factorized learning assisted with large language model for gloss-free sign language translation. *arXiv preprint arXiv:2403.12556*.
- Chung, H. W.; Hou, L.; Longpre, S.; Zoph, B.; Tay, Y.; Fedus, W.; Li, Y.; Wang, X.; Dehghani, M.; Brahma, S.; et al. 2024. Scaling instruction-finetuned language models. *Journal of Machine Learning Research*, 25(70): 1–53.
- Duarte, A.; Palaskar, S.; Ventura, L.; Ghadiyaram, D.; DeHaan, K.; Metze, F.; Torres, J.; and Giro-i Nieto, X. 2021. How2sign: a large-scale multimodal dataset for continuous american sign language. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2735–2744.
- Dubey, A.; Jauhri, A.; Pandey, A.; Kadian, A.; Al-Dahle, A.; Letman, A.; Mathur, A.; Schelten, A.; Yang, A.; Fan, A.; et al. 2024. The llama 3 herd of models. *arXiv e-prints*, arXiv–2407.
- Gong, J.; Foo, L. G.; He, Y.; Rahmani, H.; and Liu, J. 2024. LLMs are good sign language translators. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 18362–18372.
- Hu, E. J.; Shen, Y.; Wallis, P.; Allen-Zhu, Z.; Li, Y.; Wang, S.; Wang, L.; Chen, W.; et al. 2022. Lora: Low-rank adaptation of large language models. *ICLR*, 1(2): 3.
- Hwang, E. J.; Cho, S.; Lee, J.; and Park, J. C. 2025. An Efficient Gloss-Free Sign Language Translation Using Spatial Configurations and Motion Dynamics with LLMs. In Chiruzzo, L.; Ritter, A.; and Wang, L., eds., *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, 3901–3920. Albuquerque, New Mexico: Association for Computational Linguistics. ISBN 979-8-89176-189-6.
- Koller, O.; Ney, H.; and Bowden, R. 2015. Deep Learning of Mouth Shapes for Sign Language. In *2015 IEEE International Conference on Computer Vision Workshop (ICCVW)*, 477–483.
- Lin, C.-Y.; and Och, F. J. 2004. Automatic evaluation of machine translation quality using longest common subsequence and skip-bigram statistics. In *Proceedings of the 42nd annual meeting of the association for computational linguistics (ACL-04)*, 605–612.
- Lin, K.; Wang, X.; Zhu, L.; Sun, K.; Zhang, B.; and Yang, Y. 2023. Gloss-free end-to-end sign language translation. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics*.
- Núñez-Marcos, A.; Perez-de Viñaspre, O.; and Labaka, G. 2023. A survey on Sign Language machine translation. *Expert Systems with Applications*, 213: 118993.
- Post, M. 2018. A call for clarity in reporting BLEU scores. *arXiv preprint arXiv:1804.08771*.
- Rastgoo, R.; Kiani, K.; Escalera, S.; Athitsos, V.; and Sabokrou, M. 2024. A survey on recent advances in Sign Language Production. *Expert Systems with Applications*, 243: 122846.
- Rust, P.; Shi, B.; Wang, S.; Camgöz, N. C.; and Maillard, J. 2024. Towards Privacy-Aware Sign Language Translation at Scale. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*.
- Shi, B.; Hsu, W.-N.; Lakhotia, K.; and Mohamed, A. 2022. Learning audio-visual speech representation by masked multimodal cluster prediction. *arXiv preprint arXiv:2201.02184*.
- Tarrés, L.; Gállego, G. I.; Duarte, A.; Torres, J.; and Giro-i Nieto, X. 2023. Sign language translation from instructional videos. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) Workshops*, 5625–5635.
- Uthus, D.; Tanzer, G.; and Georg, M. 2024. Youtube-asl: A large-scale, open-domain american sign language-english parallel corpus. *Advances in Neural Information Processing Systems*, 36.
- Wadhawan, A.; and Kumar, P. 2021. Sign language recognition systems: A decade systematic literature review. *Archives of computational methods in engineering*, 28(3): 785–813.

- Wong, R.; Camgoz, N. C.; and Bowden, R. 2024. Sign2GPT: Leveraging large language models for gloss-free sign language translation. *arXiv preprint arXiv:2405.04164*.
- Xue, L.; Constant, N.; Roberts, A.; Kale, M.; Al-Rfou, R.; Siddhant, A.; Barua, A.; and Raffel, C. 2020. mT5: A massively multilingual pre-trained text-to-text transformer. *arXiv preprint arXiv:2010.11934*.
- Zhang, B.; Müller, M.; and Sennrich, R. 2023. SLTUNET: A simple unified model for sign language translation. *arXiv preprint arXiv:2305.01778*.
- Zhao, J.; Qi, W.; Zhou, W.; Duan, N.; Zhou, M.; and Li, H. 2021. Conditional sentence generation and cross-modal reranking for sign language translation. *IEEE Transactions on Multimedia*, 24: 2662–2672.
- Zhou, B.; Chen, Z.; Clapés, A.; Wan, J.; Liang, Y.; Escalera, S.; Lei, Z.; and Zhang, D. 2023. Gloss-free sign language translation: Improving from visual-language pretraining. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 20871–20881.
- Zhou, H.; Zhou, W.; Qi, W.; Pu, J.; and Li, H. 2021. Improving sign language translation with monolingual data by sign back-translation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 1316–1325.