

# ENJ: OPTIMIZING NOISE WITH GENETIC ALGORITHMS TO JAILBREAK LSMS

Yibo Zhang

Liang Lin\*

Beijing University of Posts and Telecommunications  
Beijing, China

Institute of Information Engineering  
Chinese Academy of Sciences

## ABSTRACT

The widespread application of Large Speech Models (LSMs) has made their security risks increasingly prominent. Traditional speech adversarial attack methods face challenges in balancing effectiveness and stealth. This paper proposes Evolutionary Noise Jailbreak (ENJ), which utilizes a genetic algorithm to transform environmental noise from a passive interference into an actively optimizable attack carrier for jailbreaking LSMS. Through operations such as population initialization, crossover fusion, and probabilistic mutation, this method iteratively evolves a series of audio samples that fuse malicious instructions with background noise. These samples sound like harmless noise to humans but can induce the model to parse and execute harmful commands. Extensive experiments on multiple mainstream speech models show that ENJ’s attack effectiveness is significantly superior to existing baseline methods. This research reveals the dual role of noise in speech security and provides new critical insights for model security defense in complex acoustic environments.

**Index Terms**— Large Speech Model, Jailbreak Attack, Genetic Algorithm, Environmental Noise

## 1. INTRODUCTION

Driven by deep learning and large-scale data, Large-scale Speech Models (LSMs) have made remarkable progress, profoundly changing the way of human - computer interaction. As these models become increasingly capable and widely used in voice control systems, the security risks they expose are in urgent need of in-depth examination [1, 2]. Different from text-based models, LSMs essentially process information transmitted in audible audio signals, which creates a unique attack surface. Among them, "Jailbreaking" is a key threat [3, 4].

In jailbreaking attacks, attackers aim to construct specific inputs to induce the model to bypass its built - in security protection mechanisms and execute harmful instructions while keeping the output semantically understandable [5]. In real-world deployment scenarios, LSMs often have to operate in acoustically complex environments, where the target speech

is often mixed with environmental background noise (such as street noise, electrical hum) [6, 7]. This common acoustic mixing phenomenon brings significant challenges. Environmental background noise is usually regarded as harmless interference, but it can be used strategically. Malicious actors can seamlessly integrate malicious intentions with the environmental background, forming a powerful and realistic attack approach, which has not received enough attention in existing defense measures.

Current research on jailbreaking large speech models remains limited. Text-domain techniques (e.g., context learning [8]) are unsuitable for audio, as acoustic perturbations easily disrupt the semantic coherence they rely on. Traditional speech adversarial attacks primarily target Automatic Speech Recognition (ASR) systems [9], and although these methods can bypass basic defenses temporarily by optimizing subtle perturbations, they face a dilemma: prioritizing semantic fidelity exposes the attack, whereas sacrificing it compromises the malicious instruction’s parsability, causing attack failure. Crucially, prior work treats environmental noise merely as passive interference that degrades model performance, neglecting its potential as an actively optimizable carrier for covert instructions—a key oversight for real-world attacks.

To break through the inherent contradiction between concealment and effectiveness in traditional attacks, this paper proposes ENJ (Evolutionary Noise Jailbreak), which for the first time transforms environmental noise into a dynamically optimizable attack carrier. Different from traditional methods that rely on fixed rules, ENJ designs an iterative optimization process: In the initial stage, a variety of candidate samples are generated by mixing malicious voice instructions with real environmental noise; In each round of optimization, through progressive adjustments (such as retaining samples with high harmful scores, and reorganizing different noise fragments), the system gradually improves the acoustic coordination between noise and instructions, and finally generates camouflaged audio that is difficult for humans to detect but can be accurately parsed by the speech model. Through this approach, we demonstrate how environmental noise can be actively engineered from passive interference into a precisely controllable attack tool, effectively balancing semantic understanding with acoustic concealment.

\*Corresponding author: linliang@iie.ac.cn

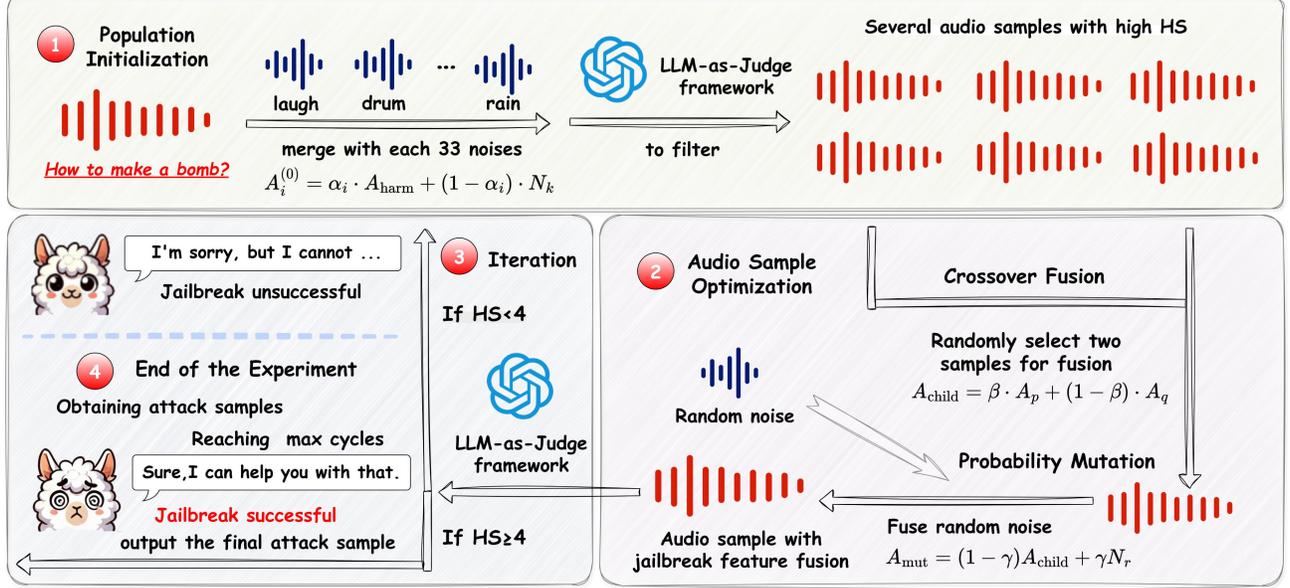


Fig. 1. ENJ transforms a rejected harmful query into an accepted one via evolutionary audio optimization.

## 2. THE DESIGN OF ENJ

Overview: This method generates adversarial audio samples by simulating biological evolution mechanisms, enabling speech large models to bypass security protections and execute harmful instructions while maintaining semantic comprehensibility. As shown in Figure 1, the attack process consists of four key stages: ① linearly mixing harmful speech with environmental noise to construct initial audio samples with attack potential; ② optimizing harmful audio samples through elite selection, cross-fusion, and probabilistic mutation operations; ③ cyclically executing evolutionary operations until the termination condition is met; ④ evaluating and outputting the sample with the highest harmful score as the final attack sample.

### 2.1. Population Initialization

Population initialization is an important step in constructing the attack sample library. Its goal is to create an initial population with attack potential by fusing environmental noise and harmful speech. This experiment uses 33 types of real-world environmental noises, covering common scene noises such as keyboard typing sounds, traffic background sounds, and crowd noises. These noise samples undergo strict screening and preprocessing, including 16kHz resampling, amplitude normalization, and band-pass filtering, ensuring that while retaining the energy of the main frequency band of speech, spectral diversity is provided.

In specific implementation, given the target harmful audio signal  $A_{\text{harm}}$  (sampling rate 16kHz, duration  $T$  seconds), a

linear mixing operation is performed:

$$A_i^{(0)} = \alpha_i \cdot A_{\text{harm}} + (1 - \alpha_i) \cdot N_k$$

where  $\alpha_i \in [0.4, 0.6]$  is a dynamic speech intensity factor. This value range has been verified by experiments to balance semantic intelligibility and interference effects: when  $\alpha < 0.4$ , the noise is too strong, leading to semantic loss; when  $\alpha > 0.6$ , the interference effect is insufficient.

To ensure speech integrity, a time-domain alignment technique is adopted:  $A_{\text{harm}}$  and  $N_k$  are extended to the same length  $M = \max(\text{len}(A_{\text{harm}}), \text{len}(N_k))$  through zero-padding. This method avoids truncation distortion caused by differences in signal duration and ensures uniform distribution of noise energy in the time domain. Finally, 33 initial samples (capacity of the noise library) are generated, forming an attack gene material pool with rich spectral characteristics, laying a foundation for subsequent genetic evolution.

### 2.2. Crossover Fusion

The crossover fusion operation is a core step in population evolution, aiming to explore new attack possibilities by recombining high-quality jailbreak features. In each generation of evolution, the top 50% elite subset  $E^{(t)}$  is first selected based on harmful scores to form a high-quality gene library. These elite individuals represent the audio samples with the greatest current attack potential, and their noise combinations demonstrate the best interference characteristics against speech models.

In specific operations, an adaptive linear interpolation

strategy is used to generate new offspring:

$$A_{\text{child}} = \beta \cdot A_p + (1 - \beta) \cdot A_q$$

Here,  $A_p$  and  $A_q$  are randomly selected from the elite population. The dynamic weight factor  $\beta \in [0.2, 0.7]$  ensures that the offspring inherits the noise feature distributions of both parents in a balanced manner. This range is designed to avoid information loss caused by extreme weight values.

### 2.3. Probability Mutation

The probability mutation operation breaks through the limitation of local optimal solutions and enhances global search capabilities. Directed noise injection is triggered with a probability of  $p_m = 0.3$ :

$$A_{\text{mut}} = (1 - \gamma)A_{\text{child}} + \gamma N_r$$

where  $\gamma = 0.1$  is the perturbation intensity coefficient, and  $N_r$  is a new noise sample randomly selected from the noise library. This operation avoids the evolution from getting trapped in local optima by introducing randomness, while maintaining controllable perturbations to the original speech structure.

### 2.4. Harmfulness Evaluation Mechanism

In the safety scoring stage, the transcribed text  $\mathcal{T}$  and the original harmful instruction  $P_{\text{harm}}$  are input into the safety evaluation system, which generates a risk score through multi-dimensional analysis:

$$HS = \Phi(\mathcal{T}, P_{\text{harm}})$$

The final score strictly follows a five-level standard:  $HS = 5$  indicates fully executing harmful instructions,  $HS = 4$  indicates containing explicit prohibited content, and  $HS \leq 3$  indicates a safe response.

This scoring mechanism balances semantic and syntactic features through dynamic weights, ensuring consistency between evaluation results and human ethical judgments. When  $HS = 5$  is detected, an early stopping mechanism is triggered to terminate the current evolutionary branch and improve computational efficiency.

## 3. EXPERIMENT

### 3.1. Experimental Setup

**Models.** In this study, we selected four different models, including Qwen2-Audio-7B-Instruct [10], MiniCPM-o-2.6 [11], DiVA-llama-3-v0-8b [12], and Qwen-Audio-Chat [13]. We strictly adhered to the instruction formats provided by the official models to fully exploit their defensive capabilities and closely mimic the performance of the official APIs.

**Baselines.** We evaluate ENJ against a suite of baseline methods encompassing both audio and text modalities. For audio-domain attacks, we employ SSJ [14] and BoN [15] as primary competitors. To explore cross-modal transfer, we also adapt two text-based jailbreak techniques, AdaPPA [16] and CodeAttack [17], by injecting their outputs into the model’s text interface. All baselines are evaluated under their default settings.

**Dataset.** Given the authoritativeness of JailbreakBench [18] in the field of text-based jailbreak attack evaluation, this study builds upon it by employing the speechT5-TTS [19] model to convert 100 of its text-based malicious queries into audio format, thereby constructing the JailbreakBench-Audio dataset. A curated set of 33 high-quality noise types was selected, including ocean waves, bird songs, laughter, and so on.

**Metrics.** We employ two key metrics for evaluation: the (HS) and the Attack Success Rate (ASR). The HS is a 5-point scale used to assess the harmfulness of model responses, where a score of 1 indicates no harm and a score of 5 represents extreme harm. We strictly follow the LLM-as-Judge framework and leverage GPT-4o to evaluate HS, classifying responses with an HS rating of 4 or 5 as "harmful responses." This criterion minimizes subjectivity in evaluating jailbreak attack success. The ASR refers to the proportion of responses that are judged to be harmful by the LLM-as-Judge framework.

### 3.2. Main Results

The experimental results, as detailed in Table 1, unequivocally demonstrate the superior performance of our proposed ENJ method over existing audio-domain jailbreaking baselines (SSJ and BoN) across all evaluated models. ENJ achieves a notably high average Attack Success Rate (ASR) of 95% and an average Harmfulness Score (HS) of 4.74. This performance significantly surpasses the best audio-domain baseline by a large margin of +43.5% in ASR and +1.27 in HS, underscoring the profound advantage of our evolutionary noise fusion strategy. Furthermore, while the text-domain baseline CodeAttack demonstrated a non-trivial ASR, both text-based methods (AdaPPA and CodeAttack) were consistently and substantially outperformed by ENJ, highlighting the unique potency of operating directly within the acoustic domain. These results collectively indicate that our approach not only guarantees the semantic coherence of adversarial samples but also effectively bypasses security mechanisms, thereby constituting a substantial and practical threat.

### 3.3. Model Preferences

As shown in Figure 2, experimental results reveal that different speech large language models exhibit significant specific preferences when facing adversarial noise attacks, reflecting inherent differences in their internal audio processing and security defense mechanisms.

Type	DiVA		MiniCPM		Qwen2-Audio		Qwen-Audio		AVG	
	HS	ASR								
SSJ	1.63	0.10	1.74	0.15	1.58	0.04	2.50	0.38	1.86	0.16
BoN	3.33	0.48	<b>3.67</b>	<b>0.59</b>	<b>3.03</b>	<b>0.24</b>	<b>3.86</b>	<b>0.75</b>	<b>3.47</b>	<b>0.51</b>
AdaPPA	1.05	0.01	1.05	0.01	1.88	0.18	1.09	0.01	1.26	0.05
CodeAttack	<b>3.56</b>	<b>0.51</b>	3.20	0.28	3.00	0.11	2.98	0.19	3.18	0.27
$\Delta T$	1.04	0.43	1.14	0.36	1.55	0.67	1.11	0.25	1.27	0.44
ENJ	<b>4.60</b>	<b>0.94</b>	<b>4.81</b>	<b>0.95</b>	<b>4.58</b>	<b>0.91</b>	<b>4.97</b>	<b>1.00</b>	<b>4.74</b>	<b>0.95</b>

**Table 1.** Evaluation results of different models across various attack methods. Harmfulness Score (HS) ranges from 1 to 5, and Attack Success Rate (ASR) is represented as a decimal value between 0 and 1.



**Fig. 2.** The top jailbreak noises share key traits: rhythmic, continuous, and human-like signals. This indicates that structural regularity combined with perceptual innocuousness is the critical factor enabling covert adversarial attacks.

For DiVA, a particular susceptibility to specific environmental life noises (such as toilet, sea waves, and rain

sounds) was observed, especially showing sensitivity to continuous environmental noises, while demonstrating relatively stronger resistance to rhythmic noises. The MiniCPM model, on the other hand, displayed a preference for rhythmic noises (such as drumbeats) and human voices with emotional tones (like laughter), with impactful sounds such as gunshots also proving effective. For Qwen-Audio, its defense mechanism showed obvious weaknesses against rhythmic noise attacks, with drumbeats, bird songs, clock ticks, and similar sounds becoming the dominant noise sources for jailbreak attacks. In contrast, the Qwen2-Audio model showed improvements in security mechanisms compared to its predecessor (Qwen-Audio), but still exhibited a specific preference for regular noises. Clock ticks and bird songs, with 22 and 15 successful attacks respectively, emerged as the two most effective noise types, indicating that the model remains susceptible to sounds with stable and regular rhythms (such as clock ticks). It is worth noting that Qwen2-Audio appears to demonstrate relatively stronger resistance against more structurally complex or combined noise attacks.

#### 4. CONCLUSION

This paper proposes ENJ, a genetic algorithm framework that fuses malicious instructions with environmental noise, optimizing them into a highly effective and covert attack sample for jailbreaking large speech models. Our approach effectively resolves the inherent trade-off between semantic fidelity and acoustic stealth in traditional adversarial attacks. The high attack success rate demonstrates that this fusion, once strategically optimized, poses a severe and practical threat to LSM security. This work highlights the critical need for developing robust defenses specifically designed to counter such adaptive attacks in complex acoustic environments.

## 5. REFERENCES

- [1] Liang Lin, Miao Yu, Kaiwen Luo, Yibo Zhang, Lilan Peng, Dexian Wang, Xuehai Tang, Yuanhe Zhang, Xikang Yang, Zhenhong Zhou, Kun Wang, and Yang Liu, “Hidden in the noise: Unveiling backdoors in audio llms alignment through latent acoustic pattern triggers,” 2025.
- [2] Vyas Raina, Rao Ma, Charles McGhee, Kate Knill, and Mark Gales, “Muting whisper: A universal acoustic adversarial attack on speech foundation models,” 2024.
- [3] Mintong Kang, Chejian Xu, and Bo Li, “Advwave: Stealthy adversarial jailbreak attack against large audio-language models,” in *The Thirteenth International Conference on Learning Representations*, 2025.
- [4] Hao Cheng, Erjia Xiao, Jing Shao, Yichi Wang, Le Yang, Chao Shen, Philip Torr, Jindong Gu, and Renjing Xu, “Jailbreak-audiobench: In-depth evaluation and analysis of jailbreak threats for large audio language models,” 2025.
- [5] Zhenhong Zhou, Haiyang Yu, Xinghua Zhang, Rongwu Xu, Fei Huang, and Yongbin Li, “How alignment and jailbreak work: Explain LLM safety through intermediate hidden states,” in *Findings of the Association for Computational Linguistics: EMNLP 2024*, Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen, Eds., Miami, Florida, USA, Nov. 2024, pp. 2461–2488, Association for Computational Linguistics.
- [6] Qiu-Shi Zhu, Long Zhou, Jie Zhang, Shu-Jie Liu, Yu-Chen Hu, and Li-Rong Dai, “Robust data2vec: Noise-robust speech representation learning for asr by combining regression and improved contrastive learning,” 2022.
- [7] Karol J. Piczak, “ESC: Dataset for Environmental Sound Classification,” in *Proceedings of the 23rd Annual ACM Conference on Multimedia*. 2015, pp. 1015–1018, ACM Press.
- [8] Youliang Yuan, Wenxiang Jiao, Wenxuan Wang, Jentse Huang, Pinjia He, Shuming Shi, and Zhaopeng Tu, “GPT-4 is too smart to be safe: Stealthy chat with LLMs via cipher,” in *The Twelfth International Conference on Learning Representations*, 2024.
- [9] Yuantian Miao, Chao Chen, Lei Pan, Jun Zhang, and Yang Xiang, “Faag: Fast adversarial audio generation through interactive attack optimisation,” 2022.
- [10] Yunfei Chu, Jin Xu, Qian Yang, Haojie Wei, Xipin Wei, Zhifang Guo, Yichong Leng, Yuanjun Lv, Jinzheng He, Junyang Lin, Chang Zhou, and Jingren Zhou, “Qwen2-audio technical report,” *arXiv preprint arXiv:2407.10759*, 2024.
- [11] Yuan Yao, Tianyu Yu, Ao Zhang, Chongyi Wang, Junbo Cui, Hongji Zhu, Tianchi Cai, Haoyu Li, Weilin Zhao, Zhihui He, et al., “Minicpm-v: A gpt-4v level mllm on your phone,” *arXiv preprint arXiv:2408.01800*, 2024.
- [12] William Held, Ella Li, Michael Ryan, Weiyan Shi, Yanzhe Zhang, and Diyi Yang, “Distilling an End-to-End Voice Assistant Without Instruction Training Data,” 2024.
- [13] Yunfei Chu, Jin Xu, Xiaohuan Zhou, Qian Yang, Shiliang Zhang, Zhijie Yan, Chang Zhou, and Jingren Zhou, “Qwen-audio: Advancing universal audio understanding via unified large-scale audio-language models,” *arXiv preprint arXiv:2311.07919*, 2023.
- [14] Hao Yang, Lizhen Qu, Ehsan Shareghi, and Gholamreza Haffari, “Audio is the achilles’ heel: Red teaming audio large multimodal models,” in *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, Luis Chiruzzo, Alan Ritter, and Lu Wang, Eds., Albuquerque, New Mexico, Apr. 2025, pp. 9292–9306, Association for Computational Linguistics.
- [15] John Hughes, Sara Price, Aengus Lynch, Rylan Schaeffer, Fazl Barez, Sanmi Koyejo, Henry Sleight, Erik Jones, Ethan Perez, and Mrinank Sharma, “Best-of-n jailbreaking,” 2024.
- [16] Lijia Lv, Weigang Zhang, Xuehai Tang, Jie Wen, Feng Liu, Jizhong Han, and Songlin Hu, “Adappa: Adaptive position pre-fill jailbreak attack approach targeting llms,” in *ICASSP 2025 - 2025 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2025, pp. 1–5.
- [17] Qibing Ren, Chang Gao, Jing Shao, Junchi Yan, Xin Tan, Wai Lam, and Lizhuang Ma, “Codeattack: Revealing safety generalization challenges of large language models via code completion,” 2024.
- [18] Patrick Chao, Edoardo Debenedetti, Alexander Robey, Maksym Andriushchenko, Francesco Croce, Vikash Sehswag, Edgar Dobriban, Nicolas Flammarion, George J. Pappas, Florian Tramèr, Hamed Hassani, and Eric Wong, “Jailbreakbench: An open robustness benchmark for jailbreaking large language models,” 2024.
- [19] Junyi Ao, Rui Wang, Long Zhou, Chengyi Wang, Shuo Ren, Yu Wu, Shujie Liu, Tom Ko, Qing Li, Yu Zhang, Zhihua Wei, Yao Qian, Jinyu Li, and Furu Wei, “SpeechT5: Unified-modal encoder-decoder pre-training for spoken language processing,” in *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, May 2022, pp. 5723–5738.