

Neuromorphic Intelligence

Marcel van Gerven^{1,*}

¹Department of Machine Learning and Neural Computing, Donders Institute for Brain, Cognition and Behaviour, Radboud University, Nijmegen, the Netherlands

*e-mail: marcel.vangerven@donders.ru.nl

ABSTRACT

Neuromorphic computing seeks to replicate the remarkable efficiency, flexibility, and adaptability of the human brain in artificial systems. Unlike conventional digital approaches, which depend on massive computational and energy resources, neuromorphic systems exploit brain-inspired principles of computation to achieve orders of magnitude greater energy efficiency. By drawing on insights from artificial intelligence, neuroscience, physics, chemistry, and materials science, neuromorphic computing promises to deliver intelligent systems that are sustainable, transparent, and widely accessible. A central challenge, however, is to identify a unifying theoretical framework capable of bridging these diverse disciplines. We argue that dynamical systems theory provides such a foundation. Rooted in differential calculus, it offers a principled language for modeling inference, learning, and control in both natural and artificial substrates. Within this framework, noise can be harnessed as a resource for learning, while differential genetic programming enables the discovery of dynamical systems that implement adaptive behaviors. Embracing this perspective paves the way toward emergent neuromorphic intelligence, where intelligent behavior arises from the dynamics of physical substrates, advancing both the science and sustainability of AI.

Keywords: Neuromorphic computing, artificial intelligence, stochastic perturbation, differential genetic programming

1 Introduction

Artificial intelligence (AI), defined as the science and engineering of creating intelligent machines [1], has experienced unprecedented advancements in the past decade. This remarkable progress stems largely from the deep learning revolution [2]. That is, the ability to train deep neural networks (DNNs) at scale using the backpropagation algorithm [3] in conjunction with abundant access to data and compute, has propelled AI from laboratory settings into mainstream society. This transformation is evidenced by significant scientific breakthroughs across multiple disciplines [4–6] and the emergence of applications addressing diverse societal challenges [7–9]. Perhaps most striking is the development of generative AI models with unprecedented reasoning capabilities [10–12]. Motivated by neural scaling laws, these breakthroughs have prompted some to suggest that achieving human-level artificial general intelligence only requires more data, memory, and compute to train end-to-end models at scale [13, 14].

Despite the significant advancements and potential of deep learning to drive scientific breakthroughs and address challenges in industry and society, the current approach to AI also comes with considerable drawbacks. Training and using DNNs at scale consumes vast amounts of natural resources and results in a substantial carbon footprint, which adversely affects the environment [15, 16]. On its current exponential trajectory, the cost of compute is projected to approach the world’s total energy production by 2050 with AI as one of its major contributors [17, 18]. The problem with the scale-is-all-you-need approach to AI is, of course, that it is unsustainable in a resource-bounded world [19].¹ The resource-intensive nature of this approach further implies that it is predominantly accessible to big tech companies, whose policies can have adverse societal and geopolitical consequences [24, 25]. Another challenge associated with the trend of developing increasingly complex and therefore opaque deep learning models is that it makes it progressively difficult to understand their functioning [26]. Finally, the present emphasis on scale and application-driven progress leaves limited space for addressing the fundamental question which originally inspired

¹This issue is receiving increasing attention [20]. At the same time, AI may provide breakthroughs that help address global energy needs [21–23].

the establishment of AI as a scientific discipline [27–30], that is, how does mind emerge from matter? Indeed, despite the remarkable advances in AI, the human brain remains superior in terms of its reasoning capabilities and adaptability in real-world settings [31].

These considerations raise the question whether there is an alternative approach to AI that may be more sustainable and more aligned with the ambition to understand the nature of intelligence. Neuromorphic computing, which mimics the neural information processing mechanisms of the human brain, offers a route forward [32, 33]. The human brain is estimated to achieve on the order of 1 exaFLOPS (10^{18} floating-point operations per second) while consuming only 20 W of power [29, 34], equivalent to powering one light bulb.² Neuromorphic computing, or brain-inspired computing, aims to develop systems as flexible and efficient as the human brain by embracing its structure and function and replicating this in physical devices [32, 35–37]. Hence, mimicking natural computing in artificial systems has the potential to significantly reduce energy consumption and environmental impact, as neuromorphic systems are designed to be highly efficient in terms of power usage [38]. Moreover, it may provide a bridge between natural and artificial intelligence.

While neuromorphic computing holds great promise as an attractive alternative to traditional deep learning approaches, we have not yet fully realized its potential [18, 39]. The development and deployment of neuromorphic systems require a concerted effort across multiple disciplines, including the natural sciences, materials science, artificial intelligence and systems engineering [17, 40]. The natural sciences provide insights into the mechanisms employed by nature, ranging from physics [41, 42] and chemistry [43] to biology [44], neuroscience [29, 45–47] and cognitive science [48]. Materials science is crucial for designing and fabricating specialized hardware that emulates biological information processing, ensuring energy efficiency and high performance [38]. Artificial intelligence, in particular machine learning, provides algorithms and models that leverage neuromorphic hardware’s unique capabilities [49, 50]. Finally, systems engineering integrate these components into scalable architectures, managing information flow effectively in real-world applications [51, 52].

To realize the full potential of neuromorphic computing, it is essential to establish a comprehensive program that encourages collaboration among this diversity of disciplines. The key to achieving this multidisciplinary integration relies on the adoption of a common theoretical framework that unites these disciplines. Dynamical systems theory (DST) is the natural candidate for such a framework [53]. Dynamical systems theory adopts differential calculus – which has proven extremely successful in other branches of science [54–56] – to model the mechanisms underlying (natural and artificial) intelligence. As such, it views AI as a discipline rooted in the natural sciences. This dynamical systems approach to the development of intelligent systems dates back to the early days of AI, which has its roots in the cybernetics movement [57]. Already in 1947, the cyberneticist Ross Ashby, described self-organization of complex systems in terms of dynamical systems that automatically evolve towards an attractor state in a basin of surrounding states [58]. The dynamical systems approach to AI has been advocated several times before [59–65] but, given the dominance of digital computing based on the von Neumann paradigm, has not been widely embraced by the AI community to guide the development of intelligent systems. In contrast, in the neuromorphic computing community, dynamical systems theory is the language of choice given the objective to mimic natural intelligence in (noisy, analog) physical hardware [32, 50].

By embracing dynamical systems theory, we can bridge between algorithms and models motivated by the natural sciences and implementations on neuromorphic substrates in order to realize AI systems that are more aligned with natural intelligence. Adopting this common language also allows for a fruitful exchange with several other scientific disciplines that already use DST as their theoretical foundation [66–73]. As will be shown, dynamical systems can be set up in such a way that inference, learning and control ensues purely by following the system’s equations of motion. By mapping these equations directly onto physical substrates we remove the distinction between software and hardware, driving the development of neuromorphic systems. Finally, I argue that intelligent neuromorphic systems can be automatically discovered using evolutionary algorithms that are able to search through the space of (constrained) dynamical systems. This provides a truly end-to-end approach to realizing (bottom-up, emergent) *neuromorphic intelligence*.

²In contrast, the El Capitan supercomputer operates at 1.7 exaFLOPS while consuming 30 MW of power, which is sufficient to power a small town.

2 The dynamical systems approach to neuromorphic intelligence

Neuromorphic computing aims to develop systems as flexible and efficient as the human brain by embracing its analog or mixed-signal (analog-digital) nature and replicating this in physical devices [32, 35, 37]. The question remains how to construct neuromorphic systems such that they replicate principles and mechanisms underlying natural intelligence. We will approach this question from a dynamical systems perspective. To introduce the dynamical systems approach to neuromorphic intelligence, we will find it convenient to adopt Marr’s proposal that complex information processing systems should be considered at three different levels of analysis [30, 74, 75], that is, the computational, algorithmic and implementational level. Figure 1a depicts these three levels of analysis from the perspective of neuromorphic computing.

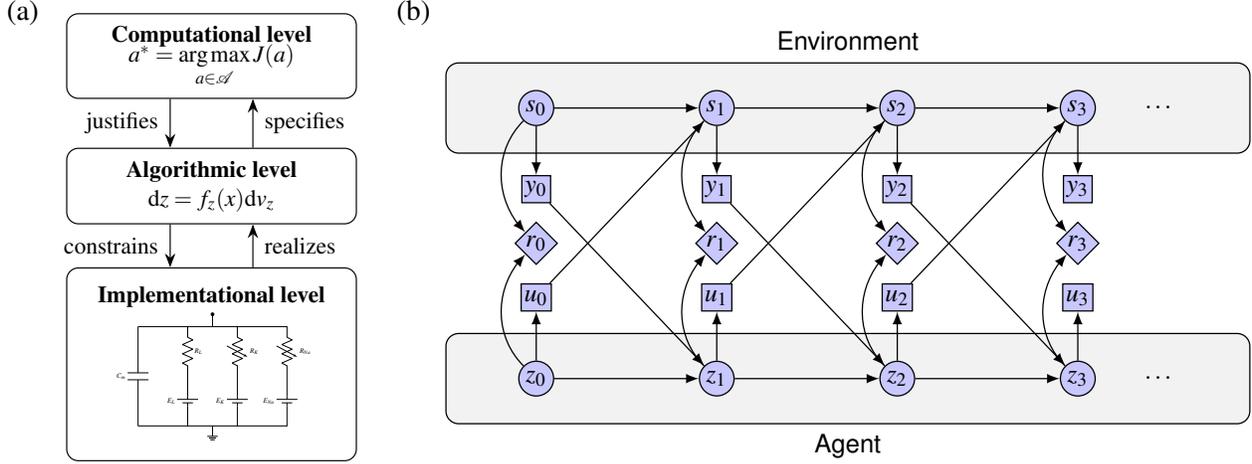


Figure 1. The dynamical systems approach to neuromorphic intelligence. (a) Marr’s three levels of analysis from the perspective of neuromorphic computing. The computational level makes explicit what the computational problem is. The algorithmic level defines how the computational problem is solved. The implementational level makes explicit how this solution is realised in the neuromorphic substrate. (b) An agent and its environment can be modelled as a coupled dynamical system with state $x = (z, s)$. Interactions between the agent and the environment are mediated by observations y and controls u . The agent’s objective is quantified in terms of instantaneous rewards r , which may depend on the state of both the agent and the environment. State variables are denoted by circles, system inputs by squares and rewards by diamonds. The continuous time dynamics are recovered as the time step Δt between transitions goes to zero.

2.1 The computational level

At the computational level of analysis, the goal is to understand the computational problem that is solved by a natural agent and to design artificial agents that solve the same problem. Let us formulate this problem in abstract terms as the ability of an agent to adapt its behavior in order to optimally achieve its objective [30]. That is, an agent a is a (rational, intelligent) entity which acts in a *seemingly* teleological (goal-directed) manner in some environment e [76].

To formalize such goal-directness, we assume the existence of some objective function J which the agent strives to optimize [77, 78]. For concreteness, we assume that the objective function of an agent a operating in environment e takes the form of an expected discounted return (cumulative reward), given by

$$J_e(a) = \mathbb{E} \left[\int_0^{\infty} \alpha(t) r(t) dt \mid A = a, E = e \right] \quad (1)$$

where $\alpha(t) = \exp(-\lambda t)$ is an (exponential) discounting function, and the instantaneous reward $r(t)$ is an implicit function of the state of the agent and/or environment. The expectation operator expresses that the discounted return

is a random variable due to the stochastic nature of the coupled dynamics of the agent and the environment. We also refer to such irreducible uncertainty as aleatoric uncertainty. We proceed by defining the *intelligence* of an agent as

$$J(a) = \mathbb{E}_{e \sim p_E} [J_e(a)] \quad (2)$$

where the expectation is taken over the environmental distribution p_E . That is, an agent's intelligence is defined as the (weighted) average ability of an agent to behave optimally in any environment. It follows that, at the computational level of analysis, the goal is to find the optimal agent

$$a^* = \arg \max_{a \in \mathcal{A}} J(a) \quad (3)$$

where \mathcal{A} denotes the set of all agents.

2.2 The algorithmic level

The algorithmic level of analysis asks how an intelligent system behaves the way it does. That is, what are the mechanisms that allow the agent to achieve its computational-level goal? The dynamical systems approach assumes that both the agent and the environment are structured physical processes that unfold over time, subject to external influences.

Formally, a dynamical system is a rule for time evolution on a state space, which can be described in terms of (a system of) differential equations. Let $x(t) \in \mathbb{R}^d$ denote the joint state of the agent and the environment. We assume that the joint dynamics can be modeled by a differential equation of the form

$$M(x(t))dx(t) = f(x(t))dv(t) \quad (4)$$

where $f: \mathbb{R}^d \rightarrow \mathbb{R}^{d \times n}$ is the state equation, $v(t) \in \mathbb{R}^n$ are the driving paths, typically representing time and/or uncontrollable random force, and $M: \mathbb{R}^d \rightarrow \mathbb{R}^{d \times d}$ is the mass matrix, representing (optional) algebraic constraints. Given an initial state $x(0) = x_0$, Eq. (4) generates the joint dynamics.

For ease of exposition, we will assume that $M(x) = I$ in the following and omit the time index from our notation, such that we may write the joint dynamics as $dx = f(x)dv$. This provides a compact notation to represent different kinds of dynamical systems. For example, when the driving path is given by the identity function $v(t) = t$, we obtain an ordinary differential equation $dx = f(x)dt$. In contrast, if we choose the driving path to be (the realization of) a noise process $\xi(t)$, we obtain a stochastic process $dx = f(x)d\xi$. This can be extended to more complex (random) dynamical systems such as those described by a stochastic differential equation (SDE)

$$dx = \mu(x)dt + \sigma(x)d\xi \quad (5)$$

where the drift function $\mu: \mathbb{R}^d \rightarrow \mathbb{R}^d$ and diffusion function $\sigma: \mathbb{R}^d \rightarrow \mathbb{R}^{d \times n}$ represent the deterministic and stochastic components of the dynamics, respectively. This can be written equivalently as $dx = f(x)dv$ by defining $f(x) = [\mu(x), \sigma(x)]$ and $v = (t, \xi)$.³ In the following, we will assume that SDEs provide an ideal basis for the development of neuromorphic intelligence. Quoting Carver Mead: "Drift and diffusion are the stuff that biology and neuromorphic systems are made of." [32]

Recall that $x(t)$ describes the joint dynamics of the agent and the environment. We can make this more explicit by defining $x(t) = (z(t), s(t))$ with $z(t) \in \mathbb{R}^{d_z}$ the state of the agent and $s(t) \in \mathbb{R}^{d_s}$ the state of the environment. Define $f(x) = (f_z(x), f_s(x))$ and $v = (v_z, v_s)$. We may now write the joint dynamics $dx = f(x)dv$ in terms of two coupled systems $dz = f_z(x)dv_z$ and $ds = f_s(x)dv_s$ with initial state $x_0 = (z_0, s_0)$. Using this notation, given driving paths v_z and v_s , the agent and the environment are completely specified by tuples $a = (f_z, z_0)$ and $e = (f_s, s_0)$, respectively.

The goal is to define the agent a such that the joint dynamics maximize (2) as the result of sequential decision making under uncertainty by the agent, translating observations $y = g_z(s)$ into controls $u = g_s(z)$. Determining the optimal control from observational data is particularly challenging given the epistemic uncertainty of the agent about (the state of) the environment since it can only partially observe the environmental state through its senses. Figure 1b depicts the interaction between the agent and the environment across time.

³We use $[v_1, \dots, v_n]$ and (v_1, \dots, v_n) to denote horizontal and vertical stacking of (the elements in) v_1, \dots, v_n , respectively.

2.3 The implementational level

The implementational level of analysis asks how an intelligent system is physically realized. The neuromorphic computing paradigm assumes that there is no distinction between the physical substrate that implements an intelligent algorithm and the algorithm itself. In this sense, a neuromorphic system can be seen as a special-purpose device whose sole purpose is to generate appropriate output in response to its input. This notion of directly using the physical substrate for compute is also referred to as in-physics or in-materia computing [41, 50, 79, 80]. In other words, the substrate *is* the compute. Furthermore, unlike conventional von Neumann architectures, which separate processing and memory units, leading to inefficiencies due to the Von Neumann bottleneck [29], neuromorphic architectures integrate these units to achieve in-memory computing, removing the distinction between memory and compute.

Under the dynamical systems approach, we achieve this equivalence between an algorithm and its physical realization by assuming that the neuromorphic agent's state equation f_z implements the equations of motion of the corresponding physical system. Given the joint initial state x_0 , the physical system is assumed to adapt towards more desirable states as it interacts with its environment as dictated by the driving paths v . This mapping is multiply realizable using various physical substrates, ranging from digital and analog silicon-based technologies [42, 81] to emerging materials such as memristors [82], phase-change memory [83], spintronic devices [84–86], photonic systems [87], electrochemical systems [43, 88] and biological substrates [44, 46]. In terms, of efficiency, these unconventional computing paradigms offer orders of magnitude better energy efficiency compared to conventional digital hardware, up to the Landauer limit [89] and beyond [90, 91].

Even though neuromorphic algorithms should ultimately run in neuromorphic substrates, conventional hardware continues to fulfill an important role since it acts as a testbed for simulating neuromorphic agents via numerical integration of the underlying differential equations. Field-programmable gate arrays (FPGAs) are of particular interest here since this reconfigurable digital hardware combines fidelity and flexibility to pave the way for high-throughput simulation of neuromorphic systems [92, 93].

3 Working example: Controlling a stochastic particle

To make the computational problem a neuromorphic agent is faced with more concrete, let us consider positional control of a stochastic particle as a minimal working example. We can represent this problem using coupled stochastic differential equations.

Stochastic double integrator Consider a particle whose state is given by $s = (s_1, s_2) = (p, \dot{p})$ with p the particle position and \dot{p} the particle velocity. The particle position and velocity are determined by the stochastic differential equation

$$ds = \begin{bmatrix} s_2 dt \\ (-\gamma s_2 + u) dt + \varepsilon dW \end{bmatrix} \quad (6)$$

where $\gamma = 0.5$ determines the friction experienced by the particle, u is the control exerted by the agent and W is Brownian noise scaled by $\varepsilon = 0.1$. This system is also known as a stochastic double integrator (SDI) [94].

Continuous-time recurrent neural network To implement a (noisy, analog) neuromorphic agent that controls the particle dynamics, we consider a stochastic continuous-time recurrent neural network (CTRNN) [64]. Let α denote the state variables of the CTRNN that implement the inference process, mapping observations to controls through dynamics

$$d\alpha = \tau^{-1} \circ (-\alpha + A\sigma(\alpha + b) + By) dt + \kappa dW \quad (7)$$

with time constants $\tau = (\tau_1, \dots, \tau_k)$, Hadamard product \circ , sigmoid function $\sigma(\cdot)$, bias vector $b = (b_1, \dots, b_k)$, observations y , noise scale κ and k -dimensional Brownian noise W . We define $\theta = (\tau, b, A, B, C)$ as the model parameters. The initial state $a_0 = 0$ and noise scale $\kappa = 0.01$ are considered as fixed hyper-parameters. For simplicity, we assume complete observability of the particle position and velocity. That is, the agent's observations are given by

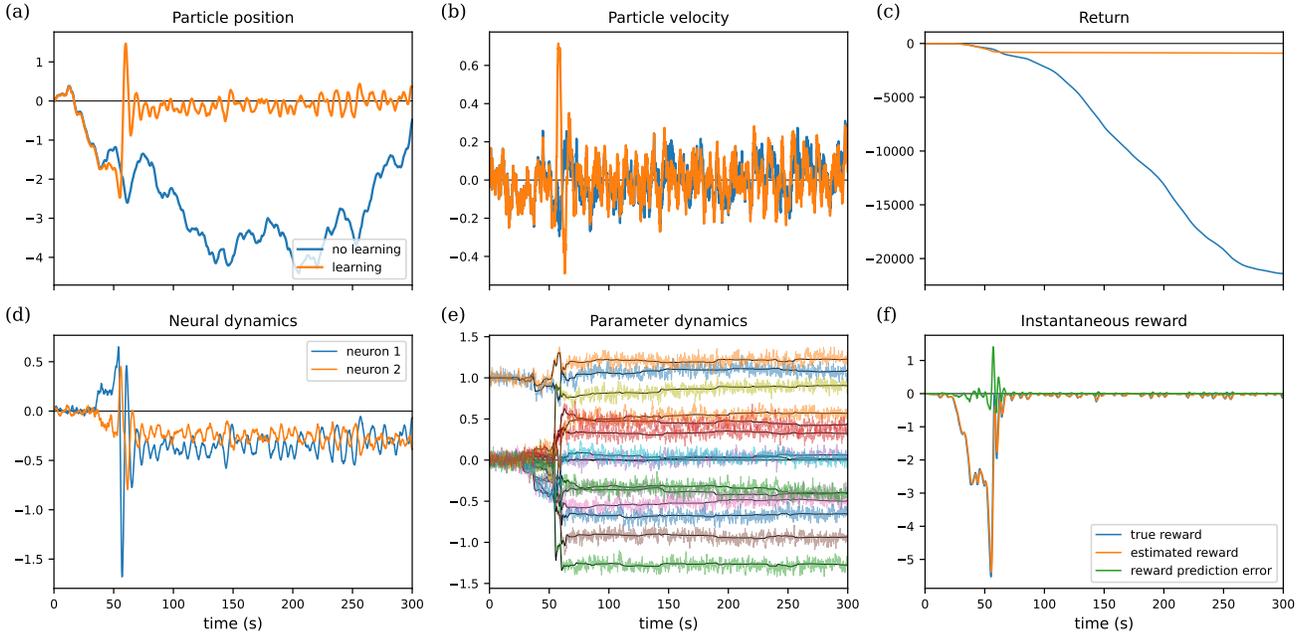


Figure 2. Control of the stochastic double integrator (SDI) by a continuous-time recurrent neural network (CTRNN). SDI hyper-parameters given by $\gamma = 0.5$ and $\varepsilon = 0.1$. CTRNN parameters are all initialized to zero, except the time constants, which are set to one. The number of neurons is set to $k = 2$. We compare SDI dynamics with and without learning. Learning is induced via Ornstein-Uhlenbeck adaptation (OUA). OUA hyper-parameters given by $\lambda = 2$, $\sigma = 0.1$, $\eta = 5$ and $\rho = 2$. Panels a-c show the particle position, particle velocity and return (cumulative reward) with and without learning. (d) Neural dynamics α during OUA learning. (e) Parameter dynamics θ during OUA learning. (f) True reward r , estimated reward v and reward prediction error δ during OUA learning.

$y = s$. We further assume that the control is given by a saturating nonlinear readout of the agent state $u = \tanh(C\alpha)$. Finally, we assume that the agent's objective function is given by Eq. (8) with instantaneous quadratic reward function

$$r(t) = -0.9s_1(t)^2 - 0.1u(t)^2 \quad (8)$$

penalizing large magnitudes of the particle position s_1 while attenuating the control amplitude u .

The coupled CTRNN-SDI system was implemented using Diffrax [95]; a JAX-based numerical integration package. Numerical integration was performed using a stochastic Runge-Kutta solver with a step size of $\Delta t = 0.1$ [96]. Given randomly initialized parameters, the coupled dynamics between the agent and its environment evolve in a non-teleological manner, as demonstrated in Figure 2, Panels a-c (blue curves). Evidently, the particle's position fluctuates about since the dynamics are effectively uncontrolled in this case, which is associated with a low return.

4 Experience-dependent learning

The key question remains how an agent can modify its behavior such as to maximize the expected return. One way to do so, is by learning from experience, that is, by adapting its dynamics based on incoming observations such as to reach more desirable states.

4.1 Automatic differentiation

The conventional way to train deep learning models in dynamic control settings is by performing policy gradient ascent on the model parameters θ via backpropagation through time (BPTT) [97]. In case of parameterized dynamical

systems, BPTT amounts to reverse-mode automatic differentiation on the unrolled computational graph that is defined by the state equations and the numerical solver [95, 98]. This involves iteratively running a forward pass to simulate the coupled system followed by a backward pass to transmit gradient information for credit assignment. However, the backpropagation algorithm has several issues [99]. First, it is non-parsimonious as it requires additional mechanisms to implement the backward pass. Second, it interleaves forward and backward passes, meaning that it continuously needs to switch between inference and learning. This is also referred to as update locking. Third, the backward pass requires that presynaptic weights have access to postsynaptic weights, making the algorithm non-local. This is referred to as the weight transport problem. Fourth, it requires transmission of exact gradients, which is generally impossible in physical systems that are subject to intrinsic noise. Finally, and perhaps most importantly, BPTT is impossible to implement in a physically realistic manner exactly because it moves against the arrow of time, preventing online learning. An alternative approach is provided by real-time recurrent learning (RTRL), which is equivalent to running forward-mode automatic differentiation [100]. While this solves the issues associated with running a backward pass, it is less efficient than BPTT and still relies on the storage and transmission of exact gradients.

4.2 Learning as adaptation

In contrast to the conventional approach, the dynamical systems approach assumes that learning emerges purely from simulating the agent's equations of motion using operations that are local in space and time. That is, we focus on online, in-situ learning instead of the more conventional off-line, ex-situ approach to learning as implemented in conventional AI systems using the backpropagation algorithm [3]. Such lifelong, continual learning [101] can be realized by incorporating the learning mechanism in the system dynamics. To this end, let us partition the agent state as $z = (\alpha, \phi)$, where we distinguish variables α whose dynamics implement inference, as before, from variables ϕ , whose dynamics implement learning. That is, inference refers to the reasoning process which translates observation into action, whereas learning refers to changes in the reasoning process based on experience-driven adaptation. The agent dynamics are described by

$$d\alpha = f_\alpha(x) dv_\alpha \tag{9a}$$

$$d\phi = f_\phi(x) dv_\phi \tag{9b}$$

where the dynamics of ϕ are assumed to induce increasingly optimal states a .

The challenge is to define $f_z = (f_\alpha, f_\phi)$ and $z_0 = (\alpha_0, \phi_0)$ in such a way that optimal behavior emerges, purely from forward simulating the equations of motion of the agent-environment system. From a dynamical systems perspective there is no difference between inference and learning, other than that the latter is assumed to evolve at a slower time scale. This is also known as a fast-slow system [102]. For instance, in case of biological agents, the fast system would determine neuronal dynamics whereas the slow system describes structural or functional changes due to neuronal plasticity. The question remains how an agent can modify its parameters to learn from experience purely by following its equations of motion.

4.3 Noise-based learning

A potentially more appealing approach to online learning is provided by stochastic perturbation methods; derivative-free zero-order optimization methods that approximate the gradient by evaluating the objective function at different points to find an optimum [103]. These methods exploit process noise that affects system dynamics as a way to drive parameter values in more optimal directions, implementing credit assignment via stochastic approximations of the gradient [104–107]. Stochastic perturbation methods view noise as a feature rather than a bug, also making them ideally suited for implementation in (noisy, analog) neuromorphic systems [108]. This principle is also well-aligned with ideas about the functional role of noise in biological systems [109–112].

As an example of noise-based learning, let us consider Ornstein-Uhlenbeck adaptation (OUA); a recently proposed mechanism that incorporates noise-based learning in the agent's state equations [107]. OUA induces parameter changes by introducing state variables $\phi = (\theta, \mu, \nu)$ that implement learning. Here, $\theta \in \mathbb{R}^n$ are the

parameters on which the dynamics of inference variables z depend, $\mu \in \mathbb{R}^n$ are the parameter means and $v \in \mathbb{R}$ is a reward estimate. For each parameter θ_i , the dynamics are defined by an Ornstein-Uhlenbeck (OU) process

$$d\theta_i(t) = \lambda(\mu_i(t) - \theta_i(t))dt + \sigma dW(t) \quad (10)$$

where λ is a rate parameter and σ determines how quickly parameters θ_i diffuse away from their mean μ_i due to Brownian noise W . Starting at $\mu_0 = \theta_0$, the OUA dynamics implement an exploration process about the current parameter mean. Learning is induced via the parameter means $\mu \in \mathbb{R}^n$ through dynamics

$$d\mu_i(t) = \eta \delta(t)(\theta_i(t) - \mu_i(t))dt \quad (11)$$

where η is a rate parameter and δ is the reward prediction error (RPE), acting as a learning signal for credit assignment. The RPE quantifies the difference between the expected return under the parameters θ and the expected return under the means μ . $\delta(t) = J(t) - v(t)$. Following [107], we ignore future rewards and use $\delta(t) = r(t) - v(t)$, where $r(t)$ is the observed reward and $v(t)$ is a reward estimate whose dynamics are given by

$$dv(t) = \rho(r(t) - v(t))dt \quad (12)$$

with rate parameter ρ and initial state $v(0) = 0$.

To demonstrate the use of noise as a mechanism for learning, we applied OUA to our working example. To this end, we extend the CTRNN state to $z = (\alpha, \phi)$ where the dynamics of α are given by (7) and $\phi = (\theta, \mu, v)$, where θ are the CTRNN parameters and v is computed from the reward function (8). Figure 2 shows that for this problem, the proposed OUA learning mechanism indeed modifies the CTRNN parameters in such a way that a more desirable state is obtained, purely by simulating the equations of motion of the system at hand. The same OUA mechanism can be applied to the model hyper-parameters. For example, as shown in [107], dynamic updating of the noise variance σ allows for adaptively increasing and decreasing the noise variance, effectively trading off between exploration and exploitation. This exploration-exploitation dilemma is a key problem faced by any intelligent agent faced with epistemic uncertainty [113]. The need to trade off between information-seeking and reward-seeking behavior is known as dual control in the control theory community [114].

5 Differential genetic programming

The dynamical systems approach to the development of intelligent agents is concerned with setting up equations of motion that implement learning, inference and control. The previous section demonstrated that we can set up the equations of motion of a neuromorphic system in such a way that the system self-organizes towards increasingly optimal states. Here, we assumed that adaptation takes place at an ontogenetic timescale, that is, during the lifetime of an intelligent agent. The question remains, however, if the equations that implement learning, inference and control are optimal themselves. In this section, we will consider how we can evolve neuromorphic agents at a phylogenetic timescale through a process of natural selection. From this evolutionary perspective, the goal is to evolve populations of agents

$$\mathcal{A}_0 \rightarrow \mathcal{A}_1 \rightarrow \dots \rightarrow \mathcal{A}_N$$

with \mathcal{A}_i the agent population at the i -th generation such that the average fitness $F_i = \frac{1}{|\mathcal{A}_i|} \sum_{a \in \mathcal{A}_i} J(a)$ of the population increases across generations, where an individual agent's fitness is equated with $J(a)$.

Evolving neuromorphic systems constitutes a truly bottom-up approach for the development of neuromorphic intelligence. Evolutionary adaptation affords changes towards optimality that cannot be learned through experience-dependent learning. This particularly pertains to the non-differentiable symbolic structure of the state equation as well as those changes whose optimality cannot be sensed locally in space and time. This pertains, e.g., to evolving the structure of sensory and motor components that link the agent to its environment, evolving objective functions that can be locally estimated and act as surrogates to the true (but possibly unknowable) objective J , or evolving the slow part of the system to induce more effective learning.

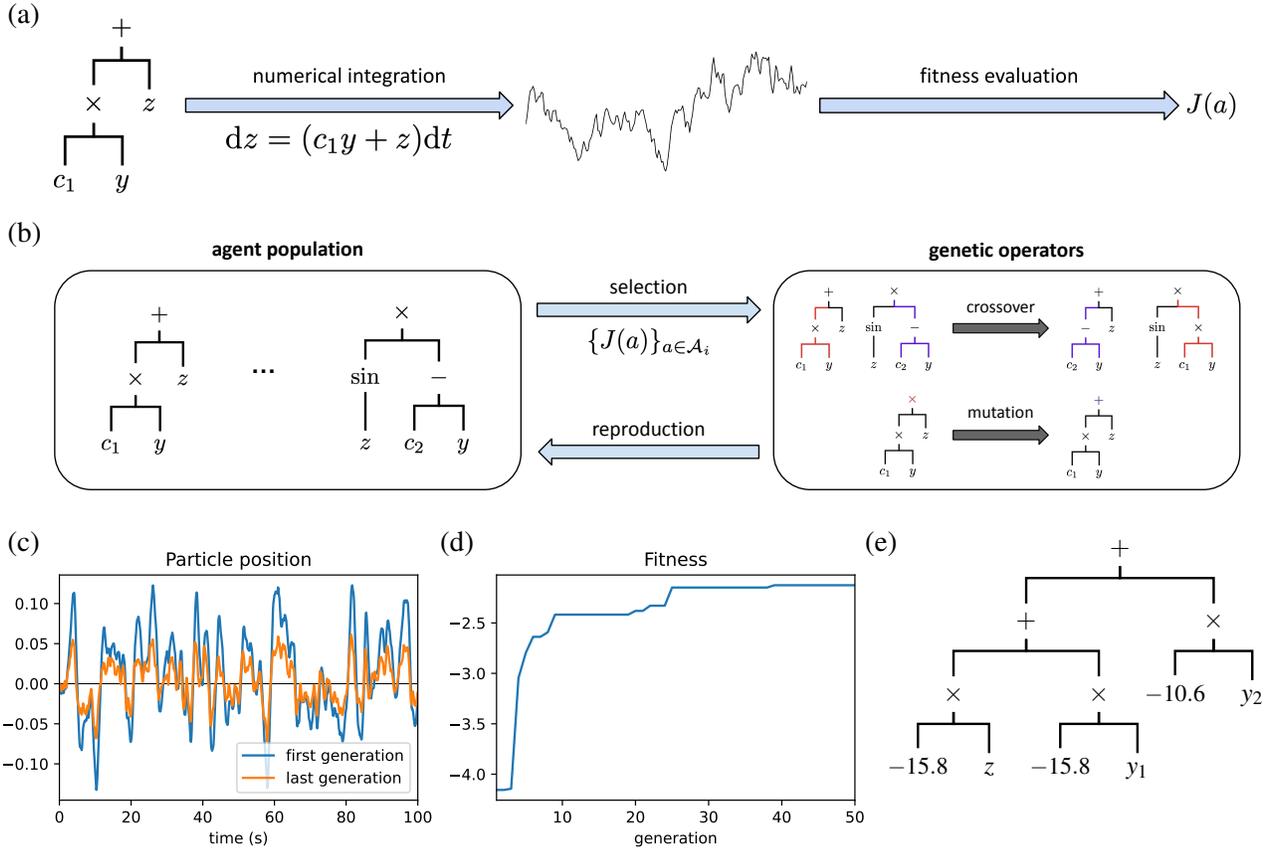


Figure 3. Evolving neuromorphic agents using DGP. a) The state equation describing a neuromorphic agent can be represented by a computational graph consisting of function nodes and leaf nodes. The agent-environment interaction is simulated using numerical integration, based on which the agent’s fitness can be computed. We here consider a scalar ODE. This can be easily extended to systems of differential equations by representing the system as a multitree or directed acyclic graph. b) Agents are preferentially selected for reproduction based on their fitness. The new population is evolved using crossover and mutation operations. c) Comparison of particle position for the best agent in the first and last generation when using DGP to control a stochastic particle. d) Increasing fitness of the agent population. e) Best symbolic expression $f_z(x) = -15.8z - 15.8y_1 - 10.6y_2$ obtained in the last generation. Here, z denotes the (scalar) agent state, y_1 the observed particle position and y_2 the observed particle velocity. The control output is learned as a separate tree and given by $u = 3z$.

To emulate evolutionary adaptation, we may resort to genetic programming (GP) [115, 116]. Genetic programming is an evolutionary algorithm for learning computer programs. GP maintains a population of individuals that each embody a computer program represented in terms of a computational graph. This graph is constructed from predefined sets of function nodes and leaf nodes. Function nodes cover mathematical (unary and binary) functions, while leaf nodes describe variables and constants (nullary functions). GP seeks to evolve populations with increasing fitness through crossover and mutation operations.

In the dynamical systems approach to AI, we may employ GP to evolve agents $a = (f_z, z_0)$. The initial state z_0 simply requires evolving a state vector. For ease of exposition, we will assume that the initial state is fixed to $z_0 = 0$. In contrast, we interpret f_z as a computer program $x \mapsto dz$ that takes input x and generates differentials dz . I refer to the genetic programming approach to evolving dynamical systems as differential genetic programming (DGP). Figure 3 illustrates the use of DGP to evolve neuromorphic agents. Figure 3a shows how the state equation of a scalar ordinary differential equation, representing the neuromorphic agent, can be represented as a parse tree. The fitness

of this state equation can be evaluated by computing the return as the agent-environment interaction is simulated. Figure 3b shows how differential genetic programming evolves populations of agents through selective crossover and mutation. The generalization to more complex dynamical systems consisting of multiple state variables and/or state equations representing both drift and diffusion is straightforward, requiring the evolution of a multitree (set of parse trees).

As an example of the effectiveness of evolving dynamical systems, De Vries et al. [117] have shown that the state equations of dynamical systems can be evolved to learn agents that are able to control classical control problems. To demonstrate evolving populations of agents with increasing average fitness F , we again consider our working example of controlling a stochastic particle. Instead of specifying the structure of the agent as a continuous-time recurrent neural network, we evolve the symbolic equations that together define the agent’s dynamics. Function nodes were chosen to be elements in $\{\times, +, -\}$, providing a complete basis for polynomial functions. To implement DGP for the SDI, we made use of Kozax [118] – a flexible and efficient genetic programming framework developed in JAX. Figure 3, Panels c-e demonstrate that symbolic expressions can indeed be evolved that allow the agent to more effectively control its environment.

6 Discussion

In this paper we have shown how neuromorphic agents, interpreted as a system of differential equations, implementable in hardware, can be effectively learnt, either through a process of experience-dependent learning at an ontogenetic timescale or by evolving the equations as symbolic expressions using differential genetic programming at a phylogenetic timescale. That is, we argue that *dynamical systems are all you need* to develop more efficient and effective AI systems [119–121]. A key assumption here is that intelligent adaptive behavior must be an emergent phenomenon which arises exclusively from following the physical equations of motion that describe the neuromorphic agent. In the following, we discuss this approach in more detail and point out directions for future research.

We specifically considered Ornstein-Uhlenbeck adaptation as a mechanism for learning that is driven by the intrinsic noise inherent to analog systems. This nicely complements recent work, which showed that the self-organizing behavior of neuromorphic nanowire networks can be represented as an Ornstein-Uhlenbeck process [122]. While OUA provides a proof of principle of noise-based learning, several limitations and open questions remain. OUA assumes that the reward prediction error δ – as the difference between the current reward and the average reward – is a suitable signal for credit assignment. Whereas this was shown to be effective in low-dimensional linear systems such as the stochastic double integrator, alternative formulations of noise-based learning are likely required when dealing with large-scale nonlinear control problems. Note further that OUA – which can be seen as a continuous-time local formulation of weight perturbation [105, 123, 124] – is but one proposed mechanism for the development of physical learning machines. For example, equilibrium propagation is an alternative approach, which proceeds by comparing the steady state of a system run in a free phase and weakly clamped phase and using this as a learning signal [125, 126].

We further committed ourselves to using continuous-time recurrent neural networks of the form (7) when specifying the inference mechanism of the neuromorphic agent. Other systems of equations defining liquid time-constant models [127] or coupled oscillator models [128] may turn out to be more suitable in terms of parameter efficiency as well as physical realizability. Furthermore, we exclusively considered analog systems described by continuous-valued state variables. In practice, we may want to embrace mixed analog-digital systems that, like our own brains, communicate via spikes [69, 129]. Such systems can be more energetically efficient given their event-driven nature.

Concerning physical realizability, it is assumed that the system of equations specifying the agent can be mapped to specific neuromorphic hardware. Whether or not this is the case depends on if such a one-to-one mapping exists. One step in this direction is the demonstration that physical (telegraph) noise generated by stochastic magnetic tunnel junctions can be used to drive learning [108]. Note further that, even if such a mapping exists, results obtained in simulations may not carry over to physical systems due to the limited precision of numerical integration. Here, the mass matrix $M(x)$ plays an important role since it enforces algebraic constraints, such as respecting Kirchoff’s laws,

ensuring that the dynamics remain on the constraint manifold [130]. Next to this, unmodelled circuit properties such as parasitic currents may also cause misalignment between the (SPICE) simulation and the physical realization of the neuromorphic circuit at hand.

To evolve neuromorphic intelligence, the concept of differential genetic programming was introduced. Here, the idea is that neuromorphic circuits can be evolved using principles developed in evolutionary computing [131]. Using our working example, it was shown that it is indeed possible to evolve the state equation of a neuromorphic agent such that it learns to compensate for stochastic perturbations. Moreover, representation of the state equation in terms of a symbolic expression facilitates interpretation of how the agent achieves its goal, contributing to the development of more transparent and explainable AI systems. Note however that to date it remains notoriously hard to evolve computational graphs that effectively solve large-scale problems. For example, GP is known to suffer from code bloat, referring to the uncontrolled growth of computational graphs without corresponding increases in fitness [132–134].

If these problems can be overcome, genetic programming may become the ultimate approach in artificial intelligence as it affords truly end-to-end learning of intelligent systems. It may also become feasible to evolve the learning mechanism itself. That is, by pitting neuromorphic agents against unpredictable environments, learning mechanisms competitive with backpropagation might emerge as a strategy for the agent to adapt during its lifetime [135]. This is also referred to as meta-learning or learning to learn [136–138]. Here we envision that zero-order gradient methods that embrace noise as a mechanism for learning may turn out to be essential. Finally, emergent adaptive mechanisms may not only pertain to experience-dependent changes but also developmental changes that unfold during the agent’s lifetime [139], as well as morphological changes that modify the coupling between an agent and its environment [140].

Let us return to the concept of neuromorphic intelligence. This paper argues that this can be conveniently formalized in terms of Marr’s levels of analysis, linking intelligence – as the ability of agent to adapt to changing circumstances – to algorithms defined as systems of differential equations that can be mapped to physical substrates. This provides a roadmap for the neuromorphics community, allowing us to bridge between multiple disciplines that embody different levels of the neuromorphic value chain, ranging from theory to applications. Which applications we will pursue critically depends on ourselves; especially if we want to live in a society that is based on human values other than buying or selling [141, 142].

References

1. McCarthy, J. What is Artificial Intelligence? <http://jmc.stanford.edu/articles/whatisai/whatisai.pdf> (2007).
2. LeCun, Y., Bengio, Y. & Hinton, G. Deep learning. *Nature* **521**, 436–444, DOI: [10.1038/nature14539](https://doi.org/10.1038/nature14539) (2015).
3. Werbos, P. *Beyond Regression: New Tools for Prediction and Analysis in the Behavioral Sciences*. Ph.D. thesis, Harvard University, Cambridge, MA (1974).
4. Abramson, J. *et al.* Accurate structure prediction of biomolecular interactions with AlphaFold 3. *Nature* **630**, 493–500, DOI: [10.1038/s41586-024-07487-w](https://doi.org/10.1038/s41586-024-07487-w) (2024).
5. Trinh, T. H., Wu, Y., Le, Q. V., He, H. & Luong, T. Solving olympiad geometry without human demonstrations. *Nature* **625**, 476–482, DOI: [10.1038/s41586-023-06747-5](https://doi.org/10.1038/s41586-023-06747-5) (2024).
6. Kolmus, A. *et al.* Fast sky localization of gravitational waves using deep learning seeded importance sampling. *Phys. Rev. D* **106**, 023032, DOI: [10.1103/PhysRevD.106.023032](https://doi.org/10.1103/PhysRevD.106.023032) (2022).
7. Tuia, D. *et al.* Perspectives in machine learning for wildlife conservation. *Nat. Commun.* **13**, 792, DOI: [10.1038/s41467-022-27980-y](https://doi.org/10.1038/s41467-022-27980-y) (2022).
8. Rolnick, D. *et al.* Tackling Climate Change with Machine Learning. *ACM Comput. Surv. (CSUR)* **55**, 96, DOI: [10.1145/3485128](https://doi.org/10.1145/3485128) (2022).

9. Dingemans, A. J. M. *et al.* PhenoScore quantifies phenotypic variation for rare genetic diseases by combining facial analysis with other clinical features using a machine-learning framework. *Nat. Genet.* **55**, 1598–1607, DOI: [10.1038/s41588-023-01469-w](https://doi.org/10.1038/s41588-023-01469-w) (2023).
10. OpenAI *et al.* GPT-4 Technical Report, DOI: [10.48550/arXiv.2303.08774](https://doi.org/10.48550/arXiv.2303.08774) (2024). [2303.08774](https://arxiv.org/abs/2303.08774).
11. Touvron, H. *et al.* Llama 2: Open Foundation and Fine-Tuned Chat Models, DOI: [10.48550/arXiv.2307.09288](https://doi.org/10.48550/arXiv.2307.09288) (2023). [2307.09288](https://arxiv.org/abs/2307.09288).
12. Gu, A. & Dao, T. Mamba: Linear-time sequence modeling with selective state spaces. *arXiv:2312.00752v2 [cs.LG]* (2024). [2312.00752v2](https://arxiv.org/abs/2312.00752v2).
13. Sutton, Rich. The Bitter Lesson. <http://www.incompleteideas.net/IncIdeas/BitterLesson.html> (2019).
14. Kaplan, J. *et al.* Scaling Laws for Neural Language Models, DOI: [10.48550/arXiv.2001.08361](https://doi.org/10.48550/arXiv.2001.08361) (2020). [2001.08361](https://arxiv.org/abs/2001.08361).
15. Strubell, E., Ganesh, A. & McCallum, A. Energy and policy considerations for deep learning in NLP. *arXiv:1906.02243 [cs]* (2019). [1906.02243](https://arxiv.org/abs/1906.02243).
16. Schwartz, R., Dodge, J., Smith, N. A. & Etzioni, O. Green AI. *Commun. ACM* **63**, 54–63, DOI: [10.1145/3381831](https://doi.org/10.1145/3381831) (2020).
17. Ang et al., J. Decadal Plan for Semiconductors. Tech. Rep. <https://www.src.org/about/decadal-plan> (2021).
18. Mehonic, A. & Kenyon, A. J. Brain-inspired computing needs a master plan. *Nature* **604**, 255–260, DOI: [10.1038/s41586-021-04362-w](https://doi.org/10.1038/s41586-021-04362-w) (2022).
19. Steffen, W. *et al.* Planetary boundaries: Guiding human development on a changing planet. *Science* **347**, DOI: [10.1126/SCIENCE.1259855/SUPPL_FILE/STEFFEN-SM.PDF](https://doi.org/10.1126/SCIENCE.1259855/SUPPL_FILE/STEFFEN-SM.PDF) (2015).
20. Elsworth, C. *et al.* Measuring the environmental impact of delivering AI at Google Scale, DOI: [10.48550/arXiv.2508.15734](https://doi.org/10.48550/arXiv.2508.15734) (2025). [2508.15734](https://arxiv.org/abs/2508.15734).
21. Degraeve, J. *et al.* Magnetic control of Tokamak plasmas through deep reinforcement learning. *Nature* **602**, 414–419, DOI: [10.1038/s41586-021-04301-9](https://doi.org/10.1038/s41586-021-04301-9) (2022).
22. Pyzer-Knapp, E. O. *et al.* Foundation models for materials discovery – current state and future directions. *npj Comput. Mater.* **11**, 61, DOI: [10.1038/s41524-025-01538-0](https://doi.org/10.1038/s41524-025-01538-0) (2025).
23. Meselhy, A. & Almalkawi, A. A review of artificial intelligence methodologies in computational automated generation of high performance floorplans. *NPJ Clean Energy* **1**, 2, DOI: [10.1038/s44406-025-00002-8](https://doi.org/10.1038/s44406-025-00002-8) (2025).
24. Crawford, K. *The Atlas of AI: Power, Politics, and the Planetary Costs of Artificial Intelligence* (Yale University Press, 2021). [j.ctv1ghv45t](https://doi.org/10.1017/9780300243441).
25. Xu, B. & Yang, G. Interpretability research of deep learning: A literature survey. *Inf. Fusion* **115**, 102721, DOI: [10.1016/j.inffus.2024.102721](https://doi.org/10.1016/j.inffus.2024.102721) (2025).
26. Ras, G., Xie, N., Gerven, M. V. & Doran, D. Explainable Deep Learning: A Field Guide for the Uninitiated. *J. Artif. Intell. Res.* **73**, 329–397, DOI: [10.1613/jair.1.13200](https://doi.org/10.1613/jair.1.13200) (2022).
27. Lighthill, James. Artificial intelligence: A general survey. Tech. Rep., UK: Science Research Council (1973).

28. Lake, B. M., Ullman, T. D., Tenenbaum, J. B. & Gershman, S. J. Building machines that learn and think like people. *Behav. Brain Sci.* In press (2017). [1604.00289](https://doi.org/10.1604/00289).
29. Hassabis, D., Kumaran, D., Summerfield, C. & Botvinick, M. Neuroscience-inspired artificial intelligence. *Neuron* **95**, 245–258, DOI: [10.1016/j.neuron.2017.06.011](https://doi.org/10.1016/j.neuron.2017.06.011) (2017).
30. van Gerven, M. Computational foundations of natural intelligence. *Front. Comput. Neurosci.* **11**, 1–24, DOI: [10.3389/fncom.2017.00112](https://doi.org/10.3389/fncom.2017.00112) (2017).
31. Marcus, G. The Next Decade in AI: Four Steps towards Robust Artificial Intelligence, DOI: [10.48550/arXiv.2002.06177](https://doi.org/10.48550/arXiv.2002.06177) (2020).
32. Mead, C. Neuromorphic electronic systems. *Proc. IEEE* **78**, 1629–1636 (1990).
33. Modha, D. S. *et al.* Cognitive computing. *Commun. ACM* **54**, 62–71, DOI: [10.1145/1978542.1978559](https://doi.org/10.1145/1978542.1978559) (2011).
34. Marcus, G. & Davis, E. *Rebooting AI: Building Artificial Intelligence We Can Trust* (Random House, 2019).
35. Indiveri, G. *et al.* Neuromorphic silicon neuron circuits. *Front. Neurosci.* **5**, 1–23, DOI: [10.3389/fnins.2011.00073](https://doi.org/10.3389/fnins.2011.00073) (2011).
36. Neftci, E. *et al.* Synthesizing cognition in neuromorphic electronic systems. *Proc. Natl. Acad. Sci. United States Am.* **110**, DOI: [10.1073/pnas.1212083110](https://doi.org/10.1073/pnas.1212083110) (2013).
37. Chicca, E. & Indiveri, G. A recipe for creating ideal hybrid memristive-CMOS neuromorphic processing systems. *Appl. Phys. Lett.* **116**, 120501, DOI: [10.1063/1.5142089](https://doi.org/10.1063/1.5142089) (2020).
38. Davies, M. *et al.* Loihi: A Neuromorphic Manycore Processor with On-Chip Learning. *IEEE Micro* **38**, 82–99, DOI: [10.1109/MM.2018.112130359](https://doi.org/10.1109/MM.2018.112130359) (2018).
39. Kudithipudi, D. *et al.* Neuromorphic computing at scale. *Nat. 2025 637:8047* **637**, 801–812, DOI: [10.1038/s41586-024-08253-8](https://doi.org/10.1038/s41586-024-08253-8) (2025).
40. Mentink, J. *et al.* Neuromorphic Computing in the Netherlands. Tech. Rep. (2025).
41. Markovic, D., Mizrahi, A., Querlioz, D. & Grollier, J. Physics for neuromorphic computing. *Nat. Rev. Phys.* **2**, 499–510 (2020).
42. Chen, T. *et al.* Classification with a disordered dopant-atom network in silicon. *Nature* **577**, 341–345, DOI: [10.1038/s41586-019-1901-0](https://doi.org/10.1038/s41586-019-1901-0) (2020).
43. van De Burgt, Y. *et al.* A non-volatile organic electrochemical device as a low-voltage artificial synapse for neuromorphic computing. *Nat. Mater.* **16**, 414–418, DOI: [10.1038/nmat4856](https://doi.org/10.1038/nmat4856) (2017).
44. Smirnova, L. Biocomputing with organoid intelligence. *Nat. Rev. Bioeng.* **2**, 633–634, DOI: [10.1038/S44222-024-00200-6](https://doi.org/10.1038/S44222-024-00200-6) (2024).
45. Zenke, F. *et al.* Visualizing a joint future of neuroscience and neuromorphic engineering. *Neuron* **109**, 571–575, DOI: [10.1016/J.NEURON.2021.01.009](https://doi.org/10.1016/J.NEURON.2021.01.009) (2021).
46. Kagan, B. J. *et al.* In vitro neurons learn and exhibit sentience when embodied in a simulated game-world. *Neuron* **110**, 3952–3969.e8, DOI: [10.1016/j.neuron.2022.09.001](https://doi.org/10.1016/j.neuron.2022.09.001) (2022).
47. Zador, A. *et al.* Catalyzing next-generation artificial intelligence through NeuroAI. *Nat. Commun.* **2023 14:1** **14**, 1–7, DOI: [10.1038/s41467-023-37180-x](https://doi.org/10.1038/s41467-023-37180-x) (2023).

48. Gelder, T. V. The dynamical hypothesis in cognitive science. *Behav. Brain Sci.* **21**, 615–665, DOI: [10.1017/S0140525X98001733](https://doi.org/10.1017/S0140525X98001733) (1998).
49. Schuman, C. D. *et al.* Opportunities for neuromorphic computing algorithms and applications. *Nat. Comput. Sci.* **2022 2:1 2**, 10–19, DOI: [10.1038/s43588-021-00184-y](https://doi.org/10.1038/s43588-021-00184-y) (2022).
50. Jaeger, H., Noheda, B. & van der Wiel, W. G. Toward a formal theory for computing machines made out of whatever physics offers. *Nat. Commun.* **14**, DOI: [10.1038/s41467-023-40533-1](https://doi.org/10.1038/s41467-023-40533-1) (2023).
51. Muir, D. R. & Sheik, S. The road to commercial success for neuromorphic technologies. *Nat. Commun.* **16**, DOI: [10.1038/s41467-025-57352-1](https://doi.org/10.1038/s41467-025-57352-1) (2025).
52. Christensen, D. V. *et al.* 2022 roadmap on neuromorphic computing and engineering. *Neuromorphic Comput. Eng.* **2**, DOI: [10.1088/2634-4386/AC4A83](https://doi.org/10.1088/2634-4386/AC4A83) (2022).
53. Strogatz, S. H. *Nonlinear Dynamics and Chaos: With Applications to Physics, Biology, Chemistry, and Engineering* (Addison-Wesley Pub, 1994).
54. Newton, I. *Philosophiae Naturalis Principia Mathematica* (Smith, 1687), 1st edn.
55. Einstein, A. Über die von der molekularkinetischen Theorie der Wärme geforderte Bewegung von in ruhenden Flüssigkeiten suspendierten Teilchen. *Annalen der Physik* **322**, 549–560 (1905).
56. Langevin, P. Sur la théorie du mouvement Brownien. *Am. J. Phys.* **65**, 1079–1081, DOI: [10.1119/1.18725](https://doi.org/10.1119/1.18725) (1997).
57. Kline, R. R. Cybernetics, Automata Studies, and the Dartmouth Conference on Artificial Intelligence. *IEEE Annals Hist. Comput.* (2011).
58. Ashby, W. R. Principles of the self-organizing dynamic system. *J. Gen. Psychol.* **37**, 125–128, DOI: [10.1080/00221309.1947.9918144](https://doi.org/10.1080/00221309.1947.9918144) (1947).
59. Amari, S.-I. Dynamics of Pattern Formation in Lateral-Inhibition Type Neural Fields*. *Biol. Cybern.* **27**, 87 (1977).
60. Cohen, M. A. & Grossberg, S. Absolute stability of global pattern formation and parallel memory storage by competitive neural networks. *IEEE Transactions on Syst. Man Cybern.* **13**, 815–826 (1983).
61. Pearlmutter, B. Dynamic recurrent neural networks. Tech. Rep. CMU-CS-90-196 (1990).
62. Beer, R. D. & Gallagher, J. C. Evolving Dynamical Neural Networks for Adaptive Behavior. *Adapt. Behav.* **1**, 91–122 (1992).
63. Beer, R. D. A dynamical systems perspective on agent-environment interaction. *Artif. Intell.* **72**, 173–215 (1995).
64. Beer, R. D. On the dynamics of small continuous-time recurrent neural networks. *Adapt. Behav.* **3**, 469–509, DOI: [10.1177/105971239500300405](https://doi.org/10.1177/105971239500300405) (1995).
65. Beer, R. D. The dynamics of adaptive behavior: A research program. *Robotics Auton. Syst.* **20**, 257–289 (1997).
66. Murray, J. D. *Mathematical Biology: An Introduction* (Springer, 2002).
67. Lorenz, H.-W. *Nonlinear Dynamical Economics and Chaotic Motion* (Springer, 1993).

68. Castellano, C. Statistical physics of social dynamics. *Rev. Mod. Phys.* **81**, 591–646, DOI: [10.1103/RevModPhys.81.591](https://doi.org/10.1103/RevModPhys.81.591) (2009).
69. Izhikevich, E. M. *Dynamical Systems in Neuroscience* (The MIT Press, 2018).
70. Breakspear, M. Dynamic models of large-scale brain activity. *Nat. Neurosci.* **20**, 340–352, DOI: [10.1038/nn.4497](https://doi.org/10.1038/nn.4497) (2017).
71. Thelen, E. & Smith, L. B. *A Dynamic Systems Approach to the Development of Cognition and Action* (The MIT Press, 1994).
72. Spivey, M. *The Continuity of Mind* (Oxford University Press, Oxford, 2008).
73. Krakauer, D. C. *The Complex World: An Introduction to the Foundations of Complexity Science* (2024).
74. Marr, D. & Poggio, T. From understanding computation to understanding neural circuitry. Tech. Rep., MIT (1976).
75. Guo, Y. *et al.* A Marr’s three-level analytical framework for neuromorphic electronic systems. *Adv. Intell. Syst.* **3**, 2100054, DOI: [10.1002/AISY.202100054](https://doi.org/10.1002/AISY.202100054) (2021).
76. Russell, S. & Norvig, P. *Artificial Intelligence: A Modern Approach* (Pearson Education Limited, 2021), 4 edn.
77. Marblestone, A. H., Wayne, G. & Kording, K. P. Toward an Integration of deep learning and neuroscience. *Front. Comput. Neurosci.* **10**, 1–61, DOI: [10.3389/fncom.2016.00094](https://doi.org/10.3389/fncom.2016.00094) (2016).
78. Richards, B. A. *et al.* A deep learning framework for neuroscience. *Nat. Neurosci.* **22**, 1761–1770, DOI: [10.1038/s41593-019-0520-2](https://doi.org/10.1038/s41593-019-0520-2) (2019).
79. Nakajima, M. *et al.* Physical deep learning with biologically inspired training method: Gradient-free approach for physical hardware. *Nat. Commun.* **2022 13:1** **13**, 1–12, DOI: [10.1038/s41467-022-35216-2](https://doi.org/10.1038/s41467-022-35216-2) (2022).
80. Kaspar, C., Ravoo, B. J., van der Wiel, W. G., Wegner, S. V. & Pernice, W. H. P. The rise of intelligent matter. *Nature* **594**, 345–355, DOI: [10.1038/s41586-021-03453-y](https://doi.org/10.1038/s41586-021-03453-y) (2021).
81. Horowitz, M. Computing’s energy problem (and what we can do about it). In *2014 IEEE International Solid-State Circuits Conference Digest of Technical Papers (ISSCC)*, 10–14, DOI: [10.1109/ISSCC.2014.6757323](https://doi.org/10.1109/ISSCC.2014.6757323) (2014).
82. Pedretti, G. & Ielmini, D. In-Memory Computing with Resistive Memory Circuits: Status and Outlook. *Electronics* **10**, 1063, DOI: [10.3390/electronics10091063](https://doi.org/10.3390/electronics10091063) (2021).
83. Wong, H.-S. P. *et al.* Phase Change Memory. *Proc. IEEE* **98**, 2201–2227, DOI: [10.1109/JPROC.2010.2070050](https://doi.org/10.1109/JPROC.2010.2070050) (2010).
84. Bhatti, S. *et al.* Spintronics based random access memory: A review. *Mater. Today* **20**, 530–548, DOI: [10.1016/j.mattod.2017.07.007](https://doi.org/10.1016/j.mattod.2017.07.007) (2017).
85. Grollier, J. *et al.* Neuromorphic spintronics. *Nat. Electron.* **3**, 360–370, DOI: [10.1038/s41928-019-0360-9](https://doi.org/10.1038/s41928-019-0360-9) (2020).
86. Zink, B. R., Lv, Y. & Wang, J. P. Review of magnetic tunnel junctions for stochastic computing. *IEEE J. on Explor. Solid-State Comput. Devices Circuits* **8**, 173–184, DOI: [10.1109/JXCDC.2022.3227062](https://doi.org/10.1109/JXCDC.2022.3227062) (2022).
87. Brunner, D. *et al.* Roadmap on neuromorphic photonics, DOI: [10.48550/arXiv.2501.07917](https://doi.org/10.48550/arXiv.2501.07917) (2025). [2501.07917](https://arxiv.org/abs/2501.07917).

88. Han, S. H., Oh, M.-A. & Chung, T. D. Iontronics: Aqueous ion-based engineering for bioinspired functionalities and applications. *Chem. Phys. Rev.* **3**, DOI: [10.1063/5.0089822](https://doi.org/10.1063/5.0089822) (2022).
89. Landauer, R. Irreversibility and heat generation in the computing process. *IBM J. Res. Dev.* **5**, 183–191 (1961).
90. Bennett, C. H. Logical Reversibility of Computation. *IBM J. Res. Dev.* **17**, 525–532 (1973).
91. Fredkin, E. & Toffoli, T. Conservative Logic. *Int. J. Theor. Phys.* **21**, 219–253 (1982).
92. Farsa, E. Z., Ahmadi, A. & Keszocze, O. Reconfigurable digital FPGA implementations for neuromorphic computing: A survey on recent advances and future directions. *IEEE Transactions on Emerg. Top. Comput. Intell.* 1–23, DOI: [10.1109/tetci.2025.3551934](https://doi.org/10.1109/tetci.2025.3551934) (2025).
93. Karamimanesh, M. *et al.* Spiking neural networks on FPGA: A survey of methodologies and recent advancements. *Neural Networks* **186**, DOI: [10.1016/j.neunet.2025.107256](https://doi.org/10.1016/j.neunet.2025.107256) (2025).
94. Rao, V. G. & Bernstein, D. S. Naive Control of the Double Integrator. *IEEE Control. Syst. Mag.* 86–97 (2001).
95. Kidger, P. On Neural Differential Equations. Tech. Rep. <http://arxiv.org/abs/2202.02435> (2022).
96. Foster, J., dos Reis, G. & Strange, C. High order splitting methods for SDEs satisfying a commutativity condition. *arXiv:2210.17543* (2023). [2210.17543](https://arxiv.org/abs/2210.17543).
97. Werbos, P. J. Backpropagation through time: What it does and how to do it. *Proc. IEEE* **78**, 1550–1560, DOI: [10.1109/5.58337](https://doi.org/10.1109/5.58337) (1990).
98. Baydin, A. G., Pearlmutter, B. A., Radul, A. A. & Siskind, J. M. Automatic differentiation in machine learning: A survey. *J. Mach. Learn. Res.* (2018).
99. Crick, F. The recent excitement about neural networks. *Nature* **337**, 12 (1989).
100. Williams, R. J. & Zipser, D. A learning algorithm for continually running fully recurrent neural networks. *Neural Comput.* **1**, 270–280 (1989).
101. Kudithipudi, D. *et al.* Biological underpinnings for lifelong learning machines. *Nat. Mach. Intell.* **2022 4:3 4**, 196–210, DOI: [10.1038/s42256-022-00452-0](https://doi.org/10.1038/s42256-022-00452-0) (2022).
102. Kuehn, C. *Multiple Time Scale Dynamics* (Springer, 2015).
103. Conn, A. R., Scheinberg, K. & Vicente, L. N. *Introduction to Derivative-Free Optimization*. MOS-SIAM Series on Optimization (Society for Industrial and Applied Mathematics, 2009).
104. Barto, A. G., Sutton, R. S. & Anderson, C. W. Neuronlike Adaptive Elements That Can Solve Difficult Learning Control Problems. *IEEE Transactions on Syst. Man Cybern.* **SMC-13**, 834–846, DOI: [10.1109/TSMC.1983.6313077](https://doi.org/10.1109/TSMC.1983.6313077) (1983).
105. Cauwenberghs, G. A Fast Stochastic Error-Descent Algorithm for Supervised Learning and Optimization. In *Neural Information Processing Systems* (1992).
106. Dalm, S., van Gerven, M. & Ahmad, N. Effective Learning with Node Perturbation in Deep Neural Networks. *ArXiv Prepr. ArXiv:2310.00965v2 [cs.LG]* (2023). [2310.00965v2](https://arxiv.org/abs/2310.00965v2).
107. Fernández, J. G., Ahmad, N. & Gerven, M. V. Ornstein-Uhlenbeck adaptation as a mechanism for learning in brains and machines. *Entropy* **26**, 1125, DOI: [10.3390/e26121125](https://doi.org/10.3390/e26121125) (2024).

108. Koenders, K. *et al.* Noise-based local learning using stochastic magnetic tunnel junctions. *Phys. Rev. Appl.* **23**, 054035, DOI: [10.1103/PhysRevApplied.23.054035](https://doi.org/10.1103/PhysRevApplied.23.054035) (2025).
109. Burnod, Y. & Korn, H. Consequences of stochastic release of neurotransmitters for network computation in the central nervous system. *Proc. Natl. Acad. Sci. USA* **86**, 352–356 (1989).
110. Piwkowska, Z. *et al.* Characterizing synaptic conductance fluctuations in cortical neurons and their influence on spike generation. *J. Neurosci. Methods* **169**, 302–322, DOI: [10.1016/j.jneumeth.2007.11.010](https://doi.org/10.1016/j.jneumeth.2007.11.010) (2008).
111. Deco, G., Rolls, E. T. & Romo, R. Stochastic dynamics as a principle of brain function. *Prog. Neurobiol.* **88**, 1–16, DOI: [10.1016/j.pneurobio.2009.01.006](https://doi.org/10.1016/j.pneurobio.2009.01.006) (2009).
112. Shimizu, G., Yoshida, K., Kasai, H. & Toyozumi, T. Computational roles of intrinsic synaptic dynamics. *BioRxiv* 2021.04.22.441034, DOI: [10.1101/2021.04.22.441034](https://doi.org/10.1101/2021.04.22.441034) (2021).
113. March, J. G. Exploration and exploitation in organisational learning. *Organ. Sci.* **2** (1991).
114. Feldbaum, A. A. Dual control theory, I. *Avtomat. i Telemekh.* **21**, 1240–1249 (1960).
115. Cramer, N. L. A Representation for the Adaptive Generation of Simple Sequential Programs. In *Proceedings of the First International Conference on Genetic Algorithms and Their Applications* (1985).
116. Koza, J. R. Genetic programming as a means for programming computers by natural selection. *Stat. Comput.* **4**, 87–112, DOI: [10.1007/BF00175355](https://doi.org/10.1007/BF00175355) (1994).
117. de Vries, S., Keemink, S. & van Gerven, M. Discovering Dynamic Symbolic Policies with Genetic Programming, DOI: [10.48550/arXiv.2406.02765](https://doi.org/10.48550/arXiv.2406.02765) (2024). [2406.02765](https://arxiv.org/abs/2406.02765).
118. de Vries, S., Keemink, S. W. & Van Gerven, M. Kozax: Flexible and Scalable Genetic Programming in JAX. In *Proceedings of the Genetic and Evolutionary Computation Conference Companion*, 603–606, DOI: [10.1145/3712255.3726681](https://doi.org/10.1145/3712255.3726681) (ACM, NH Malaga Hotel Malaga Spain, 2025).
119. Vaswani, A. *et al.* Attention is all you need. In *Neural Information Processing Systems*, vol. 30, 1–8, DOI: [10.1109/2943.974352](https://doi.org/10.1109/2943.974352) (2017).
120. Ramsauer, H. *et al.* Hopfield Networks is All You Need, DOI: [10.48550/arXiv.2008.02217](https://doi.org/10.48550/arXiv.2008.02217) (2021). [2008.02217](https://arxiv.org/abs/2008.02217).
121. Feng, L., Tung, F., Ahmed, M. O., Bengio, Y. & Hajimirsadeghi, H. Were RNNs All We Needed?, DOI: [10.48550/arXiv.2410.01201](https://doi.org/10.48550/arXiv.2410.01201) (2024). [2410.01201](https://arxiv.org/abs/2410.01201).
122. Milano, G., Michieletti, F., Pilati, D., Ricciardi, C. & Miranda, E. Self-organizing neuromorphic nanowire networks as stochastic dynamical systems. *Nat. Commun.* **2025 16:1** **16**, 1–16, DOI: [10.1038/s41467-025-58741-2](https://doi.org/10.1038/s41467-025-58741-2) (2025).
123. Jabri, M. & Flower, B. Weight Perturbation: An Optimal Architecture and Learning Technique for Analog VLSI Feedforward and Recurrent Multilayer Networks. *Neural Comput.* **3**, 546–565, DOI: [10.1162/neco.1991.3.4.546](https://doi.org/10.1162/neco.1991.3.4.546) (1991).
124. Werfel, J., Xie, X. & Seung, H. S. Learning Curves for Stochastic Gradient Descent in Linear Feedforward Networks. *Neural Comput.* **17**, 2699–2718, DOI: [10.1162/089976605774320539](https://doi.org/10.1162/089976605774320539) (2005).
125. Scellier, B. & Bengio, Y. Equilibrium propagation: Bridging the gap between energy-based models and backpropagation. *Front. Comput. Neurosci.* **11**, 1–13, DOI: [10.3389/fncom.2017.00024](https://doi.org/10.3389/fncom.2017.00024) (2017). [1602.05179](https://arxiv.org/abs/1602.05179).

126. Stern, M., Hexner, D., Rocks, J. W. & Liu, A. J. Supervised Learning in Physical Networks: From Machine Learning to Learning Machines. *Phys. Rev. X* **11**, 021045, DOI: [10.1103/PHYSREVVX.11.021045](https://doi.org/10.1103/PHYSREVVX.11.021045)/FIGURES/9/MEDIUM (2021).
127. Hasani, R., Lechner, M., Amini, A., Rus, D. & Grosu, R. Liquid Time-constant Networks (2020).
128. Effenberger, F., Carvalho, P., Dubinin, I. & Singer, W. The functional role of oscillatory dynamics in neocortical circuits: A computational perspective. *Proc. Natl. Acad. Sci.* **122**, e2412830122, DOI: [10.1073/pnas.2412830122](https://doi.org/10.1073/pnas.2412830122) (2025).
129. Abbott, L. F., Depasquale, B. & Memmesheimer, R.-M. Building functional networks of spiking model neurons. *Nat. Neurosci.* **19**, 350–355, DOI: [10.1038/nn.4241](https://doi.org/10.1038/nn.4241) (2016). [26906501](https://doi.org/10.1038/nn.4241).
130. Römisch, W. & Winkler, R. Stochastic DAEs in Circuit Simulation. In Antreich, K., Bulirsch, R., Gilg, A. & Rentrop, P. (eds.) *Modeling, Simulation, and Optimization of Integrated Circuits*, 303–318, DOI: [10.1007/978-3-0348-8065-7_19](https://doi.org/10.1007/978-3-0348-8065-7_19) (Birkhäuser Basel, Basel, 2003).
131. Koza, J. R., III, F. H. B., Andre, D. & Keane, M. A. The Design of Analog Circuits by Means of Genetic Programming. In *Evolutionary Design by Computers*, 365–385 (Morgan Kaufmann, 1999).
132. Koza, J. R. *Genetic Programming* (The MIT Press, 1998).
133. Banzhaf, W., Francone, F. D., Keller, R. E. & Nordin, P. *Genetic Programming: An Introduction: On the Automatic Evolution of Computer Programs and Its Applications* (Morgan Kaufmann Publishers Inc., San Francisco, CA, USA, 1998).
134. Langdon, W. B. & Poli, R. *Foundations of Genetic Programming* (Springer Science & Business Media, 2013).
135. Zador, A. M. A critique of pure learning and what artificial neural networks can learn from animal brains. *Nat. Commun.* **10**, 3770, DOI: [10.1038/s41467-019-11786-6](https://doi.org/10.1038/s41467-019-11786-6) (2019).
136. Bengio, Y., Bengio, S. & Cloutier, J. Learning a synaptic learning rule. *Proceedings. IJCNN - Int. Jt. Conf. on Neural Networks* 969, DOI: [10.1109/IJCNN.1991.155621](https://doi.org/10.1109/IJCNN.1991.155621) (1992).
137. Hospedales, T., Antoniou, A., Micaelli, P. & Storkey, A. Meta-Learning in Neural Networks: A Survey, DOI: [10.48550/arXiv.2004.05439](https://doi.org/10.48550/arXiv.2004.05439) (2020). [2004.05439](https://doi.org/10.48550/arXiv.2004.05439).
138. Jordan, J., Schmidt, M., Senn, W. & Petrovici, M. A. Evolving interpretable plasticity for spiking networks, DOI: [10.7554/eLife.66273](https://doi.org/10.7554/eLife.66273) (2021).
139. Haber, N., Mrowca, D., Fei-Fei, L. & Yamins, D. L. K. Emergence of Structured Behaviors from Curiosity-Based Intrinsic Motivation, DOI: [10.48550/arXiv.1802.07461](https://doi.org/10.48550/arXiv.1802.07461) (2018). [1802.07461](https://doi.org/10.48550/arXiv.1802.07461).
140. Arbel, E. *et al.* A mechanical route for cooperative transport in autonomous robotic swarms. *Nat. Commun.* **16**, 7519, DOI: [10.1038/s41467-025-61896-7](https://doi.org/10.1038/s41467-025-61896-7) (2025).
141. Wiener, N. *Cybernetics: Or Control and Communication in the Animal and the Machine* (The MIT Press, Cambridge, MA, 1948).
142. Rickover, H. G. A Humanistic Technology. *Nature* **5012**, 721–726 (1965).