
BUILDING CODING AGENTS VIA ENTROPY-ENHANCED MULTI-TURN PREFERENCE OPTIMIZATION

Jiahao Yu*

Northwestern University
jiahao.yu@northwestern.edu

Zelei Cheng*

Capital One
zelei.cheng@capitalone.com

Xian Wu

Meta
xianwu123@meta.com

Xinyu Xing

Northwestern University
xinyu.xing@northwestern.edu

ABSTRACT

Software engineering presents complex, multi-step challenges for Large Language Models (LLMs), requiring reasoning over large codebases and coordinated tool use. The difficulty of these tasks is exemplified by benchmarks like SWE-bench, where current LLMs still struggle to resolve real-world issues. A promising approach to enhance performance is test-time scaling (TTS), but its gains are heavily dependent on the diversity of model outputs. While standard alignment methods such as Direct Preference Optimization (DPO) and Kahneman-Tversky Optimization (KTO) are effective at aligning model outputs with human preferences, this process can come at the cost of reduced diversity, limiting the effectiveness of TTS. Additionally, existing preference optimization algorithms are typically designed for single-turn tasks and do not fully address the complexities of multi-turn reasoning and tool integration required for interactive coding agents. To bridge this gap, we introduce ENTROPO, an entropy-enhanced framework that adapts existing preference optimization algorithms to the multi-turn, tool-assisted setting. ENTROPO augments the preference objective to explicitly preserve policy entropy and generalizes learning to optimize over multi-turn interactions rather than single-turn responses. We validate ENTROPO by fine-tuning a diverse suite of models from different families and sizes (up to 106B parameters). To maximize performance gains from TTS, we further propose a hybrid best-trajectory selection scheme combining a learned verifier model with model free approaches. On the SWEBENCH leaderboard, our approach establishes new state-of-the-art results among open-weight models. A 30B parameter model trained with ENTROPO ranks 1st on SWEBENCH-LITE and 4th on SWEBENCH-VERIFIED on the open-weight leaderboard, surpassed only by models with over 10x more parameters (*e.g.*, >350B). These results highlight the importance of preserving diversity for effective test-time scaling and establish ENTROPO as a robust method for building powerful, interactive coding agents.

1 INTRODUCTION

Large Language Models (LLMs) have achieved impressive breadth across language understanding, coding assistance, and planning. Yet, they still struggle on complex, multi-step software engineering (SWE) tasks that demand reasoning over large codebases and coordinated tool use (*e.g.*, search, execution, and patching) (Yang et al., 2024b; Wang et al., 2025; Xia et al., 2024; Antoniadou et al., 2024; Zhang et al., 2024). A promising line of work that improves performance is test-time scaling (TTS)—sampling more trajectories, searching deeper, and verifying candidates, which can uncover higher-quality solutions on challenging instances (Snell et al., 2024; Beeching et al.; Yao et al., 2023;

*Co-first author

Xu et al., 2024a). However, TTS only helps if the model produces sufficiently *diverse* candidates to explore meaningfully different solution modes.

Recent alignment methods, including Reinforcement Learning from Human Feedback (RLHF) (Ouyang et al., 2022; Ziegler et al., 2019; Bai et al., 2022) and Direct Preference Optimization (DPO) (Rafailov et al., 2023), have been observed to inadvertently reduce generation diversity (Kirk et al., 2023; Padmakumar & He, 2023; Kim et al., 2024; O’Mahony et al., 2024; Murthy et al., 2025). This *diversity collapse* limits the returns of TTS: when a model concentrates probability mass on a narrow set of responses for a given prompt, additional samples become redundant, and deeper search yields diminishing marginal gains. Prior efforts to preserve diversity during fine-tuning typically target single-turn settings (Slocum et al., 2025; Li et al., 2024; Wang et al., 2024; Lanchantin et al., 2025) or adjust decoding temperatures at inference time (Renze, 2024). These approaches do not directly address multi-turn, tool-using workflows, where diversity must be maintained *throughout the trajectory* to encourage exploration of a sequence of tool calls and partial hypotheses.

To address this limitation, we introduce ENTROPO, an entropy-enhanced preference optimization method for multi-turn SWE agents. Our approach explicitly adds an entropy regularization term to the standard preference optimization objective to preserve policy diversity. Crucially, ENTROPO extends this entropy-regularized objective from single-turn to *multi-turn trajectories*. It provides a general framework that adapts preference optimization algorithms like DPO and KTO to the multi-turn, tool-assisted setting, whereas prior work has largely focused on single-turn DPO (Slocum et al., 2025). By optimizing over multi-turn interactions, ENTROPO aligns the learning process with the sequential nature of complex coding tasks, teaching the model to build better reasoning paths. We also theoretically analyze the close-form optimal policy with our method.

To maximize the performance gain of TTS, we pair ENTROPO with a hybrid best-trajectory selection scheme. We combine (i) a learned verifier model that scores trajectories with (ii) model-free approaches that favor high-quality trajectories (e.g., passing tests, trajectory steps). This hybrid selector improves sampling effectiveness and amplifies the gains from parallel rollouts.

We empirically validate ENTROPO across a diverse suite of models from different families and sizes (up to 106B parameters) on SWEBENCH-VERIFIED (Chowdhury et al., 2024) and SWEBENCH-LITE (Jimenez et al., 2024). Our approach achieves state-of-the-art results among open-weight models, with our 30B model ranking 1st on SWEBENCH-LITE and 4th on SWEBENCH-VERIFIED (surpassed only by models over 350B which are 10x larger). Across all evaluations, ENTROPO significantly outperforms standard DPO and KTO in the TTS setting, maintaining higher trajectory diversity which translates into larger performance gains from increased test-time compute. Our results confirm that the entropy-preserving term is critical to avoid diversity collapse, and our hybrid selector is more effective than model-only or model-free-only selection.

Our contributions are threefold:

- We propose ENTROPO, an entropy-enhanced *multi-turn* preference optimization method tailored to tool-using coding agents that preserves policy diversity during fine-tuning.
- We theoretically analyze the close-form optimal policy for our multi-turn objective.
- We present state-of-the-art results among open-weight models on SWEBENCH-VERIFIED and SWEBENCH-LITE, showing significant performance gains from test-time scaling.

By addressing the critical challenge of preserving diversity in multi-turn agents, our work paves the way for developing more powerful and robust LLM-based tools capable of tackling real-world software engineering tasks. We release the code ¹, models ², and used datasets for our work for reproducibility.

2 RELATED WORK

LLM Post-training. RLHF has become the standard approach for aligning LLMs with human preferences (Ouyang et al., 2022; Ziegler et al., 2019; Bai et al., 2022; Schulman et al., 2017), but the PPO-style online approach is a computationally intensive, as it requires numerous interactions with

¹<https://github.com/sherdencooper/R2E-Gym>

²<https://huggingface.co/hubert233/qwen3-coder-30b-ekto-merged>

a reward model or live environment to generate samples during training (Xu et al., 2024b; Wei et al., 2025). To reduce the compute cost, *preference learning* methods replace explicit reward modeling and online RL with simpler, reward-free objectives that require far less compute. DPO (Rafailov et al., 2023) and its variants (KTO (Ethayarajh et al., 2024), SimPO (Meng et al., 2024), OrPO (Hong et al., 2024)) have emerged as competitive and simpler alternatives to PPO-based RLHF.

However, most preference-learning fine-tuning focuses on the *single-turn* setting and does not directly model multi-turn, tool-using trajectories. Recent efforts partially address this by moving to multi-step or multi-turn formulations (e.g., Step-DPO for long-chain reasoning (Lai et al., 2024) and DMPO for agents (Shi et al., 2024)), but they either still optimize a single response with multi-steps (Step-DPO) or work for simple tasks with fewer than 10 steps (DMPO). A second challenge is *diversity collapse*: offline preference objectives can reduce policy entropy, which undermines the exploration of the learned policy (Setlur et al., 2025). Empirical analyses have documented reduced output diversity under alignment fine-tuning (Kirk et al., 2023), and recent studies attribute mode collapse in fine-tuning to characteristics of offline objectives and KL constraints (Slocum et al., 2025; Wang et al., 2024). This has motivated methods that modify divergences or decouple KL components to better control diversity (Slocum et al., 2025; Wang et al., 2024), yet explicit entropy preservation remains underexplored in the multi-turn setting.

We address both challenges with ENTROPO: an entropy-enhanced preference optimization framework. This preserves exploration throughout the sequence of tool calls and partial hypotheses, enabling the full potential of test-time scaling to realize larger gains.

LLMs for Software Engineering. Repository-level SWE benchmarks such as the SWEBENCH (Jimenez et al., 2024; Chowdhury et al., 2024) have accelerated progress on automated bug fixing and patch generation. Agentic systems like SWE-agent (Yang et al., 2024a) introduced interfaces for repository navigation and code editing, while alternative pipelines (e.g., Agentless) (Xia et al., 2024) achieved strong results with simpler localize-and-repair stages. General-purpose agent frameworks such as OpenHands (Wang et al., 2025) provide open tooling for agents and show competitive performance on SWEBENCH. Despite diverse implementations, these systems share core components (planning and tool-use) and must reason over large codebases via sequences of tool calls. This creates a critical need to maintain exploration and diversity throughout trajectories to enable more effective solution space exploration. Our work focuses on this gap by aligning models specifically for multi-turn, tool-using SWE tasks while preserving trajectory-level policy entropy, thereby enabling more effective exploration over repositories.

Test-Time Inference Strategies. TTS strategies improve performance by sampling more candidates, searching deeper, and verifying outputs (Snell et al., 2024; Beeching et al.; Yao et al., 2023; Xu et al., 2024a). These include Best-of- N sampling with verifier reranking and structured search methods such as Tree-of-Thoughts (Yao et al., 2023), which let models explore alternative reasoning paths and self-evaluate. However, the returns from TTS depend on candidate diversity: when generations collapse to a narrow solution space, additional samples and deeper search provide diminishing gains. Moreover, self-evaluation is not always reliable, which can lead to incorrect selection of the best trajectory. We address these challenges by pairing ENTROPO with a hybrid best-trajectory selector that combines a learned verifier model with model-free approaches. This hybrid approach improves robustness to verifier errors and better exploits the increased diversity produced by ENTROPO, yielding stronger empirical gains as test-time compute scales.

3 PROPOSED TECHNIQUE

We propose ENTROPO, an entropy-enhanced preference optimization framework for multi-turn, tool-using coding agents. As shown in Figure 1, we use an agent that follows standard SWE workflow to interact with a sandboxed repository environment and receive execution feedback at each turn. For TTS, we launch parallel rollouts to collect a diverse set of trajectories for each issue. These trajectories are then scored by a hybrid selector that combines a learned, model-based verifier with model-free approaches. The top-scoring trajectory is selected to submit as the final patch and is evaluated by the benchmark tests. Our core contributions are a novel *training objective* that preserves trajectory-level diversity and a *hybrid selection* mechanism that effectively exploits this diversity. To do so, we augment the standard preference optimization objective with an explicit entropy regularization term, which directly encourages the policy to maintain a broader distribu-

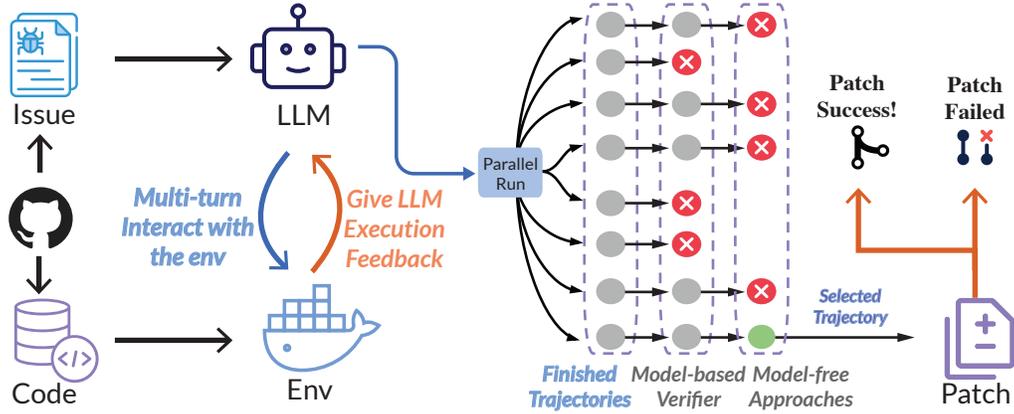


Figure 1: **Overview of ENTROPO with TTS.** Given an issue and repository, an LLM agent interacts with a sandboxed environment over multiple turns, receiving execution feedback. We run parallel rollouts to produce a pool of candidate trajectories. A hybrid selector ranks trajectories using a model-based verifier and model-free approaches, and selects the best trajectory to submit as the final patch.

tion over potential solutions. For the agent itself, we build upon a standard scaffold, avoiding the introduction of new tool schemas.

3.1 PROBLEM SETUP AND ASSUMPTION

We frame the multi-turn, tool-assisted coding task as a finite-horizon episodic Markov Decision Process (MDP), represented by the tuple $\mathcal{M} = \langle \mathcal{S}, \mathcal{A}, H, \mathbb{P}, d_0, u \rangle$. Here, \mathcal{S} is the state space, \mathcal{A} is the action space, H is the maximum number of turns (horizon), \mathbb{P} is the transition dynamics, d_0 is the initial state distribution, and u is a trajectory-level utility function.

An initial state $s_1 = x \sim d_0$ corresponds a coding problem statement. At each step $h \in \{1, \dots, H\}$, the agent’s policy $\pi(a_h | s_h)$ observes the current state s_h , which contains the full interaction history, and generates an action a_h (e.g., a bash command). The environment executes a_h , returns an observation o_h (e.g., compiler output, test results, or tool feedback), and transitions to the next state $s_{h+1} = (s_h, a_h, o_h)$. This sequential process generates a trajectory $\tau = (x, a_1, o_1, \dots, a_H, o_H)$, from which we construct a preference dataset \mathcal{D} .

Our goal is to optimize the agent’s policy π using preference feedback, formalized under the following assumption.

Assumption 3.1 (Bradley-Terry Preference Model). *We define a completion as the sequence of actions and observations in a trajectory, denoted $y = \tau \setminus x$. Given a pair of completions (y^+, y^-) generated from the same problem x , we assume that the preference probability $P(y^+ \succ y^- | x)$ can be modeled via an implicit utility function u . The optimal utility function u^* can then be learned by maximizing the log-likelihood of the observed preferences:*

$$u^* = \arg \max_u \mathbb{E}_{(x, y^+, y^-) \sim \mathcal{D}} [\log \sigma(u(x, y^+) - u(x, y^-))] \quad (1)$$

where y^+ is the preferred completion over y^- and $\sigma(\cdot)$ is the sigmoid function.

In our setting, we rely on **trajectory-level** preference signals. These are supplied by an automated oracle that determines if the final code in a trajectory passes a suite of unit tests. A trajectory that passes is strictly preferred over one that fails.

3.2 ALGORITHMIC FORMULATION OF ENTROPO

Standard preference optimization methods such as DPO (Rafailov et al., 2023) align a policy with a preference dataset by maximizing the likelihood of preferred responses. While effective, this objective often causes the policy to collapse its probability mass onto a narrow set of “winning”

solutions. This phenomenon, known as diversity collapse (Murthy et al., 2025), is especially detrimental in complex, multi-step SWE tasks. It hampers the effectiveness of Test-Time Scaling (TTS) techniques—such as parallel sampling or tree search—because repeated sampling yields redundant candidates, offering diminishing returns and preventing the discovery of potentially superior alternative solutions.

To counteract this, we augment the standard preference optimization objective with a weighted entropy regularization term, $\lambda H(\pi)$. This term directly penalizes low-entropy policies, encouraging the model to maintain a broader distribution over viable action sequences. This ensures the model not only learns what constitutes a high-quality trajectory but also retains the stochasticity needed to explore a diverse set of candidates at inference time, thereby maximizing the benefit of TTS.

Our full objective, framed as a regularized MDP, is to find the optimal policy π^* that maximizes the expected utility with respect to a reference policy π_{ref} :

$$\max_{\pi} \mathbb{E}_{x \sim d_0, a_h \sim \pi(\cdot|s_h), o_h \sim \mathbb{P}_h(\cdot|s_h, a_h)} [u(x, y) + \lambda \cdot H(\pi(\cdot|x)) - \beta \cdot D_{KL}(\pi || \pi_{ref})] \quad (2)$$

where the parameter λ promotes diversity and the coefficient β penalizes the deviation between the learned policy and the referenced policy π_{ref} . $H(\pi(\cdot|x)) = -\pi(\cdot|x) \log \pi(\cdot|x)$ denotes the entropy of the learned policy π . By decoupling the KL divergence, we can rewrite the objective as

$$\max_{\pi} \mathbb{E}_{x \sim d_0, a_h \sim \pi(\cdot|s_h), o_h \sim \mathbb{P}_h(\cdot|s_h, a_h)} [u(x, y) + \alpha \cdot H(\pi(\cdot|x)) - \beta \cdot H(\pi, \pi_{ref})] \quad (3)$$

where $\alpha = \lambda + \beta$ and $H(\pi, \pi_{ref}) = -\pi(\cdot|x) \log \pi_{ref}(\cdot|x)$ represents the cross entropy between the learned policy π and the referenced policy π_{ref} .

First, we establish the solution for the single-turn case ($H = 1$), which forms the basis for our multi-turn algorithm.

Proposition 3.2. *In the single-turn case ($H = 1$), the optimal policy for the objective in equation 3 is given by $\pi(y|x) \propto \pi_{ref}(y|x)^{\beta/\alpha} \exp(\frac{u(x,y)}{\alpha})$. This optimal policy is identical to the one learned by optimizing the following DPO-style loss function: $\max_{\pi} \mathbb{E}_{(x, y^+, y^-) \sim D} \left[\log \sigma \left(\alpha \left[\log \frac{\pi(y^+|x)}{\pi_{ref}(y^+|x)^{\beta/\alpha}} - \log \frac{\pi(y^-|x)}{\pi_{ref}(y^-|x)^{\beta/\alpha}} \right] \right) \right]$ where $y^+ \succ y^-$.*

The proof of Proposition 3.2 can be found in Appendix A. We extend this result to the multi-turn case using backward induction following Ziebart (2010). The key insight is that the optimal policy and value functions can be defined recursively from the final step $h = H$ to the initial step $h = 1$. This dynamic programming approach leads to the following general solution.

Proposition 3.3. *We can recursively define the following Q value functions for a MDP with horizon H.*

$$Q_{M,h}(s_h, a_h) = \begin{cases} u(s_h, a_h) & \text{if } h = H \\ E_{o_h \sim \mathbb{P}(\cdot|s_h, a_h)} [V_{M,h+1}(s_{h+1})] & \text{if } h \leq H - 1 \end{cases} \quad (4)$$

Based on the definition above, we have:

$$\pi_{\mathcal{M},h}(a_h|s_h) = \frac{\pi_{ref,h}(a_h|s_h)^{\beta/\alpha}}{Z_h(s_h)} \exp\left(\frac{Q_{\mathcal{M},h}(s_h, a_h)}{\alpha}\right) \quad (5)$$

$$V_{M,h}(s_h) = \mathbb{E}_{a_h \sim \pi_{\mathcal{M},h}(\cdot|s_h)} [Q_{\mathcal{M},h}(s_h, a_h) + \alpha H(\pi(\cdot|s_h)) - \beta H(\pi, \pi_{ref})] = \alpha \log Z_h(s_h)$$

where $Z_h(s_h) = \sum_{a_h \in \mathcal{A}} \pi_{ref,h}(a_h|s_h)^{\beta/\alpha} \exp(\frac{Q_{\mathcal{M},h}(s_h, a_h)}{\alpha})$.

We provide detailed analysis in Appendix B. This recursive formulation provides the foundation for our ENTROPO training objectives. By defining an implicit reward for a trajectory as the sum of per-step modified importance sampling ratios, we derive tractable loss functions that extend DPO and KTO to our entropy-enhanced, multi-turn setting. The detailed derivation is in Appendix C.

ENTROPO- DPO. For a preference pair (τ^+, τ^-) , the loss is:

$$L_{EntroPO-DPO}(\theta) = - \sum_{(x, \tau^+, \tau^-) \in D} \log \sigma \left(\alpha \sum_{h=1}^H \left[\log \frac{\pi_{\theta,h}(a_h^+|s_h^+)}{\pi_{ref,h}(a_h^+|s_h^+)^{\beta/\alpha}} - \log \frac{\pi_{\theta,h}(a_h^-|s_h^-)}{\pi_{ref,h}(a_h^-|s_h^-)^{\beta/\alpha}} \right] \right) \quad (6)$$

ENTROPO-KTO. For a dataset \mathcal{D} of trajectories labeled as “desirable” or “undesirable”, we first define an implicit reward for a trajectory τ :

$$r_\theta(x, y) = \sum_{h=1}^H \log \frac{\pi_{\mathcal{M},h}(a_h|s_h)}{\pi_{ref,h}(a_h|s_h)^{\beta/\alpha}} \quad (7)$$

The ENTROPO-KTO loss encourages high rewards for desirable trajectories and low rewards for undesirable ones, relative to a margin z_0 :

$$L_{EntroPO-KTO}(\theta) = E_{x,y \sim D}[\lambda_y - V(x, y)] \quad (8)$$

where

$$V(x, y) = \begin{cases} \lambda_+ \sigma(\alpha(r_\theta(x, y) - z_0)) & \text{if } \tau \text{ is desirable} \\ \lambda_- \sigma(\alpha(z_0 - r_\theta(x, y))) & \text{if } \tau \text{ is undesirable} \end{cases}$$

Here, λ_+ and λ_- are hyper-parameters weighting the loss for desirable and undesirable examples, respectively, and $z_0 = -H(\pi) + \frac{\beta}{\alpha}H(\pi, \pi_{ref})$.

3.3 TRAINING PIPELINE

Our training process follows a two-stage pipeline. The first stage is SFT, where we teach the base model to use tools reliably. We generate a dataset \mathcal{D}_{SFT} of successful interaction trajectories using a strong teacher model. The student model is then fine-tuned on these examples to learn stable tool-use patterns of the scaffold.

The second stage is preference learning with ENTROPO. After SFT, we generate a new pool of trajectories by rolling out both the SFT-tuned student model and teacher model. We use a SWE dataset with oracle feedback for each instance so that we can get the preference label for each trajectory. Each trajectory is scored based on its final patch. From this pool, we create a preference dataset \mathcal{D}_{pref} by pairing trajectories for the same problem, labeling the one with the higher score as preferred. The SFT model is then further fine-tuned on this dataset using our entropy-enhanced objective, which aligns the model with successful problem-solving strategies while preserving the policy diversity crucial for test-time scaling.

3.4 TEST-TIME SCALING WITH HYBRID SELECTOR

At inference, we use TTS by running N parallel rollouts for each testing instance, producing trajectories $\{\tau^{(n)}\}_{n=1}^N$ from the ENTROPO-tuned policy. We then apply a hybrid selector that combines model-free approaches with a model-based verifier to prune bad candidates and robustly pick a final patch. The verifier $p_\phi(x, \tau) \in [0, 1]$ is a learned scorer trained on \mathcal{D}_{pref} with supervised learning. Unlike prior work (Jain et al., 2025) that uses p_ϕ as the major ranking criterion, we use it as a conservative filter.

We apply the following filters in order to obtain a candidate set $\{\tau^{(n)}\}$ and then choose a single trajectory:

- **Finished score (model-free).** Discard any τ truncated by step/token limits: keep only $\mathbb{1}(\text{finished}(\tau) = 1)$.
- **Regression test score (model-free).** Run repository regression checks and keep only trajectories that do not compromise existing functionality: $\mathbb{1}(\text{regress_free}(\tau) = 1)$.
- **Verifier probability (model-based).** Filter out very unlikely candidates using a low threshold η : keep $\{\tau \in \mathcal{S} : p_\phi(x, \tau) \geq \eta\}$; we do not rank by p_ϕ .
- **Step-count heuristic (model-free).** For example, for SWEBENCH-VERIFIED, longer successful trajectories typically reflect broader exploration (e.g., more comprehensive tests) before patch submission. From the remaining set, select $\tau^* \in \arg \max_{\tau \in \{\tau^{(n)}\}} L(\tau)$, where $L(\tau)$ is the number of environment interactions.

This hybrid selector improves sampling effectiveness and amplifies the gains from parallel rollouts. As N grows, the selector can improve the final solve ratio by pruning failed or low-quality rollouts and favoring well-executed, thoroughly explored solutions.

Table 1: **Resolve rate (pass@1, %) on benchmarks.** Results are mean \pm std over three runs and the TTS uses $N = 16$ parallel rollouts. For each model, the best result is highlighted in green.

Model	Origin	SFT	ENTROPO-KTO	ENTROPO-DPO	ENTROPO-KTO+TTS	ENTROPO-DPO+TTS
SWEBENCH-VERIFIED						
Qwen3-4B	1.7 (\pm 0.1)	2.4 (\pm 0.3)	5.2 (\pm 0.4)	4.9 (\pm 0.7)	11.5 (\pm 0.6)	11.1 (\pm 0.3)
Gemma-3-27b	7.1 (\pm 0.5)	7.0 (\pm 0.4)	10.1 (\pm 0.4)	10.5 (\pm 0.3)	17.6 (\pm 0.3)	17.7 (\pm 0.4)
Qwen3-Coder-30B	37.7 (\pm 0.2)	43.8 (\pm 0.8)	51.6 (\pm 0.7)	49.8 (\pm 0.4)	59.4 (\pm 0.3)	57.7 (\pm 0.7)
GLM-4.5-Air	51.4 (\pm 0.2)	51.5 (\pm 0.8)	53.5 (\pm 0.7)	52.5 (\pm 0.7)	58.7 (\pm 0.1)	57.5 (\pm 0.4)
SWEBENCH-LITE						
Qwen3-4B	1.2 (\pm 0.3)	1.3 (\pm 0.5)	4.8 (\pm 0.4)	4.7 (\pm 0.5)	10.0 (\pm 0.8)	10.4 (\pm 0.4)
Gemma-3-27b	6.0 (\pm 0.8)	5.9 (\pm 0.4)	10.4 (\pm 0.2)	10.4 (\pm 0.7)	14.6 (\pm 0.6)	14.4 (\pm 0.7)
Qwen3-Coder-30B	28 (\pm 0.3)	33.9 (\pm 0.3)	44.0 (\pm 0.3)	43.7 (\pm 0.8)	49.2 (\pm 0.7)	48.2 (\pm 0.7)
GLM-4.5-Air	43.5 (\pm 0.6)	43.9 (\pm 0.4)	44.9 (\pm 0.4)	44.6 (\pm 0.5)	48.4 (\pm 0.1)	47.9 (\pm 0.3)

4 EXPERIMENTS

In this section, we show the performance of ENTROPO on benchmarks with R2E (Jain et al., 2025) agent scaffold. §4.1 details datasets, models, and training/inference configurations, including verifier training and the TTS budget. §4.2 presents main results and comparisons to official leaderboard submissions. §4.3 analyzes scaling with the number of parallel rollouts N and ablates ENTROPO components and hyperparameters. Additional implementation details are provided in Appendix D.

4.1 IMPLEMENTATION DETAILS

Datasets. For SFT tuning, we use the SWE-Smith dataset (Yang et al., 2025), which does not rely on oracles. For preference learning and verifier model training, we use the R2E-Gym-subset (Jain et al., 2025), whose oracles provide trajectory-level utilities. We evaluate on SWEBENCH-VERIFIED and SWEBENCH-LITE, reporting resolve rates based on their official protocols. All performance numbers are pass@1 and no hint or web-search is used.

Models. We evaluate a diverse set of models from three different families, with sizes ranging from 4B to 106B: Qwen3-4B-Instruct-2507 (Team, 2025), Gemma-3-27b-it (Team et al., 2025), Qwen3-Coder-30B-A3B-Instruct, and GLM-4.5-Air-106B (Zeng et al., 2025a). The verifier is trained with Qwen3-Coder-30B-A3B-Instruct for its strong coding quality and high token throughput.

Training and Inference. We train with LLaMAFactory (Zheng et al., 2024b) and set the maximum training sequence length to 18,000 tokens to accommodate long SWE trajectories. To manage memory, we use QLoRA (Detmeters et al., 2023) for GLM-4.5-Air and LoRA (Gao et al., 2021) for the other models. Unless noted, ENTROPO uses $\alpha = 1.1$ and the sensitivity to α is reported in §4.3. During SFT and preference training, we mask system and user prompts and make the llm response as the learning target. At inference, we allow up to 200 environment interactions per rollout and a maximum sequence length of 131,072 tokens, with temperature 0.7 and `top_k = 20`. For test-time scaling we run $N = 16$ parallel rollouts for open-weight models. To account for sampling randomness, all experiments on open-weight models are run three times, and we report mean \pm standard deviation.

4.2 MAIN RESULTS

Comparison with Original and SFT-tuned Models. As shown in Table 1, ENTROPO consistently outperforms both the original and SFT-tuned models across all benchmarks, even without TTS. For models like Gemma-3-27b and GLM-4.5-Air, standard SFT yields minimal gains over the base models. In contrast, ENTROPO delivers substantial improvements, which we attribute to its entropy-regularized objective that preserves policy diversity. This increased diversity is critical for effective exploration and better generalization to unseen problems. When combined with TTS, the performance gains are further amplified, aligning with our theoretical analysis that diversity is key to maximizing the benefits of test-time compute.

The impact of ENTROPO is particularly evident for smaller models. For instance, the Qwen3-4B model’s performance is negligible after SFT (1.7% on SWEBENCH-VERIFIED and 1.2% on SWEBENCH-LITE), indicating a failure to learn the task. However, with ENTROPO and TTS, its resolve rate surpasses 10%—a remarkable improvement that demonstrates the potential of our approach to make smaller, more efficient models viable for complex SWE tasks.

Table 2: **Resolve rate (pass@1, %) compared to representative SWEBENCH leaderboard submissions.** Our entries use the R2E scaffold and we report best single run for comparability. Budgets and scaffolds may vary across submissions.

Submission	Model	Model Size	SWEBENCH-VERIFIED ↓	SWEBENCH-LITE ↓
<i>Closed Weight Models</i>				
Refact.ai	Claude3.7/o3/o4-mini	-	74.4	60.0
SWE-agent	Claude 4 Sonnet	-	66.6	56.7
SWE-agent	Claude 3.7 Sonnet	-	62.4	48.0
<i>Open Weight Models</i>				
OpenHands	Qwen3-Coder	480B	69.6	-
OpenHands	Kimi K2	1T	65.4	-
OpenHands	GLM-4.5	355B	64.2	-
ENTROPO-KTO-TTS	Qwen3-Coder	30B	59.8	49.3
DeepSWE-TTS	Qwen3	32B	58.8	-
ENTROPO-KTO	Qwen3-Coder	30B	49.3	44.7
Skywork-SWE-TTS	Qwen2.5	32B	47	-
CodeFuse-CGM	Qwen2.5	72B	-	44.0
KGCompass	DeepSeek V3	671B	-	36.7
SWE-fixer	Qwen2.5	72B	24.7	32.8
Moatless	Deepseek V3	671B	-	30.7

For larger models, ENTROPO also achieves significant gains. The Qwen3-Coder-30B model trained with ENTROPO-KTO+TTS reaches 59.4% on SWEBENCH-VERIFIED and 49.2% on SWEBENCH-LITE, establishing a strong performance baseline. We note that for GLM-4.5-Air, the improvements from ENTROPO are less pronounced compared to Qwen3-Coder-30B. This is likely due to the use of QLoRA for fine-tuning GLM-4.5-Air, which is not as effective as LoRA.

Comparison to the Official SWEBENCH Leaderboard. In Table 2, we compare our best-performing model against submissions on the official SWEBENCH leaderboard. Our results are highly competitive, particularly among open-weight models. On SWEBENCH-VERIFIED, our 30B parameter ENTROPO-KTO-TTS model achieves a 59.8% resolve rate, surpassed only by models with over 10x more parameters (*e.g.*, >350B). On SWEBENCH-LITE, the same model sets a new state-of-the-art for open-weight models at 49.3%, with our non-TTS version securing the second-highest rank.

Crucially, ENTROPO-KTO-TTS outperforms other TTS-based submissions like DeepSWE-TTS (Luo et al., 2025) and Skywork-SWE-TTS (Zeng et al., 2025b). This highlights the effectiveness of our entropy-preserving training, which preserves the policy diversity essential for maximizing TTS gains. Note that DeepSWE-TTS is online RL based, showing that our entropy-preserving offline preference learning can be more effective than online RL. Compared to closed-weight models, our results are competitive with top-tier models like Claude 3.7 Sonnet, demonstrating that ENTROPO can significantly narrow the performance gap with commercial models.

4.3 ABLATION STUDIES

Impact of Entropy Regularization. To isolate the benefit of our entropy-preserving objective, we compare ENTROPO-KTO against the multi-turn KTO (without entropy regularization) and SFT on the Qwen3-Coder-30B model. As shown in Figure 2, ENTROPO-KTO consistently outperforms both baselines as N increases. The performance gap between ENTROPO-KTO and multi-turn KTO widens with larger N , confirming that explicit diversity preservation is critical for maximizing the gains from TTS. Both preference-based methods outperform SFT, which aligns with findings that SFT can harm generalization (Chu et al., 2025).

Hybrid Selector Components. We analyze the contribution of each component of our hybrid selector at $N = 16$. The left plot in Figure 3 shows that removing any single component degrades performance, while the full hybrid selector achieves the best results. This confirms that combining a learned verifier with model-free approaches is the most effective strategy.

Sensitivity to α . The right plot in Figure 3 shows the performance of ENTROPO-KTO across different values of the hyperparameter α . The model is robust to a reasonable range of α , indicating

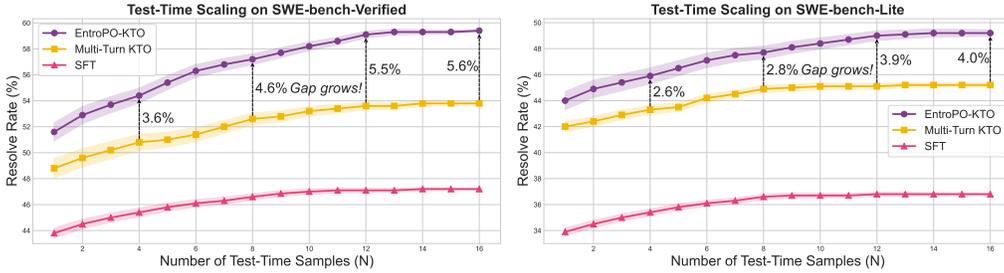


Figure 2: **The Impact of Entropy Regularization on Test-Time Scaling.** Performance of ENTROPO-KTO, multi-turn KTO, and SFT on SWEBENCH-VERIFIED (left) and SWEBENCH-LITE (right) as the number of parallel rollouts (N) increases. ENTROPO’s entropy regularization consistently yields better scaling.

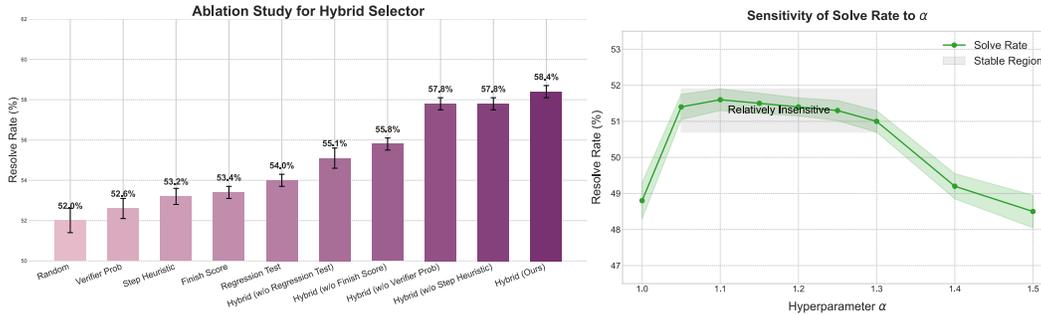


Figure 3: **Ablation Studies on SWEBENCH-VERIFIED.** (Left) Performance contribution of each component in our hybrid selector at $N = 16$. (Right) Sensitivity analysis of the hyperparameter α for ENTROPO-KTO.

that it is not a sensitive hyperparameter. Performance degrades only when α becomes excessively large, causing the training gradients to vanish.

Impact of Temperature on Performance. We also investigate whether increasing sampling temperature can replicate the benefits of ENTROPO. As detailed in §D.5, simply raising the temperature fails to deliver comparable performance gains. Instead, it degrades performance by introducing excessive sampling randomness, confirming that temperature tuning is no substitute for the principled entropy regularization of ENTROPO.

5 DISCUSSIONS AND LIMITATIONS

While ENTROPO provides a robust framework for enhancing multi-turn agents, we acknowledge several limitations and future directions. Our TTS experiments are limited to $N = 16$ parallel rollouts due to budget constraints. As our results in Figure 2 suggest that performance gains scale with N , exploring this behavior with a larger number of rollouts could more conclusively demonstrate the benefits of diversity preservation. Additionally, our end-to-end rollout strategy could be enhanced by incorporating more sophisticated search techniques like Tree-of-Thought (Yao et al., 2023) or solution merging methods (Luong et al., 2025) to explore the solution space more effectively.

Furthermore, due to computational resource constraints, our current implementation of ENTROPO is based on offline preference learning. However, the core principle of entropy regularization can be extended to an online reinforcement learning setting. In such a setup, one could explicitly reward the agent for generating diverse trajectories, potentially leading to even more robust policies. We leave this extension to online RL as a promising direction for future work. Finally, although validated on software engineering, ENTROPO is task-agnostic and could be applied to other complex reasoning domains like competitive mathematics or scientific discovery. We hope our work encourages further exploration into diversity-preserving alignment for building more capable and robust LLM agents.

6 CONCLUSION

In this work, we introduce ENTROPO, an entropy-enhanced preference optimization framework designed to improve the performance of multi-turn, tool-using agents on complex SWE tasks. By explicitly regularizing the preference objective to preserve policy diversity, ENTROPO overcomes the limitations of standard alignment methods that often lead to diversity collapse. ENTROPO achieves state-of-the-art results among open-weight models on the SWEBENCH leaderboard, establishing a robust and effective method for building more powerful and reliable coding agents. We hope our work encourages further exploration into diversity-preserving alignment for building more capable and robust LLM agents.

REFERENCES

- Antonis Antoniadis, Albert Örwall, Kexun Zhang, Yuxi Xie, Anirudh Goyal, and William Wang. Swe-search: Enhancing software agents with monte carlo tree search and iterative refinement. *arXiv preprint arXiv:2410.20285*, 2024.
- Yuntao Bai, Andy Jones, Kamal Ndousse, Amanda Askell, Anna Chen, Nova DasSarma, Dawn Drain, Stanislav Fort, Deep Ganguli, Tom Henighan, et al. Training a helpful and harmless assistant with reinforcement learning from human feedback. *arXiv preprint arXiv:2204.05862*, 2022.
- Edward Beeching, Lewis Tunstall, and Sasha Rush. Scaling test-time compute with open models. URL <https://huggingface.co/spaces/HuggingFaceH4/blogpost-scaling-test-time-compute>.
- Neil Chowdhury, James Aung, Chan Jun Shern, Oliver Jaffe, Dane Sherburn, Giulio Starace, Evan Mays, Rachel Dias, Marwan Aljubei, Mia Glaese, Carlos E. Jimenez, John Yang, Leyton Ho, Tejal Patwardhan, Kevin Liu, and Aleksander Madry. Introducing SWE-bench verified, 2024. URL <https://openai.com/index/introducing-swe-bench-verified/>.
- Tianzhe Chu, Yuexiang Zhai, Jihan Yang, Shengbang Tong, Saining Xie, Dale Schuurmans, Quoc V Le, Sergey Levine, and Yi Ma. Sft memorizes, rl generalizes: A comparative study of foundation model post-training. *arXiv preprint arXiv:2501.17161*, 2025.
- Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. Qlora: Efficient finetuning of quantized llms. *Advances in neural information processing systems*, 36:10088–10115, 2023.
- Kawin Ethayarajh, Winnie Xu, Niklas Muennighoff, Dan Jurafsky, and Douwe Kiela. Kto: Model alignment as prospect theoretic optimization. *arXiv preprint arXiv:2402.01306*, 2024.
- Lei Gao, Zeyuan Yang, Yutong Chen, Zechun Zhang, Zhongyuan Zhang, Zhiyuan Wu, Wei Zhang, and Ting Liu. Lora: Low-rank adaptation of large language models. In *International Conference on Learning Representations*, 2021.
- Jiwoo Hong, Noah Lee, and James Thorne. Orpo: Monolithic preference optimization without reference model. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pp. 11170–11189, 2024.
- Naman Jain, Jaskirat Singh, Manish Shetty, Liang Zheng, Koushik Sen, and Ion Stoica. R2e-gym: Procedural environments and hybrid verifiers for scaling open-weights swe agents. *arXiv preprint arXiv:2504.07164*, 2025.
- Carlos E Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik R Narasimhan. Swe-bench: Can language models resolve real-world github issues? In *The Twelfth International Conference on Learning Representations*, 2024.
- Jiyeon Kim, Hyunji Lee, Hyowon Cho, Joel Jang, Hyeonbin Hwang, Seungpil Won, Youbin Ahn, Dohaeng Lee, and Minjoon Seo. Knowledge entropy decay during language model pretraining hinders new knowledge acquisition. *arXiv preprint arXiv:2410.01380*, 2024.
- Robert Kirk, Ishita Mediratta, Christoforos Nalmpantis, Jelena Luketina, Eric Hambro, Edward Grefenstette, and Roberta Raileanu. Understanding the effects of rlhf on llm generalisation and diversity. *arXiv preprint arXiv:2310.06452*, 2023.
- Xin Lai, Zhuotao Tian, Yukang Chen, Senqiao Yang, Xiangru Peng, and Jiaya Jia. Step-dpo: Step-wise preference optimization for long-chain reasoning of llms. *arXiv preprint arXiv:2406.18629*, 2024.
- Jack Lanchantin, Angelica Chen, Shehzaad Dhuliawala, Ping Yu, Jason Weston, Sainbayar Sukhbaatar, and Ilia Kulikov. Diverse preference optimization. *arXiv preprint arXiv:2501.18101*, 2025.
- Ziniu Li, Congliang Chen, Tian Xu, Zeyu Qin, Jiancong Xiao, Zhi-Quan Luo, and Ruoyu Sun. Preserving diversity in supervised fine-tuning of large language models. *arXiv preprint arXiv:2408.16673*, 2024.

-
- Michael Luo, Naman Jain, Jaskirat Singh, Sijun Tan, Ameen Patel, Qingyang Wu, Alpay Ariyak, Colin Cai, Tarun Venkat, Shang Zhu, Ben Athiwaratkun, Manan Roongta, Ce Zhang, Li Erran Li, Raluca Ada Popa, Koushik Sen, and Ion Stoica. Deepswe: Training a state-of-the-art coding agent from scratch by scaling rl, 2025. Notion Blog.
- Thang Luong, Edward Lockhart, et al. Advanced version of gemini with deep think officially achieves gold-medal standard at the international mathematical olympiad. *DeepMind Blog*, 2025.
- Yu Meng, Mengzhou Xia, and Danqi Chen. Simpo: Simple preference optimization with a reference-free reward. *Advances in Neural Information Processing Systems*, 37:124198–124235, 2024.
- Sonia Krishna Murthy, Tomer Ullman, and Jennifer Hu. One fish, two fish, but not the whole sea: Alignment reduces language models’ conceptual diversity. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pp. 11241–11258, 2025.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35: 27730–27744, 2022.
- Laura O’Mahony, Leo Grinsztajn, Hailey Schoelkopf, and Stella Biderman. Attributing mode collapse in the fine-tuning of large language models. In *ICLR 2024 Workshop on Mathematical and Empirical Understanding of Foundation Models*, volume 2, 2024.
- Vishakh Padmakumar and He He. Does writing with language models reduce content diversity? *arXiv preprint arXiv:2309.05196*, 2023.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D Manning, Stefano Ermon, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model. *Advances in Neural Information Processing Systems*, 36:53728–53741, 2023.
- Matthew Renze. The effect of sampling temperature on problem solving in large language models. In *Findings of the association for computational linguistics: EMNLP 2024*, pp. 7346–7356, 2024.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- Amrith Setlur, Nived Rajaraman, Sergey Levine, and Aviral Kumar. Scaling test-time compute without verification or rl is suboptimal. *arXiv preprint arXiv:2502.12118*, 2025.
- Wentao Shi, Mengqi Yuan, Junkang Wu, Qifan Wang, and Fuli Feng. Direct multi-turn preference optimization for language agents. *arXiv preprint arXiv:2406.14868*, 2024.
- Stewart Slocum, Asher Parker-Sartori, and Dylan Hadfield-Menell. Diverse preference learning for capabilities and alignment. In *International Conference on Learning Representations*, 2025.
- Charlie Snell, Jaehoon Lee, Kelvin Xu, and Aviral Kumar. Scaling llm test-time compute optimally can be more effective than scaling model parameters. *arXiv preprint arXiv:2408.03314*, 2024.
- Gemma Team, Aishwarya Kamath, Johan Ferret, Shreya Pathak, Nino Vieillard, Ramona Merhej, Sarah Perrin, Tatiana Matejovicova, Alexandre Ramé, Morgane Rivière, et al. Gemma 3 technical report. *arXiv preprint arXiv:2503.19786*, 2025.
- Qwen Team. Qwen3 technical report, 2025. URL <https://arxiv.org/abs/2505.09388>.
- Chaoqi Wang, Yibo Jiang, Chenghao Yang, Han Liu, and Yuxin Chen. Beyond reverse kl: Generalizing direct preference optimization with diverse divergence constraints. In *International Conference on Learning Representations*, 2024.

-
- Xingyao Wang, Boxuan Li, Yufan Song, Frank F. Xu, Xiangru Tang, Mingchen Zhuge, Jiayi Pan, Yueqi Song, Bowen Li, Jaskirat Singh, Hoang H. Tran, Fuqiang Li, Ren Ma, Mingzhang Zheng, Bill Qian, Yanjun Shao, Niklas Muennighoff, Yizhe Zhang, Binyuan Hui, Junyang Lin, Robert Brennan, Hao Peng, Heng Ji, and Graham Neubig. Openhands: An open platform for AI software developers as generalist agents. In *The Thirteenth International Conference on Learning Representations*, 2025. URL <https://openreview.net/forum?id=0Jd3ayDDoF>.
- Yuxiang Wei, Olivier Duchenne, Jade Copet, Quentin Carbonneaux, Lingming Zhang, Daniel Fried, Gabriel Synnaeve, Rishabh Singh, and Sida I Wang. Swe-rl: Advancing llm reasoning via reinforcement learning on open software evolution. *arXiv preprint arXiv:2502.18449*, 2025.
- Chunqiu Steven Xia, Yinlin Deng, Soren Dunn, and Lingming Zhang. Agentless: Demystifying llm-based software engineering agents. *arXiv preprint*, 2024.
- Shicheng Xu, Liang Pang, Huawei Shen, Xueqi Cheng, and Tat-Seng Chua. Search-in-the-chain: Interactively enhancing large language models with search for knowledge-intensive tasks. In *Proceedings of the ACM Web Conference 2024*, pp. 1362–1373, 2024a.
- Shusheng Xu, Wei Fu, Jiakuan Gao, Wenjie Ye, Weilin Liu, Zhiyu Mei, Guangju Wang, Chao Yu, and Yi Wu. Is dpo superior to ppo for llm alignment? a comprehensive study. *arXiv preprint arXiv:2404.10719*, 2024b.
- John Yang, Carlos E Jimenez, Alexander Wettig, Kilian Lieret, Shunyu Yao, Karthik Narasimhan, and Ofir Press. Swe-agent: Agent-computer interfaces enable automated software engineering. *Advances in Neural Information Processing Systems*, 37:50528–50652, 2024a.
- John Yang, Carlos E Jimenez, Alexander Wettig, Kilian Lieret, Shunyu Yao, Karthik R Narasimhan, and Ofir Press. SWE-agent: Agent-computer interfaces enable automated software engineering. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024b. URL <https://arxiv.org/abs/2405.15793>.
- John Yang, Kilian Lieret, Carlos E. Jimenez, Alexander Wettig, Kabir Khandpur, Yanzhe Zhang, Binyuan Hui, Ofir Press, Ludwig Schmidt, and Diyi Yang. Swe-smith: Scaling data for software engineering agents, 2025. URL <https://arxiv.org/abs/2504.21798>.
- Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Tom Griffiths, Yuan Cao, and Karthik Narasimhan. Tree of thoughts: Deliberate problem solving with large language models. *Advances in neural information processing systems*, 36:11809–11822, 2023.
- Aohan Zeng, Xin Lv, Qinkai Zheng, Zhenyu Hou, Bin Chen, Chengxing Xie, Cunxiang Wang, Da Yin, Hao Zeng, Jiajie Zhang, et al. Glm-4.5: Agentic, reasoning, and coding (arc) foundation models. *arXiv preprint arXiv:2508.06471*, 2025a.
- Liang Zeng, Yongcong Li, Yuzhen Xiao, Changshi Li, Chris Yuhao Liu, Rui Yan, Tianwen Wei, Jujie He, Xuchen Song, Yang Liu, et al. Skywork-swe: Unveiling data scaling laws for software engineering in llms. *arXiv preprint arXiv:2506.19290*, 2025b.
- Yuntong Zhang, Haifeng Ruan, Zhiyu Fan, and Abhik Roychoudhury. Autocoderover: Autonomous program improvement. In *Proceedings of the 33rd ACM SIGSOFT International Symposium on Software Testing and Analysis*, pp. 1592–1604, 2024.
- Lianmin Zheng, Liangsheng Yin, Zhiqiang Xie, Chuyue Livia Sun, Jeff Huang, Cody Hao Yu, Shiyi Cao, Christos Kozyrakis, Ion Stoica, Joseph E Gonzalez, et al. Sglang: Efficient execution of structured language model programs. *Advances in neural information processing systems*, 37: 62557–62583, 2024a.
- Yaowei Zheng, Richong Zhang, Junhao Zhang, Yanhan Ye, Zheyang Luo, Zhangchi Feng, and Yongqiang Ma. Llamafactory: Unified efficient fine-tuning of 100+ language models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 3: System Demonstrations)*, Bangkok, Thailand, 2024b. Association for Computational Linguistics. URL <http://arxiv.org/abs/2403.13372>.
- Brian D Ziebart. *Modeling purposeful adaptive behavior with the principle of maximum causal entropy*. Carnegie Mellon University, 2010.

Daniel M Ziegler, Nisan Stiennon, Jeffrey Wu, Tom B Brown, Alec Radford, Dario Amodei, Paul Christiano, and Geoffrey Irving. Fine-tuning language models from human preferences. *arXiv preprint arXiv:1909.08593*, 2019.

A PROOF OF PROPOSITION 3.2

First, we analyze the optimal policy under the objective

$$\max_{\pi} \mathbb{E}_{y \sim \pi(y|x)} [u(x, y)] + \alpha H(\pi(\cdot|x)) - \beta H(\pi, \pi_{ref})$$

By Assumption 3.1, we have

$$u^* = \arg \max_u \mathbb{E}_{(x, y^+, y^-) \sim \rho} [\log \sigma(u(x, y^+) - u(x, y^-))] \quad (9)$$

Denote policies $\pi(\cdot|x)$, $\pi_{ref}(\cdot|x)$ and utility function $u(x, \cdot)$ as vectors π , π_{ref} , \mathbf{u} . We can rewrite our objective as:

$$\begin{aligned} \max_{\pi} \quad & \pi^T \mathbf{u} - \alpha \pi^T \log \pi + \beta \pi^T \log \pi_{ref} = \pi^T (\mathbf{u} - \alpha \log \pi + \beta \log \pi_{ref}) \\ \text{s.t.} \quad & \|\pi\|_1 = 1 \end{aligned} \quad (10)$$

The Lagrangian is

$$L(\pi, \lambda) = \pi^T (\mathbf{u} - \alpha \log \pi + \beta \log \pi_{ref}) + \lambda (\sum_i \pi_i - 1) \quad (11)$$

Taking the derivative of the Lagrangian, we have

$$\frac{\partial L}{\partial \pi} = \mathbf{u} - \alpha (\log \pi + \mathbf{1}) + \beta \log \pi_{ref} + \lambda \mathbf{1} = 0 \quad (12)$$

It gives

$$\begin{aligned} \alpha (\log \pi + \mathbf{1}) &= \mathbf{u} + \beta \log \pi_{ref} + \lambda \mathbf{1} \\ \log \pi + \mathbf{1} &= \frac{\mathbf{u} + \beta \log \pi_{ref} + \lambda \mathbf{1}}{\alpha} \\ \pi &= \exp \frac{\mathbf{u} + \beta \log \pi_{ref} + (\lambda - \alpha) \mathbf{1}}{\alpha} \end{aligned} \quad (13)$$

which implies the optimal policy $\pi^*(y|x) \propto \exp(\frac{u(x, y)}{\alpha}) \pi_{ref}(y|x)^{\beta/\alpha}$.

Then, we analyze the optimal policy under the objective

$$\max_{\pi} \mathbb{E}_{(x, y^+, y^-) \sim D} \left[\log \sigma \left(\alpha \left[\log \frac{\pi(y^+|x)}{\pi_{ref}(y^+|x)^{\beta/\alpha}} - \log \frac{\pi(y^-|x)}{\pi_{ref}(y^-|x)^{\beta/\alpha}} \right] \right) \right]$$

which is equivalent to

$$\max_{\pi} \mathbb{E}_{(x, y^+, y^-) \sim D} [\log \sigma (\alpha \log \frac{\pi(y^+|x)}{\pi(y^-|x)} - \beta \log \frac{\pi_{ref}(y^+|x)}{\pi_{ref}(y^-|x)})]$$

Note that $\pi(y|x) = \exp(\frac{1}{\eta} u(x, y)) \pi_{ref}(y|x)^{\beta/\alpha} / Z(x)$ is equivalent to $u(x, y) = \alpha \log \pi(y|x) - \beta \log \pi_{ref}(y|x) + \alpha \log Z(x)$. Given the same prompt x , compute the utility difference between two different responses y and y' . We have

$$u(x, y) - u(x, y') = \alpha \log \pi(y|x) - \beta \log \pi_{ref}(y|x) + \alpha \log Z(x) \quad (40)$$

$$- [\alpha \log \pi(y'|x) - \beta \log \pi_{ref}(y'|x) + \alpha \log Z(x)] \quad (41)$$

$$= \alpha \log \frac{\pi(y|x)}{\pi(y'|x)} - \beta \log \frac{\pi_{ref}(y|x)}{\pi_{ref}(y'|x)} \quad (42)$$

We now substitute $u(x, y)$ into the Bradley-Terry objective in Assumption 3.1

$$\pi^*(y|x) = \arg \max_{\pi} \mathbb{E}_{(x, y^+, y^- \sim \mathcal{D})} [\log \sigma(\alpha \log \frac{\pi(y^+|x)}{\pi(y^-|x)} - \beta \log \frac{\pi_{ref}(y^+|x)}{\pi_{ref}(y^-|x)})] \quad (14)$$

which satisfies the relationship $\pi^*(y|x) \propto \exp(\frac{u(x, y)}{\alpha}) \pi_{ref}(y|x)^{\beta/\alpha}$.

B PROOF OF PROPOSITION 3.3

First, we consider the case when $H = 2$. The key idea is to solve the optimization problem through a backward iteration, i.e., from $h = H = 2$ to $h = 1$.

For $h = 2$, by Proposition 3.2, we have:

$$\begin{aligned} \pi_{\mathcal{M}, 2}(\cdot|s_2) &= \arg \max_{\pi_2} \mathbb{E}_{a_2 \sim \pi_2(\cdot|s_2)} [u(s_2, a_2) + \alpha H(\pi_2(\cdot|s_2)) - \beta H(\pi_2, \pi_{ref, 2})] \\ &\propto \pi_{ref}(\cdot|s_2)^{\beta/\alpha} \exp(\frac{u(s_2, \cdot)}{\alpha}) \end{aligned} \quad (15)$$

Then, we define the value function and Q function w.r.t. $\pi_{\mathcal{M}, 2}$ as:

$$\begin{aligned} V_{\mathcal{M}, 2}(s_2) &= \mathbb{E}_{a_2 \sim \pi_2(\cdot|s_2)} [u(s_2, \cdot) + \alpha H(\pi(\cdot|s_2)) - \beta H(\pi, \pi_{ref})] \\ Q_{\mathcal{M}, 1}(s_1, a_1) &= \mathbb{E}_{o_1 \sim \mathbb{P}_1(\cdot|s_1, a_1)} [V_{\mathcal{M}, 2}(s_2)] \end{aligned} \quad (16)$$

For $h = 1$, we have:

$$\begin{aligned} \pi_{\mathcal{M}, 1}(\cdot|s_1) &= \arg \max_{\pi_1} \mathbb{E}_{a_1 \sim \pi_1(\cdot|s_1)} [Q_{\mathcal{M}, 1}(s_1, a_1) + \alpha H(\pi_1(\cdot|s_1)) - \beta H(\pi_1, \pi_{ref, 1})] \\ &\propto \pi_{ref, 1}(\cdot|s_1)^{\beta/\alpha} \exp(\frac{u(s_1, \cdot)}{\alpha}) \end{aligned} \quad (17)$$

By construction, $\pi_{\mathcal{M}, 2}$ is already optimal for $h = 2$.

Now, we consider a more general case $h = H$. Given the definition of the Q value, we would like to show that equation 5 holds. We focus on a general objective:

$$\min_{p \in \Delta(\Omega)} [E_{w \sim p} U(w) - \alpha H(p) + \beta H(p, p_0)] \quad (18)$$

where $\Delta(\Omega)$ denotes the set of probabilities on w .

Note that

$$\begin{aligned} E_{w \sim p} U(w) - \alpha H(p) + \beta H(p, p_0) &= E_{w \sim p} [\alpha \log p(w) - \alpha (\frac{\beta}{\alpha} \log p_0(w) - \frac{U(w)}{\alpha})] \\ &= E_{w \sim p} [\log p(w) - \log(p_0(w)^{\beta/\alpha} \exp(-\frac{U(w)}{\alpha}))] \end{aligned} \quad (19)$$

To ensure that $q(w)$ is a valid probability distribution, we define the following normalization constant:

$$Z = \int p_0(w)^{\beta/\alpha} \exp(-\frac{U(w)}{\alpha}) dw \quad (20)$$

Then the normalized distribution is $p^*(w) = q(w)/Z$. Inserting back, we have

$$\begin{aligned} E_{w \sim p} [U(w)] - \alpha H(p) + \beta H(p, p_0) &= \alpha E_{w \sim p} [\log p(w) - \log(Z \cdot p^*(w))] \\ &= \alpha E_{w \sim p} [\log p(w) - \log p^*(w) - \log Z] \\ &= \alpha E_{w \sim p} \log \frac{p(w)}{p^*(w)} - \alpha E_{w \sim p} [\log Z] \end{aligned} \quad (21)$$

Note that the first item is the KL divergence $KL(p||p^*)$. Thus, the minimizer of the above equation exists when $p(w) = p^*(w)$, i.e., $p^*(w) = \frac{1}{Z} p_0(w)^{\beta/\alpha} \exp(-\frac{U(w)}{\alpha})$. The minimum value is $-\alpha \log Z$.

C DERIVATION OF ENTROPO LOSS

Based on Proposition 3.3, the optimal policy at step h is

$$\pi_{\mathcal{M},h}(a_h|s_h) = \frac{\pi_{ref,h}(a_h|s_h)^{\beta/\alpha}}{Z_h(s_h)} \exp\left(\frac{Q_{\mathcal{M},h}(s_h, a_h)}{\alpha}\right), \quad (22)$$

with normalization factor

$$Z_h(s_h) = \sum_{a_h \in \mathcal{A}} \pi_{ref,h}(a_h|s_h)^{\beta/\alpha} \exp(Q_{\mathcal{M},h}(s_h, a_h)/\alpha), \quad (23)$$

and the corresponding value

$$V_{\mathcal{M},h}(s_h) = \alpha \log Z_h(s_h). \quad (24)$$

Starting from the policy expression,

$$\pi_{\mathcal{M},h}(a_h|s_h) Z_h(s_h) = \pi_{ref,h}(a_h|s_h)^{\beta/\alpha} \exp\left(\frac{Q_{\mathcal{M},h}(s_h, a_h)}{\alpha}\right) \quad (25)$$

$$\implies \exp(Q_{\mathcal{M},h}(s_h, a_h)/\alpha) = \frac{\pi_{\mathcal{M},h}(a_h|s_h) Z_h(s_h)}{\pi_{ref,h}(a_h|s_h)^{\beta/\alpha}}. \quad (26)$$

Taking the logarithm and multiplying by α gives

$$Q_{\mathcal{M},h}(s_h, a_h) = \alpha \log \pi_{\mathcal{M},h}(a_h|s_h) + \alpha \log Z_h(s_h) - \beta \log \pi_{ref,h}(a_h|s_h) \quad (27)$$

$$= V_{\mathcal{M},h}(s_h) + \alpha \log \pi_{\mathcal{M},h}(a_h|s_h) - \beta \log \pi_{ref,h}(a_h|s_h). \quad (28)$$

We can further rewrite Q-value as:

$$Q_{\mathcal{M},h}(s_h, a_h) = \alpha \cdot \log \frac{\pi_{\mathcal{M},h}(a_h|s_h)}{\pi_{ref,h}(a_h|s_h)^{\beta/\alpha}} + V_{\mathcal{M},h}(s_h) \quad (29)$$

With the definition of Q-values $Q_{\mathcal{M},h}$, we have

$$\begin{aligned} \mathbb{E}_{o_h \sim \mathbb{P}_h(\cdot|s_h, a_h)} V_{\mathcal{M},h+1}(s_{h+1}) &= \alpha \cdot \log \frac{\pi_{\mathcal{M},h}(a_h|s_h)}{\pi_{ref,h}(a_h|s_h)^{\beta/\alpha}} + V_{\mathcal{M},h}(s_h), \quad \text{if } h \leq H-1 \\ u(s_H, a_H) &= \alpha \cdot \log \frac{\pi_{\mathcal{M},H}(a_H|s_H)}{\pi_{ref,H}(a_H|s_H)^{\beta/\alpha}} + V_{\mathcal{M},H}(s_H). \end{aligned} \quad (30)$$

Summing over $h \in [H]$, we have

$$\begin{aligned} u(s_H, a_H) &= \alpha \underbrace{\sum_{h=1}^H \log \frac{\pi_{\mathcal{M},h}(a_h|s_h)}{\pi_{ref,h}(a_h|s_h)^{\beta/\alpha}}}_{(1)} + \underbrace{V_{\mathcal{M},1}(s_1)}_{(2)} \\ &\quad + \underbrace{\sum_{h=1}^{H-1} [V_{\mathcal{M},h+1}(s_{h+1}) - \mathbb{E}_{o_h \sim \mathbb{P}_h(\cdot|s_h, a_h)} V_{\mathcal{M},h+1}(s_{h+1})]}_{(3)} \end{aligned} \quad (31)$$

Term (1) is similar to what we derive in Proposition 3.2. Term (2) can be viewed as a constant when comparing two different responses for the same prompt s_1 . For Term (3), given the deterministic nature of our tool-integrated coding task, Term (3) is equal to 0. Therefore, we can utilize the maximum likelihood estimation of the utility function with a dataset \mathcal{D} consisting of (x, τ^+, τ^-) to obtain our ENTROPO-DPO loss:

$$\begin{aligned}
& L_{EntroPO-DPO}(\theta) \\
&= - \sum_{(x, \tau^+, \tau^-) \in D} \log \sigma \left(\alpha \sum_{h=1}^H \left[\log \frac{\pi_{\theta, h}(a_h^+ | s_h^+)}{\pi_{ref, h}(a_h^+ | s_h^+)^{\beta/\alpha}} - \log \frac{\pi_{\theta, h}(a_h^- | s_h^-)}{\pi_{ref, h}(a_h^- | s_h^-)^{\beta/\alpha}} \right] \right) \quad (32)
\end{aligned}$$

With equation 31 implying that Term (3) = 0, the implicit reward $r(x, y)$ is given by $\sum_{h=1}^H \log \frac{\pi_{\mathcal{M}, h}(a_h | s_h)}{\pi_{ref, h}(a_h | s_h)^{\beta/\alpha}}$. Based on Ethayarajh et al. (2024), we can naturally derive our ENTROPO-KTO loss

$$L_{EntroPO-KTO}(\theta) = E_{x, y \sim D} [\lambda_y - V(x, y)] \quad (33)$$

where

$$\begin{aligned}
r_{\theta}(x, y) &= \sum_{h=1}^H \log \frac{\pi_{\mathcal{M}, h}(a_h | s_h)}{\pi_{ref, h}(a_h | s_h)^{\beta/\alpha}} \\
V(x, y) &= \begin{cases} \lambda_+ \sigma(\alpha(r_{\theta}(x, y) - z_0)) \\ \lambda_- \sigma(\alpha(z_0 - r_{\theta}(x, y))) \end{cases} \\
z_0 &= \sum_{h=1}^H \left[-H(\pi) + \frac{\beta}{\alpha} H(\pi, \pi_{ref}) \right]
\end{aligned}$$

D EXPERIMENT DETAILS

In this section, we provide additional details about the experiment details of ENTROPO.

D.1 DATASET DETAILS

Training Data. For SFT, we use the SWE-Smith dataset (Yang et al., 2025), selecting only Python-based instances with problem statements that align with the SWEBENCH format. For preference learning, we employ the R2E-Gym-subset (Jain et al., 2025), which we selected because it contains no repository overlap with our test sets, thereby preventing data leakage.

Evaluation Data. We evaluate ENTROPO on the complete official test sets for both SWEBENCH-VERIFIED and SWEBENCH-LITE. Detailed statistics for all datasets are provided in Table 3.

Table 3: **Dataset Statistics:** The table presents the number of training and test samples for each dataset, along with the source of the dataset.

Dataset	# Train Samples	# Test Samples	Source
SWE-Smith	8736	-	https://huggingface.co/datasets/r2e-edits/swesmith-clean
R2E-Gym-subset	4578	-	https://huggingface.co/datasets/R2E-Gym/R2E-Gym-Subset
SWE-bench Verified	-	500	https://huggingface.co/datasets/princeton-nlp/SWE-bench_Verified
SWE-bench Lite	-	300	https://huggingface.co/datasets/princeton-nlp/SWE-bench_Lite

D.2 SCAFFOLD DETAILS

In our experiments, we utilize the standard R2E scaffold, which is recognized for its flexibility, ease of use, and robust performance. This scaffold equips the agent with four essential tools: `file_editor` for file editing, `execute_bash` for running bash commands, `search` for file and code retrieval, and `finish` to conclude the task. The complete system prompt, detailing the functionality and parameters of each tool, is provided below.

System Prompt of the Scaffold

You are a programming agent who is provided a github issue and repository bash environment and is tasked to solve certain tasks (e.g., file localization, testcase generation, code repair and editing etc) to resolve the issue.

We have access to the following functions:

— BEGIN FUNCTION #1: `file_editor` —

Description: Custom editing tool for viewing, creating and editing files.

- State is persistent across command calls and discussions with the user
- If path is a file, view displays the result of applying `cat -n`. If path is a directory, view lists non-hidden files and directories up to 2 levels deep
- The create command cannot be used if the specified path already exists as a file
- If a command generates a long output, it will be truncated and marked with `<response clipped>`
- The `undo_edit` command will revert the last edit made to the file at path

Notes for using the `str_replace` command:

- The `old_str` parameter should match EXACTLY one or more consecutive lines from the original file. Be mindful of whitespaces!
- If the `old_str` parameter is not unique in the file, the replacement will not be performed. Make sure to include enough context in `old_str` to make it unique
- The `new_str` parameter should contain the edited lines that should replace the `old_str`

Parameters:

1. `command` (string, required)
Allowed values: `[view, create, str_replace, insert, undo_edit]`.
The command to run.
2. `path` (string, required)
Absolute path to file or directory, e.g. `/testbed/file.py` or `/testbed`.
3. `file_text` (string, optional)
Required for the `create` command. Contains the content of the file to be created.
4. `old_str` (string, optional)
Required for the `str_replace` command. The exact string in path to replace.
5. `new_str` (string, optional)
 - Optional for the `str_replace` command to specify the replacement string.
 - Required for the `insert` command to specify the string to insert.
6. `insert_line` (integer, optional)
Required for the `insert` command. The `new_str` will be inserted after the line number specified here.
7. `view_range` (array, optional)
 - Optional for the `view` command (when path is a file).
 - If provided, specifies the line range to view, e.g. `[11, 12]` shows lines 11 and 12.
 - `[start_line, -1]` will show all lines from `start_line` to the end of file.
8. `concise` (boolean, optional)
 - Optional for the `view` command.
 - Displays a concise skeletal view of the file. If set to `False`, displays the full content in the specified `view_range`.

— END FUNCTION #1 —

— BEGIN FUNCTION #2: `execute_bash` —

Description: Execute a bash command in the terminal.

Behavior notes:

- If a command may run indefinitely (long-running), consider running it in the background and redirecting output, e.g. `python3 app.py > server.log 2>&1 &`.
- If the bash command returns exit code -1, it means the process is still running. The assistant may:
 - Call this function again with `command` as an empty string (`""`) to retrieve additional logs.

- Send more input to STDIN of the running process by calling this function again with command set to the text input.
- Send `command="ctrl+c"` to interrupt the currently running process.
- If the command times out, it will be interrupted (SIGINT). The assistant may then retry or do further steps if needed.

Parameters:

1. `cmd` (string, required)

The bash command (and optional arguments) to execute.

- Can be empty ("") to retrieve more logs if the process is still running.
- Can be "ctrl+c" to interrupt the running process.

— END FUNCTION #2 —

— BEGIN FUNCTION #3: `search` —

Description: Search for a term in a directory or a single file.

- If `path` is a directory (or unspecified, default is `.`), it recursively searches all non-hidden files and directories for the search term.
- If `path` points to a file, it runs a `grep -n` in that file to show line numbers matching the search term.
- If more than 100 files match in a directory search, results are truncated and the tool will inform you to narrow your search.
- If no matches are found, it will inform you as well.

Parameters:

1. `search_term` (string, required)

The term or string to search for in files.

2. `path` (string, optional)

The file or directory to search in. Defaults to `.` if not specified.

— END FUNCTION #3 —

— BEGIN FUNCTION #4: `finish` —

Description: Finish the interaction once the task is complete or if no further progress can be made.

Behavior notes:

- The submit command finalizes your output.

Parameters:

1. `command` (string, required)

Currently allowed value: `[submit]`.

2. `result` (string, optional)

The result text or final message to submit. Defaults to an empty string if not provided.

— END FUNCTION #4 —

If you choose to call a function ONLY reply in the following format with NO suffix:

```
<function=example_function_name>
<parameter=example_parameter_1>value_1</parameter>
<parameter=example_parameter_2>
This is the value for the second parameter
that can span
multiple lines
</parameter>
</function>
```

<IMPORTANT> Reminder:

- Function calls MUST follow the specified format, start with `<function=` and end with `</function>`
- Required parameters MUST be specified
- Only call one function at a time
- VERY IMPORTANT: Each response must include both reasoning (as natural text) and function call (in above format) to solve the task.

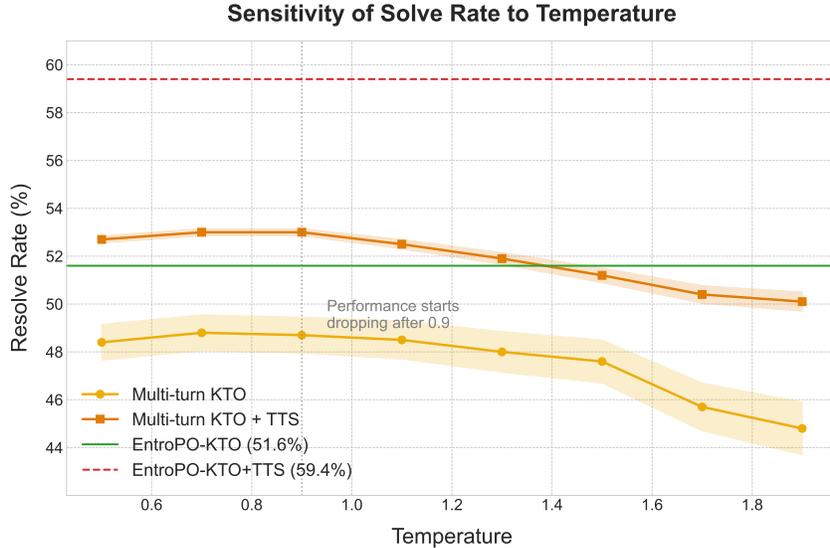


Figure 4: **Impact of Temperature on Performance.** Performance of multi-turn KTO and KTO+TTS on SWEBENCH-VERIFIED with varying temperature, compared to ENTROPO with a fixed temperature of 0.7. Increasing temperature fails to match the performance of ENTROPO and degrades performance past 0.9.

D.3 RUNNING ENVIRONMENT

Our implementation relies on the LLaMA-Factory (Zheng et al., 2024b) for model training and SGLang (Zheng et al., 2024a) for efficient inference deployment. All experiments are performed on a server configured with four 32-core AMD EPYC 7702 CPUs, 8 NVIDIA H100 (80GB) GPUs, and 4 NVIDIA A100 (40GB) GPUs. The H100 GPUs are dedicated to the primary training and inference workloads, while the A100 GPUs provided supplementary computational support during inference.

D.4 TRAINING AND INFERENCE DETAILS

Training Hyperparameters. We configure our training process as follows. For LoRA, we set `lora_rank=8`, `lora_alpha=16`, and apply it to all available modules (`lora_target=all`). For the GLM-4.5-Air model, we use 4-bit QLoRA quantization. Across all models, we use a context length of 18,000 tokens, a learning rate of $1e-5$, and a warmup ratio of 0.1. The batch size is set to 4 for GLM-4.5-Air and 16 for all other models. Both the SFT and preference optimization stages are trained for a single epoch using these settings.

Inference Parameters. During inference, each rollout is permitted a maximum of 200 environment interaction steps and a total generation length of up to 131,072 tokens. We use a sampling temperature of 0.7, `top_k` of 20, and `top_p` of 0.8 for all models, which is the recommended setting from Qwen3 model card.

Hybrid Trajectory Selection. Our hybrid selector employs a multi-stage filtering process to identify the best trajectory from the generated candidates. The process is as follows:

1. **Initial Filtering:** We first discard any trajectories that are truncated due to exceeding the step or token limits.
2. **Regression Testing:** Next, we filter out trajectories that fail the regression tests generated by the R2E-Gym framework.
3. **Verifier-Based Filtering:** We then apply a verifier model and remove trajectories with a probability below a threshold of 0.01. We choose a conservative threshold because we

empirically observe that many valid solutions do not receive high probability scores, but scores below 0.01 are a strong indicator of a flawed trajectory.

If any filtering step results in an empty set of candidates, we revert to the candidate pool from the previous step.

After filtering, we apply a final model-free heuristic for selection. We select the trajectory with the **most** environment interaction steps for SWEBENCH-VERIFIED and the **fewest** for SWEBENCH-LITE. This distinction is motivated by the nature of the benchmarks and our observation. Since all SWEBENCH-VERIFIED instances are human-verified as solvable, a longer interaction sequence can indicate a more thorough and robust solution process. Conversely, SWEBENCH-LITE is known to contain instances with misleading or incomplete problem statements (Xia et al., 2024). For these, a high number of steps often signals agent confusion or unproductive exploration. Thus, a shorter, successful trajectory is a more reliable indicator of an efficient and accurate solution.

D.5 ADDITIONAL EXPERIMENTS

Impact of Temperature on Performance. To investigate whether increased sampling diversity can replicate the benefits of our entropy-regularized approach, we evaluate the multi-turn KTO and multi-turn KTO+TTS models under varying temperatures. We test the Qwen3-Coder-30B model on SWEBENCH-VERIFIED with temperatures ranging from 0.5 to 1.8 and compare its performance to ENTROPO-KTO and ENTROPO-KTO+TTS, which use a fixed temperature of 0.7. As shown in Figure 4, increasing the temperature provides no performance benefit. In fact, performance begins to decline beyond a temperature of 0.9, as excessive sampling randomness undermines the precision required for SWE tasks involving tool use and code editing. These results demonstrate that merely increasing temperature is not a substitute for principled entropy regularization, as it fails to match the performance gains achieved by ENTROPO.