

Dual-Stage Reweighted MoE for Long-Tailed Egocentric Mistake Detection

Boyu Han^{1,2} Qianqian Xu^{1,*} Shilong Bao² Zhiyong Yang²
 Sicong Li^{3,4} Qingming Huang^{2,1,*}

¹Key Lab. of Intelligent Information Processing, Institute of Computing Technology, CAS

²School of Computer Science and Tech., University of Chinese Academy of Sciences

³Institute of Information Engineering, CAS

⁴School of Cyber Security, University of Chinese Academy of Sciences

{hanboyu23z, xuqianqian}@ict.ac.cn lisicong24@mailsucas.ac.cn

{baoshilong, yangzhiyong21, qmhuang}@ucas.ac.cn

Abstract

In this report, we address the problem of determining whether a user performs an action incorrectly from egocentric video data. To handle the challenges posed by subtle and infrequent mistakes, we propose a Dual-Stage Reweighted Mixture-of-Experts (DR-MoE) framework. In the first stage, features are extracted using a frozen ViViT model and a LoRA-tuned ViViT model, which are combined through a feature-level expert module. In the second stage, three classifiers are trained with different objectives: reweighted cross-entropy to mitigate class imbalance, AUC loss to improve ranking under skewed distributions, and label-aware loss with sharpness-aware minimization to enhance calibration and generalization. Their predictions are fused using a classification-level expert module. The proposed method achieves strong performance, particularly in identifying rare and ambiguous mistake instances. The code is available at <https://github.com/boyuh/DR-MoE>.

1. Introduction

This document introduces the solution proposed by the MR-CAS team for the Mistake Detection Challenge of the HoloAssist 2025 competition [16]. The objective of the task is to determine whether a user makes a mistake while performing an operation, such as assembling a switch. Unlike traditional action recognition, which aims to identify the type of action being performed, mistake detection focuses on assessing the quality of the action execution. This requires a more detailed temporal analysis and heightened sensitivity to subtle deviations in user behavior.

In practical terms, this problem is challenging due to two main factors. First, mistake events are inherently rare

and often ambiguous, leading to severely imbalanced data distributions that hinder conventional supervised learning. Second, the diversity of task types and user behaviors in real-world egocentric videos introduces significant intra-class variation, making it difficult for a single model to generalize effectively [14].

To address these challenges, we propose a *Dual-Stage Reweighted Mixture-of-Experts (DR-MoE)* framework designed to exploit complementary modeling strategies at both the feature extraction and classification levels. In the first stage, we extract spatiotemporal representations using two ViViT-based [1] experts: one frozen to preserve generic semantic priors and one fine-tuned with low-rank adaptation (LoRA) [7] to focus on mistake-sensitive cues. These representations are fused through a learnable Feature Mixture-of-Experts (F-MoE) module, allowing dynamic weighting based on input characteristics.

In the second stage, the fused representation is passed through three independently optimized classifiers, each trained with a different objective tailored to long-tailed recognition: class-rebalanced cross-entropy [3], AUC maximization [17], and label-aware (LA) loss [15] enhanced with sharpness-aware minimization (SAM) [4, 13]. The reweighted cross-entropy loss addresses severe class imbalance by assigning higher importance to rare mistake classes. The AUC-based objective focuses on improving ranking quality between positive and negative instances, which is crucial when the error class is underrepresented [2, 5, 6, 9, 11]. The LA loss with SAM promotes more calibrated and robust decision boundaries by adjusting logits and explicitly optimizing for flat minima. The outputs of these classifiers are adaptively integrated using a Classification Mixture-of-Experts (C-MoE) module, which dynamically weighs each expert’s contribution based on the input, enabling flexible decision-making under diverse data conditions.

*Corresponding authors

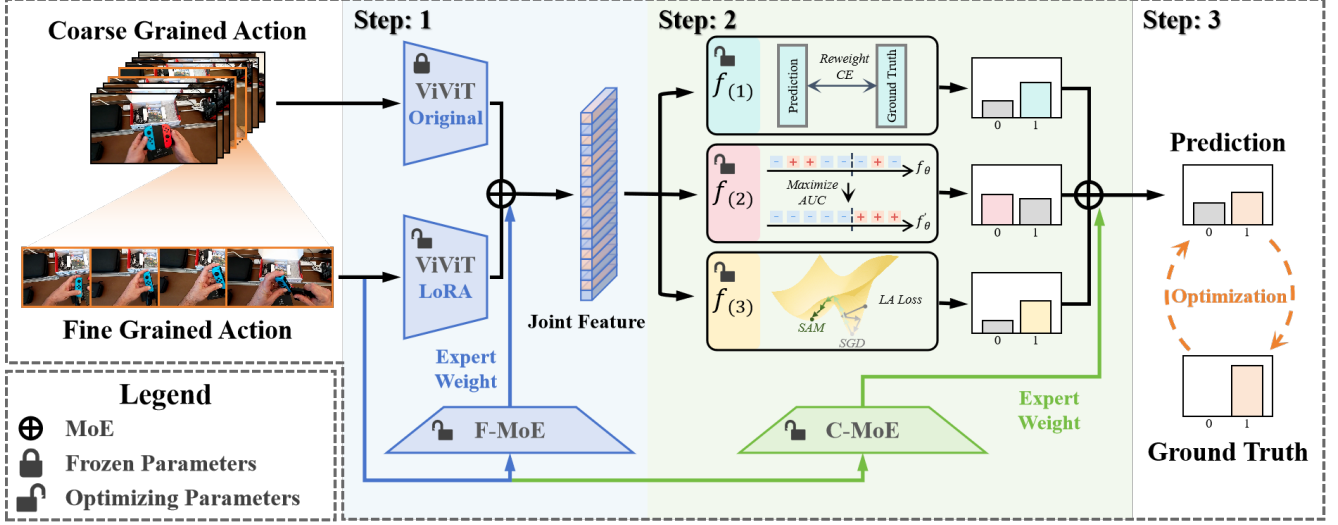


Figure 1. **An overview of our DR-MoE method.** Our method consists of two main stages. The first stage performs feature extraction by combining a frozen ViViT backbone and a LoRA-tuned ViViT backbone through a Feature Mixture-of-Experts (F-MoE) module. The second stage carries out classification by integrating the outputs of three independently trained classifiers using a Classification Mixture-of-Experts (C-MoE) module to generate the final prediction.

By leveraging diverse inductive biases from both backbone models and loss formulations, our approach significantly improves performance on mistake recognition, especially in underrepresented scenarios. The following sections detail our method, its implementation, and evaluation on the HoloAssist benchmark.

2. Method

2.1. Overview

The core objective of mistake detection is to determine whether a user makes an error while performing a specific activity in a video. Specifically, we are given a coarse-grained action video $V_{0:T}$, where T denotes the total duration of the video. A fine-grained action segment $V_{t:t+\tau}$ represents the user executing a particular task, with $t \geq 0$, $t + \tau \leq T$, and $T > 0$. The model is responsible for determining whether the fine-grained action contains a mistake, outputting 1 for a mistake and 0 for a correct action.

Figure 1 provides an overview of our approach. It consists of two key stages. **In the first stage**, we extract features using both a frozen ViViT [1] backbone and a ViViT model fine-tuned with LoRA [7]. These two feature extractors act as experts, and their outputs are combined through a *Feature Mixture-of-Experts (F-MoE)* module to generate a unified joint representation. **In the second stage**, the joint features are fed into three separate classification heads, each optimized with a different loss function: Reweight CE Loss [3], AUC Loss [17], and LA Loss [15] with SAM [4]. The predictions from these heads are then adaptively fused by a *Classification Mixture-of-*

Experts (C-MoE) module to produce the final output. Applying Mixture-of-Experts [8, 12, 18] at both the feature extraction and classification stages allows the model to integrate the complementary strengths of each expert, thereby enhancing robustness and performance, particularly in challenging, long-tailed mistake detection scenarios.

2.2. Feature Mixture of Experts (F-MoE)

We extract video representations using two complementary ViViT-based backbones. The ViViT model, pretrained on the Kinetics dataset [10], excels at capturing coarse-grained human action features. We directly utilize a frozen ViViT model f_{ori} to extract these generic spatiotemporal patterns from the input video segment $V_{0:T}$. However, since the mistake detection task requires finer-grained action understanding that is not covered by the pre-training, we apply LoRA to fine-tune the model. The fine-tuned model f_{loa} is then used to extract features tailored to the specific requirements of mistake detection.

To effectively combine the strengths of both backbones, we introduce a Feature Mixture-of-Experts (F-MoE) module that fuses their outputs through a learnable weighting mechanism. Specifically, the joint feature representation is computed as

$$\mathbf{F}_{\text{joint}} = \alpha \cdot f_{\text{ori}}(V_{0:T}) + (1 - \alpha) \cdot f_{\text{loa}}(V_{t:t+\tau}), \quad (1)$$

where $\alpha \in [0, 1]$ is an adaptive parameter that adjusts the contribution of each expert. This approach allows the network to dynamically prioritize the more informative source based on the characteristics of each input instance, thereby

enhancing its generalization ability across both typical and error-prone scenarios.

2.3. Classification Mixture of Experts (C-MoE)

Once the joint feature $\mathbf{F}_{\text{joint}}$ is obtained, it is passed through a classification module to determine whether the observed action contains a mistake. However, due to the diversity of video types and the varying degrees of class imbalance inherent in the HoloAssist datasets [16], relying on a single classification head often fails to achieve satisfactory performance across all scenarios. To address this challenge, we construct three distinct classifiers, denoted as $f^{(1)}$, $f^{(2)}$, and $f^{(3)}$, each trained using a different optimization strategy.

Reweight CE Loss. The first classifier, $f^{(1)}$, is trained using a reweighted cross-entropy (CE) loss that explicitly compensates for class imbalance. The loss function is defined as:

$$\mathcal{L}_{WCE} = - \sum_y w_y \cdot \mathbf{1}_{[y=\hat{y}]} \log p_y, \quad (2)$$

where y denotes the ground-truth label, $\hat{y}$ is the predicted label, p_y is the predicted probability for class y . w_y is the weight assigned to class y , calculated as inversely proportional to its frequency in the training data, *i.e.*, $w_y = \frac{1}{f_y}$ with f_y being the class frequency. This weighting mechanism compels the classifier to pay greater attention to the tail classes, which in our context often correspond to subtle or infrequent error patterns. As a result, $f^{(1)}$ is particularly effective in improving recall for underrepresented mistake instances.

AUC Loss. The second classifier, $f^{(2)}$, directly optimizes the Area Under the ROC Curve (AUC), which better reflects model performance in imbalanced classification settings. Specifically, the AUC loss is formulated as a pairwise ranking problem, aiming to assign higher prediction scores to positive (mistake) instances than to negative (correct) ones. The loss function is defined as:

$$\mathcal{L}_{AUC} = \frac{1}{n^+ n^-} \sum_{i=1}^{n^+} \sum_{j=1}^{n^-} \ell \left(f^{(2)}(\mathbf{F}_{\text{joint}}^{i,+}) - f^{(2)}(\mathbf{F}_{\text{joint}}^{j,-}) \right), \quad (3)$$

where n^+ and n^- denote the numbers of mistake and correct samples respectively, $\mathbf{F}_{\text{joint}}^{i,+}$ and $\mathbf{F}_{\text{joint}}^{j,-}$ represent the joint features corresponding to the i -th mistake sample and the j -th correct sample. The function $\ell(\cdot)$ is typically a convex surrogate loss such as hinge or logistic loss. This formulation explicitly encourages the model to rank mistake segments above correct ones, thereby enhancing discriminative capability under long-tailed class distributions.

LA Loss optimized with SAM. The third classifier, $f^{(3)}$, leverages a combination of LA Loss and SAM to achieve improved generalization and robustness. Its objective is ex-

pressed as:

$$\mathcal{L}_{LA} = \sum_{i=1}^N \ell((f^{(3)}(\mathbf{F}_{\text{joint}}^i) + \log \mathbf{p}), \mathbf{y}_i), \quad (4)$$

where $\ell(\cdot)$ represents the cross-entropy loss, and $\mathbf{p} = [\mathbf{f}_1, \dots, \mathbf{f}_C]$ denotes the class frequency vector. SAM further enhances this effect by seeking flat minima through an adversarial optimization scheme, formulated as:

$$\min_{\theta} \max_{\|\epsilon\| \leq \rho} \mathcal{L}(f_{\theta+\epsilon}^{(3)}) \quad (5)$$

where the inner maximization identifies parameter perturbations within radius ρ that locally worsen the loss. This forces the model to converge to parameter regions with improved generalization properties.

To unify the predictions from these heterogeneous classifiers, we introduce a Classification Mixture-of-Experts (C-MoE) module that assigns dynamic weights to the outputs of $f^{(1)}$, $f^{(2)}$, and $f^{(3)}$. The final prediction is computed as:

$$\hat{y} = \sum_{k=1}^3 \beta_k f^{(k)}(\mathbf{F}_{\text{joint}}), \quad (6)$$

where each β_k is a learnable expert weight reflecting the relevance of the k -th classifier's decision for the current input. This adaptive fusion enables the model to selectively emphasize the most suitable decision path for each instance, ultimately improving robustness and accuracy in complex mistake detection scenarios.

3. Experiments

In this section, we describe some details of the experiments and present our results.

3.1. Implementation Details

We conduct all experiments using eight NVIDIA A100 GPUs. For the feature extraction module, we adopt ViViT-B/16 $\times$ 2 [1] as our backbone and follow the original settings for hyperparameters. During fine-tuning, we apply LoRA [7] with a rank of 8 to the attention layers, specifically targeting the query and value projection matrices. For the classification module, SAM [4] is employed with a perturbation radius $\rho = 0.05$. The entire model is optimized using the Adam optimizer with a learning rate of 1×10^{-5} . We set the batch size to 128 clips, each consisting of 32 frames. The model is trained for a total of 10 epochs.

3.2. Results

Table 1 presents the performance of various models on the mistake detection task. Compared to Random and TimeS-former, our method significantly improves the F-score. Furthermore, in comparison to the top-performing method of

Table 1. **Results obtained on the test set.** The champion and the runner-up are highlighted in **bold** and underline.

Method	Modality	F-score	Correct		Mistake	
			Precision	Recall	Precision	Recall
Random	-	0.28	0.61	0.10	0.15	0.46
TimeSformer (Baseline)	RGB	0.35	0.83	0.52	<u>0.13</u>	0.27
	Hands	0.40	0.93	0.52	<u>0.13</u>	0.31
	RGB+Hands	0.36	0.86	0.43	0.10	0.12
	RGB+Hands+Eyes	0.32	0.89	0.43	0.11	<u>0.50</u>
UNICT Solution (2024 Top1)	RGB+Eyes	<u>0.51</u>	<u>0.95</u>	0.93	0.06	0.09
DR-MoE (Ours)	RGB	0.57	0.97	<u>0.60</u>	0.08	0.63

2024, our method achieves a substantial improvement in mistake recall. Most notably, our method attains competitive performance using only the RGB modality, matching or even surpassing models that rely on multimodal inputs.

References

- [1] Anurag Arnab, Mostafa Dehghani, Georg Heigold, Chen Sun, Mario Lučić, and Cordelia Schmid. Vivit: A video vision transformer. In *ICCV*, pages 6836–6846, 2021. 1, 2, 3
- [2] Shilong Bao, Qianqian Xu, Zhiyong Yang, Yuan He, Xiaochun Cao, and Qingming Huang. Improved diversity-promoting collaborative metric learning for recommendation. *PAMI*, 2024. 1
- [3] Yin Cui, Menglin Jia, Tsung-Yi Lin, Yang Song, and Serge Belongie. Class-balanced loss based on effective number of samples. In *CVPR*, pages 9268–9277, 2019. 1, 2
- [4] Pierre Foret, Ariel Kleiner, Hossein Mobahi, and Behnam Neyshabur. Sharpness-aware minimization for efficiently improving generalization. In *ICLR*, 2021. 1, 2, 3
- [5] Boyu Han, Qianqian Xu, Zhiyong Yang, Shilong Bao, Peisong Wen, Yangbangyan Jiang, and Qingming Huang. Aucseg: Auc-oriented pixel-level long-tail semantic segmentation. In *NeurIPS*, 2024. 1
- [6] James A Hanley and Barbara J McNeil. The meaning and use of the area under a receiver operating characteristic (roc) curve. *Radiology*, 143(1):29–36, 1982. 1
- [7] Edward J Hu, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, Weizhu Chen, et al. Lora: Low-rank adaptation of large language models. In *ICLR*, 2022. 1, 2, 3
- [8] Cong Hua, Qianqian Xu, Shilong Bao, Zhiyong Yang, and Qingming Huang. Reconboost: Boosting can achieve modality reconciliation. In *ICML*, pages 19573–19597, 2024. 2
- [9] Cong Hua, Qianqian Xu, Zhiyong Yang, Zitai Wang, Shilong Bao, and Qingming Huang. Openworldauc: Towards unified evaluation and optimization for open-world prompt tuning. In *ICML*, 2025. 1
- [10] Will Kay, Joao Carreira, Karen Simonyan, Brian Zhang, Chloe Hillier, Sudheendra Vijayanarasimhan, Fabio Viola, Tim Green, Trevor Back, Paul Natsev, et al. The kinetics human action video dataset. *arXiv preprint arXiv:1705.06950*, 2017. 2
- [11] Feiran Li, Qianqian Xu, Shilong Bao, Zhiyong Yang, Runmin Cong, Xiaochun Cao, and Qingming Huang. Size-invariance matters: Rethinking metrics and losses for imbalanced multi-object salient object detection. In *ICML*, 2024. 1
- [12] Feiran Li, Qianqian Xu, Shilong Bao, Boyu Han, Zhiyong Yang, and Qingming Huang. Hybrid generative fusion for efficient and privacy-preserving face recognition dataset generation. *arXiv preprint arXiv:2508.10672*, 2025. 2
- [13] Sicong Li, Qianqian Xu, Zhiyong Yang, Zitai Wang, Linchao Zhang, Xiaochun Cao, and Qingming Huang. Focal-sam: Focal sharpness-aware minimization for long-tailed classification. In *ICML*, 2025. 1
- [14] Yang Liu, Qianqian Xu, Peisong Wen, Siran Dai, and Qingming Huang. Not all pairs are equal: Hierarchical learning for average-precision-oriented video retrieval. In *ACMMM*, pages 3828–3837, 2024. 1
- [15] Aditya Krishna Menon, Sadeep Jayasumana, Ankit Singh Rawat, Himanshu Jain, Andreas Veit, and Sanjiv Kumar. Long-tail learning via logit adjustment. In *ICLR*, 2020. 1, 2
- [16] Xin Wang, Taein Kwon, Mahdi Rad, Bowen Pan, Ishani Chakraborty, Sean Andrist, Dan Bohus, Ashley Feniello, Bugra Tekin, Felipe Vieira Frujeri, et al. Holoassist: an egocentric human interaction dataset for interactive ai assistants in the real world. In *ICCV*, pages 20270–20281, 2023. 1, 3
- [17] Zhiyong Yang, Qianqian Xu, Shilong Bao, Xiaochun Cao, and Qingming Huang. Learning with multiclass auc: Theory and algorithms. *PAMI*, 44(11):7747–7763, 2021. 1, 2
- [18] Zhiyong Yang, Qianqian Xu, Zitai Wang, Sicong Li, Boyu Han, Shilong Bao, Xiaochun Cao, and Qingming Huang. Harnessing hierarchical label distribution variations in test agnostic long-tail recognition. In *ICML*, pages 56624–56664, 2024. 2