

Forget What’s Sensitive, Remember What Matters: Token-Level Differential Privacy in Memory Sculpting for Continual Learning

Bihao Zhan¹, Jie Zhou^{1*}, Junsong Li¹, Yutao Yang¹, Shilian Chen¹, Qianjun Pan¹,
Xin Li², Wen Wu¹, Xingjiao Wu¹, Qin Chen¹, Hang Yan³, Liang He¹

¹ School of Computer Science and Technology, East China Normal University, Shanghai

² Shanghai AI Laboratory, ³ The Chinese University of HongKong

Abstract

Continual Learning (CL) models, while adept at sequential knowledge acquisition, face significant and often overlooked privacy challenges due to accumulating diverse information. Traditional privacy methods, like a uniform Differential Privacy (DP) budget, indiscriminately protect all data, leading to substantial model utility degradation and hindering CL deployment in privacy-sensitive areas. To overcome this, we propose a privacy-enhanced continual learning (PeCL) framework that forgets what’s sensitive and remembers what matters. Our approach first introduces a token-level dynamic Differential Privacy strategy that adaptively allocates privacy budgets based on the semantic sensitivity of individual tokens. This ensures robust protection for private entities while minimizing noise injection for non-sensitive, general knowledge. Second, we integrate a privacy-guided memory sculpting module. This module leverages the sensitivity analysis from our dynamic DP mechanism to intelligently forget sensitive information from the model’s memory and parameters, while explicitly preserving the task-invariant historical knowledge crucial for mitigating catastrophic forgetting. Extensive experiments show that PeCL achieves a superior balance between privacy preserving and model utility, outperforming baseline models by maintaining high accuracy on previous tasks while ensuring robust privacy¹.

Introduction

The rapidly expanding field of Continual Learning (CL) seeks to enable models to acquire and integrate new knowledge sequentially without forgetting what they’ve already learned, much like human intelligence (Yang et al. 2025; Shi et al. 2024). This capability is essential for real-world applications where data streams are continuous and dynamic, such as in personalized recommendation systems, autonomous driving, and healthcare diagnostics. However, as CL models, particularly powerful Large Language Models (LLMs), continuously assimilate diverse and evolving datasets, they inherently accumulate vast amounts of information. Much of this information can contain sensitive personal or proprietary data (Carlini et al. 2021; Charles et al. 2024). This inherent characteristic poses significant and of-

ten overlooked privacy challenges, raising concerns about potential data leakage and misuse.

Research shows that LLMs can inadvertently memorize sensitive or personally identifiable information (PII) during training or fine-tuning (Meng et al. 2025; Kuo et al. 2025). Once embedded, such data become extremely difficult to audit, modify, or erase, posing significant legal and ethical challenges (Liu et al. 2025; Wang et al. 2024). Differential Privacy (DP) offers a mathematically rigorous solution by limiting the influence of individual training samples on model outputs (Dwork 2006). While promising, applying DP to LLMs, especially in continual learning settings, is challenging. Standard approaches like DPSGD (Abadi et al. 2016) and DP-FedAvg (Takakura, Liew, and Hasegawa 2025) inject uniform noise into gradients or embeddings, often degrading performance in high-dimensional, diverse tasks. Moreover, they treat all data uniformly, ignoring the fine-grained nature of text where only specific tokens may require protection (Flemings, Razaviyayn, and Annavaram 2024). These limitations are exacerbated in batch-incremental continual learning, as data arrive sequentially in this setting, which most DP methods designed for static datasets and single-round training are ill-equipped to handle (Abadi et al. 2016).

Specifically within CL, some works have investigated private data replay or private memory management to mitigate catastrophic forgetting while preserving privacy. In such scenarios, privacy risks can accumulate across training phases as each task introduces different types of sensitive information (Desai et al. 2021). Although recent methods such as synthetic data generation (Murtaza et al. 2023), privacy-aware memory modules (Özdenizci, Rueckert, and Legenstein 2025; Mulrooney et al. 2025), and auxiliary networks (Kim et al. 2023) have been proposed, they often rely on strong assumptions including access to public data or task-specific architectures. Moreover, they generally lack support for selective forgetting to remove memorized sensitive content without degrading overall model performance (Chourasia and Shah 2023). This capability is essential for trustworthy and privacy-compliant continual learning. However, these methods often struggle to differentiate between the varying levels of sensitivity within data, leading to either insufficient protection for highly sensitive information or excessive noise injection for general knowledge.

*Corresponding author.

¹The code, datasets, and trained models will be made publicly available on GitHub.

The primary challenges in achieving privacy-enhanced continual learning lie in three key areas. Firstly, effectively discerning and quantifying the sensitivity of different pieces of information at a fine-grained level (e.g., token-level in text) remains a significant hurdle. Without this nuanced understanding, a blanket privacy approach either over-protects non-sensitive data, leading to unnecessary utility loss, or under-protects truly sensitive data, resulting in privacy breaches. Secondly, balancing the often conflicting goals of privacy protection and knowledge retention (i.e., mitigating catastrophic forgetting) is a complex optimization problem. Injecting noise for privacy can inadvertently corrupt crucial historical knowledge, making it difficult for the model to recall past tasks. Finally, integrating a privacy mechanism seamlessly into the CL paradigm, where knowledge acquisition is sequential and dynamic, requires a novel architectural design that can adapt its privacy enforcement based on the evolving nature of the learned information.

To address these challenges, we propose a novel privacy-enhanced continual learning (PeCL) framework that champions the principle of “forgetting what’s sensitive and remembering what matters”. Our approach is built upon two core innovations. First, we introduce a token-level dynamic Differential Privacy strategy that adaptively allocates privacy budgets based on the semantic sensitivity of individual tokens. This mechanism intelligently identifies and quantifies the privacy risk associated with each token, ensuring robust protection for private entities while minimizing noise injection for non-sensitive, general knowledge. Second, we integrate a privacy-guided memory sculpting module. This module leverages the fine-grained sensitivity analysis from our dynamic DP mechanism to intelligently and selectively forget sensitive information from the model’s memory and parameters. Crucially, it simultaneously and explicitly preserves the task-invariant historical knowledge that is vital for mitigating catastrophic forgetting. We conduct extensive experiments across various continual learning benchmarks, demonstrating that our method achieves a superior balance between privacy protection and model utility. Our approach significantly outperforms baseline models by maintaining high accuracy on previous tasks while ensuring robust privacy guarantees.

In summary, our paper makes the following three main contributions:

- We propose a novel token-level dynamic Differential Privacy strategy that adaptively allocates privacy budgets based on the semantic sensitivity of individual tokens, enabling fine-grained and efficient privacy protection in continual learning.
- We introduce a privacy-guided memory sculpting module that intelligently forgets sensitive information from the model’s memory and parameters while explicitly preserving task-invariant historical knowledge crucial for mitigating catastrophic forgetting.
- We empirically demonstrate that our framework achieves a superior balance between privacy protection and model utility, significantly outperforming state-of-the-art baselines in continual learning scenarios.

Related Work

Privacy-Preserving in Large Language Models

The growing deployment of LLMs in privacy-sensitive domains has intensified interest in privacy-preserving training techniques. A key line of research applies DP to large-scale models, with early methods such as DPSGD (Abadi et al. 2016) and recent advances like large-scale DP pretraining (Yu et al. 2021). Moreover, DP-MLM (Meisenbacher et al. 2024) introduces per-token protection via masked prediction and differential privacy constraints, improving the fidelity of downstream tasks while maintaining privacy. Others have explored attention-based perturbations to preserve privacy (Huang, Lian, and Li 2022) or enforcing local differential privacy at inference time, such as segmentation denoising (Mai et al. 2023). PMixED (Flemings, Razaviyayn, and Annaram 2024) proposed a next-to-term differentially private prediction framework that achieves privacy preservation without full gradient updates. Meanwhile, anti-learning-based techniques such as ForgetMeNot (Feldman 2020) and SISA (Bourtoule et al. 2021) attempt to remove data effects retroactively, but typically require retraining or model partitioning, which is not feasible in parameter-efficient continual learning settings. Unlike these approaches, we integrate token-level sensitivity estimation and dynamic perturbations directly into the continuous learning phase. Furthermore, we introduce selective anti-learning capabilities via memory shaping, enabling privacy-aware adaptation without expensive retraining.

Continual Learning of Large Language Models

Continual learning (CL) for large language models (LLMs) aims to enable models to incrementally acquire new knowledge across multiple tasks while mitigating catastrophic forgetting (Yang et al. 2025). Classical CL techniques, including Elastic Weight Consolidation (EWC) (Kirkpatrick et al. 2017), Experience Replay (ER) (Rolnick et al. 2019), and functional regularization (Gomez-Villa et al. 2022), constrain parameter drift to preserve prior knowledge. However, these methods scale poorly with large models and often require full access to task-specific data or gradients.

Recent research has further explored more efficient and modular paradigms for continual learning. For instance, some works decouple parameter updates for different tasks by introducing orthogonal or low-rank subspaces, thereby enabling the effective learning and retention of new knowledge with almost no increase in model parameters (Wang et al. 2023; Yadav et al. 2023). Other studies have focused on constructing dynamic, modular architectures that activate relevant model components for specific tasks at inference time through task routers or a combination of expert models (Jung and Kim 2024; Huai et al. 2025). Such methods not only enhance the model’s scalability and forward transfer capabilities but also offer new solutions for mitigating interference between tasks through explicit functional separation, allowing large models to adapt more flexibly to continuously changing data streams. However, most CL methods ignore privacy concerns and assume access to full data or replay buffers, which is not realistic in sensitive do-

mains. Some hybrid approaches combine CL and DP, such as (Özdenizci, Rueckert, and Legenstein 2025), which incorporate privacy-aware memory or synthetic data. However, these studies overlook the balance between privacy preservation and catastrophic forgetting. Furthermore, they typically operate at the sequence level and do not offer token-level privacy protection or selective forgetting.

Our Approach

In this paper, we propose a privacy-preserving framework for continual learning (Figure 1) that dynamically protects sensitive information at the token level through fine-grained sensitivity analysis, while actively sculpting the model’s memory to forget sensitive data and consolidate general knowledge. The framework comprises two key components: (1) Token-level Dynamic Differential Privacy, which adaptively allocates privacy budgets based on the sensitivity of each token, and (2) Privacy-Guided Memory Sculpting, a mechanism that integrates targeted forgetting of sensitive content with preservation of general knowledge, guided by the sensitivity signals from the first component.

Formally, we consider a continual learning (CL) setup, where a sequence of tasks $\mathcal{T}_1, \mathcal{T}_2, \dots, \mathcal{T}_N$ arrives incrementally. Each task $\mathcal{T}_n = \{(x_i, y_i)\}$ consists of input–output pairs from distinct tasks. Let $t = (t_1, \dots, t_n)$ denote a tokenized sequence. Instead of applying a uniform privacy budget across tokens or tasks, we assign a privacy-aware sensitivity score $\text{Score}(t_i) \in [0, 1]$ to each token t_i , based on both model behavior and corpus-level statistics. This score dynamically adjusts the local DP budget ϵ_i and guides subsequent gradient perturbation and memory regularization. The goal of this task is to learn new knowledge without forgetting the skills learned from previous tasks under the privacy protection setting.

Token-level Dynamic Differential Privacy

We propose a Token-level dynamic Differential Privacy (TDP) mechanism to adaptively protect privacy based on token sensitivity. We also provide a theoretical analysis to demonstrate that our model satisfies per-token local differential privacy.

Token Sensitivity Calculation. For each token t_i in a sequence, we define its privacy sensitivity score $\text{Score}(t_i) \in [0, 1]$. This score is a weighted combination of two complementary factors:

$$\text{Score}(t_i) = 1 - \exp(-(\alpha \text{Score}_1(t_i) + (1 - \alpha) \text{Score}_2(t_i))), \quad (1)$$

where $\alpha \in [0, 1]$ is a hyperparameter balancing the contribution of these factors. A larger α emphasizes model uncertainty (Score_1), while a smaller α prioritizes contextual informativeness (Score_2).

Specifically, $\text{Score}_1(t_i)$ represents the predictive uncertainty score. This quantifies how surprising or uncertain the model is about generating token t_i given its preceding context. Formally, it is defined as:

$$\text{Score}_1(t_i) = -\log P_\theta(t_i | t_{<i}), \quad (2)$$

where P_θ denotes the model’s predictive distribution. A higher $\text{Score}_1(t_i)$ indicates lower model confidence in t_i , suggesting the token is rare, context-specific, or potentially privacy-sensitive.

In contrast, $\text{Score}_2(t_i)$ represents the contextual discriminativeness score. This measures how distinctly token t_i is associated with specific tasks across the sequence of tasks $\mathcal{T}_1, \dots, \mathcal{T}_N$. Unlike raw frequency statistics, we define:

$$\text{Score}_2(t_i) = \frac{1}{N} \sum_{n=1}^N p_n(t_i) \cdot \log \left(\frac{N}{1 + d(t_i)} \right), \quad (3)$$

where $p_n(t_i)$ is the normalized contextual salience of token t_i within task \mathcal{T}_n , and $d(t_i)$ is the number of tasks in which t_i exhibits non-negligible relevance. This formulation amplifies tokens that are semantically concentrated in specific tasks, as such tokens may reveal task-specific or private information.

By combining these two perspectives, our method achieves fine-grained control over token-level sensitivity. This enables dynamic adjustment of the differential privacy noise scale based on both the model’s predictive behavior and the token’s contextual distinctiveness across tasks.

Token-wise Dynamic Privacy Allocation. Based on the fused sensitivity score $\text{Score}(t_i)$, we define a token-wise dynamic privacy budget ϵ_i as:

$$\epsilon_i = \epsilon_{\text{lower}} + (\epsilon_{\text{upper}} - \epsilon_{\text{lower}}) \cdot (1 - \text{Score}(t_i))^2, \quad (4)$$

where ϵ_{lower} and ϵ_{upper} are the minimum and maximum allowable privacy budgets. This formulation ensures that tokens with higher sensitivity (closer to 1) receive smaller privacy budgets (i.e., stronger protection), while less sensitive tokens (closer to 0) are granted larger ϵ_i to preserve utility. Following prior work on differential privacy (Abadi et al. 2016), we set the token-level privacy budget range to $\epsilon_i \in [1, 10]$, reflecting a practical balance between model utility and privacy consistent with widely adopted DP regimes.

To enforce (ϵ_i, δ) -differential privacy at the token level, we inject calibrated Gaussian noise into the input embedding of each token. δ represents the probability that the privacy guarantee is violated and is typically set to a cryptographically small value. Let e_i denote the original embedding of token t_i , and let C be a predefined clipping norm bound. The perturbed embedding \tilde{e}_i is computed as:

$$\tilde{e}_i = \text{clip}(e_i, C) + \mathcal{N}(0, \sigma_i^2 I), \quad (5)$$

where $\sigma_i = \frac{C \cdot \sqrt{2 \log(1.25/\delta)}}{\epsilon_i}$. Only tokens with a non-zero sensitivity score (and thus a defined ϵ_i) receive noise. The $\text{clip}(\cdot, C)$ operation ensures that the ℓ_2 norm of the embedding is bounded before noise injection, which is a necessary condition for satisfying DP guarantees. This mechanism allows our model to adaptively trade off between privacy and utility at a fine-grained level, directly guided by the semantic and contextual signals encoded in $\text{Score}(t_i)$. By tailoring noise strength per token, our approach achieves localized privacy protection, ensuring that each token embedding satisfies (ϵ_i, δ) -DP while maintaining overall task performance.

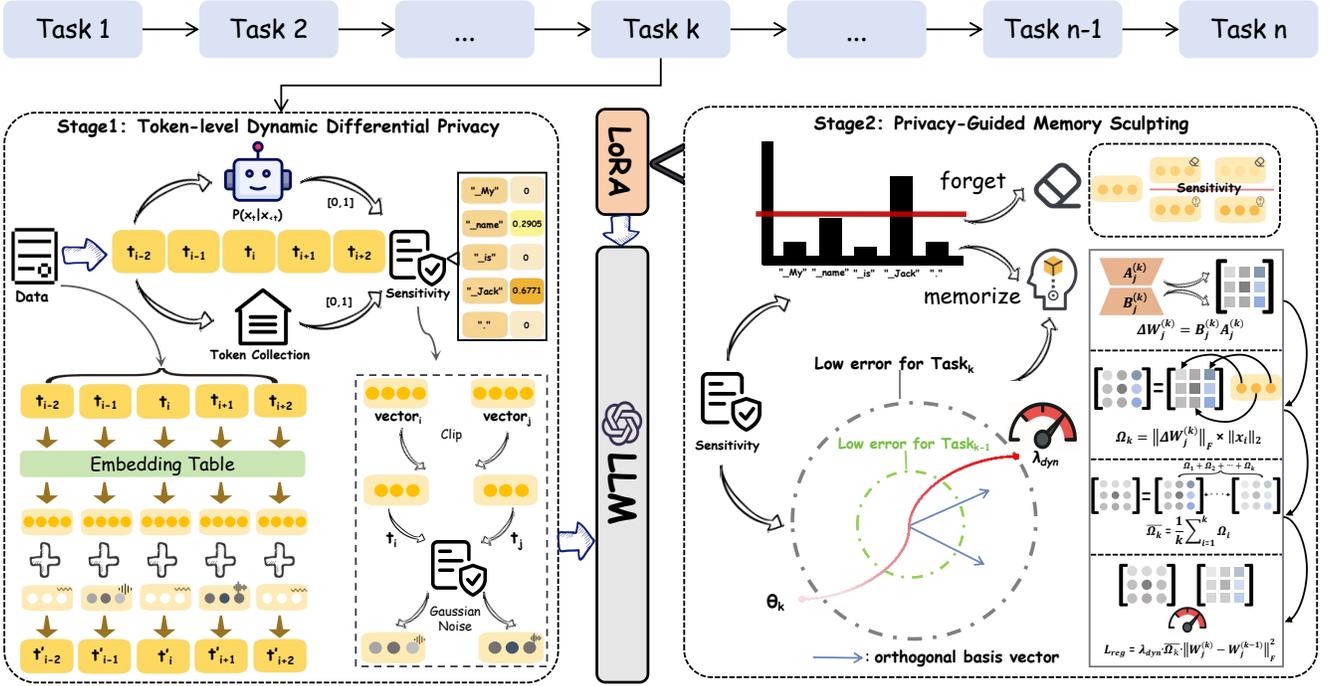


Figure 1: The framework of our PeCL, which is designed to balance privacy and utility by dynamically applying token-level differential privacy and intelligently sculpting model memory to retain crucial knowledge while forgetting sensitive information. The framework comprises two core modules: (a) Token-level Dynamic Differential Privacy, which adaptively injects noise into token embeddings based on their calculated sensitivity, and (b) Privacy-Guided Memory Sculpting, which leverages this sensitivity information to dynamically regularize parameters and implement privacy-aware unlearning, ensuring both catastrophic forgetting mitigation and robust privacy guarantees across sequential tasks.

Differential Privacy Guarantee. The token-level embedding perturbation mechanism, denoted as \mathcal{M} , ensures that the processing of each token t_i satisfies per-token local differential privacy. Formally, for any two adjacent token sequences that differ only at token t_i (or t'_i), and for any measurable set of outputs \mathcal{S} , the following holds:

$$\Pr[\mathcal{M}(e_i) \in \mathcal{S}] \leq \exp(\epsilon_i) \cdot \Pr[\mathcal{M}(e'_i) \in \mathcal{S}] + \delta. \quad (6)$$

Here, e_i and e'_i represent the embeddings of t_i and t'_i respectively, after clipping. Due to the token-wise sensitivity-aware formulation of ϵ_i , we achieve non-uniform privacy protection: sensitive tokens are protected with stronger noise (smaller ϵ_i), while non-sensitive tokens are perturbed less (larger ϵ_i) to preserve utility. This dynamic budget allocation is fully compatible with modular CL paradigms and introduces granular controllability over the trade-off between privacy and performance.

Privacy-Guided Memory Sculpting

While token-level dynamic differential privacy provides localized privacy at the input embedding level, it does not inherently prevent sensitive information from being memorized within the model parameters over time. To address this, we introduce Privacy-guided Memory Sculpting (PMS), which reshapes parameter updates by integrating token-level privacy sensitivity into the learning dynamics. Our method comprises two complementary components: Memory Regularization and Privacy-Aware Unlearning.

Memory Regularization. For each incoming task \mathcal{T}_k , we first compute the parameter increment for LoRA (Hu et al. 2022) adapter j as:

$$\Delta W_j^{(k)} = B_j^{(k)} A_j^{(k)}. \quad (7)$$

where $\Delta W_j^{(k)}$ means the learned update specific to task \mathcal{T}_k . Next, inspired by Sun et al. (2023), we compute a task-specific importance score, Ω_k , by multiplying the Frobenius norm of $\Delta W_j^{(k)}$ with the L_2 norm of the input activations x corresponding to task \mathcal{T}_k :

$$\Omega_k = \left\| \Delta W_j^{(k)} \right\|_F \times \|x\|_2. \quad (8)$$

We then accumulate the importance across tasks using an online average, which serves as a measure of the cumulative importance of previously learned knowledge:

$$\bar{\Omega}_k = \frac{1}{k} \sum_{i=1}^k \Omega_i. \quad (9)$$

Finally, we define the stability-aligned regularization loss, which aims to stabilize parameters crucial for retaining historical knowledge:

$$\mathcal{L}_{reg} = \lambda_{dyn} \cdot \bar{\Omega}_k \cdot \left\| W_j^{(k)} - W_j^{(k-1)} \right\|_F^2, \quad (10)$$

where $W_j^{(k)}$ denotes the current LoRA parameters for task k , and λ_{dyn} is a dynamic regularization weight.

To introduce privacy-aware adaptivity into this regularization, we modulate the regularization strength dynamically according to the average token sensitivity score \bar{s}_k of task \mathcal{T}_k . Specifically, we define the dynamic coefficient λ_{dyn} as:

$$\lambda_{\text{dyn}} = \lambda_{\text{max}} \cdot (1 - \bar{s}_k) + \lambda_{\text{min}} \cdot \bar{s}_k, \quad (11)$$

where λ_{max} and λ_{min} represent the maximum and minimum levels of regularization strength, respectively. This formulation ensures that tasks involving less sensitive content (i.e., lower \bar{s}_k) are regularized more strictly to retain prior knowledge, while more privacy-sensitive tasks are allowed greater flexibility for adaptation and forgetting. The average token sensitivity score \bar{s}_k for task \mathcal{T}_k is computed as the mean of $\text{Score}(t_i)$ for all tokens t_i within that task.

Privacy-Aware Unlearning. To further reshape learning dynamics by directly addressing sensitive information, we define a second loss term called Privacy-Aware Unlearning. This term directly adjusts token-level gradient contributions using their fused sensitivity scores. The formulation is:

$$\mathcal{L}_{\text{unlearn}} = \frac{1}{M} \sum_{i=1}^M (\text{Score}(t_i) - \theta) \cdot \ell(t_i) \cdot \mathbb{I}(\text{Score}(t_i) > \theta), \quad (12)$$

where $\ell(t_i)$ is the cross-entropy loss of token t_i , θ is a pre-defined sensitivity threshold, and M is the number of tokens in the sequence. $\mathbb{I}(\cdot)$ is the indicator function, meaning this term contributes only for tokens whose sensitivity $\text{Score}(t_i)$ exceeds the threshold θ . This formulation specifically targets high-sensitivity tokens: by multiplying their loss contribution by $(\text{Score}(t_i) - \theta)$, we encourage the model to unlearn or softly suppress the reinforcement of information associated with these tokens.

The overall training objective combines task-specific prediction, memory regularization, and unlearning:

$$\mathcal{L}_{\text{total}} = \mathcal{L}_{\text{task}} + \mathcal{L}_{\text{reg}} + \lambda_{\text{unlearn}} \cdot \mathcal{L}_{\text{unlearn}}, \quad (13)$$

where $\mathcal{L}_{\text{task}}$ is the standard task-specific loss (e.g., cross-entropy loss for classification or language modeling), and λ_{unlearn} is a hyperparameter controlling the strength of the privacy-aware unlearning component.

This unified objective enables continual learning that dynamically aligns parameter retention and forgetting with token-level privacy sensitivity, ensuring both task stability and robust privacy guarantees.

Experiments

Experiments Setups

Datasets. To evaluate our privacy-enhanced continual learning framework, we construct a multi-task dataset covering six distinct domains with varying privacy sensitivities. In the absence of any public benchmark for privacy-preserving continual learning, we select six tasks: FOMC (Shah, Paturi, and Chava 2023), Yelp (Asghar 2016), AGNews (Zhang, Zhao, and LeCun 2015), Amazon², Mentill³, and Yahoo⁴,

²<https://www.kaggle.com/datasets/kritanjali/jain/amazon-reviews>

³<https://huggingface.co/datasets/mavinsao/reddit-mental-illness>

⁴<https://www.kaggle.com/datasets/bhavikardeshna/yahoo-email-classification>

and sample 3,000 examples for each task.

Evaluation Metrics. We employ three widely used metrics, Backward Transfer (*BWT*), Last Accuracy (*Last*) and Average Accuracy (*Avg*) to evaluate continual learning performance (Chaudhry et al. 2018; Lopez-Paz and Ranzato 2017). *BWT* quantifies the effect of learning new tasks on previously learned ones and is defined as $\text{BWT} = \frac{1}{N-1} \sum_{i=1}^{N-1} (R_{N,i} - R_{i,i})$, where $R_{N,i}$ is the accuracy on task i after training on all N tasks and $R_{i,i}$ is the accuracy immediately after task i was first learned; *Last* measures the model’s average accuracy across all N tasks after it has been sequentially trained on all of them, i.e. $\text{Last} = \frac{1}{N} \sum_{i=1}^N R_{N,i}$; and *Avg* measures the mean accuracy over all tasks at each training step, $\text{Avg} = \frac{1}{N} \sum_{k=1}^N (\frac{1}{k} \sum_{i=1}^k R_{k,i})$, where $R_{k,i}$ is the accuracy on task i after sequentially training on tasks 1 through k .

Baselines. To evaluate the effectiveness of our approach, we compare against several representative baselines. For continual learning, we consider ER (Rolnick et al. 2019), EWC (Kirkpatrick et al. 2017), GEM (Lopez-Paz and Ranzato 2017), and O-LoRA (Wang et al. 2023), covering replay-based, regularization-based, and adapter-based strategies. For privacy protection, we include DPSGD (Abadi et al. 2016) and a frozen embedding with additive noise (FN) as baselines. Additionally, we report two control setups: Multitask training (MTL) is always regarded as the upper bound, which simultaneously learns all tasks (MTL), and Sequential Finetuning (SeqFT), which sequentially learns each task.

Implementation Details. In our experiments, we train our models on A800-80GB GPUs. All methods employ the LLaMA-2-7B-hf (Touvron et al. 2023) for text-based tasks. For all baseline methods, we follow the implementation details and configurations from the original papers to ensure faithful reproduction. During training, we train each task for three epochs with a batch size of 32. For the hyperparameters of our approach, we set $\alpha = 0.5$, $\epsilon_{\text{upper}} = \lambda_{\text{max}} = 10$, $\epsilon_{\text{lower}} = \lambda_{\text{min}} = 1$, $\delta = 1.0e - 6$, $\lambda_{\text{unlearn}} = 1$, and $\theta = 0.6$. We use AdamW as the optimizer with a learning rate of $5.0e - 4$ and employ a cosine learning rate scheduler.

Main Results

Table 3 presents the results of various CL methods under differential privacy constraints, evaluated across six tasks using three metrics: BWT, Last, and Avg. The results yield several key insights. First, PeCL achieves the best overall performance, attaining the highest Avg (0.535), the best Last accuracy (0.573), and the lowest forgetting (BWT = -0.093), demonstrating the effectiveness of our token-level dynamic privacy mechanism and memory sculpting design. In contrast, SeqFT variants perform the worst, underscoring the necessity of replay or regularization mechanisms in CL under privacy constraints. Second, PeCL consistently outperforms ER+DPSGD (Avg = 0.486, BWT = -0.136) and ER+FN (Avg = 0.492, BWT = -0.121) across all metrics, highlighting the advantage of adaptive noise allocation over static

Method	Task1	Task2	Task3	Task4	Task5	Task6	BWT	Last	Avg
SeqFT+DPSGD	0.141	0.293	0.633	0.345	0.149	0.493	-0.116	0.342	0.403
ER+DPSGD	0.438	0.463	0.536	0.443	0.152	0.573	-0.136	0.434	0.486
EWC+DPSGD	0.444	0.284	0.471	0.302	0.160	0.481	-0.137	0.358	0.393
GEM+DPSGD	0.337	0.333	0.394	0.339	0.179	0.356	-0.157	0.323	0.387
OLora+DPSGD	0.297	0.338	0.438	0.322	0.164	0.405	-0.166	0.327	0.395
SeqFT+FN	0.101	0.204	0.145	0.200	0.135	0.331	-0.306	0.186	0.351
ER+FN	0.456	0.420	0.673	0.371	0.029	0.309	-0.121	0.376	0.492
EWC+FN	0.260	0.231	0.208	0.236	0.261	0.183	-0.248	0.230	0.397
GEM+FN	0.365	0.253	0.519	0.276	0.285	0.210	-0.193	0.318	0.428
OLora+FN	0.329	0.192	0.240	0.177	0.106	0.165	-0.294	0.202	0.363
PeCL (Ours)	0.436	0.521	0.769	0.444	0.456	0.714	-0.093	0.573	0.535
MTL+DPSGD (Upper Bound)	0.456	0.538	0.780	0.482	0.197	0.334	-	0.464	-
MTL+FN (Upper Bound)	0.405	0.463	0.808	0.448	0.503	0.305	-	0.489	-

Table 1: Performance comparison of different methods.

noise injection. Regularization-based methods such as EWC and GEM, especially under FN, show limited effectiveness (e.g., GEM+FN: Avg = 0.428, BWT = -0.193), indicating that fixed constraints are ill-suited to handle the destabilizing effects of strong privacy noise. Adapter-based approaches like OLora perform poorly across all settings, suggesting limited adaptability in privacy-preserving CL. Third, PeCL even surpasses MTL+DPSGD in both Last accuracy (0.573 vs. 0.464) and Avg (0.535 vs. 0.464), despite operating in a more realistic task-incremental setting rather than the centralized, multi-task learning scenario. This underscores its robustness and practical applicability in real-world, privacy-sensitive CL environments.

Ablation Studies

To assess the effectiveness of each component in our framework, we conduct an ablation study as summarized in Table 4. We focus on two major modules: Token-level Differential Privacy (TDP) and Privacy-Guided Memory Sculpting (PMS), as well as its two internal mechanisms: Memory Regularization (MemReg) and Privacy-Aware Unlearning. TDP serves as the foundation of our privacy design: when replaced with coarser sentence-level privacy (w/o TDP), both performance and forgetting degrade significantly, indicating that fine-grained sensitivity modulation is essential for balancing utility and protection. PMS further enhances long-term performance, as removing it entirely (w/o PMS) leads to the largest drop in average accuracy and a sharp increase in forgetting. Within PMS, Memory Regularization and Unlearning target complementary aspects: disabling MemReg results in weakened task stability, while removing the unlearning component slightly reduces accuracy but notably increases forgetting. In summary, TDP enables precise privacy modulation, MemReg stabilizes knowledge across tasks, and Unlearning effectively removes sensitive traces, together forming a cohesive and robust privacy-preserving continual learning framework.

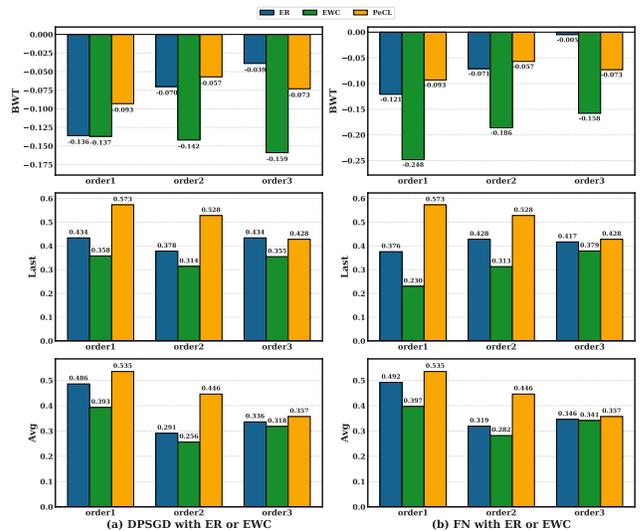


Figure 2: Results of different task order.

Further Analysis

Influence of Task Order. We consider three task orders: a natural progression (order1: 1 → 2 → ... → 6), the reversed sequence (order2: 6 → 5 → ... → 1), and a deliberately shuffled permutation (order3: 4 → 5 → 1 → 3 → 6 → 2). Figure 2 illustrates how different task arrival sequences affect model performance. Across all task orders, our PeCL consistently outperforms baselines such as ER+DPSGD and EWC+DPSGD in terms of both accuracy and forgetting. Notably, PeCL exhibits strong stability in order1 and order2, maintaining high final accuracy and low forgetting. While there is a slight performance drop in order3, PeCL still remains competitive and significantly more robust than other methods, whose results vary more dramatically across different orders. These results demonstrate that PeCL can adapt well to varying task sequences.

Impact of Hyperparameter α . We investigate the effect of the balancing coefficient $\alpha \in [0, 1]$, which controls the

Method	Task1	Task2	Task3	Task4	Task5	Task6	BWT	Last	Avg
PeCL (Ours)	0.436	0.521	0.869	0.444	0.456	0.714	-0.093	0.573	0.535
-w/o TDP	0.445	0.313	0.422	0.297	0.149	0.146	-0.155	0.295	0.473
-w/o PMS	0.294	0.224	0.349	0.219	0.262	0.710	-0.430	0.312	0.465
-w/o MemReg	0.385	0.387	0.730	0.371	0.434	0.725	-0.212	0.505	0.496
-w/o Unlearning	0.407	0.499	0.857	0.421	0.350	0.727	-0.133	0.544	0.524

Table 2: The results of ablation studies.

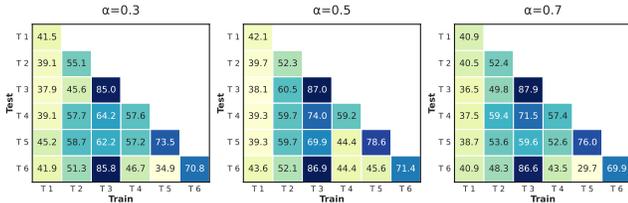


Figure 3: The performance of α .

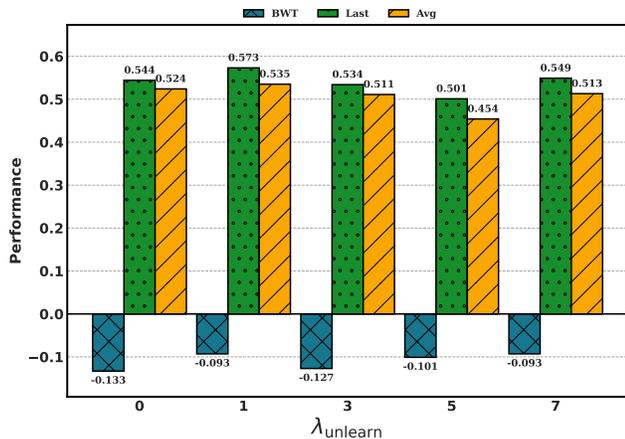


Figure 4: The Impact of λ_{unlearn} .

trade-off between model uncertainty $\text{Score}_1(t_i)$ and contextual informativeness $\text{Score}_2(t_i)$ in the privacy sensitivity score. As shown in Figure 3 and Figure 5a, both the Avg performance and BWT reach their optimal values when $\alpha = 0.5$, suggesting that a balanced combination of the two factors leads to the best performance. Increasing α beyond 0.5 (favoring uncertainty) results in degraded BWT, indicating more forgetting. Conversely, lower α values (favoring context) also hurt Avg, likely due to insufficient attention to uncertain tokens. These results validate the effectiveness of integrating both uncertainty and contextual features, with $\alpha = 0.5$ serving as a robust choice.

Impact of Hyperparameter λ_{unlearn} . We study the influence of the hyperparameter λ_{unlearn} , which controls the strength of the unlearning regularization term. As shown in Figure 4, setting $\lambda_{\text{unlearn}} = 1$ achieves the best trade-off between stability and performance, yielding the highest average score (0.535) and the lowest forgetting as measured by BWT (-0.093). When $\lambda_{\text{unlearn}} = 0$, i.e., no unlearning applied, BWT degrades to -0.133, showing more severe forgetting. As λ increases beyond 1, the Avg score drops (e.g.,

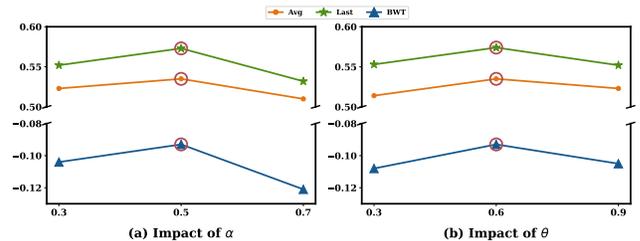


Figure 5: The Impact of Hyperparameter α and θ .

0.454 at $\lambda = 5$), likely due to over-regularization that hurts forward transfer. These results suggest that a moderate unlearning strength is beneficial for mitigating forgetting without compromising overall task performance.

Impact of Hyperparameter θ . We investigate the impact of the sensitivity threshold θ in the Privacy-Aware Unlearning loss, which determines which tokens are softly suppressed during training. As shown in Figure 5b, $\theta = 0.6$ achieves the best trade-off, yielding the highest Avg (0.535) and lowest forgetting (BWT = -0.093). A lower threshold (e.g., $\theta = 0.3$) suppresses too many tokens, hurting performance (Avg = 0.514, BWT = -0.108), while a higher one (e.g., $\theta = 0.9$) retains overly sensitive tokens (Avg = 0.523, BWT = -0.105). These results suggest that a moderate θ best balances utility and privacy at the token level.

Conclusions and Future Work

In this paper, we present PeCL, a novel privacy-enhanced continual learning framework designed to address the critical challenges of data privacy and catastrophic forgetting in sequential learning scenarios, particularly with LLMs. Our approach tackles this challenge through two key innovations: a token-level dynamic Differential Privacy strategy and a privacy-guided memory sculpting module. Extensive experiments demonstrate that PeCL achieves superior performance compared to state-of-the-art baselines, delivering higher average accuracy, better retention of past knowledge, and stronger privacy guarantees. Ablation studies confirm the necessity of the main components, while further analysis shows the robustness of our method across varying task orders and hyperparameter settings. The results highlight the importance of integrating sensitivity-aware, adaptive privacy mechanisms into continual learning systems. In the future, we would like to explore privacy-preserving techniques for online continual learning scenarios, where data arrive in a streaming fashion.

References

- Abadi, M.; Chu, A.; Goodfellow, I.; McMahan, H. B.; Mironov, I.; Talwar, K.; and Zhang, L. 2016. Deep learning with differential privacy. In *Proceedings of the 2016 ACM SIGSAC conference on computer and communications security*, 308–318.
- Asghar, N. 2016. Yelp dataset challenge: Review rating prediction. *arXiv preprint arXiv:1605.05362*.
- Bourtoule, L.; Chandrasekaran, V.; Choquette-Choo, C. A.; Jia, H.; Travers, A.; Zhang, B.; Lie, D.; and Papernot, N. 2021. Machine unlearning. In *2021 IEEE symposium on security and privacy (SP)*, 141–159. IEEE.
- Carlini, N.; Tramer, F.; Wallace, E.; Jagielski, M.; Herbert-Voss, A.; Lee, K.; Roberts, A.; Brown, T.; Song, D.; Erlingsson, U.; et al. 2021. Extracting training data from large language models. In *30th USENIX security symposium (USENIX Security 21)*, 2633–2650.
- Charles, Z.; Ganesh, A.; McKenna, R.; McMahan, H. B.; Mitchell, N.; Pillutla, K.; and Rush, K. 2024. Fine-tuning large language models with user-level differential privacy. *arXiv preprint arXiv:2407.07737*.
- Chaudhry, A.; Dokania, P. K.; Ajanthan, T.; and Torr, P. H. 2018. Riemannian walk for incremental learning: Understanding forgetting and intransigence. In *Proceedings of the European conference on computer vision (ECCV)*, 532–547.
- Chourasia, R.; and Shah, N. 2023. Forget unlearning: Towards true data-deletion in machine learning. In *International conference on machine learning*, 6028–6073. PMLR.
- Desai, P.; Lai, P.; Phan, N.; and Thai, M. T. 2021. Continual learning with differential privacy. In *International Conference on Neural Information Processing*, 334–343. Springer.
- Dwork, C. 2006. Differential privacy. In *International colloquium on automata, languages, and programming*, 1–12. Springer.
- Feldman, V. 2020. Does learning require memorization? a short tale about a long tail. In *Proceedings of the 52nd annual ACM SIGACT symposium on theory of computing*, 954–959.
- Flemings, J.; Razaviyayn, M.; and Annavaram, M. 2024. Differentially private next-token prediction of large language models. *arXiv preprint arXiv:2403.15638*.
- Gomez-Villa, A.; Twardowski, B.; Yu, L.; Bagdanov, A. D.; and Van de Weijer, J. 2022. Continually learning self-supervised representations with projected functional regularization. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 3867–3877.
- Hu, E. J.; Shen, Y.; Wallis, P.; Allen-Zhu, Z.; Li, Y.; Wang, S.; Wang, L.; Chen, W.; et al. 2022. Lora: Low-rank adaptation of large language models. *ICLR*, 1(2): 3.
- Huai, T.; Zhou, J.; Wu, X.; Chen, Q.; Bai, Q.; Zhou, Z.; and He, L. 2025. CL-MoE: Enhancing Multimodal Large Language Model with Dual Momentum Mixture-of-Experts for Continual Visual Question Answering. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, 19608–19617.
- Huang, Q.; Lian, Z.; and Li, Q. 2022. Attention based adversarial attacks with low perturbations. In *2022 IEEE International Conference on Multimedia and Expo (ICME)*, 1–6. IEEE.
- Jung, M. J.; and Kim, J. 2024. PmoE: Progressive mixture of experts with asymmetric transformer for continual learning. *arXiv preprint arXiv:2407.21571*.
- Kim, S.; Noci, L.; Orvieto, A.; and Hofmann, T. 2023. Achieving a Better Stability-Plasticity Trade-Off via Auxiliary Networks in Continual Learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 11930–11939.
- Kirkpatrick, J.; Pascanu, R.; Rabinowitz, N.; Veness, J.; Desjardins, G.; Rusu, A. A.; Milan, K.; Quan, J.; Ramalho, T.; Grabska-Barwinska, A.; et al. 2017. Overcoming catastrophic forgetting in neural networks. *Proceedings of the national academy of sciences*, 114(13): 3521–3526.
- Kuo, M.; Zhang, J.; Zhang, J.; Tang, M.; DiValentin, L.; Ding, A.; Sun, J.; Chen, W.; Hass, A.; Chen, T.; et al. 2025. Proactive privacy amnesia for large language models: Safeguarding PII with negligible impact on model utility. *arXiv preprint arXiv:2502.17591*.
- Liu, S.; Yao, Y.; Jia, J.; Casper, S.; Baracaldo, N.; Hase, P.; Yao, Y.; Liu, C. Y.; Xu, X.; Li, H.; et al. 2025. Rethinking machine unlearning for large language models. *Nature Machine Intelligence*, 1–14.
- Lopez-Paz, D.; and Ranzato, M. 2017. Gradient episodic memory for continual learning. *Advances in neural information processing systems*, 30.
- Mai, P.; Yan, R.; Huang, Z.; Yang, Y.; and Pang, Y. 2023. Split-and-denoise: Protect large language model inference with local differential privacy. *arXiv preprint arXiv:2310.09130*.
- Meisenbacher, S.; Chevli, M.; Vladika, J.; and Matthes, F. 2024. DP-MLM: Differentially private text rewriting using masked language models. *arXiv preprint arXiv:2407.00637*.
- Meng, W.; Guo, Z.; Wu, L.; Gong, C.; Liu, W.; Li, W.; Wei, C.; and Chen, W. 2025. Rr: Unveiling llm training privacy through recollection and ranking. *arXiv preprint arXiv:2502.12658*.
- Mulrooney, A.; Gupta, D.; Flemings, J.; Zhang, H.; Annavaram, M.; Razaviyayn, M.; and Zhang, X. 2025. Memory-Efficient Differentially Private Training with Gradient Random Projection. *arXiv preprint arXiv:2506.15588*.
- Murtaza, H.; Ahmed, M.; Khan, N. F.; Murtaza, G.; Zafar, S.; and Bano, A. 2023. Synthetic data generation: State of the art in health care domain. *Computer Science Review*, 48: 100546.
- Özdenizci, O.; Rueckert, E.; and Legenstein, R. 2025. Privacy-aware lifelong learning. *arXiv preprint arXiv:2505.10941*.
- Rolnick, D.; Ahuja, A.; Schwarz, J.; Lillicrap, T.; and Wayne, G. 2019. Experience replay for continual learning. *Advances in neural information processing systems*, 32.
- Shah, A.; Paturi, S.; and Chava, S. 2023. Trillion dollar words: A new financial dataset, task & market analysis. *arXiv preprint arXiv:2305.07972*.

Shi, H.; Xu, Z.; Wang, H.; Qin, W.; Wang, W.; Wang, Y.; Wang, Z.; Ebrahimi, S.; and Wang, H. 2024. Continual learning of large language models: A comprehensive survey. *ACM Computing Surveys*.

Sun, M.; Liu, Z.; Bair, A.; and Kolter, J. Z. 2023. A simple and effective pruning approach for large language models. *arXiv preprint arXiv:2306.11695*.

Takakura, S.; Liew, S. P.; and Hasegawa, S. 2025. Accelerating Differentially Private Federated Learning via Adaptive Extrapolation. *arXiv preprint arXiv:2504.09850*.

Touvron, H.; Lavril, T.; Izacard, G.; Martinet, X.; Lachaux, M.-A.; Lacroix, T.; Rozière, B.; Goyal, N.; Hambro, E.; Azhar, F.; et al. 2023. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*.

Wang, W.; Tian, Z.; Zhang, C.; and Yu, S. 2024. Machine unlearning: A comprehensive survey. *arXiv preprint arXiv:2405.07406*.

Wang, X.; Chen, T.; Ge, Q.; Xia, H.; Bao, R.; Zheng, R.; Zhang, Q.; Gui, T.; and Huang, X. 2023. Orthogonal subspace learning for language model continual learning. *arXiv preprint arXiv:2310.14152*.

Yadav, P.; Tam, D.; Choshen, L.; Raffel, C. A.; and Bansal, M. 2023. Ties-merging: Resolving interference when merging models. *Advances in Neural Information Processing Systems*, 36: 7093–7115.

Yang, Y.; Zhou, J.; Ding, X.; Huai, T.; Liu, S.; Chen, Q.; Xie, Y.; and He, L. 2025. Recent advances of foundation language models-based continual learning: A survey. *ACM Computing Surveys*, 57(5): 1–38.

Yu, D.; Naik, S.; Backurs, A.; Gopi, S.; Inan, H. A.; Kamath, G.; Kulkarni, J.; Lee, Y. T.; Manoel, A.; Wutschitz, L.; et al. 2021. Differentially private fine-tuning of language models. *arXiv preprint arXiv:2110.06500*.

Zhang, X.; Zhao, J.; and LeCun, Y. 2015. Character-level convolutional networks for text classification. *Advances in neural information processing systems*, 28.

Appendix

Contextual Sensitivity Computation Details.

In our formulation of the contextual discriminativeness score $\text{Score}_2(t_i)$, we quantify how strongly a token t_i is associated with a small subset of tasks in the continual learning stream. This section elaborates on the construction of the two key components: $p_n(t_i)$ and $d(t_i)$.

For each task \mathcal{T}_n , we consider the tokenized content of all training samples (both prompts and responses). Let $f_n(t_i)$ denote the raw frequency count of token t_i within all samples of \mathcal{T}_n , and let f_n^{\max} denote the maximum token frequency within the same task. We define the contextual salience $p_n(t_i)$ as:

$$p_n(t_i) = \frac{f_n(t_i)}{f_n^{\max}},$$

which normalizes the token frequency within each task, making $p_n(t_i) \in [0, 1]$. This quantity reflects the relative importance of token t_i within task \mathcal{T}_n .

To capture how broadly token t_i appears across the entire task sequence, we define the task-wise support count $d(t_i)$ as the number of tasks in which $p_n(t_i)$ exceeds a minimal threshold τ (e.g., 0.2):

$$d(t_i) = |\{n \in \{1, \dots, N\} \mid p_n(t_i) \geq \tau\}|.$$

This encourages selectivity: a token appearing prominently in fewer tasks (i.e., with smaller $d(t_i)$) is considered more discriminative and potentially more privacy-sensitive.

Plugging $p_n(t_i)$ and $d(t_i)$ into Eq.3, the final $\text{Score}_2(t_i)$ favors tokens with high within-task salience but low cross-task spread, allowing our mechanism to identify semantically concentrated terms indicative of specific knowledge or user contexts.

Implementation Details

In the token-level dynamic differential privacy (TDP) mechanism based on token sensitivity, a filtering is performed after the token sensitivity is calculated, mainly by assigning the token sensitivity score of Stop words to 0 through `Stopwords`.

Baseline Details

The privacy parameter ϵ of DPSGD and FN methods are both set to 1, which is the lower bound of the token-wise dynamic privacy budget of our method, and δ is set to 1e-6.

Theoretical Proof of Token-level Differential Privacy Guarantee

We present a formal analysis showing that our Token-level Dynamic Differential Privacy (TDP) mechanism satisfies (ϵ, δ) -local differential privacy for each token t_i .

Definition 1 (Local Differential Privacy). *A randomized mechanism \mathcal{M} satisfies (ϵ, δ) -local differential privacy if for any two inputs x and x' differing in one entry (e.g., one token), and for any measurable set of outputs \mathcal{S} , it holds that:*

$$\Pr[\mathcal{M}(x) \in \mathcal{S}] \leq e^\epsilon \cdot \Pr[\mathcal{M}(x') \in \mathcal{S}] + \delta.$$

Our method ensures that each token t_i is independently perturbed to produce \tilde{e}_i using Gaussian noise:

$$\tilde{e}_i = \text{clip}(e_i, C) + \mathcal{N}(0, \sigma_i^2 \cdot I),$$

where $\sigma_i = \frac{C \cdot \sqrt{2 \log(1.25/\delta)}}{\epsilon_i}$, and C is the ℓ_2 norm clipping threshold.

Lemma 1 (Sensitivity of Clipped Embedding). *Let $e_i, e'_i \in \mathbb{R}^d$ be two embeddings corresponding to tokens t_i and t'_i respectively. If both are clipped such that $\|e_i\|_2 \leq C$ and $\|e'_i\|_2 \leq C$, then the ℓ_2 sensitivity of the mechanism is bounded as:*

$$\Delta = \|\text{clip}(e_i, C) - \text{clip}(e'_i, C)\|_2 \leq 2C.$$

Theorem 1 (Per-token Differential Privacy Guarantee). *Let $\tilde{e}_i = \mathcal{M}(e_i)$ denote the perturbed embedding of token t_i . Then \mathcal{M} satisfies (ϵ_i, δ) -differential privacy for each token t_i .*

Proof. This follows directly from the Gaussian Mechanism guarantee: when using noise $\mathcal{N}(0, \sigma_i^2 I)$ calibrated to sensitivity $\Delta = 2C$, the mechanism satisfies (ϵ_i, δ) -DP if

$$\sigma_i \geq \frac{2C \cdot \sqrt{2 \log(1.25/\delta)}}{\epsilon_i}.$$

Our setting for σ_i matches this bound.

Lemma 2 (Range of Sensitivity Score). *The fused sensitivity score $\text{Score}(t_i)$ defined as*

$$\text{Score}(t_i) = 1 - \exp(-(\alpha \cdot \text{Score}_1(t_i) + (1 - \alpha) \cdot \text{Score}_2(t_i)))$$

is bounded in $[0, 1]$ for any $\alpha \in [0, 1]$, provided that $\text{Score}_1(t_i) \geq 0$ and $\text{Score}_2(t_i) \geq 0$.

Proof. Since both Score_1 and Score_2 are non-negative, their convex combination is also non-negative. Hence,

$$\text{Score}(t_i) = 1 - \exp(-z) \in [0, 1), \quad \text{where } z \geq 0.$$

Thus, the score lies in $[0, 1)$, which we clip to 1 for completeness.

Corollary 1 (Dynamic Privacy Budget Range). *Using $\text{Score}(t_i) \in [0, 1]$, the dynamically assigned privacy budget*

$$\epsilon_i = \epsilon_{\text{lower}} + (\epsilon_{\text{upper}} - \epsilon_{\text{lower}})(1 - \text{Score}(t_i))^2$$

is always in the range $[\epsilon_{\text{lower}}, \epsilon_{\text{upper}}]$.

Remark 1 (Privacy Composition Across Sequence). *If needed, a user-level privacy budget for a token sequence $\{t_1, \dots, t_L\}$ can be computed via advanced composition. For example, the total privacy budget ϵ_{total} for L tokens under sequential composition is:*

$$\epsilon_{\text{total}} \approx \sum_{i=1}^L \epsilon_i + \sqrt{2L \log(1/\delta')} \cdot \max_i \epsilon_i,$$

with final failure probability $\delta + \delta'$. Alternatively, one may use RDP accounting for tighter bounds.

Per-Task Performance of Task Order

Table 3 lists the full classification accuracy of each task for the continual learning methods that performed better in different orders. The six columns in the middle correspond to tasks 1-6, and the three columns on the far right provide BWT, Last, and Avg.

Per-Task Performance of Hyperparameter α .

Table 4 lists the complete classification accuracy of our method on each task under different hyperparameters α . The middle six columns correspond to tasks 1-6, and the rightmost three columns provide BWT, Last, and Avg.

Per-Task Performance of Hyperparameter λ_{unlearn} .

Table 5 lists the complete classification accuracy of our method on each task under different hyperparameters λ_{unlearn} . The middle six columns correspond to tasks 1-6, and the rightmost three columns provide BWT, Last, and Avg.

Task Order	Method	task1	task2	task3	task4	task5	task6	BWT	Last	Avg
order1	ER+DPSGD	0.438	0.463	0.536	0.443	0.152	0.573	-0.136	0.434	0.486
	EWC+DPSGD	0.444	0.284	0.471	0.302	0.160	0.481	-0.137	0.358	0.393
	ER+FN	0.456	0.420	0.673	0.371	0.029	0.309	-0.121	0.376	0.492
	EWC+FN	0.260	0.231	0.208	0.236	0.261	0.183	-0.248	0.230	0.397
	PeCL	0.436	0.521	0.869	0.444	0.456	0.714	-0.093	0.573	0.535
order2	ER+DPSGD	0.155	0.139	0.450	0.575	0.473	0.476	-0.070	0.378	0.291
	EWC+DPSGD	0.142	0.117	0.414	0.312	0.419	0.480	-0.142	0.314	0.256
	ER+FN	0.148	0.364	0.470	0.591	0.468	0.526	-0.071	0.428	0.319
	EWC+FN	0.104	0.123	0.347	0.502	0.322	0.480	-0.186	0.313	0.282
	PeCL	0.276	0.368	0.541	0.798	0.618	0.567	-0.057	0.528	0.446
order3	ER+DPSGD	0.174	0.493	0.450	0.657	0.283	0.546	-0.039	0.434	0.336
	EWC+DPSGD	0.089	0.462	0.262	0.496	0.302	0.516	-0.159	0.355	0.318
	ER+FN	0.184	0.493	0.558	0.601	0.147	0.521	-0.005	0.417	0.346
	EWC+FN	0.126	0.528	0.427	0.426	0.179	0.590	-0.158	0.379	0.341
	PeCL	0.233	0.555	0.300	0.522	0.359	0.598	-0.073	0.428	0.357

Table 3: Per-Task performance of task order.

	task1	task2	task3	task4	task5	task6	BWT	Last	Avg
$\alpha=0.2$	0.395	0.485	0.865	0.423	0.330	0.705	-0.130	0.534	0.518
$\alpha=0.3$	0.419	0.513	0.858	0.467	0.349	0.708	-0.104	0.552	0.523
$\alpha=0.5$	0.436	0.521	0.869	0.444	0.456	0.714	-0.093	0.573	0.535
$\alpha=0.7$	0.409	0.483	0.866	0.435	0.297	0.699	-0.121	0.532	0.510
$\alpha=0.8$	0.401	0.427	0.874	0.378	0.253	0.699	-0.148	0.505	0.489

Table 4: Per-Task Performance of Hyperparameter α .

λ_{unlearn}	task1	task2	task3	task4	task5	task6	BWT	Last	Avg
0	0.407	0.499	0.857	0.421	0.350	0.727	-0.133	0.544	0.524
1	0.436	0.521	0.869	0.444	0.456	0.714	-0.093	0.573	0.535
3	0.395	0.489	0.864	0.431	0.305	0.718	-0.127	0.534	0.511
5	0.315	0.429	0.846	0.396	0.314	0.706	-0.101	0.501	0.454
7	0.393	0.482	0.850	0.439	0.413	0.718	-0.093	0.549	0.513
10	0.440	0.471	0.850	0.423	0.333	0.715	-0.059	0.539	0.476

Table 5: Per-Task Performance of Hyperparameter λ_{unlearn} .