

Do Vision–Language Models See Urban Scenes as People Do? An Urban Perception Benchmark

Rashid Mushkani
 Université de Montréal
 Mila – Quebec AI Institute

Abstract

Understanding how people read city scenes can inform design and planning. We introduce a small benchmark for testing vision–language models (VLMs) on urban perception using 100 Montreal street images, evenly split between photographs and photorealistic synthetic scenes. Twelve participants from seven community groups supplied 230 annotation forms across 30 dimensions mixing physical attributes and subjective impressions. French responses were normalized to English. We evaluated seven VLMs in a zero-shot setup with a structured prompt and deterministic parser. We use accuracy for single-choice items and Jaccard overlap for multi-label items; human agreement uses Krippendorff’s α and pairwise Jaccard. Results suggest stronger model alignment on visible, objective properties than subjective appraisals. The top system (`claude-sonnet`) reaches macro 0.31 and mean Jaccard 0.48 on multi-label items. Higher human agreement coincides with better model scores. Synthetic images slightly lower scores. We release the benchmark, prompts, and harness for reproducible, uncertainty-aware evaluation in participatory urban analysis.¹

Keywords— vision–language models, urban perception, street-level imagery, human–AI alignment, participatory methods, evaluation

1 Introduction

Cities are interpreted through perception as well as through built form. Foundational urban design scholarship examined legibility and the imageability of place (Lynch, 1960), whereas urban computing has moved toward large-scale, data-driven accounts of city life (Zheng et al., 2014). Perception is difficult to measure at scale. Pairwise comparisons of street images revealed stable aggregate judgments of safety and appeal across cities (Salesses et al., 2013), and follow-up datasets such as Place Pulse 2.0 enabled learning models that approximate crowd judgments (Dubey et al., 2016). In parallel, computer vision on street-level imagery uncovered relationships between visual cues and indicators such as socioeconomic change, urban form, or mobility (Fan et al., 2023; Jean et al., 2016; Yeh et al., 2020; Tatem, 2017).

Recent vision–language models (VLMs) integrate image understanding with natural language reasoning (Achiam et al., 2023; Li et al., 2023; Dai et al., 2023; LLaVA Team, 2024; Pichai et al., 2023). They promise general, instruction-following analysis of images without task-specific training. However, there is limited evidence about how well such systems emulate human perception of urban scenes, particularly on subjective qualities. Existing evaluations of spatial knowledge in language models highlight both competence and brittleness (Gurnee and Tegmark, 2024; Roberts et al., 2023;

¹The dataset will be released together with the images and the evaluation grids from participants.

Mai et al., 2023; Bhandari et al., 2023; Manvi et al., 2024). Bringing these strands together requires human-centered protocols that respect subjectivity, document uncertainty, and make evaluation reproducible (Mushkani et al., 2025f).

Research Questions:

- **RQ1** To what extent do contemporary VLMs align with human judgments on *objective* (visually grounded) versus *subjective* (appraisal) dimensions?
- **RQ2** How does inter-annotator reliability relate to model alignment across dimensions?
- **RQ3** How do results differ between photographic and photorealistic synthetic scenes?

Contributions. We contribute: (1) a documented, community-grounded benchmark of 100 Montreal street-level scenes with 30 perception dimensions and deterministic French–English normalization; (2) a transparent, reproducible zero-shot evaluation harness for seven VLMs; and (3) analyses addressing RQ1–RQ3, including human reliability, subjective vs. objective performance, and real–synthetic differences.

2 Related Work

Urban perception at scale. Pairwise comparisons facilitated large-scale mapping of perceived urban qualities, starting with the “collaborative image of the city” (Salesses et al., 2013) and extended by Place Pulse 2.0 (Dubey et al., 2016; Mushkani et al., 2025c). Street-view imagery has subsequently supported tasks from estimating socioeconomic status to tracking urban change (Fan et al., 2023). At regional scales, multispectral imagery and machine learning have been used to reveal socioeconomic gradients (Jean et al., 2016; Yeh et al., 2020; Tatem, 2017). This body of work suggests that images carry strong signals of the built environment and social life while underscoring that perception is not reducible to a single ground truth (Mushkani and Koseki, 2025b).

Vision–language models and spatial knowledge. VLMs unify visual perception and language modeling (Achiam et al., 2023; Li et al., 2023; Dai et al., 2023; LLaVA Team, 2024; Pichai et al., 2023). Tooling for systematic evaluation is emerging (Duan et al., 2024). Separate threads probe whether language models encode spatial and geographic structure (Gurnee and Tegmark, 2024; Roberts et al., 2023; Mai et al., 2023; Bhandari et al., 2023; Manvi et al., 2024). The present work examines the intersection: how well do VLMs reproduce human appraisals of urban scenes when provided with a structured prompt and held to a reproducible scoring protocol?

3 Dataset, Participants, and Annotation Protocol

Image panels and sources. We curated 100 street-level scenes in Montreal. Images are organized into ten panels ($p1..p10$), each containing ten scenes. Panels $p1$ – $p5$ consist of photorealistic *synthetic* images, while $p6$ – $p10$ contain *photographs* (50 images per source type). Synthetic scenes were screened for plausibility and filtered to avoid artifacts that would dominate perception. Across panels we sought variety in locations, times of day, presence of vegetation, and crowding.

Participants and recruitment. Twelve Montreal-based participants from seven community organizations annotated the images. Participants were recruited via partner organizations and compensated for their time. Self-identification for context was optional. Figure 1 summarizes the diversity of the participant pool.²

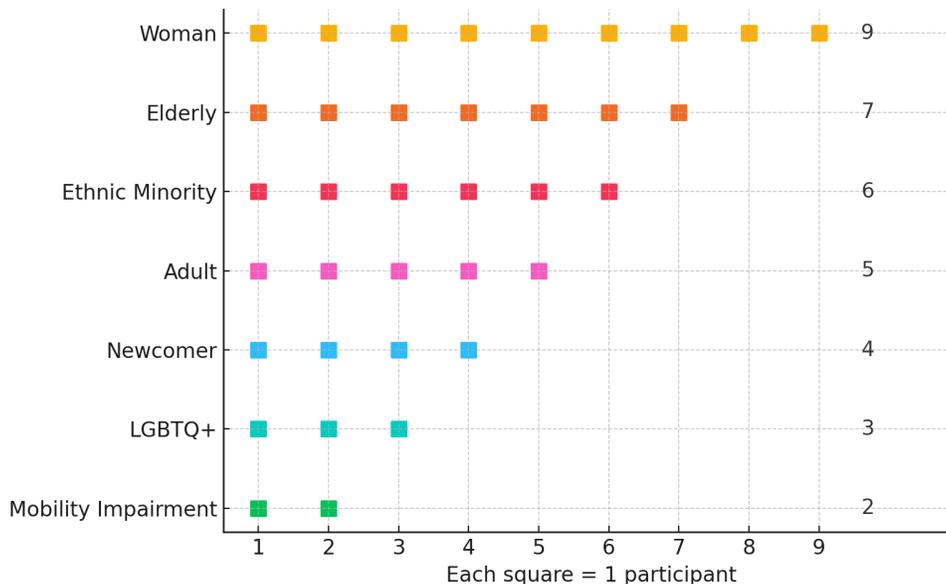


Figure 1: Self-reported participant context (counts). These categories were optional and are reported only in aggregate to characterize the annotator pool. Categories are not mutually exclusive and reflect intersectional identities; participants could select multiple identity markers, so counts exceed the number of participants Mushkani (2025b).

Dimensions. The annotation schema comprises **30** dimensions spanning four families: physical setting (e.g., space typology, spatial configuration, lighting, vegetation, maintenance, signage, barriers), human presence and activity (e.g., human presence, types of activities, economic activities, accessibility features, visibility), built form and aesthetics (e.g., built environment, architectural style, aesthetic elements, cultural elements), and subjective impressions (e.g., overall impression). Each dimension was defined with concise descriptions and canonical label sets, distinguishing single-choice from multi-label items. To avoid identity inference, we use observational descriptors such as *Presence of mobility aids* rather than attributes like ethnicity or gender (Mushkani and Koseki, 2025a).

Collection. Each image received between one and three independent annotations, resulting in 230 completed forms. A shared subset ensured overlap across participants for reliability analysis. Annotation was conducted in French.

Normalization and consensus. We constructed a deterministic French–English mapping for each possible response string, covering synonyms and capitalization. For multi-label dimensions, we aggregated selections per image and formed a *hard consensus set* by retaining options selected by at least half of annotators ($\geq 50\%$). For single-choice dimensions, we used majority vote; exact

²Categories were self-reported and optional; no individual-level demographics are released.

ties were flagged *unsure* and excluded from accuracy calculations. To avoid inflated agreement, “Not applicable” was not rewarded as a match on multi-label Jaccard scores; empty human and model sets were treated as missing rather than perfect overlap.

4 Models and Zero-Shot Protocol

Evaluated models. We evaluate seven VLMs representative of current practice: `claude-sonnet`, `openai-o4-mini`, `gpt-4.1`, `gemini-2.5-pro`, `grok-2-vision`, `qwen2.5-v1`, and `llama-4-maverick`. All models were queried through the same script that embeds local images as base-64 data URIs (ensuring pixel access) and requests a single-line CSV response. For determinism we set `temperature=0`, `top_p=1`, and log model version strings and run dates.

Prompting and parsing. The prompt enumerates the 30 dimensions in a fixed order with short definitions. It asks the model to choose one label for single-choice items and any number of labels for multi-label items. The script enforces a strict CSV format and retries on parse failures. The parser is rule-based and deterministic: it tokenizes the model CSV, trims whitespace, normalizes spelling, and maps tokens to codebook labels. The pipeline yields complete per-image, per-dimension model responses for all models; non-conforming replies are captured in a `Comments` column and excluded from scoring.

5 Evaluation Methodology

Scoring. For single-choice dimensions we compute accuracy against the human majority label, excluding images marked *unsure*. For multi-label dimensions we compute the Jaccard index between the model-selected set and the human hard consensus set, not rewarding “Not applicable”; images where both sets are empty are treated as missing for that dimension. We then average scores per dimension and report macro-averages across the 30 dimensions. We additionally report set overlap restricted to the multi-label subset to illuminate where selection breadth matters.

Human reliability. Inter-annotator reliability is computed per dimension. For single-choice items we use Krippendorff’s α with nominal distance; for multi-label items we compute mean pairwise Jaccard across annotator sets, per image, then average per dimension. These measures are not interchangeable but together indicate which dimensions admit more stable human judgments.

Additional analyses. We analyze the relationship between human reliability and average model performance across dimensions; we compare performance across subjective and objective subsets of dimensions; and we visualize distributional mismatches for the “Overall Impression” dimension. Synthetic-versus-real gaps are computed analogously by stratifying images by source. For multiple variable-level comparisons in exploratory analyses we control the false discovery rate with the Benjamini–Hochberg procedure (Benjamini and Hochberg, 1995).

6 Results

Overall alignment and ranking. Figure 2 shows macro agreement with human consensus across the 30 dimensions. `claude-sonnet` leads with 0.31, followed by `openai-o4-mini` (0.29), `gpt-4.1` (0.27), `gemini-2.5-pro` (0.25), `grok-2-vision` (0.23), `qwen2.5-v1` (0.21), and `llama-4-maverick`

(0.16). To isolate multi-label behavior, Figure 3 reports mean Jaccard overlap with the human consensus set. The same two models occupy the top positions, with `claude-sonnet` at 0.48 and `openai-o4-mini` at 0.45.

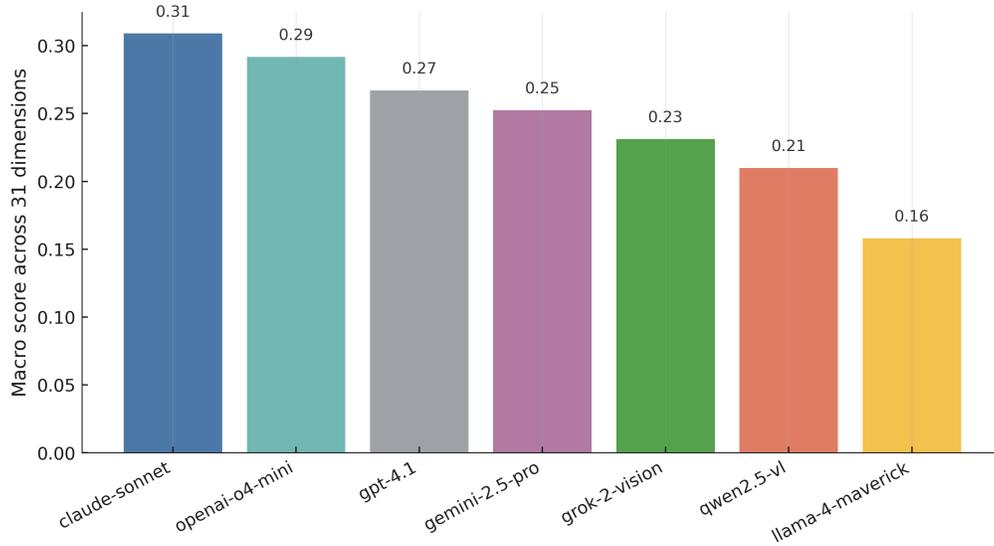


Figure 2: Overall agreement with human consensus by model. Macro-averaged accuracy (single-choice) and Jaccard (multi-label) across 30 dimensions.

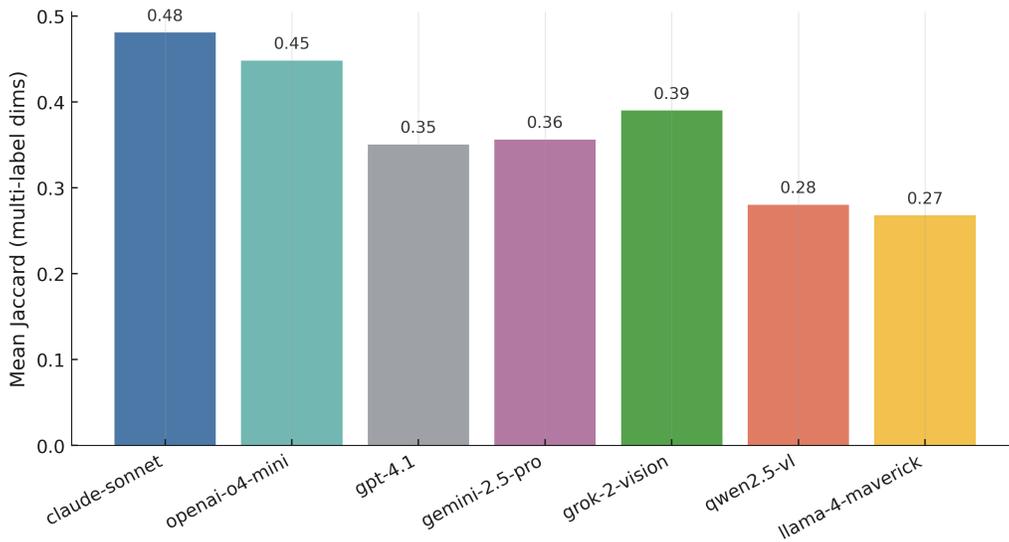


Figure 3: Mean Jaccard set overlap between model selections and the human consensus for the multi-label dimensions.

Which dimensions are easier or harder? Figure 4 ranks dimensions by average model score. The top of the list includes *Spatial Configuration*, *Human Presence*, *Vegetation*, *Built Environment*,

and *Size (visual estimate)* with average scores in the 0.39–0.47 range. At the other extreme, *Sustainability*, *Public Amenities*, and *Cultural Elements* are near zero, followed by *Safety Measures* and *Accessibility Features*. These patterns are broadly consistent with visual observability: readily visible or structural properties are recovered more reliably than diffuse or rare concepts.

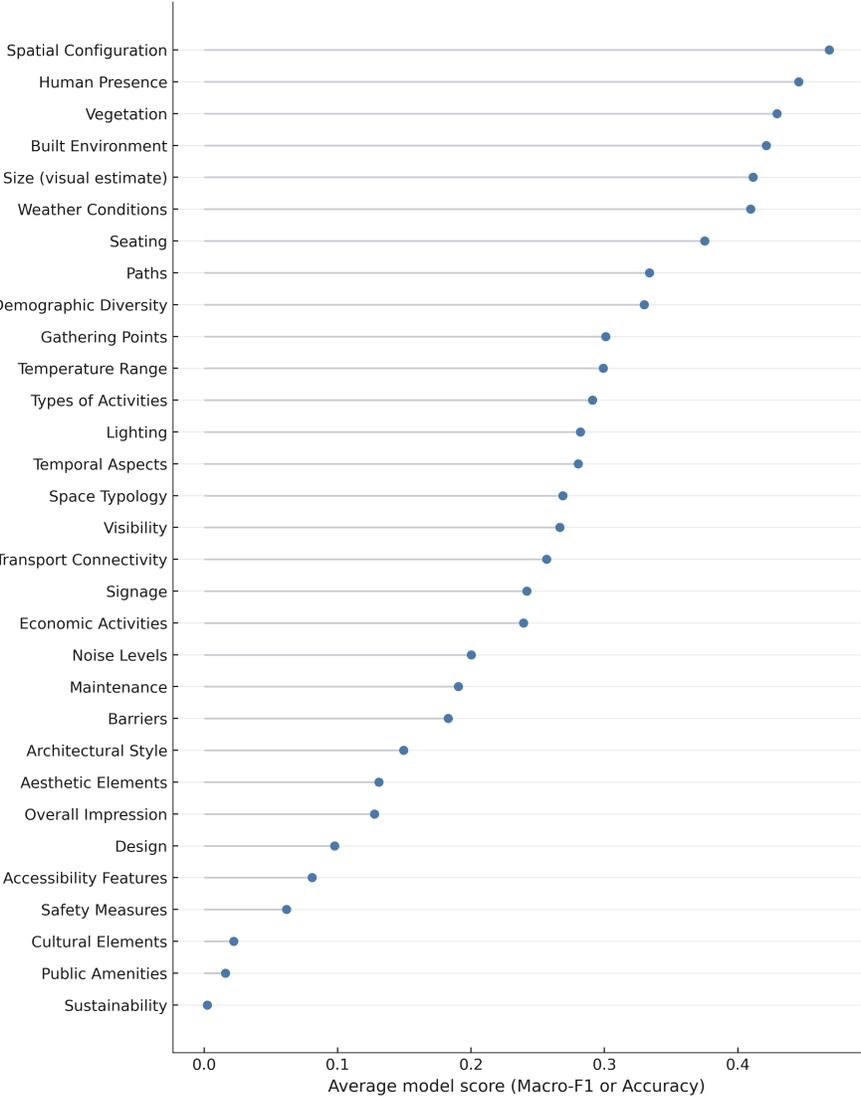


Figure 4: Difficulty by dimension. Each point is the mean model score for the dimension (accuracy or Jaccard depending on the item type).

Agreement structure across models and dimensions. The heatmap in Figure 5 shows shared strengths and weaknesses across models. Most systems perform well on *Space Typology*, *Vegetation*, and *Seating*, while struggling on *Sustainability* and *Overall Impression*. Model-specific differences are visible but modest relative to the cross-dimension structure, suggesting that the schema itself partitions tasks into relatively tractable and relatively difficult categories under zero-shot prompting.

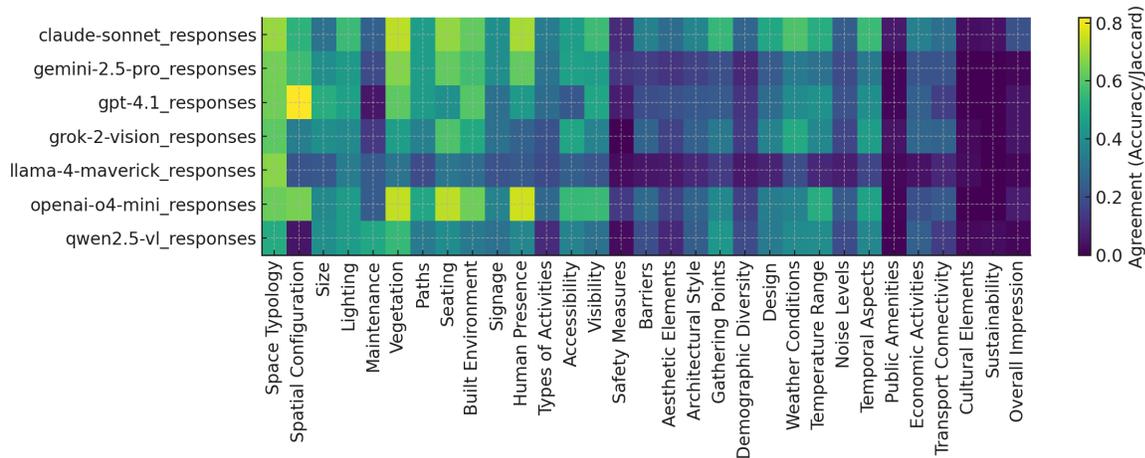


Figure 5: Agreement by dimension and model. Warmer colors indicate higher agreement with human consensus (accuracy for single-choice, Jaccard for multi-label).

Human reliability and model performance. Two complementary views relate human reliability to model results. The bar chart in Figure 6 shows Krippendorff’s α by dimension. Human agreement is highest for *Human Presence*, *Seating*, and *Economic Activities*; it is lowest or unstable for *Design*, *Size (visual estimate)*, and *Temporal Aspects*. The scatter in Figure 7 plots average model score against inter-annotator reliability. The upward trend indicates that models perform better where humans agree more. Outliers are informative: *Economic Activities* has relatively high human agreement yet only middling model scores, while *Spatial Configuration* achieves high model scores despite moderate human agreement, possibly because models rely on strong global layout priors even where people hesitate between open and semi-enclosed labels.

Subjective versus objective dimensions. We partition the schema into subjective and objective subsets and compute model scores per subset. Figure 8 shows that most models improve on objective items. The difference is largest for *openai-o4-mini* and *gpt-4.1*. Two models buck the trend: *qwen2.5-vl* performs slightly worse on objective items, and *llama-4-maverick* exhibits very small differences. These divergences could reflect differences in visual backbone training or prompting sensitivity.

Distributional mismatch on subjective appraisals. Beyond accuracy, distributional differences illuminate qualitative mismatches. Figure 9 plots the proportion of labels selected for *Overall Impression*. Human annotators most often selected *Accessible* and *Comfortable*, whereas several models over-produce *Not applicable* and under-produce *Accessible*. This mismatch indicates that models do not simply make random errors; rather, they follow different priors over subjective categories.

Image source effects. Across models we observe modest but consistent decreases on synthetic images relative to photographs. The gap is small compared to cross-dimension variation and does not change the ordering of models. Qualitative inspection suggests that synthetic scenes sometimes contain idealized plazas and abundant seating, which humans and models both interpret differently than in photographs of typical residential streets. We provide per-source breakdowns in the

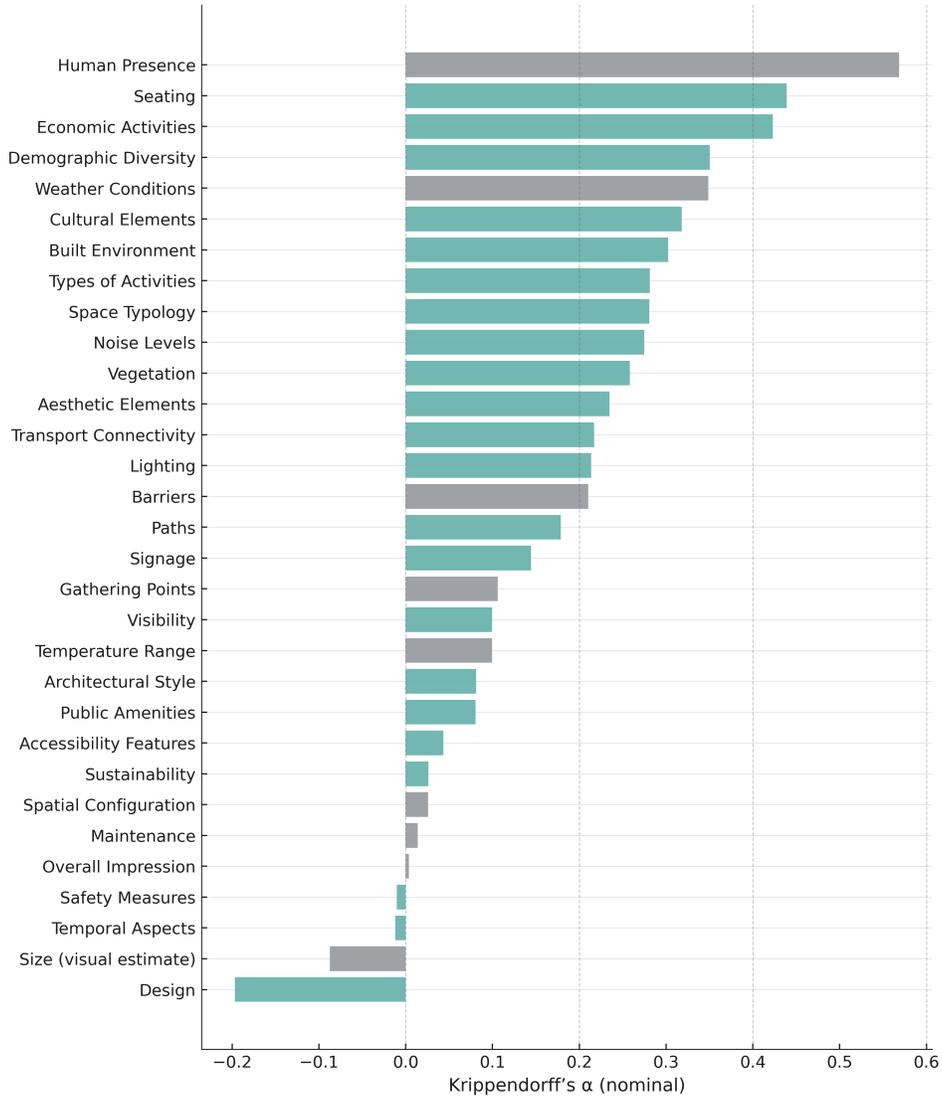


Figure 6: Inter-annotator reliability by dimension. Bars show Krippendorff’s α (nominal).

supplementary tables.

7 Discussion

The benchmark suggests a clear stratification by observability. Dimensions grounded in readily visible structure, such as spatial configuration or presence of vegetation, are detected more consistently even in a zero-shot setting. By contrast, low-scoring dimensions combine two challenges: the required evidence is either rare in our panels (*Sustainability*, *Public Amenities*) or it involves diffuse cultural and affective interpretation (*Cultural Elements*, *Overall Impression*). These results echo observations in urban studies that subjective impressions are plural and context dependent, and they support presenting distributions and uncertainty rather than single labels (Mushkani et al., 2025d).

The relationship between human reliability and model performance suggests that VLMs are

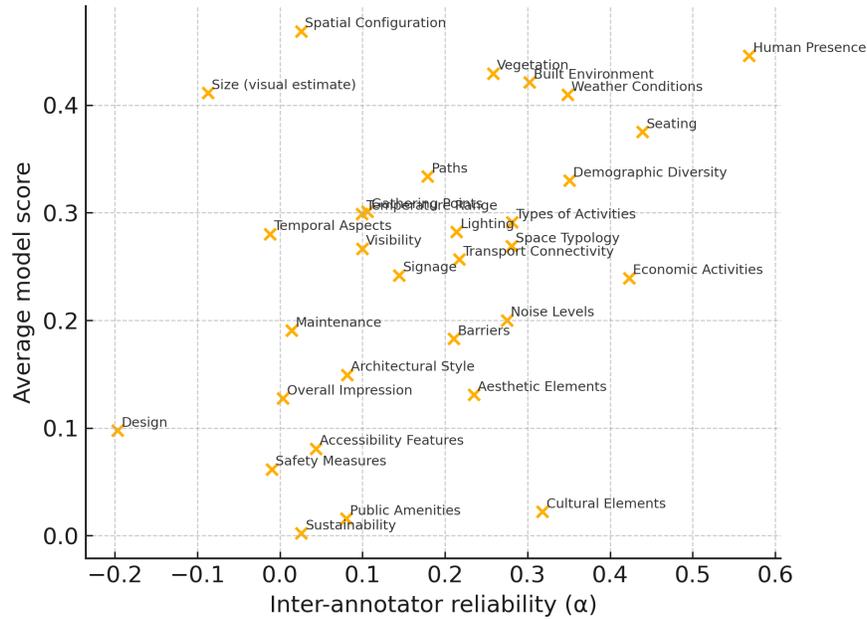


Figure 7: Relationship between human reliability (Krippendorff’s α) and average model score by dimension.

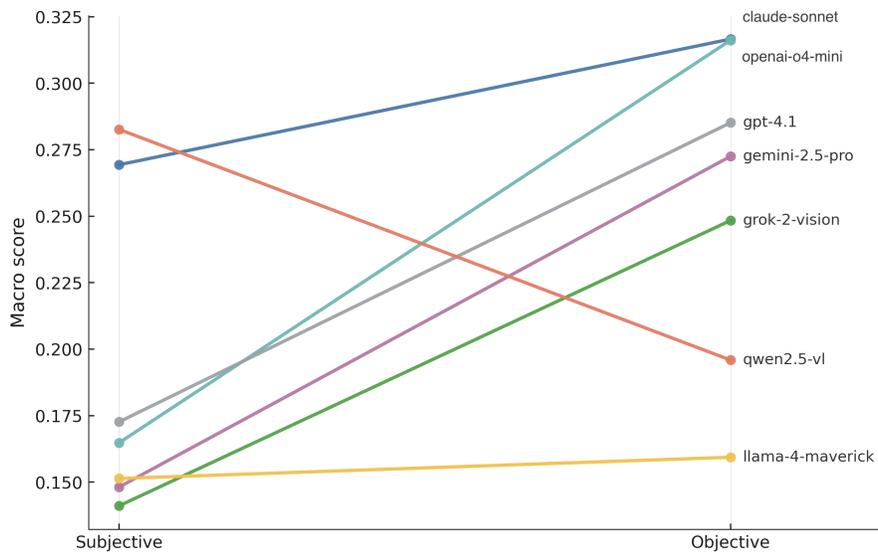


Figure 8: Subjective versus objective performance by model. Each line connects a model’s macro score on the subjective subset to its macro score on the objective subset.

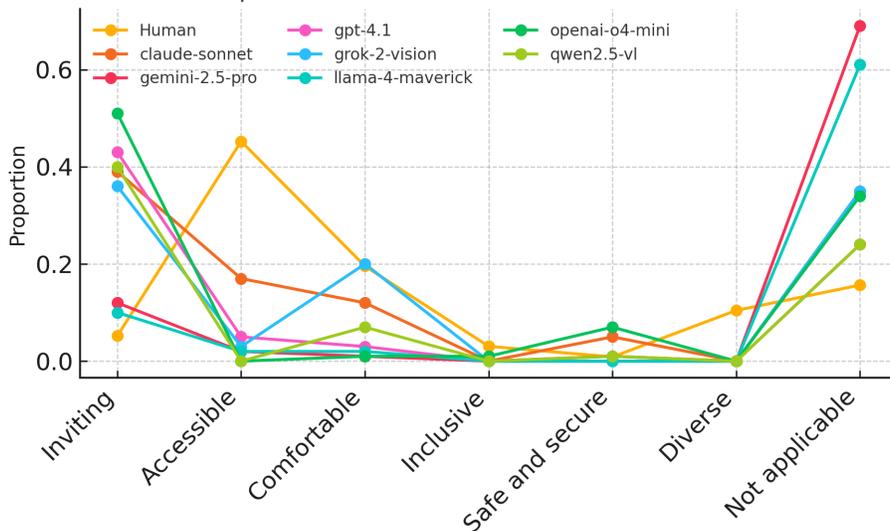


Figure 9: Overall Impression: distribution across annotators and models. Curves indicate the proportion of images assigned to each category.

sensitive to the intrinsic clarity of a dimension. Where people agree strongly, models typically do too; where people disagree, models also struggle. This argues for evaluation protocols that place model scores alongside human reliability rather than against an assumed ground truth. It also creates an opportunity: identifying dimensions with high human agreement but modest model scores, such as *Economic Activities*, can guide targeted data collection or prompt engineering.

The distributional analysis of *Overall Impression* demonstrates that differences are not only about accuracy. Several models fall back on *Not applicable* more often than humans do, a conservative strategy that may be reasonable when the visual evidence is weak but that limits usefulness in participatory settings. Interfaces that allow models to express calibrated uncertainty could mitigate this issue.

Finally, the modest real-versus-synthetic gap is encouraging for data augmentation. Synthetic panels helped expose rare combinations (for example, sunlit plazas with diverse activities). They also risk imprinting stylistic biases from the generator. Future work could probe stronger domain shifts and include a more explicit assessment of synthetic artifacts.

8 Ethics and Privacy

This study was reviewed by the authors’ institutional ethics board and determined to be minimal risk (Mushkani, 2025c). All participants provided informed consent and were compensated. Annotations are released only in aggregate form with no personal data. Photographs were captured by the authors in public spaces; faces and license plates were automatically blurred and manually verified prior to use. Synthetic images were generated with Stable Diffusion XL.

9 Limitations

The dataset is intentionally small to enable careful documentation, community partnership, and reliability analysis. This limits statistical power for subgroup analyses and restricts the diversity of Montreal contexts. Annotations reflect a specific group of community members; other groups could disagree (Mushkani (2025a)). We use a deterministic parser for French–English normalization and CSV extraction; although validated, any remaining mapping errors would underrate models. Our evaluation is strictly zero-shot. Light-weight tuning with local data or multi-turn interaction may yield higher agreement but would assess a different capability. Finally, while we avoid personally identifying information in images and release only de-identified annotations, any work that links urban perception with place requires caution to avoid stigmatizing neighborhoods or groups.

10 Implications for practice and research

For practice, present-day VLMs may assist with factual components of streetscape audits, such as identifying seating, vegetation, and typology, and can pre-annotate images for human review. They are less dependable for subjective appraisals. Tools should therefore surface both model predictions and human reliability for each dimension, display uncertainty, and allow community members to contest labels (Mushkani et al., 2025a).

For research, the benchmark suggests two directions. The first is methodological: evaluation should normalize for inter-annotator variability, report both accuracy and distributional fit, and separate subjective from objective items. The second is technical: future models could incorporate structured visual geometry for spatial tasks and learn to express calibrated uncertainty for subjective appraisals. Participatory co-design with local organizations can help align model outputs with situated values (Mushkani et al., 2025b,e).

11 Conclusion

We introduced a community-grounded benchmark for evaluating vision–language models on urban perception using Montreal street-level scenes. The analysis shows stronger alignment on objective dimensions, weaker alignment on subjective appraisals, and a positive relationship between human reliability and model performance; we also observe a modest but consistent performance drop on photorealistic synthetic scenes. Taken together, these results provide baseline yardsticks for seven contemporary VLMs under a strict zero-shot protocol and a documented pipeline that emphasizes determinism and transparency.³

Three methodological takeaways emerge. *First, observability matters:* dimensions with readily visible, structural evidence (e.g., vegetation, spatial configuration) are recovered far more reliably than diffuse or rare concepts (e.g., sustainability, cultural elements). *Second, reliability matters:* model scores co-vary with inter-annotator agreement, arguing for evaluation that reports model alignment *alongside* human reliability rather than against a presumed single ground truth. *Third, distribution matters:* on subjective appraisals, models exhibit distinct priors (e.g., overusing **Not applicable**); surfacing calibrated uncertainty and presenting distributions rather than single labels can make these systems more useful in participatory contexts.

For practice, the benchmark suggests that present-day VLMs can help pre-annotate factual components of streetscape audits (seating, typology, vegetation) and support triage for human review, but they should not be relied upon as arbiters of subjective qualities. Interfaces should

³The dataset will be released together with the images and the evaluation grids from participants.

therefore (i) disclose per-dimension human reliability, (ii) expose model abstention and confidence, and (iii) allow community members to contest or revise labels. These design choices align with participatory goals and reduce the risk of reifying model priors as facts.

For research, several extensions follow naturally. Scaling beyond 100 scenes to additional neighborhoods, seasons, and cities—and engaging a broader set of community groups and languages—would test generalization and illuminate place-specific priors. Richer targets (e.g., pairwise preferences, ordinal ratings, or small, structured rationales) could probe whether models learn *why* a label applies, not just *which* one. Technique-wise, future systems may benefit from (i) uncertainty-aware objectives that calibrate abstention, (ii) better spatial reasoning via explicit geometric cues, (iii) multi-image or multi-turn protocols that let models reconcile ambiguous evidence, and (iv) analyses of domain shift beyond photorealism (e.g., night scenes, weather, seasonality). Because perception is situated, future evaluations should also include value-sensitive comparisons and fairness checks across communities.

We release prompts, normalization mappings, and a deterministic harness to support reproducible comparisons and community extension. Our aim is a living benchmark that helps the urban AI community track progress on human–AI alignment, encourages uncertainty-aware reporting, and keeps participatory values at the center of street-scale analysis.⁴

Table 1: Summary of overall model alignment. Left: macro score across all 30 dimensions (accuracy for single-choice; Jaccard for multi-label). Right: mean Jaccard restricted to the multi-label subset. Values match Figures 2 and 3.

Model	Macro (all dims) (Acc/Jaccard)	Mean Jaccard (multi-label only)
claude-sonnet	0.31	0.48
openai-o4-mini	0.29	0.45
gpt-4.1	0.27	0.35
gemini-2.5-pro	0.25	0.36
grok-2-vision	0.23	0.39
qwen2.5-vl	0.21	0.28
llama-4-maverick	0.16	0.27

References

- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report, 2023.
- Yoav Benjamini and Yosef Hochberg. Controlling the false discovery rate: A practical and powerful approach to multiple testing. *Journal of the Royal Statistical Society: Series B (Methodological)*, 57(1):289–300, 1995. doi: 10.1111/j.2517-6161.1995.tb02031.x.
- Prabin Bhandari, Antonios Anastasopoulos, and Dieter Pfoser. Are large language models geospatially knowledgeable?, 2023.
- Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Junqi Zhao, Weisheng Wang,

⁴The dataset will be released together with the images and the evaluation grids from participants.

- Boyang Li, Pascale Fung, and Steven Hoi. Instructblip: Towards general-purpose vision–language models with instruction tuning, 2023.
- Haodong Duan, Junming Yang, Yuxuan Qiao, Xinyu Fang, Lin Chen, Yuan Liu, Xiaoyi Dong, Yuhang Zang, Pan Zhang, Jiaqi Wang, et al. Vlmevalkit: An open-source toolkit for evaluating large multi-modality models. In *Proceedings of the 32nd ACM International Conference on Multimedia*, MM ’24, pages 11198–11201, New York, NY, USA, 2024. Association for Computing Machinery. doi: 10.1145/3664647.3685520.
- Abhimanyu Dubey, Nikhil Naik, Devi Parikh, Ramesh Raskar, and César A. Hidalgo. Deep learning the city: Quantifying urban perception at a global scale, 2016. Place Pulse 2.0 dataset paper.
- Zhuangyuan Fan, Fan Zhang, Becky P. Y. Loo, and Carlo Ratti. Urban visual intelligence: Uncovering hidden city profiles with street view images. *Proceedings of the National Academy of Sciences*, 120(27):e2220417120, 2023. doi: 10.1073/pnas.2220417120.
- Wes Gurnee and Max Tegmark. Language models represent space and time, 2024. URL <https://openreview.net/forum?id=jE8xbmvFin>. Published as a conference paper at ICLR 2024; arXiv:2310.02207.
- Neal Jean, Marshall Burke, Michael Xie, W. Matthew Davis, David B. Lobell, and Stefano Ermon. Combining satellite imagery and machine learning to predict poverty. *Science*, 353(6301):790–794, 2016. doi: 10.1126/science.aaf7894.
- Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language–image pre-training with frozen image encoders and large language models. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pages 19730–19742, Cambridge, MA, USA, July 2023. PMLR. URL <https://proceedings.mlr.press/v202/li23q.html>.
- LLaVA Team. Llava-next: Improved reasoning, ocr, and world knowledge. <https://llava-vl.github.io/blog/2024-01-30-llava-next/>, 2024. Accessed 2025-09-11.
- Kevin Lynch. *The Image of the City*. MIT Press, Cambridge, MA, 1960.
- Gengchen Mai, Weiming Huang, Jin Sun, Suhang Song, Deepak Mishra, Ninghao Liu, Song Gao, Tianming Liu, Gao Cong, Yingjie Hu, Chris Cundy, Ziyuan Li, Rui Zhu, and Ni Lao. On the opportunities and challenges of foundation models for geospatial artificial intelligence, 2023.
- Rohin Manvi, Samar Khanna, Marshall Burke, David Lobell, and Stefano Ermon. Large language models are geographically biased, 2024.
- Rashid Mushkani. Collective recourse for generative urban visualizations, 2025a. URL <https://arxiv.org/abs/2509.11487>.
- Rashid Mushkani. Prompt commons: Collective prompting as governance for urban ai, 2025b. URL <https://arxiv.org/abs/2509.12415>.
- Rashid Mushkani. Urban ai governance must embed legal reasonableness for democratic and sustainable cities, 2025c. URL <https://arxiv.org/abs/2508.12174>.
- Rashid Mushkani and Shin Koseki. Intersecting perspectives: A participatory street review framework for urban inclusivity. *Habitat International*, 2025a. doi: 10.1016/j.habitatint.2025.103536. URL <https://doi.org/10.1016/j.habitatint.2025.103536>.

- Rashid Mushkani and Shin Koseki. Street review: A participatory ai-based framework for assessing streetscape inclusivity, 2025b. URL <https://arxiv.org/abs/2508.11708>.
- Rashid Mushkani, H. Berard, A. Cohen, and S. Koseki. The right to AI. In *Proceedings of the 42nd International Conference on Machine Learning (ICML)*, 2025a. URL <https://arxiv.org/abs/2501.17899>.
- Rashid Mushkani, Hugo Berard, Toumadher Ammar, and Shin Koseki. Co-producing AI: An augmented AI lifecycle. In *Proceedings of the AAAI/ACM Conference on AI, Ethics, and Society (AIES)*, 2025b. URL <https://doi.org/10.48550/arXiv.2508.00138>.
- Rashid Mushkani, Hugo Berard, Toumadher Ammar, and Shin Koseki. Public perceptions of montréal’s streets: Implications for inclusive public space making and management. *Journal of Urban Management*, 2025c. doi: 10.1016/j.jum.2025.07.004. URL <https://doi.org/10.1016/j.jum.2025.07.004>.
- Rashid Mushkani, Hugo Berard, and Shin Koseki. Negotiative alignment: Embracing disagreement to achieve fairer outcomes – insights from urban studies, 2025d. URL <https://arxiv.org/abs/2503.12613>.
- Rashid Mushkani, Hugo Berard, and Shin Koseki. Wedesign: Generative ai-facilitated community consultations for urban public space design, 2025e. URL <https://arxiv.org/abs/2508.19256>.
- Rashid Mushkani, S. Nayak, H. Berard, A. Cohen, S. Koseki, and H. Bertrand. Livs: A pluralistic alignment dataset for inclusive public spaces. In *Proceedings of the 42nd International Conference on Machine Learning (ICML)*, 2025f. URL <https://arxiv.org/abs/2503.01894>.
- Sundar Pichai, Demis Hassabis, Jeff Reid, and colleagues. Introducing gemini: Our largest and most capable ai model. <https://blog.google/technology/ai/google-gemini-ai/>, 2023. Accessed 2025-09-11.
- Jonathan Roberts, Timo Lüddecke, Sowmen Das, Kai Han, and Samuel Albanie. Gpt4geo: How a language model sees the world’s geography, 2023.
- Philip Salesses, Katja Schechtner, and César A. Hidalgo. The collaborative image of the city: Mapping the inequality of urban perception. *PLOS ONE*, 8(7):e68400, 2013. doi: 10.1371/journal.pone.0068400.
- Andrew J. Tatem. Worldpop, open data for spatial demography. *Scientific Data*, 4(1):170004, 2017. doi: 10.1038/sdata.2017.4.
- Christopher Yeh, Anthony Perez, Anne Driscoll, George Azzari, Zhongyi Tang, David Lobell, Stefano Ermon, and Marshall Burke. Using publicly available satellite imagery and deep learning to understand economic well-being in africa. *Nature Communications*, 11(2583):1–11, 2020. doi: 10.1038/s41467-020-16185-w.
- Yu Zheng, Licia Capra, Ouri Wolfson, and Hai Yang. Urban computing: Concepts, methodologies, and applications. *ACM Transactions on Intelligent Systems and Technology*, 5(3):1–55, 2014. doi: 10.1145/2629592.

A Perception grid

The benchmark uses **30** dimensions.

Table 2: Perception grid: dimensions, allowed values, and response type.

Dimension	Allowed values	Type
Space Typology	Park; Street; Square; Courtyard; Garden; Waterfront; Public plaza; Alley; Playground; Not applicable	multiple
Spatial Configuration	Open; Enclosed; Semi-enclosed; Structured; Organic; Not applicable	single
Size (visual estimate)	Small (<500 m ²); Medium (500–2000 m ²); Large (>2000 m ²); Not applicable	single
Lighting	Natural lighting; Artificial lighting; Well lit; Poorly lit; Shaded areas; Not applicable	multiple
Maintenance	Clean; Dirty; Well maintained; Neglected; Recently renovated; Not applicable	single
Vegetation	Trees present; Too much greenery; Little greenery; Grass present; Bushes present; Flower beds present; No vegetation; Not applicable	multiple
Paths	Paved paths present; Unpaved paths present; Wide paths present; Narrow paths present; Linear paths present; Curved paths present; Intersecting paths present; Dead-end paths present; Not applicable	multiple
Seating	Benches present; Chairs present; Picnic tables present; Custom seats present; Movable seats present; No seating; Not applicable	multiple
Built Environment	Modern buildings present; Historic buildings present; Residential buildings present; Commercial buildings present; Mixed-use buildings present; Vacant lots present; Not applicable	multiple
Signage	Informational signs present; Decorative signs present; Directional signs present; Interactive signs present; No signage; Not applicable	multiple
Human Presence	Crowded (>50 people); Moderately populated (20–50 people); Sparsely populated (<20 people); Empty; Not applicable	single
Types of Activities	Recreational activities present; Leisure activities present; Commercial activities present; Transportation activities present; Cultural activities present; Social activities present; Sports activities present; Religious activities present; Not applicable	multiple
Accessibility Features	Ramps present; Handrails present; Tactile paving present; Elevators present; Wide entrances present; Accessible restrooms present; No accessibility features; Not applicable	multiple
Visibility	Clear sight lines; Obstructed views present; Panoramic views present; Hidden corners present; Not applicable	multiple
Safety Measures	Surveillance cameras present; Security personnel present; Safety lighting; Emergency exits present; Safety signs present; Fences present; Walls present; Not applicable	multiple
Barriers	Physical barriers present (fences, walls); Natural barriers present (rivers, hills); No barriers; Not applicable	single

Continued on next page

Dimension	Allowed values	Type
Aesthetic Elements	Bright colours present; Dark colours present; Monochrome elements present; Murals present; Sculptures present; Street art present; Water features present; No decorative elements; Not applicable	multiple
Architectural Style	Traditional buildings present; Contemporary buildings present; Eclectic buildings present; Vernacular buildings present; Post-modern buildings present; Brutalist buildings present; Not applicable	multiple
Gathering Points	Central gathering point present; Edge gathering points present; Gathering points near monuments present; Informal gathering points present; No gathering points; Not applicable	single
Observed Group Diversity	Variety in group sizes; Presence of family groups; Presence of mixed-age groups; Presence of mobility aids; Not applicable	multiple
Inclusive Design Features	Wheelchair-accessible features present; Braille signage present; Multilingual signs present; Gender-neutral restrooms present; Adapted play equipment present; No design features; Not applicable	multiple
Weather Conditions	Sunny; Rainy; Snowy; Cloudy; Windy; Foggy; Not applicable	single
Temperature Range	Hot (>30 °C); Warm (20-30 °C); Cool (10-20 °C); Cold (<10 °C); Not applicable	single
Noise Levels	Quiet; Moderate; Loud; Traffic noise present; Construction noise present; Natural sounds present; Not applicable	multiple
Temporal Aspects	Daytime; Night; Weekday; Weekend; Seasonal variations; Not applicable	single
Public Amenities	Restrooms present; Water fountains present; Information kiosks present; Trash bins present; Play areas present; Fitness equipment present; Not applicable	multiple
Economic Activities	Street vendors present; Markets present; Shops present; Cafés present; No commercial activities; Not applicable	multiple
Transport Connectivity	Public transport access present; Bicycle lanes present; Pedestrian paths present; Parking spaces present; Carpool points present; Not applicable	multiple
Cultural Elements	Historic monuments present; Monuments present; Culturally significant features present; Public art installations present; Not applicable	multiple
Sustainability	Recycling bins present; Green building features present; Use of renewable energy present (e.g., solar panels); Water conservation measures present; Not applicable	multiple
Overall Impression	Inviting; Accessible; Comfortable; Inclusive; Safe and secure; Diverse; Cannot judge; Not applicable	single

Tokenization note. The harness expects a *single CSV line* per image with *30* comma-separated fields, one per dimension above; multi-label selections are joined with semicolons and no spaces (e.g., `Natural lighting;Well lit`). The output CSV written to disk adds two columns around this line-level response: a leading `Image_ID` and a trailing `Comments` field used for parser diagnostics. The model never outputs `Image_ID`.

B Prompt and parsing details

The inference script provides a deterministic system prompt that: (1) lists the 30 columns in the exact order shown in Table 2; (2) requires *only* a single CSV line with 30 fields and no header or commentary; (3) instructs models to use `Not applicable` when unclear; and (4) specifies the semicolon rule for multi-label items. Parsing is rule-based: replies are split on commas (with a CSV fallback), trimmed and mapped to the codebook tokens, and padded/truncated to the expected length. Any non-conforming reply is captured in `Comments` and excluded from scoring.

C Implementation notes for reproducibility

To ensure the models truly see pixels and that results are repeatable, the benchmark harness:

1. embeds local images as *base-64 data URIs* in the chat message (no remote fetches);
2. sets `temperature=0`, `top_p=1`, fixes max tokens, and logs model version strings and run timestamps;
3. uses exponential retry/backoff for transient API errors and logs the first 120 characters of each raw reply at `DEBUG`;
4. discovers images under `p1–p10` panel folders (expecting 100 files);
5. enforces the one-line CSV contract and a deterministic post-processor that writes `Image_ID + 30 fields + Comments` to disk.

D Image source effects (real vs. synthetic)

Panels *p1–p5* consist of photorealistic *synthetic* scenes and *p6–p10* are *real* photographs (50 images each). Figure 10 breaks down agreement by source. We observe modest, consistent decreases on synthetic images across models, but the gap is small compared with cross-dimension variation and does not change the ranking.

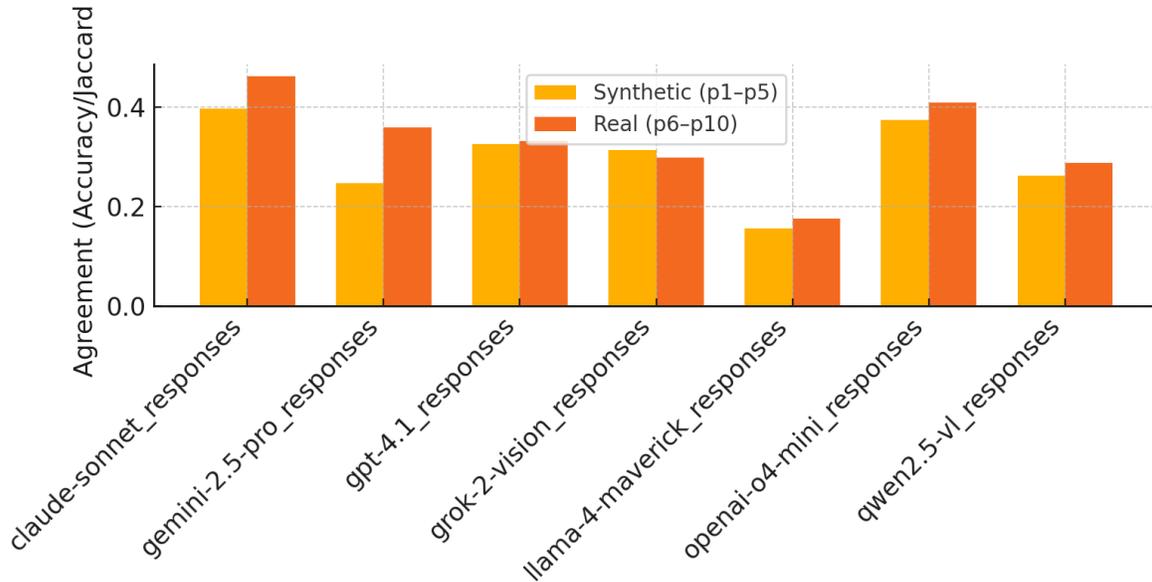


Figure 10: Model agreement by image source. Orange: real photos ($p6-p10$). Gold: synthetic renders ($p1-p5$).

E Prompt template

Prompt contract (model-facing)

```
def build_system_prompt() -> str:
    lines = [
        "You are an expert urban-perception assessor.",
        "Return ONLY a single CSV line (no header) with 30 comma-separated fields",
        ",",
        "one field per dimension, in the exact order listed below.",
        "For multi-select dimensions, join choices with semicolons (no spaces).",
        "If evidence is unclear or absent, output Not applicable.",
        "Do NOT include an image id, quotes, or -commentary just the CSV line.",
        "",
        "Example (for the Lighting dimension only, which is column 4):",
        ",,,Natural lighting;Well lit,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,",
        "",
        "Column order and allowed values:",
    ]
    for i, dim in enumerate(GRID, 1):
        flag = " (multiple)" if dim.multiple else " (single)"
        lines.append(f"{i}. {dim.name}{flag}: " + "; ".join(dim.variables))
    lines.append("Return just the CSV -line nothing else.")
    return "\n".join(lines)
```