

A Survey of Threats Against Voice Authentication and Anti-Spoofing Systems

Kamel Kamel^{a,*}, Keshav Sood^a, Hridoy Sankar Dutta^a, Sunil Aryal^a

^a*School of Information Technology, Deakin University, 75 Pigdons Road, Warrn Ponds, 3216, Victoria, Australia*

Abstract

Voice authentication has undergone significant changes from traditional systems that relied on handcrafted acoustic features to deep learning models that can extract robust speaker embeddings. This advancement has expanded its applications across finance, smart devices, law enforcement, and beyond. However, as adoption has grown, so have the threats. This survey presents a comprehensive review of the modern threat landscape targeting Voice Authentication Systems (VAS) and Anti-Spoofing Countermeasures (CMs), including data poisoning, adversarial, deepfake, and adversarial spoofing attacks. We chronologically trace the development of voice authentication and examine how vulnerabilities have evolved in tandem with technological advancements. For each category of attack, we summarize methodologies, highlight commonly used datasets, compare performance and limitations, and organize existing literature using widely accepted taxonomies. By highlighting emerging risks and open challenges, this survey aims to support the development of more secure and resilient voice authentication systems.

Keywords: Privacy, Authentication, Anti-spoofing, Poisoning, Adversarial, Deepfake, Spoofing

*Corresponding author: Kamel Kamel, email: kamel.kamel@research.deakin.edu.au
Email addresses: kamel.kamel@research.deakin.edu.au (Kamel Kamel),
keshav.sood@deakin.edu.au (Keshav Sood), hridoy.dutta@deakin.edu.au (Hridoy Sankar Dutta), sunil.aryal@deakin.edu.au (Sunil Aryal)

1. Introduction

Voice authentication is a biometric verification method that leverages the unique characteristics of an individual’s voice to authenticate their identity. It originated as a simple speaker recognition technique in the mid-20th century, relying primarily on handcrafted acoustic features and statistical models such as Gaussian Mixture Models (GMMs). It was initially adopted in restricted environments like forensic analysis and limited-access security systems, where its development was constrained by speech condition variation and limited computational capabilities. However, the landscape changed dramatically with the emergence of deep learning. Over the past decade, deep learning has fundamentally transformed voice authentication, enabling more accurate, robust, and scalable solutions. Advanced models, such as Deep Neural Networks (DNNs), Convolutional Neural Networks (CNNs), and Transformer-based architectures, now extract complex and invariant voice representations, often referred to as speaker embeddings, which significantly improve performance in real-world environments [1, 2, 3, 4].

Voice authentication plays a critical role in modern security ecosystems due to its non-intrusive nature, ease of implementation, and cost-effectiveness. Its applications span a wide range of domains, from mobile device unlocking to voice assistants, secure banking transactions, smart home systems, and access control in law enforcement and judicial processes [5, 6, 7]. As a contactless solution requiring only a microphone, voice authentication enhances user experience while mitigating risks associated with password leakage, social engineering, and physical spoofing, making it an increasingly important component of multi-factor authentication frameworks [8].

The first documented attack on a voice authentication system was recorded in the 1990s when researchers discovered that replaying a pre-recorded voice sample could effectively bypass early speaker verification systems [9]. These systems lacked robust liveness detection and could not distinguish between a real speaker and a recorded signal, exposing a fundamental weakness that undermined their security in practical scenarios. This initial form of the replay attack became a foundational example in the study of biometric spoofing and highlighted the necessity of building systems capable of discerning not just who is speaking, but also how and when the speech occurs [10, 11].

Despite major advances in deep learning, the sophistication and frequency of attacks against voice authentication systems have significantly increased. As these systems become more widely adopted and technically advanced, var-

ious kinds of attacks against these systems also emerge at the same time. One fascinating example occurred when criminals successfully cloned the voice of a company director to defraud a bank in the United Arab Emirates [12, 13]. Leveraging AI voice synthesis, the attackers convincingly impersonated the director through a phone call and reinforced the deception through carefully crafted emails. This coordinated attack ultimately led to the unauthorized transfer of \$35 million. The incident illustrates that, while deep learning has improved voice authentication accuracy, it has also enabled new forms of high-impact, cross-border fraud that traditional security mechanisms struggle to detect and prevent with conventional security controls.

This incident highlights a growing concern: as voice authentication systems become more sophisticated, so do the methods used to compromise them. One critical threat is **data poisoning**, where adversaries inject malicious or mislabeled data into training datasets or pipelines to compromise model behavior or insert hidden backdoors [14, 15, 16, 17, 18]. While extensively studied in Computer Vision and NLP, poisoning remains underexplored in the audio domain, lacking standardized benchmarks and threat models. Another challenge comes from **adversarial attacks**, which involve subtle audio perturbations that trick models into misclassification or unauthorized authentication. Though some defenses exist, they often fail under realistic deployment conditions, such as black-box or over-the-air scenarios [19, 20, 21, 22].

Meanwhile, **deepfake voice attacks** are evolving very quickly. High-fidelity synthetic voices, generated from minimal samples, are now capable of effectively mimicking real users, making it easier to bypass voice authentication systems [23, 24]. Existing countermeasures, including replay and spoofing detectors, are increasingly outpaced by these generative techniques. Even the defensive modules themselves have become targets. Attackers now design **adversarial spoofing attacks** to evade VAS and spoofing detectors, undermining the reliability of traditional protection measures. This has led to a security arms race in which new defenses trigger more advanced attack strategies, emphasizing the need for holistic, adaptive, and robust approaches to secure voice authentication.

In this review, we provide a comprehensive and systematic survey of the threats targeting voice authentication systems. These threat channels exploit vulnerabilities across the machine learning pipeline—from model training to input inference and security filtering—and challenge the reliability of speaker verification technology. By synthesizing findings from recent literature, we

present a structured overview of how these threats operate, how current systems respond, and where critical security gaps remain. This perspective aims to equip researchers and practitioners with a deeper understanding of the evolving adversarial landscape in voice-based authentication.

While prior surveys have explored specific attack classes—such as back-door attacks [18], adversarial attacks [21], and audio deepfake detection [25, 26, 27]—they have overlooked key areas like broader data poisoning techniques, deepfake attacks themselves, and adversarial spoofing attacks. Moreover, there is currently no unified review that addresses the full spectrum of attacks facing voice authentication systems. Existing works generally treat these threats in isolation, overlooking the interplay and compounding risks that arise when multiple attack strategies are combined. This review fills that gap by providing the first comprehensive study of data poisoning, adversarial, and deepfake synthesis attacks, as well as adversarial spoofing attacks. By integrating these perspectives, we offer an integrated view of the adversarial landscape and its implications for voice-based security systems.

This paper is organized as follows. Section 2 presents the motivation behind studying threats to voice authentication systems, emphasizing the growing reliance on voice-based security. Section 3 provides background on voice authentication systems and the typical threat models they face. Section 4 examines data poisoning attacks, discussing techniques that compromise training data to subvert model behavior. Section 5 delves into adversarial attacks, where carefully crafted audio inputs are designed to mislead voice authentication systems during inference. Section 6 investigates deepfake attacks, focusing on the creation of synthetic voices and their potential to impersonate legitimate users. Section 7 addresses adversarial spoofing attacks, which target anti-spoofing countermeasures to allow malicious audio to bypass security layers. Section 8 surveys prominent datasets, benchmarks, and competitions that support research and evaluation in this domain. Section 9 offers a comparison of the different attack strategies discussed. Section 10 outlines directions for future work, suggesting ways to enhance system robustness. Finally, Section 11 provides a conclusion, summarizing the key insights and implications of this review.

2. Motivation

As voice authentication becomes popular in financial services, call centers, and personal digital assistants, its appeal as a biometric modality lies in its

convenience and natural interaction. However, the growing adoption of voice-based identity systems has drawn the attention of adversaries who exploit both human trust and technical vulnerabilities. In recent years, a ripple has been detected in real-world attacks that challenge the security promises of voice authentication.

One of the most concerning trends is the rise of deepfake voice scams, which leverage AI-generated audio to impersonate individuals and obtain unauthorized access. In 2019, fraudsters cloned the voice of a German CEO to deceive a UK energy executive into sending €220,000 to a fake supplier [28]. In a more sophisticated heist in 2020, attackers combined AI voice synthesis and email spoofing to steal about \$35 million from a UAE bank [29]. These incidents underscore the reality that cloned voices can convincingly pass for legitimate users, especially when combined with social engineering.

Even more recent attacks show the evolving threat landscape. In 2024, a finance employee at Arup Engineering was tricked into transferring \$25 million during a live video call with AI-generated fake executives [30]. Meanwhile, a LastPass employee narrowly avoided a breach after receiving deep-faked audio impersonating the company CEO [31]. Additional demonstrations have further shown how adversarial audio samples and even analog strategies, such as speaking through a PVC pipe, can subvert voice recognition systems or bypass liveness detection [32, 33].

Collectively, these real-world cases reveal that the threat is no longer theoretical. From synthetic voices to adversarial bypasses, attackers have started exploiting the very attributes that once made voice authentication seem secure. As a result, a comprehensive survey is urgently needed to evaluate these vulnerabilities and guide future research toward more robust and resilient voice authentication systems.

3. Background

3.1. List of Acronyms

To facilitate understanding, this subsection provides a list of acronyms commonly used throughout the document (see Table 1).

Table 1: List of Acronyms

Acronym	Definition
SV	Speaker Verification
ASV	Automatic Speaker Verification
SRS	Speaker Recognition System
SRE	Speaker Recognition Evaluations
CSI	Closed-set Identification
OSI	Open-set Identification
VAS	Voice Authentication Systems
VC	Voice Conversion
TTS	Text-to-Speech
ADD	Audio Deepfake Detection
DFDC	Deepfake Detection Challenge
PAD	Presentation Attack Detection
PF	Partial Fake
CMs	Anti-spoofing countermeasures
GMMs	Gaussian Mixture Models
UBM	Universal Background Model
DNN	Deep Neural Network
CNN	Convolutional Neural Networks
k-NN	k-Nearest Neighbors
GAN	Generative Adversarial Network
MFCC	Mel-Frequency Cepstral Coefficients
GFCC	Gammatone Frequency Cepstral Coefficients
SNR	Signal-to-Noise Ratio
RIR	Room Impulse Response
FIR	Finite Impulse Response
DET	Detection Error Tradeoff
EER	Equal Error Rate
ASR	Attack Success Rate
FGSM	Fast Gradient Sign Method
BIM	Basic Iterative Method
PGD	Projected Gradient Decent
NES	Natural Evolution Strategy
UAPs	Universal Adversarial Perturbations

3.2. Voice Authentication Systems Overview

Voice Authentication Systems (VAS) have evolved significantly over the years, transitioning from traditional statistical models to advanced deep learning-based architectures. Understanding the architecture and taxonomy of these systems is essential for identifying their vulnerabilities, operational contexts, and security challenges. This section provides a detailed overview of the underlying architectures and the different types of voice authentication tasks.

3.2.1. System Architectures

A typical speaker recognition system (SRS) operates in three main stages, as illustrated in Figure 1:

1. **Training phase:** The system is trained on a large dataset of voices to extract speakers’ discriminative features and learn a robust embedding space, often using deep learning models.
2. **Enrollment phase:** Each user’s voiceprint is recorded through multiple samples and transformed into a reference embedding, which is securely stored.
3. **Recognition phase:** During authentication, a new voice sample is captured, embedded, and compared to the enrolled reference using similarity scoring and thresholding strategies.

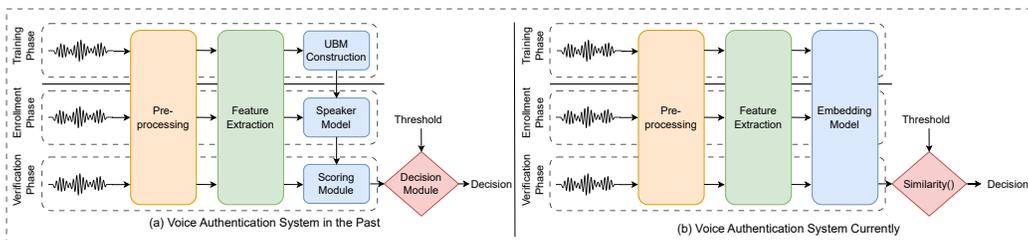


Figure 1: Speaker Recognition System Overview: (a) Overview in the past. (b) Current system – showing the modernized process where models have evolved with advancements in AI and data handling.

In traditional systems (Figure 1.a), the process begins with pre-processing and feature extraction, followed by training a Universal Background Model (UBM)[34]. Speaker-specific models are derived from the UBM during enrollment, and verification is performed using statistical techniques such as

Gaussian Mixture Models (GMMs)[35]. Models like i-vector [36] significantly improved system compactness and efficiency by encoding speaker characteristics into low-dimensional embeddings. However, this multi-stage architecture is sensitive to environmental noise and variability in speaker conditions.

Modern systems (Figure 1.b) have adopted end-to-end deep learning architectures. These systems unify pre-processing, feature extraction, and speaker modeling into a single pipeline. Rather than constructing explicit speaker models, embeddings are extracted directly from speech signals and compared using similarity metrics like cosine similarity or learned distance functions [37, 38]. While these models offer improved accuracy and scalability, they still face challenges such as environmental noise, microphone variability, and resistance to spoofing attacks (e.g., replay, synthesis, and voice conversion).

3.2.2. Voice Authentication Tasks

Voice authentication tasks can be categorized along three primary dimensions: the recognition task type, the interaction mode, and the content dependency.

1. Recognition Task Types:

- **Speaker Verification (SV):** A *one-to-one* task that verifies the claimed identity of a speaker by comparing the input voice sample to a stored reference embedding. Authentication is accepted if the similarity score exceeds a defined threshold.
- **Closed-set Identification (CSI):** A *one-to-many* classification task that identifies the speaker from a known set of enrolled users. It does not support rejection; the system must select one of the enrolled identities.
- **Open-set Identification (OSI):** Similar to CSI but includes a rejection option, allowing the system to classify a speaker as “unknown” if the similarity score does not meet the threshold.
- **Speaker Diarization:** Focuses on the question “Who spoke when?” by segmenting and clustering an audio stream according to different speakers. This task is crucial for applications like meeting transcription or call analytics.

2. Interaction Modes:

- **Active Systems:** Require users to consciously participate by speaking prompted phrases or performing voice-based actions. These systems benefit from controlled conditions, improving accuracy.
- **Passive Systems:** Operate in the background during natural conversations, offering unobtrusive authentication. However, they face greater challenges related to noise, variability, and spoofing.

3. Content Dependency:

- **Text-dependent Systems:** Rely on predefined phrases spoken by the user. Consistent wording aids system accuracy but limits user flexibility.
- **Text-independent Systems:** Allow for authentication using any speech content, offering a more natural experience and enabling passive use cases.

3.3. Attacks Definitions in Voice Authentication

Despite significant advances, voice authentication systems remain vulnerable to a diverse range of attacks that target both the training and inference phases. These attacks are often motivated by the goal of impersonating users, bypassing authentication, or degrading system performance.

To better understand the evolving focus of the research community on these threats, Figure 2 shows the number of research studies published per year that specifically address attacks against voice authentication systems.

Data poisoning attacks involve injecting carefully crafted malicious samples into the training set to manipulate the model’s behavior. A notable subclass is **backdoor attacks**, in which an attacker introduces a specific pattern or trigger during training that subsequently can be activated at inference time. These attacks are particularly concerning in **federated learning**, where malicious participants can corrupt the global model by compromising the client model. Defending against poisoning requires robust training techniques such as outlier detection, differential privacy, or adversarial training.

Adversarial attacks exploit the vulnerability of deep neural networks by adding imperceptible perturbations to audio inputs that cause misclassification. Several techniques have emerged, including additive noise, psychoacoustically-aware perturbations that remain imperceptible to humans, and universal adversarial perturbations (UAPs) that generalize across inputs.

Deepfake voice attacks involve the use of speech synthesis (TTS or VC) to mimic the vocal identity of a target speaker. Modern deepfake tools

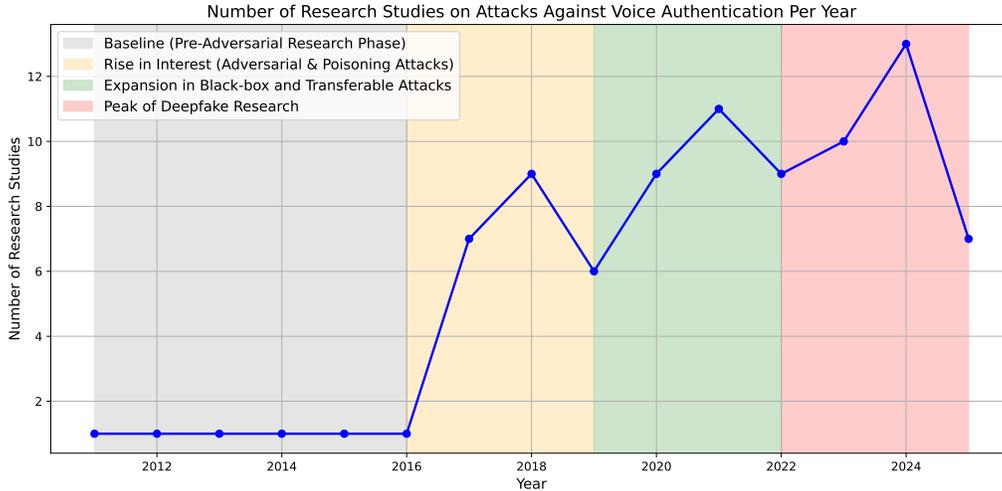


Figure 2: Number of research studies on attacks against voice authentication systems published per year.

can operate in real time, increasing the feasibility of live impersonation. The success of these attacks depends on the quality of training data and synthesis models. Recent advancements in zero-shot voice cloning enable attackers to generate convincing deepfakes with minimal reference audio, which lowers the barrier to entry. Currently, researchers produce anti-spoofing countermeasures (CMs) to prevent such attacks [27].

After designing anti-spoofing models to prevent deepfake audio attacks, attackers have adapted by launching **adversarial spoofing attacks** against both the **VAS** and the **CMs**. These attacks typically involve adding subtle perturbations to AI-generated audio, crafted by speech synthesis models, to fool the authentication system and spoofing detectors.

3.4. Attack Taxonomies

The landscape of attacks in voice authentication can be systematically categorized along several dimensions, as illustrated in Figure. 3.

Attacks are often characterized by the **attacker knowledge** they have access to:

- **White-box:** The attacker has complete access to model architecture, training data, and parameters.

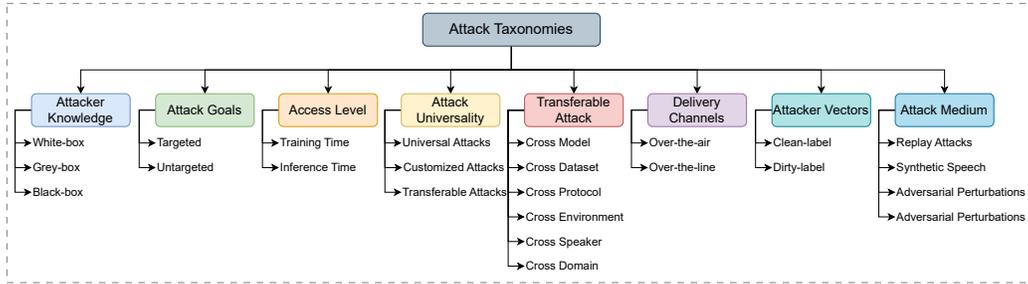


Figure 3: Comprehensive taxonomy of attacks on voice authentication systems, categorized by key factors including attacker knowledge, objectives, access level, perturbation type, transferability, medium, delivery channel, and attack vector.

- **Gray-box:** The attacker has partial knowledge, such as access to speaker embeddings, loss functions, or system design.
- **Black-box:** The attacker has no internal system knowledge and relies solely on input-output behavior, often using query-based attacks or surrogate models.

Attack objectives in VAS depend on the **attack goals** pursued by the adversary:

- **Targeted Attacks:** The attacker aims to impersonate a specific legitimate user. This includes impersonation attacks such as replay, voice conversion, or deepfake-based synthesis, where the goal is to bypass authentication by pretending to be a target speaker.
- **Untargeted Attacks:** The attacker’s goal is to cause system failures, like incorrect classification, such as misclassification, rejection of legitimate users, or degradation of model confidence.

The type of attack is influenced by the **access level**:

- **Training phase:** Enables attacks during the model training phase, including data poisoning, backdoors, or embedding adversarial triggers into training data.
- **Inference phase:** Involves attacks during model deployment or usage, such as adversarial perturbations, spoofing, and query-based attacks that exploit model behavior.

The generality of an attack is described by its **attack universality**:

- **Universal Attacks:** One crafted perturbation or method can fool multiple inputs or models.
- **Customized or Targeted Attacks:** These attacks are tailored to a particular model or input. They often require detailed knowledge of the model architecture or parameters and typically achieve high success rates against that specific target; however, they may not generalize well to other models or inputs.
- **Transferable Attacks:** Attacks crafted on one surrogate model work against another target model, which is called cross-model vulnerability.

Transferable attacks exploit adversarial examples that remain effective across different settings:

- **Cross-Model:** Attacks generated on one model architecture succeed on others with different designs.
- **Cross-Dataset:** Perturbations crafted on one dataset remain effective on another, despite differences in data distribution.
- **Cross-Protocol:** Attacks transfer between tasks such as verification and identification.
- **Cross-Environment:** Adversarial audio retains its impact under noise, channel shifts, or hardware variation.
- **Cross-Speaker:** Attacks spoof multiple user profiles beyond the original target.
- **Cross-Domain:** Transferability occurs between synthetic and natural speech inputs.

The delivery method of adversarial input is called the **attack delivery channel**:

- **Over-the-line:** Inputs are delivered digitally through online channels such as file uploads, VoIP calls, APIs, or compromised communication links.

- **Over-the-air:** Adversarial audio is played aloud in a physical space with the intent that a microphone will capture it. This includes traditional replay attacks, adversarial TTS played through speakers, and inaudible signals such as ultrasonic commands.

The method of training data compromise falls under **attacker vectors** in poisoning taxonomy:

- **Dirty-label Poisoning:** The attacker manipulates both the input (x_i) and the corresponding label (y_i), often injecting incorrect labels to misguide learning.
- **Clean-label Poisoning:** Only the input (x_i) is subtly altered, while the label remains correct. These attacks are stealthier and harder to detect since the data appears valid.

The form of adversarial input is referred to as the **attack medium**:

- **Replay Attacks:** Use of pre-recorded audio from a target speaker, typically played back via a speaker or other device to simulate a live voice.
- **Synthetic Speech:** Generation of voice samples using AI-based techniques (TTS or VC) to imitate a target speaker’s voice.
- **Adversarial Perturbations:** crafted modifications to benign audio signals that cause misclassification without being noticeable to humans.
- **Environmental Manipulation:** Attacks involving the physical space, such as injecting perturbations through room acoustics, exploiting microphone characteristics, or introducing background signals to interfere with the system.

3.5. Threat Models in Voice Authentication Attacks

Voice authentication systems are vulnerable to a variety of sophisticated threats, each exploiting different stages of the machine learning lifecycle or system architecture. Figure 4 illustrates the relationship between these attack types.

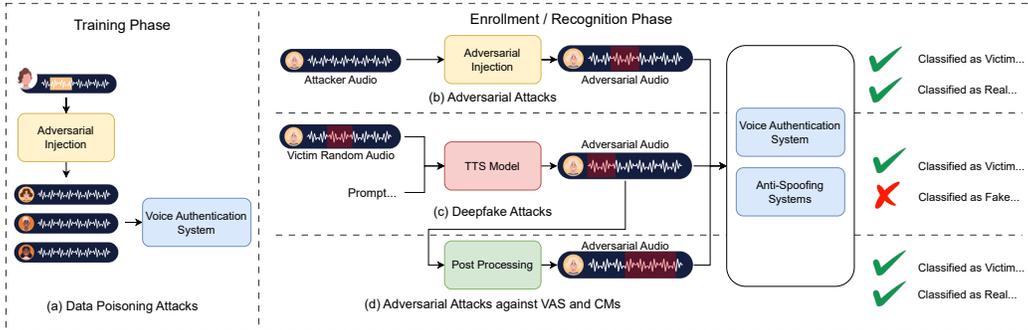


Figure 4: Attacks Threat Models (a) Data Poisoning Attacks. (b) Adversarial Attacks. (c) Deepfake Audio Attacks. (d) Adversarial Spoofing Attacks.

3.5.1. Data Poisoning Threat Models

Data poisoning attacks target the training phase of VAS by injecting malicious or manipulated data into the model’s training pipeline to corrupt its learned representations or behavior.

As discussed in Section 3.4, the attacker’s knowledge can vary: in a *white-box* setting, they may craft highly optimized poisoned inputs using full model access; in a *gray-box* scenario, poisoning is guided by partial system knowledge; and in a *black-box* setting, attacks rely on limited feedback or surrogate datasets. Poisoning goals may be *targeted*, such as embedding a backdoor to impersonate a specific user, or *untargeted*, aiming to degrade the model’s overall performance. Attack vectors include both *clean-label* and *dirty-label* strategies, depending on whether the injected samples are correctly or incorrectly labeled.

Further technical details and relevant literature will be discussed in Section 4.

3.5.2. Adversarial Threat Models

Adversarial attacks exploit vulnerabilities during the inference phase by introducing carefully crafted perturbations to input audio. These perturbations are typically imperceptible to humans and constrained under L_p -norm bounds (e.g., L_2 , L_∞), allowing them to bypass detection while manipulating model predictions.

According to the taxonomy in Section 3.4, adversarial attacks may occur under *white-box* conditions, where the attacker leverages full model access to compute gradients; *gray-box* settings, with partial system knowledge; or

black-box scenarios, relying on queries or transferability. The objective may be *targeted*, forcing the system to accept an adversary as a specific user, or *untargeted*, simply inducing misclassification or denial of access. Effective adversarial examples maintain a trade-off between attack success and perceptual naturalness.

Further technical details and relevant literature will be discussed in Section 5.

3.5.3. Deepfake Voice Threat Models

Deepfake voice attacks exploit generative models to synthesize speech that mimics a target speaker, aiming to deceive VAS. The success of these attacks depends largely on the attacker’s available resources.

The attacker’s goal is typically *targeted*, seeking to impersonate a specific speaker by generating audio that meets or exceeds the similarity threshold τ required for authentication. Common techniques include *VC*, which transforms one speaker’s voice to sound like another’s, and *TTS*, where new phrases are generated using a cloned voice profile. These attacks challenge a system’s ability to distinguish between genuine and synthetic input, particularly as deep generative models continue to improve.

Further technical details and relevant literature will be discussed in Section 6.

3.5.4. Adversarial Spoofing Threat Models

Some of the most critical threats emerge when adversarial perturbations are designed to deceive both VAS and anti-spoofing CMs. These attacks typically utilize the output of TTS or VC systems, which are already capable of targeting VAS, and further adapt them to bypass anti-spoofing CMs as well.

These attacks can follow a *white-box* paradigm, where the adversary has access to gradients of both the speaker recognition model f_θ and the spoof detector d_ϕ , allowing for coordinated optimization across both targets. These dual-purpose attacks typically involve minimizing a joint loss function: $\mathcal{L}_{\text{auth}} + \lambda\mathcal{L}_{\text{spooof}}$, where λ adjusts the emphasis between breaking authentication and bypassing spoof detection. In *black-box* or *gray-box* settings, attackers use surrogate models or query-based methods to approximate behavior. The attack goal may be either *targeted* or *untargeted*, depending on whether the adversary seeks impersonation or generalized evasion.

This multi-objective threat landscape underscores the need for robust, multi-layered defense strategies.

Further technical details and relevant literature will be discussed in Section 7.

4. Data Poisoning Attacks

Data poisoning attacks are a critical security concern for VAS, where adversaries manipulate training data to compromise a model’s integrity or availability [15, 16, 39]. With the increasing reliance on third-party data sources, including cloud-based services and web scraping, the risk of unintentionally incorporating poisoned data into training pipelines has increased significantly, particularly in the audio domain, where model training is computationally expensive and data-hungry [39, 15]. A summary of these attacks is illustrated in Table. 2.

4.1. Untargeted Data Poisoning Attacks

Untargeted data poisoning attacks aim to degrade a model’s overall performance without targeting specific outputs. Fowl et al. [40] demonstrated this by injecting adversarial examples into training sets. Their method uses crafted Projected Gradient Descent (PGD) perturbations on a substitute CNN to generate semantically valid but misleading inputs. Although this was effective in lab settings, it requires access to the pretrained model and full-batch training data, which often breaks down in streaming or privacy-preserving voice data pipelines, limiting real-world applicability.

Huang et al. [41] proposed an alternative approach using unlearnable examples, which suppress informative features in training data, disrupting representation learning in audio models. Although this clean-label method cleverly avoids detection through label inspection, its effectiveness heavily depends on the model’s inability to recover signal through preprocessing or data augmentation, standard practices in modern voice pipelines. This reliance makes the attack less transferable.

WaveFuzz by Ge et al. [42] takes clean-label poisoning a step further by changing Mel-Frequency Cepstral Coefficients (MFCC) features to mislead speech models without affecting human perception. Their method lowers accuracy in end-to-end training, but it relies on certain feature extraction techniques, like MFCC. It also has less effect on stronger architectures, such as ResNet-18 and Kaldi [43], which shows its limited ability to generalize.

Additionally, the need to poison at least 10% of the training data brings up concerns about practicality in real-world use.

A more targeted attack is SyntheticPop [44], which exploits liveness detection systems that use pop noise, like VoicePop [45], by embedding low-frequency sine-wave “pops” into training samples. This manipulation at the feature level causes Gammatone Frequency Cepstral Coefficients (GFCC)-based detectors to fail. The accuracy drops from 69% to 14% with only 20% poisoning. While this approach is impressive, it assumes white-box access to the target’s audio pipeline. It does not work against systems that use different feature sets or basic denoising, which lowers its threat level in more diverse or well-defended environments.

Across these works, a pattern emerges. Untargeted poisoning methods for audio depend heavily on certain model assumptions, such as known architectures, fixed features, and large-scale poisoning. This reliance weakens their transferability and realism. The field needs more flexible and discreet poisoning strategies that consider audio-specific issues like preprocessing pipelines, limited labels, and data streaming.

4.2. Targeted Data Poisoning Attacks

Targeted data poisoning attacks aim to manipulate machine learning models to misclassify specific targets at inference time, without degrading overall performance. These attacks pose a critical risk to biometric systems, where identity spoofing can have serious consequences.

One influential method is the feature collision poisoning introduced by Shafahi et al. [46]. In this approach, adversarial examples are created to resemble target samples in the feature space while still looking harmless in the input space. This technique achieved a 100% success rate in transfer learning scenarios using a single poisoned sample, with a negligible accuracy loss. However, its scalability to end-to-end models is limited; achieving comparable success required up to 50 poison instances, enhanced using a 30% opacity watermark of the target, highlighting a trade-off between attack stealth and practicality.

Expanding into the voice domain, Li et al. [47] showed a two-phase attack on speaker recognition models like DeepSpeaker [38]. They used label flipping during training and later mixed attacker samples with victim identities in the enrollment process. This method achieved up to 90% success while keeping overall accuracy high. However, their threat model assumes access to the training pipeline and uses a large number of enrollment samples

(10). This does not reflect real-world practices, where systems usually use fewer samples (1–3) [48, 49]. Additionally, the attack’s effectiveness depends on ideal conditions, which may not be present in production systems. This raises doubts about its practical use.

Addressing these limitations, Mohammadi et al. [50] proposed a more practical evaluation of poisoning threats. They focused on stealthy, small-scale poisoning with 5% data contamination. They introduced a hybrid CNN and k-Nearest Neighbors (k-NN) defense that exceeded earlier defenses (The Guardian [47]) in detection accuracy on real-world datasets, such as Vox-Celeb [51]. Their approach balances robustness and usability, but it still assumes that the attacker can inject poisoned samples labeled as the victim. This assumption may not match typical production systems where training happens offline and is separated from user-specific data.

In summary, targeted poisoning attacks have produced strong results in controlled settings. However, there are major gaps between these situations and real-world systems. The success of these attacks mainly relies on access to the training process and the inner workings of the model. This highlights the need to create threat models that consider practical deployment environments.

4.3. Backdoor Attacks

Backdoor attacks in machine learning involve inserting harmful behaviors into a model during training. These behaviors activate only when specific, often subtle, triggers are present. Unlike data poisoning, backdoor attacks aim to maintain high accuracy on clean inputs while secretly allowing targeted misclassification. This threat is especially pronounced in speaker verification and identification systems, where backdoors can silently override identity checks.

4.3.1. Trigger Mechanisms

Early work by Liu et al. [52] introduced a foundational Trojaning method, embedding triggers by manipulating high-activation neurons and reverse-engineering synthetic training data. This attack achieved near-perfect success across domains (including face recognition and driving systems) with minimal computational overhead and no loss in model accuracy. However, it relied on full white-box access, which limits applicability in production environments.

Building on this, Xu et al. [53] proposed a broader taxonomy of backdoor strategies—modification, blending, and parameter/latent attacks—each

targeting different modalities. While successful in vision and speech domains, attacks like blending were less effective due to feature interference, and parameter-based methods struggled with non-vision tasks. Crucially, these attacks required access to the training dataset, reducing their stealth in practical deployment settings.

4.3.2. *Audio-Specific Triggers*

As attacks advanced, researchers explored novel, audio-specific triggers that exploit unique acoustic properties. For instance, Zhai et al. [54] designed a clustering-based approach for speaker verification, using low-energy spectral noise per cluster. Their attack retained stealth (minimal Equal Error Rate (EER) elevation) while outperforming traditional backdoors like Bad-Nets. However, it traded off simplicity for operational complexity, requiring multiple trigger variants and increased inference-time burden.

A more subtle and innovative approach was introduced by Schoof et al. [55] in EmoBack, which utilized emotional prosody (e.g., pitch and speech rate) as a dynamic trigger. This strategy achieved an Attack Success Rate (ASR) up to 98.9% while preserving clean accuracy. Yet, its performance varied by emotion and model architecture, and it required higher poisoning rates (5–10%), reducing stealth. Defensive pruning degraded the attack partially, underscoring the ongoing cat-and-mouse nature of mitigation.

Pushing stealth to the extreme, Zhang et al. [56] leveraged voice conversion using FreeVC [57] to poison training data with speaker-morphed utterances, achieving 99.94% ASR with only 1% poisoning. These samples preserved the original semantics while replacing the speaker identity—a significant step toward imperceptible attacks. However, their generalizability was constrained: effectiveness sharply dropped when voiceprints did not match across train and test speakers, and success remained architecture-dependent (e.g., RawNet3 > X-vectors).

4.3.3. *Inaudible Triggers*

In parallel, Cai et al. [58] introduced inaudible triggers via ultrasonic frequencies (18–22 kHz) and pitch modifications (PBSM), exploiting psychoacoustic masking. These triggers were effective (ASR up to 100%) yet vulnerable to environmental noise and hardware variability. Follow-up analysis by Mohammadi et al. [59] demonstrated that these spectral attacks can bypass traditional defenses but fail under common preprocessing techniques like downsampling or non-linear transformations.

This growing class of non-semantic triggers—from environmental sounds (e.g., keyboard clicks) to emotional embeddings—offers high success rates but raises concerns about practical deployment. Triggers must survive real-world transformations and remain undetectable across devices, which is not always feasible. Emotional triggers, for example, may be misclassified due to natural variation, leading to false positives.

5. Adversarial Attacks

Adversarial attacks involve subtle, often hard-to-notice changes to speech signals designed to mislead SRS. Unlike spoofing, adversarial attacks directly alter the model’s decision boundaries. As speaker recognition technologies have evolved from traditional models, like GMM-UBM pipelines, to deep learning-based models like x-vector [37] and ECAPA-TDNN [60], the complexity and attack realism strategies have also grown. These strategies have evolved from purely digital changes to real-world, over-the-air implementations. Table. 3 presents a summary of adversarial attacks.

5.1. Foundational Work

The threat of adversarial audio was first examined by Hautamäki et al. in their study [61]. They employed professional impersonators to target SV systems. Although false acceptance rates rose slightly, from 9.03% to 11.61%, these mimicry attacks showed that human-level imitation is not a serious danger when compared to synthetic methods.

A key change occurred with Kreuk et al. [62], who used the Fast Gradient Sign Method (FGSM) to create targeted adversarial changes for end-to-end neural models. This significantly reduced accuracy from 85.5% to 37.5% on YOHO [63]) and dramatically increased false-positive rates. Additionally, their adversarial examples transferred between datasets and architectures, providing strong evidence of deep vulnerabilities in neural SRS.

5.2. White-Box Attacks

Li et al. [64, 65] extended these attacks to traditional systems such as GMM-UBM and i-vectors. By applying FGSM to the feature space, they raised false acceptance rates to nearly 100% under imperceptible perturbations. In later work, they employed room impulse response (RIR) modeling to simulate real acoustic environments, achieving up to 50% EER in black-box transfer scenarios, moving adversarial attacks closer to real-world feasibility.

Table 2: Summary of Data Poisoning and Backdoor Attacks on Voice Authentication Systems.

Study	Year	Mechanism	Target	Poisoning Rate	ASR	Notes / Limitations
[40]	2021	Adv. Ex-amples	CNN-SV	—	—	Requires pre-trained model and full dataset access
[41]	2021	Unlearnable Examples	Audio CNNs	—	—	Vulnerable to preprocessing/augmentation
[42]	2022	Clean-label flip	MFCC-based models	$\geq 10\%$	—	Less effective on ResNet/FFT, Kaldi shows robustness
[44]	2025	Synthetic Pop Noise	GFCC + SVM	20%	95%	White-box, pop-noise specific, mitigated by suppression
[46]	2018	Feature Collision	MFCC-based models	—	—	Classical attack, less explored in audio domain
[47]	2023	Enrollment Injection	DeepSpeaker	10% Train. - 50% En-roll	90%	Unrealistic assumptions about enrollment data access
[50]	2024	Low-rate Label Flip	LibriSpeech, VoxCeleb	5%	—	Assumes attacker controls training, limited in deployed systems
[52]	2018	Neuron Trigger	Neural Networks	—	95.5–100%	Full white-box access required
[53]	2021	Blending, Parameter	Speaker Recognition Models	—	98.66%	Detectable triggers, poor transfer to text/tabular data
[54]	2021	Clustering Trigger	SV Systems	15%	63.5%	Limited stealth at high rates, cluster sensitivity
[58]	2022	Ultrasonic Frequency Trigger	Frequency-sensitive Models	$< 5\%$	95–100%	Hardware sensitivity, fails under downsampling
[56]	2023	Voice Conversion Trigger	VoxCeleb1-based Models	1%	99.94%	Fails for mismatched voices, task-dependent performance
[55]	2024	Emotional Prosody Trigger	ResNet, X-vector, ECAPA	5–10%	98.9%	Emotion-dependent, pruning reduces efficacy
[59]	2025	Backdoor Defense	Spectrogram-based Detectors	N/A	—	Reveals PBSM stealth limits, preprocessing counters attack

Joshi et al. [66] analyzed modern x-vector-based systems under white-box conditions, showing that attacks like BIM, PGD, and Carlini-Wagner reduced classification accuracy to near-zero even under minimal perturbation ($L_\infty = 0.001$). These results underscore the inherent fragility of deep speaker representations in the absence of robust defenses.

5.3. Black-Box Attacks

More recent efforts focus on realistic attack settings with limited model access. Zhang et al. [67] introduced *VMask*, which uses psychoacoustic masking to guide perturbation generation, significantly boosting false acceptance (e.g., 3.9% to 88.2%) while preserving perceptual quality.

FakeBob [22] demonstrated a black-box attack using Natural Evolution Strategy (NES) and BIM to achieve over 90% targeted success on i-vector systems. However, the method required thousands of queries per sample and prior knowledge of the target model, limiting its practicality for real-time deployment.

Chen et al. [68] proposed QFA2SR, that pushed further by developing a query-free attack that uses ensemble-based surrogate modeling and knowledge distillation. The attack reached 89.3% success on commercial APIs like Microsoft Azure, though it demanded significant computational resources due to surrogate training and optimization complexity.

5.4. Physical Attacks

To bridge the gap between simulation and real-world application, Chen et al. [69] proposed a generalizable, transfer-based framework that supports SV, CSI, and OSI. Using multi-task learning and RIR simulation, AS2T achieved success rates up to 98.5% in white-box settings, demonstrating cross-task generalization.

PhyTalker [70] brought adversarial attacks into real-time physical space by injecting phoneme-level perturbations during live playback via speakers. Achieving 85% targeted success in real-world conditions without model access, PhyTalker showed how physical attacks can defeat even robust systems without retraining or dataset access.

Complementarily, Kassis et al. [71] used pitch and duration manipulations to clone prosodic patterns, bypassing both speaker verification and spoofing defenses. Although effective (>90% ASR), this method required over 100 high-quality utterances per target speaker, limiting its scalability.

Table 3: Comparison of Key Adversarial Attacks on Voice Authentication Systems.

Study	Year	Attack	Target SRS	Method	Results	Limitations / Notes
[61]	2013	Human mimicry	GMM-UBM, i-vector	Professional impersonation	FAR \uparrow 9.03% \rightarrow 11.61%	Less effective vs. synthetic attacks
[62]	2018	White-box, transferable	End-to-end (YOHO, NTIMIT)	FGSM on MFCC	Acc \downarrow 85.5% \rightarrow 37.5%, FPR \uparrow 4.88% \rightarrow 94.63%	Strong transferability
[64]	2020	White-box, Black-box	GMM-UBM, x-vector	FGSM + RIR sim.	FAR \uparrow to 99.99%, EER \uparrow to 50%	Imperceptible noise; transferable
[66]	2021	White-box	x-vector	BIM, PGD, CW attack	Acc \downarrow to 0% at $L_\infty=0.001$	Extremely vulnerable even with small ℓ_∞
[69]	2022	White-box, transferable	SV, CSI, OSI	Multi-task + RIR sim.	Acc \uparrow 98.5% (SV), 97.6% (CSI)	Strong generalization
[67]	2020	Black-box (stealth)	i-vector, x-vector	Psychoacoustic masking (VMask)	FAR \uparrow 3.9% \rightarrow 88.2%	High stealth, indistinguishable audio
[22]	2021	Black-box (targeted)	GMM-UBM, i-vector	NES + BIM	ASR: 90.5% (i-vector), 78.6% (GMM-UBM)	High query cost/sample
[68]	2023	Black-box (query-free)	Azure API	Surrogate ensemble + KD	ASR \uparrow to 89.3%	Costly surrogate training
[70]	2022	Black-box (physical)	Real-time SRS	Time-domain phoneme injection	ASR \uparrow 85% OTA	Real-time; no model access
[71]	2023	Physical (signal)	SRS + Anti-spoof	Prosody + spectral cloning	ASR \uparrow >90% (ASVspoof, SASV)	Needs 100+ target utterances

6. Deepfake Attacks

Deepfake speech attacks exploit advanced voice synthesis techniques, such as VC and TTS, to impersonate users in SRS. These attacks can bypass both automated authentication systems and human listeners by generating speech that closely mimics a target speaker’s voice, often using minimal training data. Unlike traditional spoofing, which relies on replayed audio, deepfake attacks can fabricate entirely new utterances, expanding the threat surface considerably. As generative models become more accessible and natural-sounding, deepfake attacks pose a growing challenge to voice-based security systems. A summary of these attacks is illustrated in Table. 4.

Scope Note: Although a large body of work exists on high-quality speech synthesis and voice cloning technologies—such as Tacotron 2 [72], VITS [73], and Vall-E [74]—we limit our review to studies that explicitly evaluate these technologies in the context of adversarial attacks against speaker recognition systems. General-purpose TTS or voice conversion models not assessed in a threat setting are excluded to maintain focus on empirical evidence of system vulnerabilities [75, 76, 72, 77, 74, 3, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 57, 96, 97].

6.1. Foundation Work

One of the earliest empirical demonstrations of AI-powered voice spoofing was conducted by Saxena et al. [98]. Using an off-the-shelf voice morphing tool, they reconstructed a target speaker’s voice using only a few minutes of enrollment data. The manipulated voices were evaluated against both automated speaker verification systems and human listeners. Their results were striking: state-of-the-art SRS failed to reject 80–90% of spoofed attempts, and human listeners only correctly identified fakes about 50% of the time, particularly when the attacker mimicked familiar individuals.

This study served as an early warning about the potency of voice conversion attacks and underscored the limitations of both machine-based and human auditory verification. It also emphasized the urgency of developing liveness detection and anti-spoofing strategies before high-fidelity synthesis technologies became more widespread.

6.2. Partial Fake (PF) Attacks

More recent work has shifted toward *PF* speech, where only segments of an utterance are synthetically generated. Alali et al. [99] explored PF attacks using zero-shot TTS and VC models, such as VITS and YourTTS. Their

findings reveal that both humans and SRS models remain highly susceptible to these nuanced manipulations. Partial fakes—because they preserve some genuine speech—are often more difficult to detect than fully synthetic samples, especially in zero-shot scenarios where no speaker-specific fine-tuning is needed.

Despite demonstrating strong attack success across multiple systems, the study leaves several open questions. It lacks evaluation under noisy or real-world deployment conditions (e.g., background speech, channel variation) and does not assess defense mechanisms or adversarial robustness. These limitations reduce the actionable value of the findings for real-time or production-grade systems.

Table 4: Summary of Deepfake Attacks on Voice Authentication Systems.

Study	Year	Type	Target	Method	Effect	Limitations
[98]	2015	Full Voice Imitation	ASV & Human	Voice morphing from a few minutes of speech	ASV bypass \uparrow (80–90%), Human error \rightarrow 50%	Early tools; no env. or cross-lingual tests
[99]	2025	Partial Speech	Fake SRS & Human	Zero-shot TTS (YourTTS), VC (VITS) for partial synthesis	Detection \downarrow (systems & humans)	Noisy/multilingual settings untested; defense eval. limited

7. Adversarial Spoofing Attacks

Anti-spoofing countermeasures (CMs), also known as presentation attack detection (PAD), are a critical defense line in SV pipelines, designed to distinguish bona fide speech from spoofed audio. However, recent studies have demonstrated that these systems are highly vulnerable to adversarial attacks, which introduce crafted perturbations to degrade the reliability of CMs and increase the false acceptance of synthetic or replayed speech. Table. 5 presents a summary of these attacks.

7.1. White-Box Attacks

Early efforts, by Liu et al. [100], utilized white-box adversarial techniques, such as FGSM and PGD, to PAD models. Even minimal perturbations (ϵ below human perceptibility) caused detector error rates to rise drastically—up

to 85–95% in some cases. These results reveal that, with access to model gradients, attackers can nearly eliminate the PAD’s ability to detect spoofed speech, effectively reducing its performance to random guessing.

Building on this, Gomez-Alanis et al. [101] proposed a trainable adversarial generator named ABTN (Adversarial Biometrics Transformation Network), designed to optimize perturbations using PAD and ASV losses. ABTN outperformed traditional FGSM by generating perturbations that generalized better across spoof types and preserved the speaker’s identity, thus fooling PAD without raising flags in the ASV system. It improved attack EER by 27–51% (absolute) across ASVspoof 2019 logical and physical access protocols [102].

7.2. Black-Box Attacks

To overcome the limitations of white-box assumptions, several works have explored black-box strategies. Zhang et al. [67] developed VMask, which utilizes psychoacoustic masking to craft perturbations imperceptible to humans but effective against commercial and open-source systems. However, its real-world applicability was hindered by playback sensitivity and environmental noise.

GANBA [103] introduced a conditional GAN architecture capable of simultaneously fooling both the speaker verification and PAD modules. Trained on bona fide and spoofed samples, the model generated synthetic utterances with high perceptual quality. Evaluations on ASVspoof 2019 showed that speaker verification accuracy dropped below 20%, and PAD performance significantly degraded, illustrating the danger of jointly optimized, high-quality adversarial audio.

A more physically robust approach was introduced by Kassis et al. [71], who proposed a lightweight signal processing attack that successfully fooled both ASV and CM systems under over-the-air playback. By cloning prosodic and spectral features from high-quality speaker recordings, the attack bypassed multiple detection systems; however, it required at least 15 minutes of speech from the target speaker and was less effective against advanced models, like Wav2Vec-based PADs.

Xuan Hai et al. [104] presented *SiFDetectCracker*, a black-box query-based attack that perturbs non-speech segments (e.g., silence, background noise) to exploit the reliance of PADs on environmental cues. The attack achieved over 80% success rate without altering speaker-identifying components, thereby remaining effective for ASV and human listeners. This

highlights that adversarial success does not require manipulating the entire signal—targeting peripheral acoustic features may suffice.

Zuo et al. [105] presented *AdvTTS*, a two-stage framework that combines zero-shot TTS with PGD-based perturbation of speaker embeddings. The attack achieved strong results in black-box settings. However, relies on surrogate models and incurs some degradation in naturalness, which may impact stealth in real-world applications.

A different attack type involves creating universal adversarial filters. Parnariello et al. [106] introduced *Malafide*, a fixed finite impulse response (FIR) filter learned via adversarial training. Once optimized, the filter can be convolved with any spoofed utterance to evade detection, without needing input-specific perturbation. The method was effective even against top-performing deep PADs and is practical for real-time application via playback devices or frequency response shaping.

This approach was extended in *Malacopula* [107], a nonlinear filter targeting the ASV component itself by enhancing spoofed audio to better match the victim’s voice. These methods demonstrate a trend toward physical-world-capable adversarial strategies that survive digital-to-analog transformations, re-recording, and transmission through real-world channels.

8. Evaluation

8.1. Popular Datasets

Evaluating VAS and studying their vulnerabilities requires access to diverse and well-annotated datasets. Over the past decade, several benchmark datasets have been developed to support research in SV, spoofing detection, and adversarial robustness. An overview of dataset distribution per field is illustrated in Figure 5, offering a visual breakdown of the number of datasets categorized by their primary research purpose. Additionally, A detailed comparison of these datasets is provided in Table. 6.

Among the most widely used for SV are VoxCeleb1 [108] and VoxCeleb2 [109], which consist of real-world audio samples collected from celebrity interviews on YouTube. These datasets are particularly valuable for training and evaluating deep learning models in unconstrained, noisy environments. LibriSpeech [110], TIMIT [111], and NTIMIT [112] offer cleaner and more controlled conditions, with NTIMIT providing a telephone-quality version of TIMIT that introduces channel variability while preserving phonetic alignment. This makes them suitable for baseline models, phonetic analysis,

Table 5: Summary of Adversarial Spoofing Attacks on Voice Authentication and Anti-Spoofing Systems.

Study	Year	Access	Method	Target	Effect	Notes
[100]	2019	White-box	Gradient-based perturbations	PAD	↑ Error rate >85% (large ϵ)	Needs gradients; small-norm bound
[101]	2022	White-box	ABTN (adversarial generator, PAD+ASV loss)	PAD, ASV	↑ Attack EER +27–51%	Generalizes better than FGSM; identity preserved
[103]	2022	White-box	GAN-generated spoof speech	PAD, ASV	↓ ASV Acc <20%; PAD degraded	High compute; training overhead
[67]	2020	Black-box	Psychoacoustic, mimicry	PAD	↑ ASR; realistic audio	Playback constraints; noise-sensitive
[71]	2023	Black-box	Playback perturbation	ASV, CM	↓ Acc even under replay	Needs 15+ min data; weak on strong CMs
[104]	2023	Black-box	Perturbing background/silence via score queries	PAD	↑ >80% ASR; identity preserved	Query-heavy; PAD-specific
[106]	2023	Black-box (univ.)	FIR adversarial filter	PAD	→ Universal spoofing; real-time feasible	Attack-tuned; generalization limited
[107]	2024	Black-box (univ.)	Nonlinear adversarial filter (Malacopula)	ASV	↑ Voice match; bypasses ASV	Targets ASV instead of PAD; physical-world viable
[105]	2024	Black-box	Zero-shot TTS, PGD on speaker emb.	SI, PAD	↑ Transferable; bypasses ADD	Uses surrogate models; quality drop

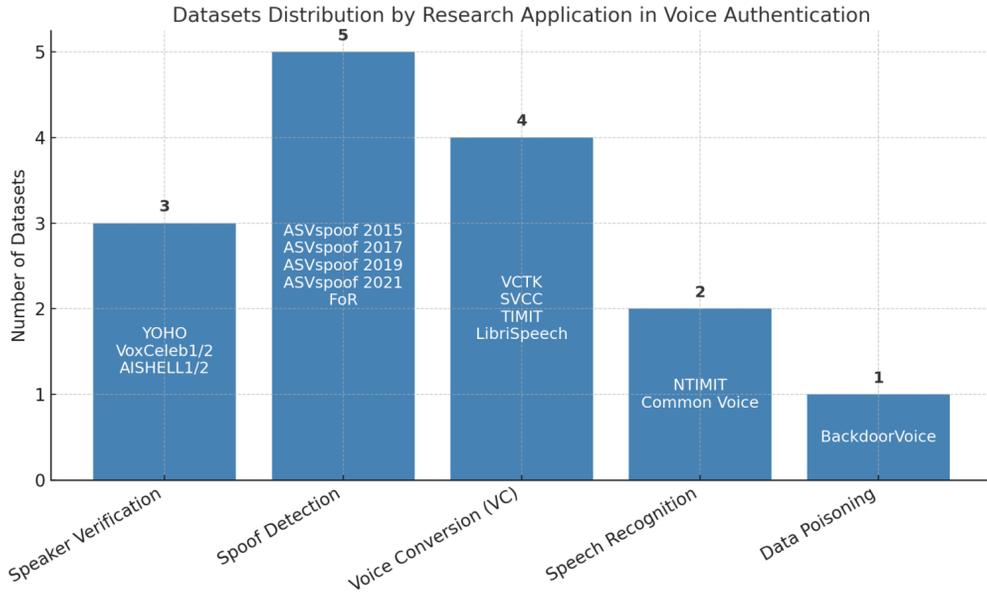


Figure 5: Distribution of voice-related datasets across different research fields such as Speaker Verification, Spoofing Detection, Voice Conversion, Speech Recognition, and Data Poisoning.

and exploring channel robustness. Mozilla’s Common Voice [113] and the AISHELL datasets [114, 115] expand the focus to multilingual and Mandarin speech, respectively.

In the context of spoofing and synthetic voice detection, the ASVspoof challenges [116, 117, 102, 118] have provided standardized protocols and data for evaluating systems under various types of attacks, including replay, TTS, and VC. Recently, datasets such as Fake or Real (FoR) [119] and BackdoorVoice [120] are specifically designed for deepfake detection and data poisoning attack evaluation, respectively. The Voice Conversion Challenge (SVCC) datasets [121] also contain a diverse set of converted and genuine voice samples to benchmark VC systems and anti-spoofing models.

8.2. Evaluation Metrics

The standard metrics for evaluating SV systems include:

- **Equal Error Rate (EER):** The rate at which the false acceptance rate (FAR) equals the false rejection rate (FRR). Lower EER indicates

Table 6: Comparison of Voice Authentication and Spoofing Datasets.

Dataset	Purpose	# Spkrs	Content Type	Spoofing Attacks
YOHO [63]	SV	138	Fixed phrases, mic-recorded in lab	—
VoxCeleb1/2 [108, 109, 51]	SV	1,251 / 6,112	Celebrity interviews (YouTube)	—
AISHELL1/2 [114, 115]	Mandarin SV	400+	Mandarin, read speech	—
TIMIT [111]	Phonetics / SID	630	Phonetic, scripted, studio speech	—
NTIMIT [112]	SR (Noisy Env.)	630	Phonetic speech, telephone-quality	—
LibriSpeech [110]	ASR / SID	~2,400	Audiobooks (clean/noisy)	—
Common Voice [113]	Multilingual SR	>90,000	Crowdsourced, multilingual speech	—
VCTK [122]	VC / SID	109	Read speech, accented, studio-recorded	—
SVCC [121]	VC benchmark	Varies	Natural and converted speech	VC
ASVspoof 2015 [116]	Anti-spoofing	106	Logical	Synth., Replay
ASVspoof 2017 [117]	Replay detection	10	Replay across acoustic setups	Replay
ASVspoof 2019 [102]	Advanced spoofing	121	Logical (VC/TTS), Physical (Replay)	VC, TTS, Replay
ASVspoof 2021 [118]	Deepfake detection	208	Neural (VC/TTS), replay, noisy cond.	Neural VC, TTS, Replay
FoR [119]	Deepfake detection	110	Real vs. TTS clips	TTS
BackdoorVoice [120]	Data poisoning	150	Clean vs. triggered utterances	Backdoor

better system accuracy.

- **Detection Error Tradeoff (DET) Curve:** A plot showing the trade-off between FAR and FRR over different thresholds, used to visualize system performance.
- **Attack Success Rate (ASR):** The proportion of adversarial attempts that successfully fool the system. A higher ASR indicates the system is more vulnerable.
- **Signal-to-Noise Ratio (SNR):** Measures the strength of the original signal relative to adversarial noise. Higher SNR indicates less perceptible attacks.

$$\text{SNR (dB)} = 10 \log_{10} \left(\frac{P_{\text{signal}}}{P_{\text{noise}}} \right)$$

- **t-DCF (tandem Detection Cost Function):** A primary metric for evaluating automatic speaker verification systems in combination with countermeasure systems. Lower t-DCF values indicate better joint system performance.

$$\text{t-DCF} = C_{\text{miss}}^{\text{ASV}} \cdot \pi_{\text{tar}} \cdot P_{\text{miss}}^{\text{ASV}} + C_{\text{fa}}^{\text{ASV}} \cdot \pi_{\text{non}} \cdot P_{\text{fa}}^{\text{ASV}} + C_{\text{fa}}^{\text{CM}} \cdot \pi_{\text{spoof}} \cdot P_{\text{fa}}^{\text{CM}} + C_{\text{miss}}^{\text{CM}} \cdot \pi_{\text{tar}} \cdot P_{\text{miss}}^{\text{CM}}$$

8.3. Competitions

Table 7 provides a comparative overview of the major anti-spoofing competitions, summarizing their key characteristics, attack types, and contributions to the field.

8.3.1. Speaker Verification Competitions

Several benchmark competitions have significantly improved the field of speaker verification. **The NIST Speaker Recognition Evaluations (SRE)** [123] have played a critical role since 1996 in shaping speaker recognition research. These evaluations focus on assessing systems under a wide range of real-world conditions, including language variability, channel effects, and environmental noise.

More recently, the **VOICES from a Distance Challenge** [124] has targeted speaker recognition in far-field and acoustically challenging environments, using data captured in realistic room settings. Such challenges push the boundaries of SRS in practical, low-SNR conditions.

8.3.2. Anti-spoofing Competitions

With the rise of spoofing threats, dedicated anti-spoofing competitions have emerged. The **ASVspoof Challenge series** [116, 117, 102, 118] is the most prominent, providing standardized protocols and datasets to evaluate spoof detection systems. Each edition of ASVspoof introduces new attack types, evolving from replay and voice conversion to advanced synthetic speech generated by neural vocoders and TTS systems.

Other initiatives include the **Microsoft ADD Challenge** [125], which broadens the scope to deepfake audio detection, and the **Deepfake Detection Challenge (DFDC)** [126], which, although primarily visual, includes audio-based manipulations in its multi-modal dataset.

Table 7: Summary of Major Anti-Spoofing Competitions.

Competition	Year	Attacks	Focus	Key Contribution
ASVspoof 2015 [116]	2015	VC, SS	Standalone ASV spoofing	Introduced standard protocols for synthetic spoofing detection
ASVspoof 2017 [117]	2017	Replay	Physical replay attacks	Real-world replay attacks recorded in diverse acoustic conditions
ASVspoof 2019 [102]	2019	VC, SS, Replay	Logical and physical access	Used neural vocoders for synthesis; first division into LA and PA tasks
DFDC Audio Track [126]	2020	Deepfake (multi-modal)	Multimodal fake detection	Included manipulated audio in conjunction with manipulated video
ASVspoof 2021 [118]	2021	LA, DF, VC	Generalized anti-spoofing	Focused on generalization across spoofing types and unseen attacks
Microsoft ADD [125]	2022	TTS, VC, Deepfake	Audio deepfake detection	Realistic multi-accent dataset targeting fake audio from TTS/VC

9. Comparison and Limitations

This section provides a comparative analysis of the attack methods discussed throughout the previous sections. Table 8 summarizes the common limitations identified across all reviewed attack categories, highlighting shared vulnerabilities and constraints that hinder their practical deployment in real-world voice authentication systems.

9.1. Data Poisoning

Untargeted data poisoning methods like Our-UE [41], WaveFuzz [42], and SyntheticPop [44] rely on clean-label manipulation to degrade model performance stealthily. While effective, they typically require high poisoning ratios ($\geq 10\%$) and suffer from limited scalability, generalizability, and robustness to preprocessing.

Targeted attacks, such as those by Li et al. [47] and Mohammadi et al. [50], aim to induce specific misclassifications with minimal global impact. Though successful under ideal conditions, they often rely on unrealistic assumptions like full control over training data or victim-labeled injections, limiting real-world applicability.

Backdoor attacks exploit hidden triggers to activate malicious behavior without degrading clean performance. Advanced methods like EmoBack [55], PBSM [58], and FakeVC [56] achieve high success with minimal poisoning, but they face challenges in stealth, trigger reliability, and transferability across architectures or environments.

Across all categories, major limitations persist: reliance on white-box assumptions, sensitivity to audio preprocessing, poor scalability, and environmental fragility. While defenses (e.g., pruning, robust training) show promise, they often reduce accuracy or add complexity. Future research should focus on attacks that are adaptive, low-resource, and resilient in real-world, black-box conditions.

9.2. Adversarial Attacks

Among the studies reviewed in Section 5, adversarial attacks on SRSs largely focus on white-box and black-box scenarios. White-box methods leverage model gradients, while black-box methods aim for query-efficient, imperceptible attacks. Despite innovations such as psychoacoustic modeling and ensemble-based surrogates, practical limitations remain due to reliance on score access, high query budgets, or constrained physical-world setups.

Physical-world attacks and evaluations under realistic conditions, such as PhyTalker[70] and AS2T[69], are still uncommon and often assume semi-controlled environments. Most studies overlook countermeasure-resilient or fully over-the-air attack settings, which limits their real-world use. Additionally, generalization across different languages, time changes, and various conditions is not adequately covered. Most evaluations focus on specific datasets and assume that acoustic conditions remain unchanged.

On the defense side, progress lags significantly. Aside from a few survey mentions, proactive or real-time defenses are underexplored, and existing countermeasures are largely reactive and lack standard benchmarking. This highlights a growing asymmetry between offensive advancements and defensive maturity, signaling a need for more robust, deployment-ready protections.

9.3. Deepfake Attacks

As outlined in Section 6, deepfake-based attacks present an increasingly serious threat to SRSs, leveraging generative models for voice imitation or partial utterance replacement. Unlike traditional adversarial attacks that rely on optimization or model access, deepfake methods often succeed in fully black-box, zero-shot settings—making them highly practical and scalable. Early work using voice morphing and more recent partial spoofing (PF) techniques confirm the vulnerability of both machine and human verification systems, even with minimal attacker knowledge.

However, these attacks face limitations in real-world deployment. Most are evaluated in ideal, noise-free settings and rarely consider multilingual, low-quality, or dynamic acoustic conditions. Furthermore, generative artifacts and timing inconsistencies remain detectable in some models, and defense-aware strategies are largely unexplored. Compared to adversarial audio, where countermeasure bypass is an active research area, deepfake studies often neglect robust CM evaluations.

Overall, deepfake and adversarial approaches expose complementary weaknesses in SRSs—optimization-based attacks exploit model internals, while generative synthesis bypasses through realism. This calls for unified defense mechanisms capable of detecting both perturbation- and synthesis-based threats amid evolving generative audio capabilities.

9.4. Adversarial Attacks against CMs

As discussed in Section 7, most reviewed defenses rely on passive, model-agnostic strategies, yet they fall short against modern, adaptive attack techniques. Recent adversarial methods, discussed in Section 5, exploit subtle, non-obvious audio features or leverage universal perturbations that evade traditional PAD systems—even under physical conditions. Notably, none of the defenses evaluated address real-time constraints or defense latency, leaving systems vulnerable to fast, transferable attacks.

White-box attacks demonstrate the fragility of PADs under full access but face scalability and perceptual quality limitations. In contrast, black-box and signal-level attacks offer more realistic threat models but often depend on query access or suffer from environmental sensitivity, limiting their deployment potential. While GAN-based approaches can deceive end-to-end systems with high perceptual quality, they require intensive training and remain sensitive to architectural variance.

Across the board, key gaps persist: limited evaluation in multilingual, cross-device, or live settings, and a lack of defense solutions that are both attack- and model-agnostic. These gaps underline the urgent need for adaptive, proactive PAD systems capable of low-latency, robust detection in dynamic real-world scenarios.

Table 8: Limitations Comparison for Data Poisoning, Adversarial, Deepfake, and Adversarial Spoofing Attacks.

Limitation Category	Data Poisoning Attacks	Adversarial Attacks	Deepfake Attacks	Adversarial Spoofing Attacks
Requires model or training access	✓ High	△ Partial	✗ None	△ Partial
Breaks under preprocessing	✓ Yes	✓ Yes	✓ Yes	✓ Yes
Low transferability	✓ Present	✓ Present	✓ Present	✓ Present
Needs high resource/querying	△ Sometimes	✓ Yes	✓ Often	✓ Often
Limited real-world robustness	✓ Not robust	✓ Not robust	✓ Not robust	✓ Not robust
Multilingual/generalization gaps	✓ Present	✓ Present	✓ Present	✓ Present
Evaluated in ideal conditions	✓ Mostly	✓ Mostly	✓ Mostly	✓ Mostly
Scalability challenges	✓ Significant	✓ Significant	✓ Significant	✓ Significant

10. Future Work

Despite significant progress in voice-based biometric systems, emerging threats continue to challenge the robustness, generalizability, and real-world applicability of current defenses. We structure this section around four major threat types: **data poisoning**, **adversarial attacks**, **deepfake attacks**, and **adversarial spoofing attacks**.

Several challenges, such as limited transferability, unrealistic evaluations, and deployment inefficiency, are common across these threats. These issues are discussed in each relevant subsection and then summarized at the end.

10.1. Data Poisoning Attacks

1. **Detection of Stealthy Poisoning:** Current defenses struggle to detect ultra-subtle manipulations affecting $<1\%$ of training data. Future work should explore anomaly-sensitive detection using unsupervised learning or contrastive objectives.

2. **Realistic Threat Models:** Most poisoning studies assume white-box access and full control. Research should consider practical environments, such as federated learning, data marketplaces, or API-based systems.
3. **Transferability of Poisoned Data:** The persistence of poisoning effects across architectures and datasets remains underexplored. Understanding this will improve generalization and strength.
4. **Low-Cost and Adaptive Attacks:** Existing poisoning methods are often resource-intensive. Future attacks should be lightweight and able to change in response to defenses.
5. **Hybrid Attack Pipelines:** Combining poisoning with adversarial inputs at test time can create complex pipelines. It is important to formalize and defend against these for overall system security.

10.2. Adversarial Attacks

1. **Universal and Transferable Perturbations:** Adversarial attacks often fail across architectures and datasets. Future efforts should develop universal perturbations via meta-learning or training-agnostic methods.
2. **Realistic Benchmarking:** Many attacks are evaluated on static or clean inputs. Evaluations should include noise, compression, spontaneous dialogue, and differences between devices.
3. **Robustness in the Physical World:** Adversarial examples degrade under real-world conditions. Research into real-time, dynamic perturbations can improve attack effectiveness in live settings.
4. **Query-Efficient Black-Box Attacks:** Current methods are often impractical due to query limits. Decision-based or generative surrogate models with little supervision are promising alternatives.
5. **Cross-Lingual Transferability:** Adversarial performance drops sharply outside English datasets. Research in this area is still very limited, and future work should explore language-agnostic and multilingual attack techniques.

10.3. Deepfake Attacks

1. **Robust Detection in Real-World Environments:** Detection models must work under telephony, reverberation, crosstalk, and overlapping speech conditions, often ignored in current benchmarks.

2. **Cross-Language and Accent Generalization:** Most models are trained on English. We need multilingual datasets and features that work across different accents for global use.
3. **Artifact-Based Detection:** Deepfakes show subtle inconsistencies in their waveforms. Future detection should use frame-level alignment, waveform modeling, and detailed spectral cues.
4. **Efficient and Real-Time Inference:** Models must be deployable on edge devices and operate in real-time. Techniques such as quantization and early-exit models are needed.
5. **Adaptive Deepfakes and Defense Evasion:** Future evaluations should simulate adversarial deepfakes trained to evade known detectors, to benchmark true model robustness.

10.4. Adversarial Spoofing Attacks

1. **Threat Model Standardization:** Evaluation assumptions are inconsistent. Clear definitions for white-box, gray-box, and black-box setups will improve reproducibility.
2. **Adversarial Training of CMs:** Most CMs are not robust to adversarial audio. Training with perturbed examples is necessary to strengthen their resilience.
3. **Generalizable Detection Strategies:** CMs often overfit to specific spoofing types. Broader methods, like signal fingerprinting or multi-modal biometric fusion, can improve generalization.
4. **Active Defense Mechanisms:** Passive defenses can be bypassed. Active strategies such as randomized prompts or timing jitter can disrupt attack optimization.
5. **Low-Latency and Edge-Ready Defenses:** Deployment requires real-time capabilities. Early-exit scoring, frame-level anomaly detection, and lightweight ensembles are viable paths.

Similar Challenges

Many of the challenges mentioned above are common across different threat categories. We list the most important ones below:

1. **Transferability:** Attacks and defenses often lack generalization across models, datasets, and languages. Developing universal perturbation and detection strategies remains a critical research frontier.

2. **Realism in Evaluation:** Benchmarks frequently ignore real-world artifacts such as compression, ambient noise, spontaneous dialogue, or cross-device variability. Future evaluation protocols must simulate realistic deployment settings.
3. **Efficiency and Deployment Constraints:** Both attack and defense mechanisms must be optimized for real-time, low-power, and bandwidth-constrained environments, especially for mobile and edge devices.
4. **Standardization of Threat Models:** Inconsistent definitions of white-box, gray-box, and black-box scenarios hinder reproducibility and fair benchmarking. Future work should adopt shared assumptions and standardized evaluation setups.

Addressing these cross-cutting challenges is crucial to secure voice authentication systems and ensure they can withstand changing threats.

11. Conclusion

In this survey, we provided a comprehensive review of the threats targeting voice authentication systems. We categorized and analyzed the main types of attacks, including data poisoning, adversarial, deepfakes, and adversarial spoofing attacks. For each threat, we summarized the key techniques, identified commonly used datasets, and examined the main taxonomies used in the field. We conducted detailed comparisons and highlighted limitations across the different attack strategies. Furthermore, we organized existing research based on widely adopted taxonomies and identified key open challenges. Finally, we outlined future research directions to guide and inspire continued advancements in securing voice authentication systems.

Funding

This research is supported by the Air Force Office of Scientific Research under award number FA2386-23-1-4003.

Declaration of generative AI and AI-assisted technologies in the writing process

During the preparation of this work, the author(s) used ChatGPT 4.0 to check grammar, correct language, and paraphrase certain sentences to improve readability. After using this tool, the author(s) reviewed and edited the

content as needed and take full responsibility for the content of the published article.

Data availability

No data was used for the research described in the article.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

References

- [1] D. O'Shaughnessy, Review of methods for automatic speaker verification, *IEEE/ACM Transactions on Audio, Speech, and Language Processing* 32 (2023) 1776–1789.
- [2] R. Sharma, D. Govind, J. Mishra, A. Dubey, K. Deepak, S. Prasanna, Milestones in speaker recognition, *Artificial Intelligence Review* 57 (3) (2024) 58.
- [3] M. Jakubec, R. Jarina, E. Lieskovska, P. Kasak, Deep speaker embeddings for speaker verification: Review and experimental comparison, *Engineering Applications of Artificial Intelligence* 127 (2024) 107232.
- [4] R. M. Hanifa, K. Isa, S. Mohamad, A review on speaker recognition: Technology and challenges, *Computers & Electrical Engineering* 90 (2021) 107005.
- [5] N. Singh, R. Khan, R. Shree, Applications of speaker recognition, *Procedia Engineering* 38 (2012) 3122–3126.
- [6] M. Algabri, H. Mathkour, M. A. Bencherif, M. Alsulaiman, M. A. Mekhtiche, Automatic speaker recognition for mobile forensic applications, *Mobile Information Systems 2017* (2017) 1–6.
- [7] P. Rose, Technical forensic speaker recognition: Evaluation, types and testing of evidence, *Computer Speech & Language* 20 (2-3) (2006) 159–191.

- [8] J. A. Markowitz, Voice biometrics, *Communications of the ACM* 43 (9) (2000) 66–73.
- [9] J. Lindberg, M. Blomberg, Vulnerabilities in automatic speaker verification, in: *6th European Conference on Speech Communication and Technology (Eurospeech 1999)*, 1999, pp. 2121–2124.
URL https://www.isca-speech.org/archive/archive_papers/eurospeech_1999/e99_2121.pdf
- [10] J. Villalba, E. Lleida, Detecting replay attacks from far-field recordings on speaker verification systems, in: *Biometrics and ID Management: COST 2101 European Workshop, BioID 2011, Brandenburg (Havel), Germany, March 8-10, 2011. Proceedings 3*, Springer, 2011, pp. 274–285.
- [11] K. A. Al-Karawi, Convolutional neural network-based detection of audio replay attacks in speaker verification systems, *International Journal of Speech Technology* 28 (1) (2025) 175–184.
- [12] T. Brewster, Fraudsters cloned company director’s voice in \$35 million heist, police find, *Forbes* (October 2021).
URL <https://www.forbes.com/sites/thomasbrewster/2021/10/14/huge-bank-fraud-uses-deep-fake-voice-tech-to-steal-millions/>
- [13] T. H. Tran, Bank robbers steal \$35 million by deepfaking boss’s voice, *Futurism* (October 2021).
URL <https://futurism.com/the-byte/bank-robbers-deepfaking-voice>
- [14] J. Fan, Q. Yan, M. Li, G. Qu, Y. Xiao, A survey on data poisoning attacks and defenses, in: *2022 7th IEEE International Conference on Data Science in Cyberspace (DSC)*, 2022, pp. 48–55. doi:10.1109/DSC55868.2022.00014.
- [15] M. Jagielski, A. Oprea, B. Biggio, C. Liu, C. Nita-Rotaru, B. Li, Manipulating machine learning: Poisoning attacks and countermeasures for regression learning, in: *2018 IEEE symposium on security and privacy (SP)*, IEEE, 2018, pp. 19–35.
- [16] B. Biggio, B. Nelson, P. Laskov, Poisoning attacks against support vector machines, *arXiv preprint arXiv:1206.6389* (2012).

- [17] Y. Ge, Q. Wang, J. Yu, C. Shen, Q. Li, Data poisoning and backdoor attacks on audio intelligence systems, *IEEE Communications Magazine* 61 (12) (2023) 176–182.
- [18] B. Yan, J. Lan, Z. Yan, Backdoor attacks against voice recognition systems: A survey, *ACM Computing Surveys* 57 (3) (2024) 1–35.
- [19] H. Xu, Y. Ma, H.-C. Liu, D. Deb, H. Liu, J.-L. Tang, A. K. Jain, Adversarial attacks and defenses in images, graphs and text: A review, *International journal of automation and computing* 17 (2020) 151–178.
- [20] G. R. Machado, E. Silva, R. R. Goldschmidt, Adversarial machine learning in image classification: A survey toward the defender’s perspective, *ACM Computing Surveys (CSUR)* 55 (1) (2021) 1–38.
- [21] J. Lan, R. Zhang, Z. Yan, J. Wang, Y. Chen, R. Hou, Adversarial attacks and defenses in speaker recognition systems: A survey, *Journal of Systems Architecture* 127 (2022) 102526.
- [22] G. Chen, S. Chenb, L. Fan, X. Du, Z. Zhao, F. Song, Y. Liu, Who is real bob? adversarial attacks on speaker recognition systems, in: *2021 IEEE Symposium on Security and Privacy (SP)*, IEEE, 2021, pp. 694–711.
- [23] Z. Wu, V. Sridhar, N. Tomashenko, A. Nautsch, M. Todisco, N. Evans, T. Liu, F. Fang, J. Yamagishi, Voice privacy challenge 2020: Participant strategies and results, in: *Proc. Interspeech, 2020*, pp. 1404–1408.
- [24] T. Kinnunen, H. Delgado, A. Nautsch, M. Todisco, N. Evans, J. Yamagishi, K. A. Lee, Tandem assessment of spoofing countermeasures and automatic speaker verification: Fundamentals, challenges, and benchmark results, *IEEE Transactions on Biometrics, Behavior, and Identity Science* 2 (2) (2020) 135–148.
- [25] J. Yi, C. Wang, J. Tao, X. Zhang, C. Y. Zhang, Y. Zhao, Audio deepfake detection: A survey, *arXiv preprint arXiv:2308.14970* (2023).
- [26] B. Zhang, H. Cui, V. Nguyen, M. Whitty, Audio deepfake detection: What has been achieved and what lies ahead, *Sensors (Basel, Switzerland)* 25 (7) (2025) 1989.

- [27] Z. Almutairi, H. Elgibreen, A review of modern audio deepfake detection methods: challenges and future directions, *Algorithms* 15 (5) (2022) 155.
- [28] Avast Security News, Deepfake voice fraud causes \$243,000 scam (2019).
URL <https://blog.avast.com/deepfake-voice-fraud-causes-243k-scam>
- [29] DarkReading, Deepfake audio nabs \$35m in corporate heist (2020).
URL <https://www.darkreading.com/cyberattacks-data-breaches/deepfake-audio-scores-35-million-in-corporate-hei>
- [30] A. S. Blog, Arup's \$25m deepfake loss: Anatomy of an ai-powered scam (2024).
URL <https://www.adaptivesecurity.com/blog/arup-deepfake-scam-attack>
- [31] A. S. Blog, Lastpass stops ai voice phishing attack impersonating ceo (2024).
URL <https://www.adaptivesecurity.com/blog/lastpass-ai-voice-phishing-attack-karim-toubba>
- [32] V. News, How i broke into a bank account with an ai-generated voice (2023).
URL <https://www.vice.com/en/article/how-i-broke-into-a-bank-account-with-an-ai-generated-voice>
- [33] W. P. Radio, Research shows talking through pvc pipes can hack voice identification systems (2023).
URL <https://www.wpr.org/science-and-technology/research-shows-talking-through-pvc-pipes-can-hack-voice-identification-syste>
- [34] D. A. Reynolds, T. F. Quatieri, R. B. Dunn, Speaker verification using adapted gaussian mixture models, *Digital signal processing* 10 (1-3) (2000) 19–41.
- [35] D. A. Reynolds, Robust text-independent speaker identification using gaussian mixture speaker models, in: *IEEE Transactions on Speech and Audio Processing*, Vol. 3, IEEE, 1995, pp. 72–83.

- [36] N. Dehak, P. J. Kenny, R. Dehak, P. Dumouchel, P. Ouellet, Front-end factor analysis for speaker verification, *IEEE Transactions on Audio, Speech, and Language Processing* 19 (4) (2011) 788–798. doi:10.1109/TASL.2010.2064307.
- [37] D. Snyder, D. Garcia-Romero, G. Sell, D. Povey, S. Khudanpur, X-vectors: Robust dnn embeddings for speaker recognition, in: *Proceedings of the IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2018, pp. 5329–5333. doi:10.1109/ICASSP.2018.8461375.
URL https://www.danielpovey.com/files/2018_icassp_xvectors.pdf
- [38] C. Li, X. Ma, B. Jiang, X. Li, X. Zhang, X. Liu, Y. Cao, A. Kannan, Z. Zhu, Deep speaker: an end-to-end neural speaker embedding system, *arXiv preprint arXiv:1705.02304* (2017).
- [39] X. Ling, S. Ji, J. Zou, J. Wang, C. Wu, B. Li, T. Wang, Deepsec: A uniform platform for security analysis of deep learning model, in: *2019 IEEE Symposium on Security and Privacy (SP)*, IEEE, 2019, pp. 673–690.
- [40] L. Fowl, M. Goldblum, P.-y. Chiang, J. Geiping, W. Czaja, T. Goldstein, Adversarial examples make strong poisons, *Advances in Neural Information Processing Systems* 34 (2021) 30339–30351.
- [41] H. Huang, X. Ma, S. M. Erfani, J. Bailey, Y. Wang, Unlearnable examples: Making personal data unexploitable, *arXiv preprint arXiv:2101.04898* (2021).
- [42] Y. Ge, Q. Wang, J. Zhang, J. Zhou, Y. Zhang, C. Shen, Wavefuzz: A clean-label poisoning attack to protect your voice, *arXiv preprint arXiv:2203.13497* (2022).
- [43] D. Povey, A. Ghoshal, G. Boulianne, L. Burget, O. Glembek, N. Goel, M. Hannemann, P. Motlíček, Y. Qian, P. Schwarz, J. Silovský, G. Stemmer, K. Veselý, The Kaldi speech recognition toolkit, in: *Proceedings of the 2011 IEEE Workshop on Automatic Speech Recognition and Understanding (ASRU)*, IEEE Signal Processing Society, Hilton Waikoloa Village Resort, Big Island, Hawaii, USA, 2011, pp. 1–4.

- [44] E. Jamdar, A. K. Belman, Syntheticpop: Attacking speaker verification systems with synthetic voicepops, arXiv preprint arXiv:2502.09553 (2025).
- [45] Q. Wang, X. Lin, M. Zhou, Y. Chen, C. Wang, Q. Li, X. Luo, Voicepop: A pop noise based anti-spoofing system for voice authentication on smartphones, in: IEEE INFOCOM 2019-IEEE Conference on Computer Communications, IEEE, 2019, pp. 2062–2070.
- [46] A. Shafahi, W. R. Huang, M. Najibi, O. Suci, C. Studer, T. Dumitras, T. Goldstein, Poison frogs! targeted clean-label poisoning attacks on neural networks, Advances in neural information processing systems 31 (2018).
- [47] K. Li, C. Baird, D. Lin, Defend data poisoning attacks on voice authentication, IEEE Transactions on Dependable and Secure Computing (2023).
- [48] Amazon Web Services, Amazon connect voice id - real-time caller authentication.
URL <https://aws.amazon.com/connect/voice-id/>
- [49] Google Cloud Platform, Google speaker id.
URL <https://cloud.google.com/speaker-id>
- [50] A. Mohammadi, K. Sood, A. Nazari, D. Thiruvady, Securing voice authentication applications against targeted data poisoning, arXiv preprint arXiv:2406.17277 (2024).
- [51] A. Nagrani, J. S. Chung, W. Xie, A. Zisserman, Voxceleb: Large-scale speaker verification in the wild, Computer Speech & Language 60 (2020) 101027.
- [52] Y. Liu, S. Ma, Y. Aafer, W.-C. Lee, J. Zhai, W. Wang, X. Zhang, Trojaning attack on neural networks, in: 25th Annual Network And Distributed System Security Symposium (NDSS 2018), Internet Soc, 2018.
- [53] X. Xu, Q. Wang, H. Li, N. Borisov, C. A. Gunter, B. Li, Detecting ai trojans using meta neural analysis, in: 2021 IEEE Symposium on Security and Privacy (SP), IEEE, 2021, pp. 103–120.

- [54] T. Zhai, Y. Li, Z. Zhang, B. Wu, Y. Jiang, S.-T. Xia, Backdoor attack against speaker verification, in: ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), IEEE, 2021, pp. 2560–2564.
- [55] C. Schoof, S. Koffas, M. Conti, S. Picek, Emoback: Backdoor attacks against speaker identification using emotional prosody, in: Proceedings of the 2024 Workshop on Artificial Intelligence and Security, 2024, pp. 137–148.
- [56] Z. Ye, T. Mao, L. Dong, D. Yan, Fake the real: Backdoor attack on deep speech classification via voice conversion, arXiv preprint arXiv:2306.15875 (2023).
- [57] J. Li, W. Tu, L. Xiao, Freevc: Towards high-quality text-free one-shot voice conversion, in: ICASSP 2023-2023 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), IEEE, 2023, pp. 1–5.
- [58] H. Cai, P. Zhang, H. Dong, Y. Xiao, S. Ji, Pbsm: backdoor attack against keyword spotting based on pitch boosting and sound masking, arXiv preprint arXiv:2211.08697 (2022).
- [59] A. Mohammadi, K. Sood, D. Thiruvady, A. Nazari, Mitigating backdoor triggered and targeted data poisoning attacks in voice authentication systems, arXiv preprint arXiv:2505.03455 (2025).
- [60] B. Desplanques, J. Thienpondt, K. Demuynck, Ecapa-tdnn: Emphasized channel attention, propagation and aggregation in tdnn based speaker verification, arXiv preprint arXiv:2005.07143 (2020).
- [61] R. G. Hautamäki, T. Kinnunen, V. Hautamäki, T. Leino, A.-M. Laukkanen, I-vectors meet imitators: on vulnerability of speaker verification systems against voice mimicry, in: Interspeech 2013, 2013, pp. 930–934. doi:10.21437/Interspeech.2013-289.
- [62] F. Kreuk, Y. Adi, M. Cisse, J. Keshet, Fooling end-to-end speaker verification with adversarial examples, in: 2018 IEEE international conference on acoustics, speech and signal processing (ICASSP), IEEE, 2018, pp. 1962–1966.

- [63] J. P. Campbell, Testing with the yoho cd-rom voice verification corpus, in: 1995 international conference on acoustics, speech, and signal processing, Vol. 1, IEEE, 1995, pp. 341–344.
- [64] X. Li, J. Zhong, X. Wu, J. Yu, X. Liu, H. Meng, Adversarial attacks on gmm i-vector based speaker verification systems, in: ICASSP 2020-2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), IEEE, 2020, pp. 6579–6583.
- [65] Z. Li, C. Shi, Y. Xie, J. Liu, B. Yuan, Y. Chen, Practical adversarial attacks against speaker recognition systems, in: Proceedings of the 21st international workshop on mobile computing systems and applications, 2020, pp. 9–14.
- [66] S. Joshi, J. Villalba, P. Želasko, L. Moro-Velázquez, N. Dehak, Study of pre-processing defenses against adversarial attacks on state-of-the-art speaker recognition systems, *IEEE Transactions on Information Forensics and Security* 16 (2021) 4811–4826.
- [67] L. Zhang, Y. Meng, J. Yu, C. Xiang, B. Falk, H. Zhu, Voiceprint mimicry attack towards speaker verification system in smart home, in: IEEE INFOCOM 2020-IEEE conference on computer communications, IEEE, 2020, pp. 377–386.
- [68] G. Chen, Y. Zhang, Z. Zhao, F. Song, {QFA2SR}: {Query-Free} adversarial transfer attacks to speaker recognition systems, in: 32nd USENIX Security Symposium (USENIX Security 23), 2023, pp. 2437–2454.
- [69] G. Chen, Z. Zhao, F. Song, S. Chen, L. Fan, Y. Liu, As2t: Arbitrary source-to-target adversarial attack on speaker recognition systems, *IEEE Transactions on Dependable and Secure Computing* (2022).
- [70] Q. Chen, M. Chen, L. Lu, J. Yu, Y. Chen, Z. Wang, Z. Ba, F. Lin, K. Ren, Push the limit of adversarial example attack on speaker recognition in physical domain, in: Proceedings of the 20th ACM Conference on Embedded Networked Sensor Systems, 2022, pp. 710–724.
- [71] A. Kassis, U. Hengartner, Breaking security-critical voice authentication, in: 2023 IEEE Symposium on Security and Privacy (SP), IEEE, 2023, pp. 951–968.

- [72] J. Shen, R. Pang, R. J. Weiss, M. Schuster, N. Jaitly, Z. Yang, Z. Chen, Y. Zhang, Y. Wang, R. Skerry-Ryan, et al., Natural tts synthesis by conditioning wavenet on mel spectrogram predictions, in: 2018 IEEE international conference on acoustics, speech and signal processing (ICASSP), IEEE, 2018, pp. 4779–4783.
- [73] J. Kim, J. Kong, J. Son, Conditional variational autoencoder with adversarial learning for end-to-end text-to-speech, in: International Conference on Machine Learning, PMLR, 2021, pp. 5530–5540.
- [74] C. Wang, S. Chen, Y. Wu, Z. Zhang, L. Zhou, S. Liu, Z. Chen, Y. Liu, H. Wang, J. Li, et al., Neural codec language models are zero-shot text to speech synthesizers, arXiv preprint arXiv:2301.02111 (2023).
- [75] A. Van Den Oord, S. Dieleman, H. Zen, K. Simonyan, O. Vinyals, A. Graves, N. Kalchbrenner, A. Senior, K. Kavukcuoglu, et al., Wavenet: A generative model for raw audio, arXiv preprint arXiv:1609.03499 12 (2016) 1.
- [76] Y. Wang, R. Skerry-Ryan, D. Stanton, Y. Wu, R. J. Weiss, N. Jaitly, Z. Yang, Y. Xiao, Z. Chen, S. Bengio, et al., Tacotron: Towards end-to-end speech synthesis, arXiv preprint arXiv:1703.10135 (2017).
- [77] S. Ö. Arik, M. Chrzanowski, A. Coates, G. Diamos, A. Gibiansky, Y. Kang, X. Li, J. Miller, A. Ng, J. Raiman, et al., Deep voice: Real-time neural text-to-speech, in: International conference on machine learning, PMLR, 2017, pp. 195–204.
- [78] W. Ping, K. Peng, A. Gibiansky, S. O. Arik, A. Kannan, S. Narang, J. Raiman, J. Miller, Deep voice 3: Scaling text-to-speech with convolutional sequence learning, arXiv preprint arXiv:1710.07654 (2017).
- [79] Y. Ren, Y. Ruan, X. Tan, T. Qin, S. Zhao, Z. Zhao, T.-Y. Liu, Fast-speech: Fast, robust and controllable text to speech, Advances in neural information processing systems 32 (2019).
- [80] Y. Ren, C. Hu, X. Tan, T. Qin, S. Zhao, Z. Zhao, T.-Y. Liu, Fastspeech 2: Fast and high-quality end-to-end text to speech, arXiv preprint arXiv:2006.04558 (2020).

- [81] J. Kim, S. Kim, J. Kong, S. Yoon, Glow-tts: A generative flow for text-to-speech via monotonic alignment search, *Advances in Neural Information Processing Systems* 33 (2020) 8067–8077.
- [82] R. Valle, K. Shih, R. Prenger, B. Catanzaro, Flowtron: an autoregressive flow-based generative network for text-to-speech synthesis, *arXiv preprint arXiv:2005.05957* (2020).
- [83] V. Popov, I. Vovk, V. Gogoryan, T. Sadekova, M. Kudinov, Grad-tts: A diffusion probabilistic model for text-to-speech, in: *International conference on machine learning*, PMLR, 2021, pp. 8599–8608.
- [84] T. Kaneko, H. Kameoka, Cyclegan-vc: Non-parallel voice conversion using cycle-consistent adversarial networks, in: *2018 26th European Signal Processing Conference (EUSIPCO)*, IEEE, 2018, pp. 2100–2104.
- [85] H. Kameoka, T. Kaneko, K. Tanaka, N. Hojo, Stargan-vc: Non-parallel many-to-many voice conversion using star generative adversarial networks, in: *2018 IEEE Spoken Language Technology Workshop (SLT)*, IEEE, 2018, pp. 266–273.
- [86] K. Qian, Y. Zhang, S. Chang, X. Yang, M. Hasegawa-Johnson, Autovc: Zero-shot voice style transfer with only autoencoder loss, in: *International Conference on Machine Learning*, PMLR, 2019, pp. 5210–5219.
- [87] J.-c. Chou, C.-c. Yeh, H.-y. Lee, One-shot voice conversion by separating speaker and content representations with instance normalization, *arXiv preprint arXiv:1904.05742* (2019).
- [88] Z. Qin, W. Zhao, X. Yu, X. Sun, Openvoice: Versatile instant voice cloning, *arXiv preprint arXiv:2312.01479* (2023).
- [89] P. Peng, P.-Y. Huang, S.-W. Li, A. Mohamed, D. Harwath, Voicecraft: Zero-shot speech editing and text-to-speech in the wild, *arXiv preprint arXiv:2403.16973* (2024).
- [90] E. Casanova, K. Davis, E. Gölge, G. Gökner, I. Gulea, L. Hart, A. Aljafari, J. Meyer, R. Morais, S. Olayemi, et al., Xtts: a massively multilingual zero-shot text-to-speech model, *arXiv preprint arXiv:2406.04904* (2024).

- [91] X. Li, Z. Shang, H. Hua, P. Shi, C. Yang, L. Wang, P. Zhang, Sfspeech: Straightened flow for zero-shot voice clone, *IEEE Transactions on Audio, Speech and Language Processing* (2025).
- [92] M. Meng, Z. Yang, J. Yang, Z. Su, Y. Zhu, Z. Fan, Ds-tts: Zero-shot speaker style adaptation from voice clips via dynamic dual-style feature modulation, *arXiv preprint arXiv:2506.01020* (2025).
- [93] S. Ji, J. Zuo, M. Fang, S. Zheng, Q. Chen, W. Wang, Z. Jiang, H. Huang, X. Cheng, R. Huang, et al., Controlspeech: Towards simultaneous zero-shot speaker cloning and zero-shot language style control with decoupled codec, *arXiv e-prints* (2024) arXiv-2406.
- [94] Y. A. Li, R. Kumar, Z. Jin, Dmdspeech: Distilled diffusion model surpassing the teacher in zero-shot speech synthesis via direct metric optimization (2024).
- [95] Y. Wang, H. Zhan, L. Liu, R. Zeng, H. Guo, J. Zheng, Q. Zhang, X. Zhang, S. Zhang, Z. Wu, Maskgct: Zero-shot text-to-speech with masked generative codec transformer, *arXiv preprint arXiv:2409.00750* (2024).
- [96] F. Huang, K. Zeng, W. Zhu, Diffvc+: Improving diffusion-based voice conversion for speaker anonymization, in: *Proc. Interspeech 2024*, 2024, pp. 4453–4457.
- [97] S. Liao, Y. Wang, T. Li, Y. Cheng, R. Zhang, R. Zhou, Y. Xing, Fishspeech: Leveraging large language models for advanced multilingual text-to-speech synthesis (2024). *arXiv:2411.01156*.
URL <https://arxiv.org/abs/2411.01156>
- [98] K. Shonesy, Research finds automated voice imitation can fool humans and machines, *Phys.org* (September 28 2015).
URL <https://phys.org/news/2015-09-automated-voice-imitation-humans-machines.html>
- [99] A. Alali, G. Theodorakopoulos, Partial fake speech attacks in the real world using deepfake audio, *Journal of Cybersecurity and Privacy* 5 (1) (2025) 6.

- [100] S. Liu, H. Wu, H.-y. Lee, H. Meng, Adversarial attacks on spoofing countermeasures of automatic speaker verification, in: 2019 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU), IEEE, 2019, pp. 312–319.
- [101] A. Gomez-Alanis, J. A. Gonzalez-Lopez, A. M. Peinado, Adversarial transformation of spoofing attacks for voice biometrics, arXiv preprint arXiv:2201.01226 (2022).
- [102] M. T. et al., Asvspoof 2019: Future horizons in spoofed and fake audio detection, in: INTERSPEECH, 2019.
- [103] A. Gomez-Alanis, J. A. Gonzalez-Lopez, A. M. Peinado, Ganba: Generative adversarial network for biometric anti-spoofing, Applied Sciences 12 (3) (2022) 1454.
- [104] X. Hai, X. Liu, Y. Tan, Q. Zhou, Sifdetectcracker: An adversarial attack against fake voice detection based on speaker-irrelative features, in: Proceedings of the 31st ACM international conference on multimedia, 2023, pp. 8552–8560.
- [105] C.-X. Zuo, Z.-J. Jia, W.-J. Li, Advtts: Adversarial text-to-speech synthesis attack on speaker identification systems, in: ICASSP 2024-2024 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), IEEE, 2024, pp. 4840–4844.
- [106] M. Panariello, W. Ge, H. Tak, M. Todisco, N. Evans, Malafide: a novel adversarial convolutive noise attack against deepfake and spoofing detection systems, arXiv preprint arXiv:2306.07655 (2023).
- [107] M. Todisco, M. Panariello, X. Wang, H. Delgado, K. A. Lee, N. Evans, Malacopula: Adversarial automatic speaker verification attacks using a neural-based generalised hammerstein model, arXiv preprint arXiv:2408.09300 (2024).
- [108] A. Nagrani, J. S. Chung, A. Zisserman, Voxceleb: A large-scale speaker identification dataset, Interspeech (2017).
- [109] J. S. Chung, A. Nagrani, A. Zisserman, Voxceleb2: Deep speaker recognition, arXiv preprint arXiv:1806.05622 (2018).

- [110] V. Panayotov, G. Chen, D. Povey, S. Khudanpur, Librispeech: an asr corpus based on public domain audio books, in: 2015 IEEE international conference on acoustics, speech and signal processing (ICASSP), IEEE, 2015, pp. 5206–5210.
- [111] J. S. G. et al., Timit acoustic-phonetic continuous speech corpus, Linguistic Data ConsortiumLDC93S1 (1993).
- [112] C. Jankowski, A. Kalyanswamy, S. Basson, J. Spitz, Ntimit: A phonetically balanced, continuous speech, telephone bandwidth speech database, in: International Conference on Acoustics, Speech, and Signal Processing, IEEE, 1990, pp. 109–112.
- [113] M. Foundation, Mozilla common voice: A massively-multilingual open-source dataset, <https://commonvoice.mozilla.org> (2017).
- [114] H. Bu, J. Du, X. Na, B. Wu, H. Zheng, Aishell-1: An open-source mandarin speech corpus and a speech recognition baseline, in: Oriental COCODA, 2017.
- [115] K. Yu, Aishell-2: Transforming mandarin asr research into industrial scale, in: LREC, 2020.
- [116] Z. W. et al., Asvspoof 2015: the first automatic speaker verification spoofing and countermeasures challenge, in: INTERSPEECH, 2015.
- [117] T. K. et al., Asvspoof 2017: Automatic speaker verification spoofing and countermeasures challenge evaluation plan, in: INTERSPEECH, 2017.
- [118] J. Y. et al., Asvspoof 2021: Automatic speaker verification spoofing and countermeasures challenge evaluation plan, in: ASVspoof Workshop, 2021.
- [119] Y. Zhang, X. Liu, Z. Duan, One-class learning towards synthetic voice spoofing detection, ICASSP (2021).
- [120] H. Qi, Y. Bai, S.-T. Xia, L. Sun, Backdoor attacks in voice-controlled systems via data poisoning, in: USENIX Security Symposium, 2022.

- [121] J. L.-T. et al., Voice conversion challenge 2020: Intra-lingual semi-parallel and cross-lingual voice conversion, in: ISCA Speech Synthesis Workshop (SSW), 2020.
- [122] C. Veaux, J. Yamagishi, K. MacDonald, Cstr vctk corpus: English multi-speaker corpus for cstr voice cloning toolkit, 2017.
- [123] NIST, Nist speaker recognition evaluations, <https://www.nist.gov/itl/iad/mig/speaker-recognition> (2023).
- [124] M. Nandwana, et al., Voices from a distance challenge 2019, in: INTERSPEECH, 2019.
- [125] M. R. Asia, Add 2022 challenge: Audio deepfake detection, <https://addchallenge.cn/> (2022).
- [126] F. AI, et al., Deepfake detection challenge, <https://ai.facebook.com/datasets/dfdc/> (2020).