

USERRL: TRAINING INTERACTIVE USER-CENTRIC AGENT VIA REINFORCEMENT LEARNING

Cheng Qian^{1,2}, Zuxin Liu¹, Akshara Prabhakar¹, Jieli Qiu¹, Zhiwei Liu¹,
Haolin Chen¹, Shirley Kokane¹, Heng Ji², Weiran Yao¹, Shelby Heinecke¹, Silvio Savarese¹,
Caiming Xiong¹, Huan Wang¹

¹Salesforce AI Research ²University of Illinois Urbana-Champaign

ABSTRACT

Reinforcement learning (RL) has shown promise in training agentic models that move beyond static benchmarks to engage in dynamic, multi-turn interactions. Yet, the ultimate value of such agents lies in their ability to assist users, a setting where diversity and dynamics of user interaction pose challenges. In this work, we propose **UserRL**, a unified framework for training and evaluating user-centric abilities through standardized gym environments paired with simulated users. We systematically vary turn-level reward assignment and trajectory-level score calculation to analyze how different formulations affect learning under the GRPO algorithm. Our experiments across Qwen3 models reveal three key findings: (i) SFT cold start is critical for unlocking initial interaction ability and enabling sustained RL improvements; (ii) deliberate trajectory scoring yields more efficient and effective multi-turn interactions; and (iii) while stronger simulated users (e.g., GPT-4o) facilitates training, open-source simulators (e.g., Qwen3-32B) remain a cost-effective and transferable option. Together, these results highlight that careful design of reward shaping and user simulation choice is as crucial as model scale, and establish UserRL as a practical pathway for developing robust user-centric agentic models. All codes and data are public for future research.¹

1 INTRODUCTION

Reinforcement learning (RL) has emerged as a powerful approach for training *agentic* large language models (LLMs), offering greater generalizability than supervised fine-tuning (Chu et al., 2025). This advantage is crucial for agents, which must operate in varied and unpredictable environments, solving tasks that often require extended reasoning and adaptation (Xi et al., 2023). A key enabler in this direction is multi-turn rollout, where the agent engages in multiple steps of interaction with its environment, producing rich trajectories that RL algorithms can exploit. For tool-using agents, multi-turn rollout is not optional but necessary: many real tasks demand sequences of tool calls, intermediate reasoning steps, and iterative refinements, in contrast to problems that can be solved in a single step (Deng et al., 2024b; Qian et al., 2025b).

Recent progress combining RL with multi-turn rollouts has produced increasingly capable agents (Wang et al., 2025c; Zeng et al., 2025). These systems can coordinate multiple tool uses, navigate diverse domains such as web, code and games, and execute multi-stage reasoning pipelines (Deng et al., 2024a; Qian et al., 2024a; Zhu et al., 2025). Examples include iterative searches for open-domain QA (Jin et al., 2025), stepwise debugging for programming challenges (Golubev et al., 2025), and staged decision-making for complex browsing tasks (Lù et al., 2024). Such abilities mark a significant step toward agents that function as general problem-solvers.

However, an agent’s ultimate value is not determined by its performance in abstract benchmarks or closed environments, but by its effectiveness in assisting **users**. Whether the context is scientific research, professional analysis, or everyday information gathering, the agent’s role is collaborative (Baek et al., 2024; Sun et al., 2025; Zhang et al., 2025). This reframing shifts the perspective: the user is not merely a goal-setter or evaluator, but an integral and dynamic part of the agent’s operating

¹ UserRL released at <https://github.com/SalesforceAIResearch/UserRL>

environment. The most capable agent is one that can understand, adapt to, and actively support the user throughout the task (Qian et al., 2024b; Lu et al., 2025; Wang et al., 2025a).

Placing robust user assistance at the center exposes two critical interaction traits for training:

- **Diversity:** User behavior is heterogeneous and shaped by individual preferences, goals, and communication styles. This diversity demands that agents master a broad range of interaction skills.
- **Dynamics:** User interaction unfolds over multiple turns and can shift in intent or constraints as the conversation progresses, making pre-collected datasets unable to fully capture evolving patterns.

These traits, while essential to real-world assistance, create challenges for model training: there is no standardized framework to represent diverse user abilities, and it is difficult to simulate realistic, dynamic interactions within existing training pipelines. This leads to our core research question: *How can we design and train agentic models that effectively acquire user-centric abilities, while accounting for the inherent diversity and dynamics of user interactions?*

To address *diversity*, we design a **unified suite of user-centric gym environments**, each targeting distinct interaction skills and supporting both benchmarking and RL training. A standardized interface and customizable reward specification allow the environments to be adapted or extended for new scenarios. To address *dynamics*, we integrate **multi-turn RL rollouts** with **LLM-based user simulation**, enabling the agent to engage with adaptive, context-aware simulated users during training. These simulations provide realistic, evolving feedback, better approximating the complexity of live user interactions.

Empirically, our study leverages this setup to examine how to best supervise agents under the GRPO algorithm (Guo et al., 2025). The dense incremental reward signals provided by our gym environments make it possible to investigate two key aspects of reward shaping during multi-turn rollouts: (1) strategies for aggregating trajectory-level scores and (2) methods for assigning turn-level rewards. Across 4B and 8B Qwen3 models, we find that trajectory-level scoring is consistently more decisive than fine-grained turn differentiation. SFT cold start emerges as critical, enabling RL training to avoid early plateaus and deliver over 100% gains for certain gyms. We further show that models trained with weaker simulated users (Qwen3-32B) transfer effectively to stronger evaluators (GPT-4o), while stronger simulated users accelerate learning and yield higher performance. Beyond simulation, our models achieve greater interaction efficiency and make more effective use of multi-turn interactions. Finally, in evaluations with real users, our models could even outperform their performance with simulated users, thanks to the cooperative guidance humans naturally offer. These results highlight that careful design of reward shaping and user simulation is as critical as scale, establishing **UserRL** as a robust framework for user-centric agent training.

We summarize our contributions as follows:

- We introduce a unified set of user-centric gyms with simulated users for dynamic, multi-turn engagement, enabling systematic benchmarking and training of diverse interaction abilities.
- We standardize the gym’s interaction through a tool interface to support customization and future extension, making it convenient and scalable for RL pipelines.
- We comprehensively analyze user-centric RL through turn and trajectory-level reward shaping, highlighting design choices that enhance interaction efficiency and effectiveness.

We view this framework as a step toward agents that are not merely task-solvers, but adaptive partners capable of actively understanding, reasoning, and collaborating with users in complex settings.

2 RELATED WORK

User-centric agent design and evaluation. As LLM agents become integrated into everyday use, research has focused on both evaluating and improving their alignment with complex, evolving user needs. On the evaluation front, benchmarks grounded in real user interactions capture underspecified or multi-intent queries and in-the-wild scenarios (Wang et al., 2024a; Qian et al., 2024b; Lin et al., 2024), while multi-turn testbeds probe an agent’s ability to incorporate feedback, use tools, and adapt to shifting goals (Wang et al., 2024b; Yao et al., 2024; Barres et al., 2025). Personalized evaluation suites further explore whether models can infer and sustain user-specific preferences across long conversations (Zhao et al., 2025a). Complementing these, agent design advances teach LLMs to clarify ambiguity rather than hallucinate intent (Zhang et al., 2024; Chen et al., 2025a),

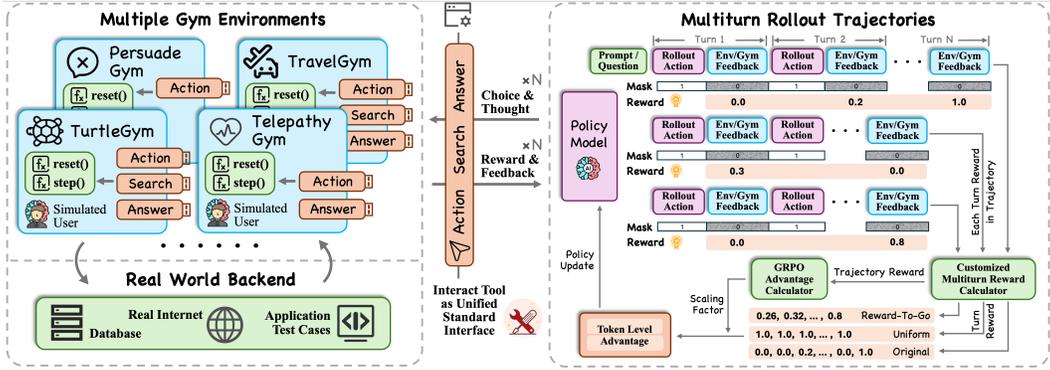


Figure 1: The UserRL framework: Applying the standardized interact tool as interface, the policy model interacts with multiple Gym environments in the multi-turn rollout, generating groups of trajectories with turn-level rewards. A custom reward calculator remaps each trajectory into (i) a single trajectory-level score for advantage estimation and (ii) turn-level rewards, which are scaled and integrated to produce the final token-level advantages for policy updates.

and to personalize outputs via explicit or latent user modeling (Gao et al., 2024; Singh et al., 2024). Meanwhile, progress in reinforcement learning, such as MAU-RL, has begun to unlock more robust user-centric behaviors in agentic LLMs (Zhao et al., 2025b). Building on these directions, our work introduces UserRL, a unified framework that jointly benchmarks and trains agents on user-centric RL abilities within standardized gym environments.

Agentic RL training and adaptation. Previous studies have primarily relied on supervised fine-tuning with carefully curated datasets to enhance LLMs’ agentic abilities, such as tool use (Schick et al., 2023; Qin et al., 2024). More recently, reinforcement learning has emerged as a scalable and efficient training paradigm that fosters deeper reasoning and broader generalization. Early methods such as PPO (Schulman et al., 2017) and RLHF (Ouyang et al., 2022) laid the foundation, which has since evolved into preference-based algorithms including DPO (Rafailov et al., 2023), SimPO (Meng et al., 2024), and more recent trajectory-level approaches such as GRPO (Guo et al., 2025) and its variants DAPO (Yu et al., 2025), VAPO (Yuan et al., 2025) and OTC-PO (Wang et al., 2025b). These successive refinements improve training stability and efficiency, enabling RL to scale effectively to large models. In parallel, agentic RL frameworks extend beyond single-turn alignment to multi-turn interactions and long-horizon reasoning, including trajectory-level preference optimization (Shani et al., 2024), direct trajectory optimization via StarPO (Wang et al., 2025c), and tool learning without step-level supervision (Singh et al., 2025). Such advances have broadened LLMs’ agentic capabilities across diverse applications, including search (Jin et al., 2025), tool use (Qian et al., 2025a), and value judgment (Chen et al., 2025b). Furthermore, agentic RL has begun to intersect with unsupervised adaptation through test-time optimization (Zuo et al., 2025) and extend into other modalities such as vision–language modeling (Shen et al., 2025). Building on these, our work focuses on customizing RL for user-centric tasks, with particular emphasis on reward shaping at the turn and trajectory levels.

3 GYM CONSTRUCTION

Gymnasium environments have long been central to RL training (Towers et al., 2024). Their enduring value lies in providing a clean and reproducible interface through which agents can interact with environments. Building on this foundation, we construct eight novel gym environments, unified under a standardized interface, each with unique emphasis on different user interaction capabilities. This design ensures that the environments not only support agent training and benchmarking, but also capture the nuances of real-world interaction.

General Gym Components. Each gym environment is built around two core components: the *task* and the *user*. From the **task perspective**, the environment can be seen as a finite automaton. After initialization through the `reset()` function, the environment transitions step-by-step based on

Gym Name	Description	Data Source	Capability	Interface
IntentGym	Reveal user’s real intent from agentic tasks	IN3 (Qian et al., 2024b)	Intent understanding, ambiguity resolution	Action: ask clarifying question
TurtleGym	Play turtle soup game with user to reveal hidden twists	Newly curated	Creative reasoning, contextual adaptation	Action: inquire story details; Answer: unveil the hidden story
PersuadeGym	Persuade user with opposing claims and arguments	Persuasion (Durmus et al., 2024)	Strategic reasoning, persuasive communication	Action: provide persuasive arguments
TelepathyGym	Guess out what entity user is thinking	Newly curated	Strategic reasoning, hypothesis testing	Action: interact for clues; Answer: guess out the entity
FunctionGym	Reveal user’s hidden mapping rule for a set of numbers	Newly curated	Math reasoning, pattern generalization	Action: get number’s mapping results; Search: retrieve test case; Answer: give test case result
TravelGym	Help user make personalized travel booking	UserBench (Qian et al., 2025c)	Preference elicitation, personalized planning	Action: interact for preferences; Search: retrieve travel options; Answer: provide travel recommendation
TauGym	Fulfill user requirements through tools and conversation	Tau-Bench (Yao et al., 2024)	Tool use, task-oriented interaction	Action: interact for user details; Search: retrieve available tools; Answer: perform tool call for task solving
SearchGym	Search and answer general user questions	Bamboogle (Press et al., 2022)	General helpfulness and reasoning	Search: retrieve online information; Answer: respond to user query

Table 1: Eight gym environment details including data source, tested capability, and interface design.

Gym	Travel	Turtle	Function	Tau	Persuade	Intention	Telepathy	Search	Total
Train Num.	925	423	460	500	378	380	360	0	3426
Test Num.	471	48	78	165	42	40	41	125	1010
Metric	Choice Correctness (Follow UserBench)	Sum Turn Reward	Test Case Correctness	Task Completion (Follow Tau-Bench)	Sum Turn Reward	Sum Turn Reward	Final Guess Correctness	Final Answer Exact Match	-

Table 2: Statistics of eight gym environments, including data point numbers and metrics for evaluation.

agent actions, where each `step()` updates the internal state according to deterministic, rule-based transition functions. Along with the new state, the environment emits rewards that reflect whether progress toward task completion has been made. This structure ensures that the evaluation remains rigorous, transparent, and reproducible.

From the **user perspective**, certain agent actions are interpreted as input to the simulated user. The environment then returns a response generated by a LLM, which acts as the user simulator. Depending on the specific task, this feedback may take the form of a conversational utterance, a preference judgment, or an answer to a posed query. By employing LLMs, the user responses remain dynamic and contextually adaptive, while the underlying task completion remains strictly rule-based. This dual design introduces both the rigor of formal evaluation and the richness of natural user interaction.

Standardized Tool Interface. A key innovation in our construction is the *standardized tool interface*, which governs how agents interact with the environment. As shown in Figure 1, this interface reduces all interactions to three core operation types: `Action`, `Search`, and `Answer`.

- **Action:** Direct communication with the simulated user. The agent provides utterances as input, and the gym returns user responses.
- **Search:** Retrieval of external knowledge. The agent issues a search query, and the gym interacts with a backend to provide retrieved content.
- **Answer:** Submission of a candidate solution. The agent provides an answer, and the gym verifies correctness if the task is goal-oriented.

This interface is deliberately minimal yet expressive: it captures the essential modes of agent behavior, keeps implementation simple, and allows straightforward extensibility. Importantly, the set of available options may vary by environment. For instance, `TurtleGym` permits all three operation types, while `PersuadeGym` restricts agents to `Action`, as persuasion tasks lack verifiable answers and completion is instead defined by user attitude change.

Specific Gym Designs. We design eight distinct gym environments, each targeting a different aspect of agent ability. The details are summarized in Table 1. Some gyms are newly curated, while

others adapt existing benchmarks under our unified interface, demonstrating both the flexibility and extensibility of our framework. These environments collectively test a spectrum of user-centric skills: from intent understanding and persuasive communication, to personalized planning and tool use. They also probe different reasoning capacities, including creative, strategic, and mathematical reasoning. Taken together, our gyms provide a principled yet dynamic platform for advancing agent training and evaluation, ensuring that agents are not only competent in abstract tasks but also genuinely helpful in supporting users. For additional construction details, user simulation prompts and task design logic, please refer to Section A.

4 USERRL EXPLORATION

Along with the gyms we release, we further present a reinforcement learning framework for training agents in user-centric environments. As illustrated in Figure 1 (right), UserRL extends GRPO by introducing a *flexible mechanism* for distributing rewards across turns and defining trajectory-level scores. Instead of fixing a single scheme, we provide a general interface where different strategies can be trialed, thereby opening room for empirical comparison and task-specific adaptation.

4.1 MULTI-TURN ROLLOUTS AND NOTATION

Let π_θ denote the policy and T the number of interaction turns. A *multi-turn rollout trajectory* is

$$\tau = \{(s_1, a_1, r_1), (s_2, a_2, r_2), \dots, (s_T, a_T, r_T)\},$$

where $a_t \sim \pi_\theta(\cdot | s_t)$, the environment transitions to s_{t+1} , and emits a *turn reward* r_t . Each turn t corresponds to a generated sequence of tokens $x_t = (x_{t,1}, \dots, x_{t,L_t})$.

Motivation. In multi-turn interaction, feedback is naturally incremental: some turns are exploratory, others solve subgoals, and later turns may finalize the outcome. Our gyms provide turn-level rewards, making it possible to use these dense signals for assigning credit across turns. This motivates a framework that can flexibly redistribute supervision and evaluate different hypotheses about what matters most in user interaction.

4.2 TURN-LEVEL REWARD SHAPING

The gym produces raw turn rewards $\{r_t\}_{t=1}^T$. Before broadcasting them to tokens, we transform them into turn-level signals $\{\tilde{r}_t\}_{t=1}^T$:

$$R(x_{t,k}) = \tilde{r}_t, \quad \forall k \in \{1, \dots, L_t\}.$$

This ensures that tokens within a turn share the same signal, while different turns can be treated differently depending on the chosen scheme.

We experiment with the following reward shaping methods:

- **Naive:** $\tilde{r}_t = r_t$, rewards remain unchanged, but in practice this often makes them too sparse, which quickly leads to training collapse.
- **Equalized:** $\tilde{r}_t = c$, a constant reward is assigned to every turn, effectively treating them all equally. This mirrors the approach used in the original GRPO, where each turn’s reward is uniform.
- **Reward-to-Go (R2G):** Each turn accumulates discounted future rewards:

$$\tilde{r}_t = \sum_{j=t}^T \gamma^{j-t} r_j, \quad \gamma \in [0, 1].$$

- **Exponential Mapping (EM):** A nonlinear rescaling of $r_t \in [0, 1]$ into $[0.5, 1]$:

$$\tilde{r}_t = \phi_k(r_t) = 0.5 + 0.5 \cdot \frac{1 - \exp(-kr_t)}{1 - \exp(-k)}, \quad k > 0.$$

Insight. Each scheme reflects a different inductive bias: equalization emphasizes structural importance of all turns; reward-to-go propagates credit temporally, rewarding early enabling moves; exponential mapping ensures small positive progress is not lost, while still differentiating high rewards. The key point is that our framework makes it straightforward to trial such alternatives without altering the base optimization framework.

4.3 TRAJECTORY-LEVEL SCORING

GRPO requires a single scalar trajectory score for group-wise normalization. Since our environments produce incremental feedback, we define two strategies:

- **Sum:** As turn rewards reflect incremental gains, summing naturally recovers total progress.
- **Reward-to-Go (R2G):** This variant encourages efficient strategies that achieve progress earlier within fewer turns.

$$R_{\text{traj}}^{\text{sum}}(\tau) = \sum_{t=1}^T r_t, \quad R_{\text{traj}}^{\text{r2g}}(\tau) = \sum_{j=1}^T \gamma^{j-1} r_j.$$

Insight. By exposing multiple scoring rules, our design allows principled exploration of how to best aggregate incremental user feedback. One may view the sum as reflecting raw task completion, while reward-to-go adds temporal preference.

4.4 GROUPED ADVANTAGE ESTIMATION AND OBJECTIVE

For each query Q , a rollout group $G_Q = \{\tau^{(i)}\}_{i=1}^n$ is collected. Using a chosen trajectory scorer R_{traj} , we compute:

$$\mu_Q = \frac{1}{n} \sum_{i=1}^n R_{\text{traj}}(\tau^{(i)}), \quad \sigma_Q = \sqrt{\frac{1}{n} \sum_{i=1}^n (R_{\text{traj}}(\tau^{(i)}) - \mu_Q)^2}.$$

Each token $x_{t,k}$ in trajectory i is then assigned a normalized advantage:

$$A(x_{t,k}|Q) = \frac{\tilde{r}_t^{(i)} - \mu_Q}{\sigma_Q + \eta}, \quad \eta > 0.$$

Objective. This design keeps GRPO’s normalization across comparable rollouts, but leaves the definition of per-turn and trajectory-level rewards flexible. This modularity allows us to test different biases, while keeping the optimization pipeline consistent. Finally, the policy is trained with the clipped PPO objective, adapted to our advantage formulation. Note that we also omit the KL loss in original objective to encourage exploration and alignment to our new interface:

$$J_{\text{UserRL}}(\theta) = \mathbb{E}_{Q \sim \mathcal{D}} \mathbb{E}_{\tau \sim \pi_{\text{old}}} \left[\frac{1}{\sum_{t=1}^T L_t} \sum_{t=1}^T \sum_{k=1}^{L_t} \min(\rho_{t,k} A(x_{t,k}|Q), \text{clip}(\rho_{t,k}, 1 - \epsilon, 1 + \epsilon) A(x_{t,k}|Q)) \right],$$

where $\rho_{t,k} = \pi_{\theta}(x_{t,k} | \text{context}_{t,k}) / \pi_{\text{old}}(x_{t,k} | \text{context}_{t,k})$.

Summary. UserRL generalizes GRPO to multi-turn interactive settings by decoupling *turn-level reward shaping* from *trajectory-level scoring*. This modularity provides a principled way to trial different reward allocation strategies, enabling systematic comparison of design choices without modifying the optimization framework. Importantly, this design is *user-centric*: since the gyms provide per-turn feedback grounded in simulated user interaction, the framework is explicitly tailored to reflect user experience over time. By treating interaction as incremental progress rather than a single end-state, UserRL better supports agents in learning behaviors that align with user needs, while giving researchers the flexibility to decide how such feedback should be weighted and aggregated.

5 EXPERIMENTS

Building on the framework and the gym environments we constructed, we now investigate what constitutes an effective RL setting for user-centric agentic tasks. Our analysis focuses specifically on *trajectory-level scoring* and *turn-level reward shaping*, two dimensions that are uniquely enabled by multi-turn, dense feedback from user-centric environments. These settings allow us to probe how different reward structures influence policy learning in interactive contexts.

Model	TravelGym	TurtleGym	FunctionGym	TauGym	PersuadeGym	IntentionGym	TelepathyGym	SearchGym	Avg.
<i>Open-Source (Trained Model)</i>									
Qwen3-8B (Equalized/R2G)	0.5730	0.1854	0.4231	0.1818	0.5317	1.8175	0.5610	0.8880	0.5652
Qwen3-8B (EM/R2G)	0.5025	<u>0.1917</u>	0.4103	0.2000	0.5397	1.9025	0.5366	0.8640	0.5343
Qwen3-8B (R2G/R2G)	0.5724	0.1615	0.4231	0.1394	0.5238	1.8525	<u>0.5854</u>	0.8480	0.5539
Qwen3-8B (Equalized/Sum)	0.5054	0.1323	0.2692	0.2121	0.5040	1.6275	0.5366	0.8320	0.5076
Qwen3-4B (Equalized/R2G)	<u>0.5086</u>	<u>0.1844</u>	0.3333	<u>0.2000</u>	0.4643	<u>1.8075</u>	0.6098	<u>0.8640</u>	<u>0.5269</u>
Qwen3-4B (EM/R2G)	0.5076	0.1417	0.3333	0.1576	0.4563	1.7375	<u>0.6341</u>	<u>0.8640</u>	0.5154
Qwen3-4B (R2G/R2G)	0.4629	0.1687	<u>0.3974</u>	0.1333	<u>0.5794</u>	1.5975	0.4634	<u>0.8640</u>	0.4895
Qwen3-4B (Equalized/Sum)	0.4456	0.1615	0.2308	0.1333	0.4524	1.7150	0.4878	<u>0.8400</u>	0.4656
<i>Open-Source (Raw Model)</i>									
Qwen3-32B (Raw)	0.1724	<u>0.1510</u>	0.1538	0.0000	0.4841	<u>1.8300</u>	0.5610	0.7920	<u>0.3128</u>
Qwen3-14B (Raw)	<u>0.1924</u>	0.1417	<u>0.1667</u>	<u>0.1030</u>	<u>0.5317</u>	1.7000	<u>0.5854</u>	0.5120	0.3027
Qwen3-4B (Raw)	0.1405	0.0854	0.0769	0.0364	0.4048	1.7400	0.4878	<u>0.8560</u>	0.2929
<i>Closed-Source</i>									
Gemini-2.5-Pro	0.3468	0.2740	<u>0.4103</u>	0.1939	0.4246	1.5900	0.9024	0.9280	<u>0.4702</u>
Gemini-2.5-Flash	0.2553	0.1958	0.3205	0.1212	0.4087	1.6850	0.6341	0.9280	0.3973
GPT-4o	<u>0.3643</u>	0.2917	0.2821	0.0303	0.3770	<u>1.8975</u>	0.8537	0.8800	0.4449
GPT-4o-mini	0.0976	0.0906	0.1538	0.2061	<u>0.5317</u>	0.2500	0.0488	0.3520	0.1729

Table 3: The main evaluation results on held-in and held-out Gym environments. For each gym, the highest performance within certain section is marked with underline, while the global best performance is highlighted in **bold**.

5.1 EXPERIMENT SETTINGS

Settings. We evaluate four representative configurations, denoted as A/B where A refers to the turn-level reward shaping method and B refers to the trajectory-level scoring method: Equalized/Sum, Equalized/R2G, EM/R2G, and R2G/R2G. The *Naive* setting is excluded because in practice its sparse effective reward signal, where many turns yield zero reward, quickly leads to training collapse. Among these variants, Equalized/Sum serves as the most natural extension of the original GRPO algorithm into the multi-turn setting, treating every turn equally while summing the incremental rewards to produce the trajectory score. From this baseline, we vary either the turn-level reward or the trajectory-level score to enable fair comparison across methods.

Training. All RL models are initialized with an SFT cold start, which we generally found to stabilize optimization and improve downstream performance; we will analyze this effect more closely in the later section. We employ VERL (Sheng et al., 2024) framework for training. For each training step, we sample a batch of 128, and generate 8 responses per query, training for 15 epochs in total (please see Section B for full configuration). To encourage policy exploration, we remove KL regularization and apply temperature 1.0. For all the gyms, we employ Qwen3-32B as the simulated user model, set max interaction turns to 16 without step penalty, and keep all others to default setting as detailed in Section A.

Data. We use TravelGym, TurtleGym, FunctionGym, TauGym, and PersuadeGym for training, while reserving IntentionGym, TelepathyGym, and SearchGym as entirely held-out evaluation environments. This ensures that test-time evaluation requires generalization to unseen interaction purposes. For the training split, we additionally retain 1K trajectories sampled from each of the five training gyms as supervised fine-tuning (SFT) data. These trajectories are distilled using GPT-4o as both the agent and simulated user, which provides consistent high-quality supervision for the SFT initialization stage. All remaining trajectories are then used for RL training. Please refer to detailed data statistics in Table 2.

Model and Metrics. We primarily conduct experiments with Qwen3 models of 4B and 8B parameters, while also including larger Qwen3 variants such as 14B and 32B for raw performance comparison. For closed-source baselines, we report the performance of GPT and Gemini families as references. Evaluation metrics follow the definition of each gym: For TravelGym and TauGym, we adopt the UserBench and Tau-Bench protocols respectively, and calculate the score based on the correctness of the final choice; for all other environments, the final score is computed as the sum of

turn rewards since each turn’s score reflects incremental gain (Note: this is equivalent to the metric definitions in Table 2). In addition to per-gym results, we report the micro-averaged performance across all eight gyms for an overall comparison.

5.2 EXPERIMENT RESULTS

We present our main results in Table 3. The key findings are presented in the following.

Equalized/R2G consistently outperforms other training settings. We find that the *Equalized/R2G* setting consistently achieves the best performance across both 4B and 8B models, while *Equalized/Sum* performs the worst. This highlights the importance of trajectory-level score calculation: R2G outperforms simple summation because it better captures the cumulative value of intermediate steps toward reward-yielding turns. Importantly, zero reward does not imply zero contribution: for example, in *TelepathyGym*, asking clarifying questions earns no direct reward but helps narrow the answer space and thus supports final success. Assigning such turns zero advantage undermines learning, which explains the collapse observed under naive turn-level reward training. Finally, we find that the choice of turn-wise reward assignment within R2G (Equalized, EM, Distance-based) has relatively less impact on performance and the simple Equalized scheme already suffices. This suggests that trajectory-level scoring is more decisive than fine-grained turn differentiation for achieving strong overall performance. We further discuss this in Section 6.

Gym-trained models can surpass closed-source ones in interactive tasks. Our gym-trained models achieve higher overall performance than leading closed-source models, with Qwen3-8B notably outperforming Gemini-2.5-Pro and GPT-4o in *TravelGym*, *PersuadeGym*, and *IntentionGym*. These gains suggest that reinforcement learning in our environments is particularly effective at enhancing direct user-interaction and communication skills. However, closed-source models still dominate in environments such as *TurtleGym*, *TelepathyGym*, and *SearchGym*, which require integration with external tools (e.g. search engine) and strategic reasoning (e.g., proactive guessing). This contrast underscores that success in user-centric interaction is a deeply synthetic capability: it depends not only on refined reward shaping but also on strengthening broader competencies such as proactiveness, robust tool use, and curiosity-driven reasoning.

Scaling raw model size is less effective without interaction training. Using the Qwen3 model family as a baseline, we find that scaling raw model size yields only marginal gains in our gym evaluations: larger models show little advantage when they lack robustness in user-interaction abilities. By contrast, reinforcement learning in our environments unlocks improvements brought by scaling: for 4B and 8B models trained under the best setting, their performance gap can surpass that of the raw 4B and 32B models. This indicates that scaling effects emerge most clearly after adaptation to user-centric interaction, suggesting that foundational capacity alone is insufficient unless paired with training that elicits effective communication and user adaptability.

Adapting existing benchmarks to user-centric settings can reduce performance. We observe this phenomenon in *TravelGym* and *TauGym*: models perform substantially worse in our gym environments than in the original UserBench (Qian et al., 2025c) and Tau-Bench (Yao et al., 2024), even for top closed-source models. Importantly, the raw test data and evaluation metrics remain unchanged, and our only modification is the introduction of a standardized tool interface to mediate user interactions. This performance drop suggests several insights. First, prior results may partially reflect data leakage or overfitting to benchmark-specific patterns. Second, interacting correctly through standardized tools remains a significant challenge, even for strong models. Third, and more fundamentally, these findings highlight that user-centric abilities, such as structured communication, consistent tool use, and adaptive interaction, are still underdeveloped in current models, leaving room for improvement.

5.3 ANALYSIS

Effectiveness of SFT cold start. To validate our choice of using SFT cold start in the main experiments, we further trained both Qwen3 4B and 8B models under the *Equalized/R2G* setting, which achieved the best results in Table 3. The results on the left of Figure 2 show that SFT cold start

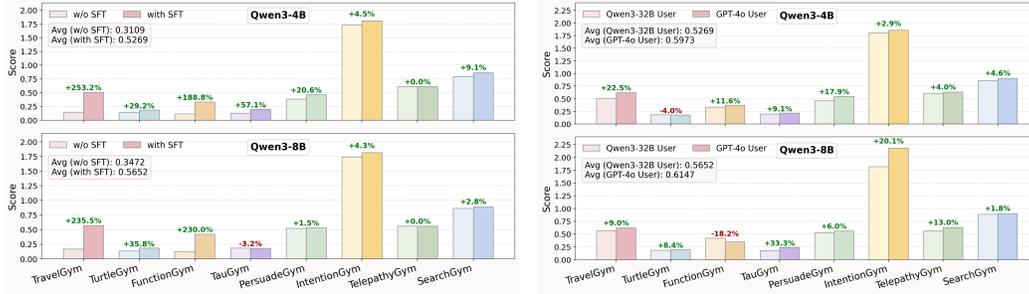


Figure 2: **Left:** SFT cold start improves RL training performance compared to direct RL on raw Qwen3 models. **Right:** GPT-4o as simulated user during training yields better downstream performance than Qwen3-32B as simulated user in gym environments.

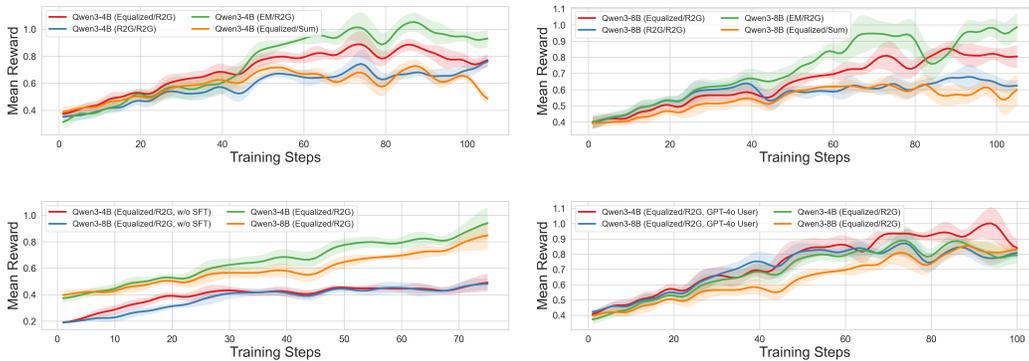


Figure 3: Training curves of Qwen3 models under different settings. **Top:** Qwen3 4B (left) and 8B (right) across different reward strategies. **Bottom:** Comparisons under the Equalized/R2G setting: w/ vs. w/o SFT cold start (left), and using GPT-4o vs. Qwen3-32B as the simulated user (right).

consistently enables RL to boost performance, in some tasks exceeding 100% gains. Examining the training curves in the lower-left of Figure 3, we see that models with SFT cold start not only begin from a higher baseline but also continue to improve, whereas models trained without SFT plateau early at lower performance levels. These observations highlight the significance of SFT cold start: it equips the model with essential initial interaction abilities, which are then amplified through RL training. In other words, SFT serves as the foundation that unlocks user-centric capabilities before RL can refine and extend them.

Choice of user simulation model for training. Across all training settings in Table 3, we use Qwen3-32B as the simulated user due to the prohibitive cost of employing stronger models, while evaluation was consistently performed with GPT-4o (detailed justifications in Section C). To probe the effect of the simulated user model, however, we also trained Qwen3 4B and 8B models under the *Equalized/R2G* setting using GPT-4o as the training-time simulated user. As shown on the right of Figure 2, GPT-4o-based training generally yields higher performance, and the training curves in the lower-right of Figure 3 suggest faster growth and higher plateaus (albeit subtly). This improvement likely arises because using the same simulated user in both training and evaluation aligns interaction patterns, enabling the model to adapt more effectively. Nonetheless, our main results demonstrate that models trained with weaker, low-cost simulated users (Qwen3-32B) can still transfer well to stronger users (GPT-4o). This indicates that budget-friendly open-source simulators remain a viable choice for training, while also confirming that stronger simulated users during training can foster more robust and user-centric interaction abilities. We further discuss effective user simulation in detail in Section 6.

Effectiveness and efficiency of user interaction. Across all settings, we first measure the average effective turns for each evaluated gym, defined as the number of turns a model takes before obtaining

its last non-zero turn-wise reward. This metric captures whether the model can meaningfully leverage interaction turns to achieve reward. As shown in the left column of Table 4, our trained models generally make more effective use of interactions, whereas the raw Qwen3 series models typically obtain rewards only in the first two or three turns, with later interactions remaining ineffective. Nevertheless, we note that the evaluation maximum is set to 16 turns, and even the best model achieves only 6.6463 effective turns on average, which is less than half of the allowed budget. This highlights that while training improves effectiveness, there remains significant room for models to exploit user interaction more fully.

Building on the interaction efficiency definition in Qian et al. (2025c), we further conduct weighted-timing analysis, where the reward at turn i is scaled by a weight of $1/(i + 1)$, and the final metric is the sum of all weighted rewards. This emphasizes early rewards, encouraging models to achieve gains quickly rather than delaying progress. The right column of Table 4 shows that our trained models consistently score higher on this metric, with all *R2G*-based models outperforming those trained with the *Sum* trajectory. This validates that the *R2G* reward design not only improves effectiveness but also fosters efficiency by incentivizing earlier successes in interaction. In contrast, raw open-source Qwen3 models and even some closed-source baselines, while sometimes achieving higher overall performance, often lack interaction efficiency, for which we further discuss in Section 6.

Interaction with real users. To evaluate the robustness of our trained models with real users, we tested the best-performing 4B and 8B models on TurtleGym and TelepathyGym, replacing simulated users with human participants during evaluation (see Section C for more details). The results shown in Table 5 reveal a surprising finding: our models achieve higher performance with real users than GPT-4o. Examination of the interaction logs sheds light on the reasons behind: unlike GPT-4o, which typically responds with brief signals such as “Yes,” “No,” or “Maybe”, human users often view the task as a cooperative game and provide richer guidance. For example, in TelepathyGym, real users offer helpful cues such as “*The event kind of happens in the past, but not that far*”, which encourage the model to refine its guesses. These findings highlight an important dimension of user interaction: agentic models are more effective when treated as collaborators rather than mere executors. Encouragingly, our models demonstrate robustness and adaptability under these cooperative dynamics with real users.

6 DISCUSSIONS

Limits of turn-wise reward differentiation. While finer trajectory-level scores are clearly beneficial, our results also reveal the limitations of existing turn-wise reward formulations. Methods like EM and R2G attempt to approximate turn contributions but fail to capture their true value. EM maps all zero-reward turns to the same intermediate reward, making it unable to distinguish productive from unproductive actions (e.g., insightful vs. irrelevant questions in *IntentionGym*). R2G instead assumes that turns closer to reward-yielding actions matter more, yet this overlooks cases where critical progress occurs earlier in the trajectory. These shortcomings suggest that differentiating turn-level contributions with simple heuristics can be sometimes misleading. To push beyond the current

Model	Effective Turns [†]	Time-Weighted Performance [†]
Qwen3-8B (Equalized/R2G)	6.6463	0.6516
Qwen3-8B (EM/R2G)	5.8792	0.5586
Qwen3-8B (R2G/R2G)	5.1050	0.6510
Qwen3-8B (Equalized/Sum)	6.1842	0.4530
Qwen3-4B (Equalized/R2G)	6.1307	0.6423
Qwen3-4B (R2G/R2G)	5.7317	0.6213
Qwen3-4B (EM/R2G)	5.6743	0.5355
Qwen3-4B (Equalized/Sum)	5.3881	0.5118
Qwen3-32B (Raw)	2.8079	0.2852
Qwen3-14B (Raw)	3.4129	0.3211
Qwen3-4B (Raw)	2.2545	0.2674
Gemini-2.5-Pro	5.7731	0.5263
Gemini-2.5-Flash	4.2465	0.4525
GPT-4o	3.4087	0.4024
GPT-4o-mini	1.9461	0.1614

Table 4: Gym-based RL trained models generally has more effective turns on average, while gaining non-zero reward more efficiently.

Model	TurtleGym	TelepathyGym
Qwen3-4B (GPT-4o User)	0.1844	0.6098
Qwen3-4B (Real User)	0.2952 ^{†0.1108}	0.7805 ^{†0.1707}
Qwen3-8B (GPT-4o User)	0.1854	0.5610
Qwen3-8B (Real User)	0.3127 ^{†0.1273}	0.7805 ^{†0.2195}

Table 5: Comparison of GPT-4o simulated user and real user test results on TurtleGym and TelepathyGym.

ceiling, more fine-grained reward signals are needed: ones that account not only for incremental gains but also for each turn’s contextual role in driving the final outcome. Such signals may need to be environment-specific, as the nature of useful intermediate steps varies across gyms. Therefore, a universal strategy is unlikely to suffice, and instead future research should aim to design adaptive or learned reward shaping mechanisms that better capture turn-level utility while preserving the strengths of trajectory-level score calculation.

Balance of rigor and flexibility in user simulation. User simulation is essential for scaling RL training and enabling dynamic multi-turn rollouts. To make trained agentic models robust to diverse user behaviors, simulations must incorporate variation in responses, such as different strategies, tones, and communication styles. Future extensions of our framework could introduce richer user profiles in gym environments to better approximate real-world diversity and further strengthen robustness. At the same time, benchmarks must preserve rigor: when user interaction is the primary challenge, fairness across models is critical to ensure comparability. This inevitably reduces naturalness and requires rule-based structures to maintain consistency. In our eight gym designs, we address this tension by combining LLM-driven dynamic responses with rule-based strategies that track task completion. For example, in TravelGym the simulated user categorizes the agent’s utterance before generating a guided response. This illustrates the inherent tradeoff between flexibility and rigor in user simulation, highlighting an important direction for future work on balancing the two for robust agent training.

Balance of efficiency and effectiveness in user interaction. In Section 5.3, we introduced two complementary metrics to evaluate user interaction: *Effective Turns* and *Time-Weighted Performance*. While higher values for both are desirable, we should note that inherently they may conflict. Models that achieve effectiveness by exploiting many turns risk creating tedious, inefficient conversations, while overly efficient agents may fail to fully capture user intent. Our metrics address this by accounting not only for the number of turns but also for the rewards they deliver. This also mirrors real-world tradeoffs: users may tolerate a few clarifying questions, but prolonged or repetitive probing quickly becomes frustrating. Therefore, training and evaluation should consider how to balance efficiency and effectiveness, potentially through improved metrics and reward designs that encourage models to be both accurate and concise in user interaction.

7 CONCLUSION

In this paper, we introduced **UserRL**, a framework that provides eight distinct gym environments with a standardized interaction interface for training and evaluating user-centric agents. By leveraging turn-wise user feedback and rewards, we proposed customizable strategies for trajectory-level scoring and turn-level reward assignment, enabling systematic analysis of their impact on user-centric RL training. Our experiments confirm three key insights: (i) SFT cold start is essential for unlocking initial interaction ability and sustaining RL improvements, (ii) trajectory-level scoring strategies are more effective than fine-grained turn differentiation, and (iii) LLM-based user simulators provide a scalable and practical means of facilitating training. Furthermore, our trained models demonstrate improved effectiveness and efficiency in multi-turn interactions, transferring well across different simulated users and even real users in certain evaluations. Looking ahead, we see several promising directions for extending UserRL: designing richer gym environments that balance rigor with flexibility, refining reward formulations that jointly capture effectiveness and efficiency, and exploring more diverse user simulation profiles. Altogether, we envision UserRL as a foundation for developing agentic models that act not merely as executors, but as user-centric collaborators capable of adapting to diverse needs in real-world interactions.

REFERENCES

- Jinheon Baek, Sujay Kumar Jauhar, Silviu Cucerzan, and Sung Ju Hwang. Researchagent: Iterative research idea generation over scientific literature with large language models. *arXiv preprint arXiv:2404.07738*, 2024.
- Victor Barres, Honghua Dong, Soham Ray, Xujie Si, and Karthik Narasimhan. τ^2 -bench: Evaluating conversational agents in a dual-control environment, 2025.

- Maximillian Chen, Ruoxi Sun, Tomas Pfister, and Sercan O. Arik. Learning to clarify: Multi-turn conversations with action-based contrastive self-training. In *International Conference on Learning Representations*, 2025a.
- Xiusi Chen, Gaotang Li, Ziqi Wang, Bowen Jin, Cheng Qian, Yu Wang, Hongru Wang, Yu Zhang, Denghui Zhang, Tong Zhang, et al. Rm-r1: Reward modeling as reasoning. *arXiv preprint arXiv:2505.02387*, 2025b.
- Tianzhe Chu, Yuexiang Zhai, Jihan Yang, Shengbang Tong, Saining Xie, Dale Schuurmans, Quoc V Le, Sergey Levine, and Yi Ma. Sft memorizes, rl generalizes: A comparative study of foundation model post-training. *arXiv preprint arXiv:2501.17161*, 2025.
- Xiang Deng, Yu Gu, Boyuan Zheng, Shijie Chen, Sam Stevens, Boshi Wang, Huan Sun, and Yu Su. Mind2web: Towards a generalist agent for the web. *Advances in Neural Information Processing Systems*, 36, 2024a.
- Yang Deng, Xuan Zhang, Wenxuan Zhang, Yifei Yuan, See-Kiong Ng, and Tat-Seng Chua. On the multi-turn instruction following for conversational web agents. *arXiv preprint arXiv:2402.15057*, 2024b.
- Esin Durmus, Liane Lovitt, Alex Tamkin, Stuart Ritchie, Jack Clark, and Deep Ganguli. Measuring the persuasiveness of language models, 2024. URL <https://www.anthropic.com/research/measuring-model-persuasiveness>.
- Ge Gao, Alexey Taymanov, Eduardo Salinas, Paul Mineiro, and Dipendra Misra. Aligning llm agents by learning latent preference from user edits. In *Advances in Neural Information Processing Systems*, 2024.
- Alexander Golubev, Maria Trofimova, Sergei Polezhaev, Ibragim Badertdinov, Maksim Nekrashevich, Anton Shevtsov, Simon Karasik, Sergey Abramov, Andrei Andriushchenko, Filipp Fisin, et al. Training long-context, multi-turn software engineering agents with reinforcement learning. *arXiv preprint arXiv:2508.03501*, 2025.
- Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, et al. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.
- Bowen Jin, Hansi Zeng, Zhenrui Yue, Dong Wang, Hamed Zamani, and Jiawei Han. Search-r1: Training llms to reason and leverage search engines with reinforcement learning. *arXiv preprint arXiv:2503.09516*, 2025.
- Bill Yuchen Lin, Yuntian Deng, Khyathi Chandu, Faeze Brahman, Abhilasha Ravichander, Valentina Pyatkin, Nouha Dziri, Ronan Le Bras, and Yejin Choi. Wildbench: Benchmarking llms with challenging tasks from real users in the wild, 2024.
- Xing Han Lü, Zdeněk Kasner, and Siva Reddy. Weblinx: Real-world website navigation with multi-turn dialogue. *arXiv preprint arXiv:2402.05930*, 2024.
- Yaxi Lu, Shen zhi Yang, Cheng Qian, Guirong Chen, Qinyu Luo, Yesai Wu, Huadong Wang, Xin Cong, Zhong Zhang, Yankai Lin, et al. Proactive agent: Shifting llm agents from reactive responses to active assistance. In *The Thirteenth International Conference on Learning Representations*, 2025.
- Yu Meng, Mengzhou Xia, and Danqi Chen. Simpo: Simple preference optimization with a reference-free reward. *Advances in Neural Information Processing Systems*, 37:124198–124235, 2024.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul F Christiano, Jan Leike, and Ryan Lowe. Training language models to follow instructions with human feedback. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh (eds.), *Advances in Neural Information Processing Systems*, volume 35, pp. 27730–27744. Curran Associates, Inc., 2022. URL https://proceedings.neurips.cc/paper_files/paper/2022/file/b1efde53be364a73914f58805a001731-Paper-Conference.pdf.

- Ofir Press, Muru Zhang, Sewon Min, Ludwig Schmidt, Noah A Smith, and Mike Lewis. Measuring and narrowing the compositionality gap in language models. *arXiv preprint arXiv:2210.03350*, 2022.
- Cheng Qian, Peixuan Han, Qinyu Luo, Bingxiang He, Xiushi Chen, Yuji Zhang, Hongyi Du, Jiarui Yao, Xiaocheng Yang, Denghui Zhang, et al. Escapebench: Pushing language models to think outside the box. *arXiv preprint arXiv:2412.13549*, 2024a.
- Cheng Qian, Bingxiang He, Zhong Zhuang, Jia Deng, Yujia Qin, Xin Cong, Zhong Zhang, Jie Zhou, Yankai Lin, Zhiyuan Liu, and Maosong Sun. Tell me more! towards implicit user intention understanding of language model driven agents. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics*, 2024b.
- Cheng Qian, Emre Can Acikgoz, Qi He, Hongru Wang, Xiushi Chen, Dilek Hakkani-Tür, Gokhan Tur, and Heng Ji. Toolrl: Reward is all tool learning needs. *arXiv preprint arXiv:2504.13958*, 2025a.
- Cheng Qian, Emre Can Acikgoz, Hongru Wang, Xiushi Chen, Avirup Sil, Dilek Hakkani-Tür, Gokhan Tur, and Heng Ji. Smart: Self-aware agent for tool overuse mitigation. *arXiv preprint arXiv:2502.11435*, 2025b.
- Cheng Qian, Zuxin Liu, Akshara Prabhakar, Zhiwei Liu, Jianguo Zhang, Haolin Chen, Heng Ji, Weiran Yao, Shelby Heinecke, Silvio Savarese, et al. Userbench: An interactive gym environment for user-centric agents. *arXiv preprint arXiv:2507.22034*, 2025c.
- Yujia Qin, Shihao Liang, Yining Ye, Kunlun Zhu, Lan Yan, Yaxi Lu, Yankai Lin, Xin Cong, Xiangru Tang, Bill Qian, Sihan Zhao, Lauren Hong, Runchu Tian, Ruobing Xie, Jie Zhou, Mark Gerstein, Dahai Li, Zhiyuan Liu, and Maosong Sun. Toolllm: Facilitating large language models to master 16000+ real-world apis. In *The Twelfth International Conference on Learning Representations*, 2024.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D Manning, Stefano Ermon, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model. *Advances in Neural Information Processing Systems*, 36:53728–53741, 2023.
- Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Eric Hambro, Luke Zettlemoyer, Nicola Cancedda, and Thomas Scialom. Toolformer: Language models can teach themselves to use tools. *Advances in Neural Information Processing Systems*, 36:68539–68551, 2023.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- Lior Shani, Aviv Rosenberg, Asaf Cassel, Oran Lang, Daniele Calandriello, Avital Zipori, Hila Noga, Orgad Keller, Bilal Piot, Idan Szpektor, Avinatan Hassidim, Yossi Matias, and Rémi Munos. Multi-turn reinforcement learning from preference human feedback. *arXiv preprint arXiv:2405.14655*, 2024.
- Hao Shen, Pengcheng Liu, Jiarun Li, Chenyou Fang, Yifan Ma, Jing Liao, Qiu Shen, Zhili Zhang, Kai Zhao, Qi Zhang, et al. VLM-R1: A stable and generalizable R1-style large vision-language model. *arXiv preprint arXiv:2504.07615*, 2025.
- Guangming Sheng, Chi Zhang, Zilingfeng Ye, Xibin Wu, Wang Zhang, Ru Zhang, Yanghua Peng, Haibin Lin, and Chuan Wu. Hybridflow: A flexible and efficient rlhf framework. *arXiv preprint arXiv:2409.19256*, 2024.
- Harmanpreet Singh, Nikhil Verma, Yixiao Wang, Manasa Bharadwaj, Homa Fashandi, Kevin Ferreira, and Chul Lee. Personal large language model agents: A case study on tailored travel planning. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing: Industry Track*, 2024.
- Joykirat Singh, Raghav Magazine, Yash Pandya, and Akshay Nambi. Agentic reasoning and tool integration for llms via reinforcement learning. *arXiv preprint arXiv:2505.01441*, 2025.

- Maojun Sun, Ruijian Han, Binyan Jiang, Houduo Qi, Defeng Sun, Yancheng Yuan, and Jian Huang. Lambda: A large model based data agent. *Journal of the American Statistical Association*, pp. 1–13, 2025.
- Mark Towers, Ariel Kwiatkowski, Jordan Terry, John U Balis, Gianluca De Cola, Tristan Deleu, Manuel Goulão, Andreas Kallinteris, Markus Krimmel, Arjun KG, et al. Gymnasium: A standard interface for reinforcement learning environments. *arXiv preprint arXiv:2407.17032*, 2024.
- Hongru Wang, Cheng Qian, Manling Li, Jiahao Qiu, Boyang Xue, Mengdi Wang, Heng Ji, and Kam-Fai Wong. Toward a theory of agents as tool-use decision-makers. *arXiv preprint arXiv:2506.00886*, 2025a.
- Hongru Wang, Cheng Qian, Wanjun Zhong, Xiushi Chen, Jiahao Qiu, Shijue Huang, Bowen Jin, Mengdi Wang, Kam-Fai Wong, and Heng Ji. Acting less is reasoning more! teaching model to act efficiently. *arXiv preprint arXiv:2504.14870*, 2025b.
- Jiayin Wang, Fengran Mo, Weizhi Ma, Peijie Sun, Min Zhang, and Jian-Yun Nie. A user-centric multi-intent benchmark for evaluating large language models. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, 2024a.
- Xingyao Wang, Zihan Wang, Jiateng Liu, Yangyi Chen, Lifan Yuan, Hao Peng, and Heng Ji. MINT: Evaluating llms in multi-turn interaction with tools and language feedback. In *International Conference on Learning Representations*, 2024b.
- Zihan Wang, Kangrui Wang, Qineng Wang, Pingyue Zhang, Linjie Li, Zhengyuan Yang, Xing Jin, Kefan Yu, Minh Nhat Nguyen, Licheng Liu, Eli Gottlieb, Monica Lam, Yiping Lu, Kyunghyun Cho, Jiajun Wu, Li Fei-Fei, Lijuan Wang, Yejin Choi, and Manling Li. RAGEN: Understanding self-evolution in LLM agents via multi-turn reinforcement learning. *arXiv preprint arXiv:2504.20073*, 2025c.
- Zhiheng Xi, Wenxiang Chen, Xin Guo, Wei He, Yiwen Ding, Boyang Hong, Ming Zhang, Junzhe Wang, Senjie Jin, Enyu Zhou, et al. The rise and potential of large language model based agents: A survey. *arXiv preprint arXiv:2309.07864*, 2023.
- Shunyu Yao, Noah Shinn, Pedram Razavi, and Karthik Narasimhan. τ -bench: A benchmark for tool-agent-user interaction in real-world domains, 2024.
- Qiyang Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, Yu Yue, Tiantian Fan, Gaohong Liu, Lingjun Liu, Xin Liu, et al. Dapo: An open-source llm reinforcement learning system at scale. *arXiv preprint arXiv:2503.14476*, 2025.
- Yufeng Yuan, Qiyang Yu, Xiaochen Zuo, Ruofei Zhu, Wenyuan Xu, Jiase Chen, Chengyi Wang, Tiantian Fan, Zhengyin Du, Xiangpeng Wei, et al. Vapo: Efficient and reliable reinforcement learning for advanced reasoning tasks. *arXiv preprint arXiv:2504.05118*, 2025.
- Siliang Zeng, Quan Wei, William Brown, Oana Frunza, Yuriy Nevmyvaka, and Mingyi Hong. Reinforcing multi-turn reasoning in llm agents via turn-level credit assignment. *arXiv preprint arXiv:2505.11821*, 2025.
- Michael J. Q. Zhang, W. Bradley Knox, and Eunsol Choi. Modeling future conversation turns to teach llms to ask clarifying questions, 2024.
- Weizhi Zhang, Yangning Li, Yuanchen Bei, Junyu Luo, Guancheng Wan, Liangwei Yang, Chenxuan Xie, Yuyao Yang, Wei-Chieh Huang, Chunyu Miao, et al. From web search towards agentic deep research: Incentivizing search with reasoning agents. *arXiv preprint arXiv:2506.18959*, 2025.
- Siyao Zhao, Mingyi Hong, Yang Liu, Devamanyu Hazarika, and Kaixiang Lin. Do llms recognize your preferences? evaluating personalized preference following in llms. In *International Conference on Learning Representations*, 2025a.
- Weikang Zhao, Xili Wang, Chengdi Ma, Lingbin Kong, Zhaohua Yang, Mingxiang Tuo, Xiaowei Shi, Yitao Zhai, and Xunliang Cai. Mua-rl: Multi-turn user-interacting agent reinforcement learning for agentic tool use. *arXiv preprint arXiv:2508.18669*, 2025b.

Yaowei Zheng, Richong Zhang, Junhao Zhang, Yanhan Ye, Zheyang Luo, Zhangchi Feng, and Yongqiang Ma. Llamafactory: Unified efficient fine-tuning of 100+ language models. *arXiv preprint arXiv:2403.13372*, 2024.

Kunlun Zhu, Hongyi Du, Zhaochen Hong, Xiaocheng Yang, Shuyi Guo, Zhe Wang, Zhenhailong Wang, Cheng Qian, Xiangru Tang, Heng Ji, et al. Multiagentbench: Evaluating the collaboration and competition of llm agents. *arXiv preprint arXiv:2503.01935*, 2025.

Yuxin Zuo, Kaiyan Zhang, Li Sheng, Shang Qu, Ganqu Cui, Xuekai Zhu, Haozhan Li, Yuchen Zhang, Xinwei Long, Ermo Hua, Biqing Qi, Youbang Sun, Zhiyuan Ma, Lifan Yuan, Ning Ding, and Bowen Zhou. TTRL: Test-time reinforcement learning. *arXiv preprint arXiv:2504.16084*, 2025.

APPENDIX

A GYM CONSTRUCTION DETAILS

IntentionGym. IntentionGym is an environment designed to evaluate an agent’s ability to uncover a user’s true intent when given vague or underspecified tasks. The core task logic requires the agent to iteratively ask targeted clarifying questions until all critical missing details are revealed. Rewards are assigned based on the importance of the uncovered detail (high, medium, low), with penalties for unfocused or overly broad questions, encouraging efficient and precise inquiry. The dataset includes diverse user tasks across domains such as travel, education, and technology, each annotated with missing details and importance levels. The environment thus provides a principled testbed for intent understanding and ambiguity resolution through multi-round user-agent interaction.

The IntentionGym environment processes each action through a sophisticated two-step evaluation system. When an agent submits a question as input (corresponding to `Action` operation choice), the environment performs two parallel language model calls: (1) a response generation call that creates a natural conversational response from the simulated user’s perspective without knowing the ground truth missing details (using temperature 0.7 for naturalness), and (2) an evaluation call that analyzes which specific missing details the question addresses (using temperature 0.0 for consistency). The evaluation model receives the complete list of remaining missing details with their importance levels (1=Low, 2=Medium, 3=High) and returns indices of covered details plus analysis metadata. The reward calculation uses a tiered system where High importance details yield 1.0 base reward, Medium yield 0.7, and Low yield 0.4, with a multi-detail penalty of 0.2 per additional detail covered (encouraging focused questions), multiplied by the configurable reward scale (default 1.0), then reduced by the step penalty (default 0.0), and finally normalized to [0,1] if configured. The environment tracks conversation history, updates covered/remaining detail lists, and terminates when all missing details are covered or maximum steps (default 20) is reached. The simulated user role is to respond authentically as someone seeking help while maintaining ignorance of what specific details need clarification, creating a realistic intention-guessing scenario where the agent must strategically ask questions to uncover the hidden missing information.

Please refer to Figure 4 and Figure 5 for system instruction details about the response generation and coverage evaluation processes.

PersuadeGym. PersuadeGym is an environment designed to evaluate an agent’s ability to persuade a user to change its stance on controversial statements through strategic argumentation. The core task logic requires the agent to iteratively present compelling arguments to move the user from an initial “Strongly Agree” position toward “Strongly Disagree” on various claims. Rewards are assigned based on the magnitude of stance change achieved, with exponential scaling that encourages significant persuasion rather than incremental shifts. The dataset includes diverse controversial statements across domains such as technology policy, social issues, and governance, each with detailed initial arguments supporting the the user’s starting position. The environment thus provides a principled testbed for persuasive communication and strategic reasoning through multi-round adversarial dialogue.

The PersuadeGym environment processes each action through a stance evaluation system. When an agent submits a persuasive argument as input (corresponding to `Action` operation choice), the environment performs a single language model call that both generates a natural response and evaluates stance change (using temperature 0.0 for consistency). The evaluation model that simulates the user receives the current statement, the initial argument, conversation history, and the agent’s latest argument, then returns a JSON response containing the feedback, updated stance, and internal reasoning. The stance progression follows seven discrete levels: Strongly Agree (0.0), Agree (0.167), Partly Agree (0.333), Neutral (0.5), Partly Disagree (0.667), Disagree (0.833), and Strongly Disagree (1.0). The reward calculation uses exponential scaling where the reward equals the number of levels changed toward disagreement divided by 6 (the maximum possible change), with no reward for moving back toward agreement or no change. The environment tracks conversation history, updates the simulated user’s stance, and terminates when the user reaches “Strongly Disagree” (complete persuasion success) or maximum steps (default 20) is reached. The simulated user’s role is to respond authentically as someone holding a strong initial position while being open to compelling evidence, creating a realistic persuasion scenario where the agent must strategically craft arguments to overcome resistance.

IntentionGym LLM Instruction for Response Generation

You are a person who has posted a vague request for help and is now responding to someone who is trying to help clarify your needs.

Your job is to respond naturally as the person who originally made the request. Follow these guidelines:

1. If the question is asking about your specific preferences for this task:
 - Provide an authentic and coherent response
 - Share realistic preferences that someone might have for this type of task
 - Be conversational and natural
2. If the question is NOT directly about your preferences for this task:
 - Try to answer helpfully if you can
 - Guide the conversation back to clarifying what you need for your task
 - Be polite but redirect: "That's interesting, but what I'm really trying to figure out is..."
 - Do NOT provide what missing details need to be clarified or give any examples.
 - Do NOT provide concrete help or solutions - you're the one seeking help!

Please respond in the following json format: {
 "thought": "Your thought process about whether the question is about your preferences and how to respond",
 "response": "Your natural conversational response"
 }

IMPORTANT:

- Respond only as the person seeking help, not as an evaluator
- Be natural and conversational
- Don't reveal any "ground truth" or act like you know what details are missing
- Just respond authentically as someone who made this request

Figure 4: IntentionGym LLM system instruction for response generation.

Please refer to Figure 6 for system instruction details about the AI's response generation and stance evaluation process.

TurtleGym. TurtleGym is an environment designed to evaluate an agent's ability to engage in creative reasoning and contextual adaptation through interactive story-based puzzle solving with a user. The core task logic requires the agent to play a "turtle soup" game where they must uncover hidden twists in mysterious stories by asking strategic questions and providing comprehensive explanations. The environment presents the agent with a surface-level story description and challenges them to discover the underlying "bottom" truth through iterative inquiry and creative interpretation. Rewards are assigned based on how well the agent's final story explanation covers the evaluation criteria, with weighted scoring that emphasizes the most critical story elements. The dataset includes diverse mysterious scenarios with hidden twists, each annotated with evaluation criteria and importance weights. The environment thus provides a principled testbed for creative reasoning and contextual adaptation through multi-round collaborative story exploration.

The TurtleGym environment processes each action through a dual-mode evaluation system. When an agent submits an inquiry action (corresponding to `Action` operation choice), the environment performs a single language model call that evaluates whether the question is helpful for understanding the story, returning "Yes", "No", or "Maybe" responses (using temperature 0.0 for consistency). When an agent submits an answer action (corresponding to `Answer` operation choice), the environment evaluates the story explanation against multiple weighted criteria, where each criterion receives a

IntentionGym LLM Instruction for Coverage Evaluation

You are evaluating how well a user's question addresses missing details in a vague task.

Your job is to evaluate which (if any) of the missing details are addressed by the latest question.

Rules for evaluation:

- If the question is NOT related to clarifying the user's intent or task requirements, `covered_detail_indices` should be an empty list
- For each missing detail that is directly addressed by the question, note its index
- A question "addresses" a detail if it would help reveal the information needed for that detail

Please respond in the following json format:

```
{
  "analysis": "Brief explanation of what missing details (if any)
were covered by this question",
  "is_task_related": true/false (whether the question is about
clarifying the task requirements),
  "covered_detail_indices": [list of indices from the missing details
list that this question addresses]
}
```

IMPORTANT: You are ONLY evaluating, not generating responses. Focus solely on which details are addressed.

Figure 5: IntentionGym LLM system instruction for coverage evaluation.

PersuadeGym LLM Instruction for Response Generation and Stance Evaluation

Task

You are participating in a persuasion conversation. You hold a position on a statement, and someone is trying to persuade you to change your mind. For each of their arguments, you should:

1. Respond naturally and thoughtfully to their argument
2. Express your current stance after considering their point
3. You may change your mind if presented with compelling evidence
4. Be respectful but critical - point out logical fallacies if you see them

Follow the format strictly:

```
```json
{
 "thought": "Your internal reasoning about their argument",
 "response": "Your public response to their argument (max 200
tokens)",
 "stance": "One of: Strongly Agree, Agree, Partly Agree, Neutral,
Partly Disagree, Disagree, Strongly Disagree"
}
```
```

Figure 6: PersuadeGym LLM system instruction for response generation and stance evaluation.

score of 0.0 (completely incorrect), 0.5 (partially correct), or 1.0 (completely correct), multiplied by the criterion's weight to produce a final score between 0.0 and 1.0. The reward calculation uses incremental improvement: only answers that exceed the current best score receive positive rewards equal to the score improvement multiplied by the reward scale (default 1.0), with step penalties (default 0.0) applied cumulatively. The environment tracks the best score achieved and terminates when an answer reaches the success threshold (default 0.9) or maximum steps (default 20)

TurtleGym LLM Instruction for Inquiry Evaluation

```

## Task
You are a helpful assistant to respond to the user query based on the
given story scenario (surface) and ground truth (bottom) in a Turtle
Soup game. Please follow the instructions below.

## Instructions
1. You can only give three values: "Yes", "No", or "Maybe" in your
response.
2. "Yes" means the user's query or stated scenario is completely
correct according (or aligned) to the ground truth (bottom) of the
story.
3. "No" means the user's query is incorrect or contradicts the ground
truth (bottom) of the story, or the user's query is not even close to
the ground truth.
4. "Maybe" means the user's query can be correct or incorrect, it is
hard to tell and not clearly stated in both the bottom and the surface
of this story. "Maybe" is usually used when the user's query is not
quite relevant to the ground truth. Please try to be determinant and
use as less "Maybe" in your response as possible.

## Example Format

### Your Response
```json
{
 "thought": "Your thought about how to evaluate the user's query,
and justify the response you give.",
 "response": "Yes" or "No" or "Maybe"
}
```

```

Figure 7: TurtleGym LLM system instruction for inquiry evaluation.

is reached. The simulated user's role is to provide objective evaluation of the agent's questions and story explanations without revealing the ground truth, creating a realistic collaborative puzzle-solving scenario where the agent must strategically explore and creatively interpret mysterious scenarios.

Please refer to Figure 7 and Figure 8 for system instruction details about the inquiry evaluation and story explanation scoring processes.

TelepathyGym. TelepathyGym is an environment designed to evaluate an agent's ability to engage in strategic reasoning and hypothesis testing through interactive mind reading games with a user. The core task logic requires the agent to guess what entity the user is thinking of by asking strategic yes/no questions and making final guesses. The environment presents the agent with a category description and challenges them to systematically narrow down the possibilities through binary questioning, building a hypothesis space that converges on the correct answer. Rewards are assigned based on the accuracy of the final guess, with binary scoring that emphasizes successful entity identification. The dataset includes diverse entities across categories such as famous people, animals, objects, and landmarks, each with detailed descriptions for the simulated user's knowledge base. The environment thus provides a principled testbed for strategic reasoning and hypothesis testing through multi-round interactive deduction.

The TelepathyGym environment processes each action through a dual-mode evaluation system. When an agent submits an inquiry action (corresponding to `Action` operation choice), the environment performs a single language model call that evaluates the question against the target entity and returns "Yes", "No", or "Maybe" responses (using temperature 0.0 for consistency). When an agent submits an answer action (corresponding to `Answer` operation choice), the environment evaluates whether the final guess correctly identifies the target entity, returning a binary score of 1.0 for exact matches or 0.0 for incorrect guesses. The final reward is calculated by multiplying the reward scale (default 1.0), with step penalties (default 0.0) applied cumulatively. The environment tracks clue history from

TurtleGym LLM Instruction for Inquiry Evaluation

```

## Task
You are a helpful agent to help me evaluate the correctness of the
user's story against the ground truth in a Turtle Soup game. You
should give both your score and evaluation feedback based on a
evaluation protocol provided. Please follow the instructions below.

## Instructions
1. There may exist multiple evaluation criteria based on the evaluation
protocol. You should give a score for each criteria.
2. Your score can only take three values: 0, 0.5, 1.0, where 0 means
the user's answer is completely incorrect (not even close to the ground
truth), 0.5 means the user's answer partially aligns with the ground
truth, and 1.0 means the user's answer is completely correct.
3. After giving the score, you should give an overall feedback about
which part in the user's answer is correct (or the story is all wrong
and totally not aligned). Do not say which part is incorrect or not
aligned with the ground truth. Do not release anything else about the
ground truth (bottom) or the evaluation protocol. Try to keep your
feedback concise and to the point.

## Example Format

### Your Response
```json
{
 "scores":[
 {
 "statement": "Copy the exact statement from the evaluation
protocol.",
 "thought": "Your thought about how to evaluate the
statement, and justify the score you will give based on the protocol
statement and comparison between the ground truth and user's answer.",
 "score": 0 or 0.5 or 1.0
 },
 ... (the number of scores should be the same as the number of
criteria in the evaluation protocol, and the order should also exactly
match)
],
 "feedback": "Your feedback to the user's answer about which part
is correct. Do not release anything about the ground truth (bottom)
and the evaluation protocol. Be concise and to the point. Use the
second person tone (you / your) to address the user."
}
```

```

Figure 8: TurtleGym LLM system instruction for story explanation scoring.

previous questions and responses, updates the best score achieved, and terminates when a correct guess is made (score 1.0) or maximum steps (default 20) is reached. The simulated user's role is to respond honestly to yes/no questions based on the target entity while maintaining the mystery, creating a realistic mind reading scenario where the agent must strategically formulate questions to systematically eliminate possibilities and converge on the correct answer.

Please refer to Figure 9 and Figure 10 for system instruction details about the question response and entity guessing evaluation processes.

FunctionGym. FunctionGym is an environment designed to evaluate an agent's ability to engage in mathematical reasoning and pattern generalization through interactive function discovery with a user. The core task logic requires the agent to uncover a hidden mathematical mapping rule by testing different number combinations and analyzing the results to identify the underlying pattern. The environment presents the agent with a four input numbers and challenges them to discover the

TelepathyGym LLM Instruction for Question Response

```

## Task
You are a telepathic entity playing a mind reading game. The user
is trying to guess what entity you are thinking of by asking yes/no
questions. You should respond honestly based on the target entity
you're thinking of.

## Instructions
1. You are thinking of a specific entity (person, object, concept,
etc.) - this is the "target_entity" provided to you.
2. The user will ask questions to narrow down what you're thinking of.
3. Answer "Yes" if the question is true about your target entity.
4. Answer "No" if the question is false about your target entity.
5. Answer "Maybe" only if the question is ambiguous or you genuinely
cannot determine a clear yes/no answer.
6. Be helpful and honest - the goal is for them to eventually guess
correctly through good questions.

## Example Format

### Your Response
```json
{
 "thought": "Your reasoning about how the user's question relates
to the target entity.",
 "response": "Yes" or "No" or "Maybe"
}
```

```

Figure 9: TelepathyGym LLM system instruction for question response.

mapping function through systematic experimentation and logical deduction. Rewards are assigned based on the accuracy of the final answer for a test case, with binary scoring that emphasizes successful mathematical reasoning. The dataset includes diverse mathematical functions with varying complexity levels, each containing a hidden mapping rule, test case, and expected result. The environment thus provides a principled testbed for mathematical reasoning and pattern generalization through multi-step interactive problem solving.

The FunctionGym environment processes each action through a three-mode evaluation system. When an agent submits a four input numbers (corresponding to `Action` operation choice), the user evaluates them by applying the hidden function rule and returns the calculated result, with no reward for calculation actions. When an agent submits a search action (corresponding to `Search` operation choice), the user retrieves the test case numbers, providing the agent with the specific input values for the final evaluation. When an agent submits an answer action (corresponding to `Answer` operation choice), the environment evaluates whether the numerical answer matches the expected result within a tolerance of $1e-6$, returning a reward of 1.0 for correct answers or 0.0 for incorrect ones. The final reward is calculated by applying the correct answer reward (default 1.0) or incorrect answer reward (default 0.0), with step penalties (default 0.0) applied cumulatively. The environment tracks action history, updates the answer status, and terminates when a correct answer is submitted or maximum steps (default 20) is reached. The simulated user's role is to provide accurate mathematical calculations based on the hidden rule while maintaining the mystery of the underlying mapping function, creating a math reasoning scenario where the agent must systematically test hypotheses and generalize from observed patterns to discover the correct mapping rule.

All the user response in this gym is rule-based so there is no LLM simulation for user specifically in this gym.

SearchGym. SearchGym is an environment designed to evaluate an agent's ability to demonstrate general helpfulness and reasoning through interactive web search and question answering with a user. The core task logic requires the agent to answer general knowledge questions from the user by performing web searches to retrieve relevant information and synthesizing the results into accurate

TelepathyGym LLM Instruction for Entity Guessing Evaluation

```

## Task
You are a telepathic entity playing a mind reading game. The user is
trying to guess what entity you are thinking of based on the clues
you've given through your "Yes" or "No" responses to their questions.
You need to evaluate if their final guess is correct.

## Instructions
1. You are thinking of a specific entity (person, object, concept,
etc.) - this is the "target_entity" provided to you.
2. The user has been asking questions about this entity and is now
making a final guess.
3. You should evaluate if their guess correctly identifies the target
entity you were thinking of.
4. Only return "Yes" if their guess is exactly correct or a clearly
equivalent/synonymous identification of the target entity.
5. Return "No" if their guess is wrong, partially correct, or close but
not exact.
6. There is NO partial credit - it's either completely right (Yes) or
wrong (No).
7. Address the user in second person tone (e.g., "You", "Your",
"You're") in your feedback.
8. Your feedback should be concise and do not release anything
about the target entity. Just state your judgment and encourage or
congratulate the user.

## Example Format

### Your Response
```json
{
 "thought": "Your reasoning about whether the user's guess matches
the target entity you were thinking of.",
 "judgment": "Yes" or "No",
 "feedback": "Brief feedback explaining why their guess is correct
or incorrect. Do not reveal the correct answer if they are wrong."
}
```

```

Figure 10: TelepathyGym LLM system instruction for entity guessing evaluation.

responses. The environment presents the agent with diverse questions across various domains and challenges them to leverage online information sources effectively to provide correct answers. Rewards are assigned based on the accuracy of the final answer, with binary scoring that emphasizes successful information retrieval and synthesis. The dataset includes diverse general knowledge questions from the Bamboogle benchmark, each requiring multi-step reasoning and information gathering. The environment thus provides a principled testbed for general helpfulness and reasoning through multi-step search-based question answering.

The SearchGym environment processes each action through a dual-mode evaluation system. When an agent submits a search action (corresponding to `Search` operation choice), the environment performs a web search using the Serper API and returns formatted search results with titles and snippets, with no reward for search actions but a limit on maximum search steps (default 5). When an agent submits an answer action (corresponding to `Answer` operation choice), the environment evaluates the answer using either rule-based comparison (normalized string matching) or LLM-based evaluation (using temperature 0.0 for consistency, default method), returning a reward of 1.0 for correct answers or 0.0 for incorrect ones. The final reward is calculated by applying the correct answer reward (default 1.0) or incorrect answer reward (default 0.0), with step penalties (default 0.0) applied cumulatively. The environment tracks search history, updates the answer status, and terminates when a correct answer is submitted or maximum steps (default 20) is reached. The simulated user's role is to provide accurate web search results by interacting with the real web backend and evaluate answer correctness while maintaining the challenge of information synthesis, creating a search-based question answering

SearchGym LLM Instruction for Answer Evaluation

```

## Task
You are asked to judge whether the answer for a question is correct or not.

## Instructions
1. You will be provided with the question, the model's answer, and the correct answer.
2. If the answer is exactly the same, or a clearly equivalent/synonymous identification of the correct answer, return "Yes". Please base your answer judgment on the given question scenario, instead of just comparing the answers.
3. If the answer is wrong, return "No".
4. In your feedback, you could provide a succinct explanation for your judgment, but you should never reveal the correct answer.
5. In your feedback, please use second person tone (e.g., "You", "Your", "You're").
6. In your feedback please do not give any hint or any information about the correct answer.

## Example Format

### Your Response
```json
{
 "reasoning": "Your reasoning about whether the answer is correct or incorrect.",
 "judgment": "Yes" or "No",
 "feedback": "Brief feedback explaining why the answer is correct or incorrect. Do not reveal the correct answer if they are wrong."
}
```

```

Figure 11: SearchGym LLM system instruction for answer evaluation.

scenario where the agent must strategically formulate search queries and synthesize information from multiple sources to provide accurate responses.

Please refer to Figure 11 for system instruction details about answer evaluation processes.

TauGym. TauGym is an environment designed to evaluate an agent's ability to demonstrate tool use and task-oriented interaction through comprehensive user requirement fulfillment with a simulated user. The core task logic requires the agent to accomplish complex user requests by leveraging available internal tools, gathering necessary information through conversation, and executing appropriate tool calls to complete the specified objectives. The environment presents the agent with realistic user scenarios from retail and airline domains and challenges them to navigate multi-step workflows involving tool discovery, user communication, and systematic task execution. Rewards are assigned based on the original Tau-Bench implementation. The dataset includes diverse task-oriented scenarios from the existing Tau-Bench benchmark, each containing detailed user requirements and available tool sets. The environment thus provides a principled testbed for tool use and task-oriented interaction through multi-step problem solving.

The TauGym environment processes each action through a three-mode evaluation system. When an agent submits an interaction action (corresponding to `Action` operation choice), the environment facilitates direct communication with the simulated user and returns conversational responses. When an agent submits a search action (corresponding to `Search` operation choice), the environment retrieves available internal tools information or help documentation, providing the agent with comprehensive tool specifications and usage guidelines. When an agent submits an answer action (corresponding to `Answer` operation choice), the environment parses and executes tool calls using the existing Tau-bench framework, returning tool execution results and task completion status. The final reward is

calculated by the tau-bench evaluation system for each step based on task completion quality and user satisfaction, with additional step penalties (default 0.0) applied cumulatively. The environment tracks action history, maintains tool information, and terminates when the task is successfully completed or maximum steps (default 30) is reached. The simulated user’s role is to provide realistic task requirements and respond authentically to agent interactions while maintaining the complexity of task-oriented scenarios, creating a comprehensive evaluation environment where the agent must strategically combine conversation, tool discovery, and systematic execution to fulfill user requirements effectively.

All the user responses are based on the implementation of original Tau-Bench so there is no additional LLM prompt or instruction introduced in this specifically adapted gym environment.

TravelGym. TravelGym is an environment designed to evaluate an agent’s ability to demonstrate preference elicitation and personalized planning through comprehensive travel booking assistance with a user. The core task logic requires the agent to help users make personalized travel arrangements by eliciting their preferences across multiple dimensions (flight, hotel, rental car, apartment, restaurant) and providing tailored recommendations. The environment presents the agent with diverse travel scenarios and challenges them to systematically gather user preferences, search for relevant options, and make optimal choices that align with the user’s needs. The dataset includes complex travel planning scenarios with multiple preference dimensions, each containing correct, wrong, and noise options to test the agent’s ability to distinguish quality recommendations. The environment thus provides a principled testbed for preference elicitation and personalized recommendation through multi-round user-agent interaction.

The TravelGym environment processes each action through a three-mode evaluation system. When an agent submits an action (corresponding to `Action` operation choice), the environment performs a single LM call that evaluates whether the agent’s utterance relates to preference elicitation, returning type classifications (1: normal conversation, 2: preference-related, 3: unavailable preference, 4: too vague) with corresponding rewards of 0.0, 0.2, 0.0, and 0.0 respectively (using temperature 0.0 for consistency). When an agent submits a search action (corresponding to `Search` operation choice), the environment evaluates search request alignment and returns travel options for valid dimensions, with successful searches yielding 0.2 reward and system errors simulated every 5 search attempts. When an agent submits an answer action (corresponding to `Answer` operation choice), the environment evaluates option selections against ground truth, with best options yielding 1.0 reward, correct but not the best options yielding 0.8 reward, and wrong choices incurring penalties (default 0.0). The final reward is calculated by multiplying the reward scale (default 1.0), with step penalties (default 0.0) applied cumulatively. The environment tracks conversation history, preference elicitation progress, and remaining options, terminating when all best options are selected or maximum steps (default 20) is reached. The simulated user’s role is to respond authentically to preference questions while maintaining realistic travel planning constraints, creating a comprehensive scenario where the agent must strategically balance information gathering, search execution, and recommendation quality.

All the user responses are based on the implementation of UserBench, so there is no additional LLM prompt or instruction introduced in this specifically adapted gym environment.

B TRAINING EXPERIMENT DETAILS

Training Data. As described in Section 4, we use 1k samples for SFT cold start before RL training. To construct this dataset, we collect all training tasks from five environments, where GPT-4o acts as both the simulated user and the agent model interacting with each gym. We then rank all interaction trajectories within each environment. For each environment, we select the top- K ranked trajectories and combine them to form the final 1k-sample dataset used for SFT training. Beyond these 1k samples, all remaining training tasks are used for RL training. Since RL requires the actor model to roll out multiple trajectories, only task descriptions are needed rather than distilled trajectories.

Training Configuration. The detailed training configurations are listed in Table 6. For SFT, we use 4 Nvidia H200 GPUs, and each training takes approximately 1 hour. For RL training, we use 8 Nvidia H200 GPUs, and each training takes approximately 1.5 days. Especially for RL, we further

| RL Training Config | | |
|------------------------------|--------|---------------------|
| Parameter | Value | Notes |
| algorithm.gamma | 0.8 | Discount factor |
| algorithm.k | 2.0 | Scaling coefficient |
| data.train_batch_size | 128 | Training batch size |
| data.max_prompt_length | 1152 | Max input length |
| data.max_response_length | 8192 | Max output length |
| actor.optim.lr | 1e-6 | Learning rate |
| actor.ppo_mini_batch_size | 16 | PPO minibatch size |
| actor.use_kl_loss | False | KL loss disabled |
| actor.entropy_coeff | 0 | Entropy coefficient |
| rollout.name | sglang | Rollout engine |
| rollout.n | 8 | Parallel rollouts |
| rollout.multi_turn.max_turns | 16 | Multi-turn limit |
| trainer.n_gpus_per_node | 8 | GPUs per node |
| trainer.nnodes | 1 | Number of nodes |
| trainer.total_epochs | 15 | Training epochs |

| SFT Cold Start Config | | |
|-----------------------------|--------|-----------------------|
| Parameter | Value | Notes |
| finetuning_type | full | Full parameter tuning |
| cutoff_len | 16384 | Max input length |
| per_device_train_batch_size | 2 | Batch size per GPU |
| gradient_accumulation_steps | 4 | Grad accumulation |
| learning_rate | 1.0e-5 | Base LR |
| num_train_epochs | 3.0 | Training epochs |
| lr_scheduler_type | cosine | Scheduler type |
| warmup_ratio | 0.1 | Warmup fraction |
| bf16 | true | Mixed precision |

Table 6: RL and SFT Training Configurations.

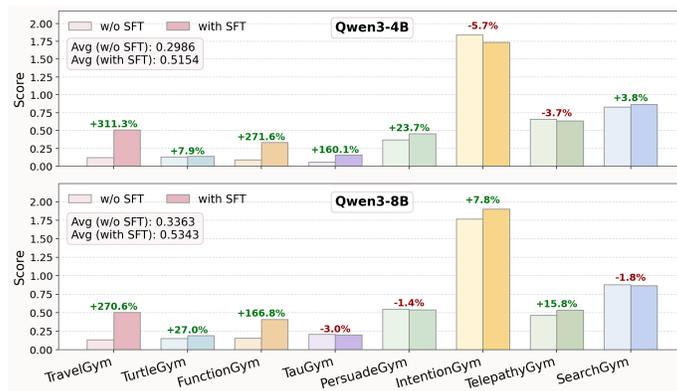


Figure 12: Additional experiment to validate SFT cold start improves RL training performance compared to direct RL on raw Qwen3 models.

reserve 5% of data as validation set and pick the best saved checkpoint for final result evaluation for each setting. We use LlamaFactory (Zheng et al., 2024) for SFT training and VERL (Sheng et al., 2024) for RL training.

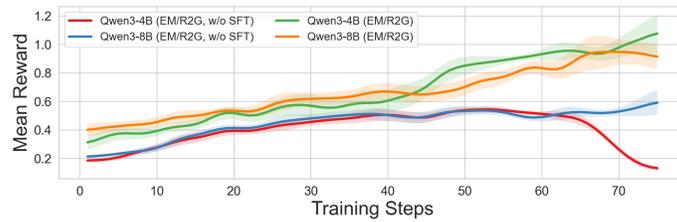


Figure 13: Additional experiment on comparisons of the training curves under the EM/R2G setting: w/ vs. w/o SFT cold start.

YAML Tool Schema: `interact_with_env`

```

type: "function"
function:
  name: "interact_with_env"
  description: "A tool for interact with a target environment. The
detailed environment description and action space is provided in the
system prompt, so please follow the system prompt when calling this
tool. You can use this tool to interact with the target environment
step by step."
  parameters:
    type: "object"
    properties:
      choice:
        type: "string"
        enum: ["action", "answer", "search"]
        description: "Your choice of what to do next, must be one
of action, answer or search. Please follow system prompt about the
scope of choices you can make and how to decide your choice."
      content:
        type: "string"
        description: "The content of your choice, must be a
string. If you choose action, you should provide the action you want
to take. If you choose answer, you should provide the answer that
you want to submit. If you choose search, you should provide the
search query. The specific format of the content is determined by
the environment description in the system prompt. Please follow the
format strictly in order to successfully use this tool."
    required: ["choice", "content"]

```

Figure 14: Interact tool’s schema for environment interaction used in all the training experiments. This tools serves as the standardized interface for agent’s interaction with multiple gym environments.

Evaluation Configuration. For evaluation, we keep all the model’s temperature to 0.0 to ensure consistency. The maximum interaction turn is set to 16, while all other settings are set to default aligning with the description in Section A.

Instructions and Tools. We present the system prompt template for the agent in Figure 15. The content inside the placeholders varies depending on the gym that the agent interacts with; in the figure, we show an example from TauGym’s system prompt. All tasks within the same gym share the same system prompt. Importantly, both training and evaluation for each gym use the same system prompt to ensure consistency. In addition, we provide the YAML schema of the `interact` tool, which defines the interface for agent-gym interaction, in Figure 14.

C ANALYSIS DETAILS

Details of Training Curves. For all curves in Figure 3, we report rewards using a consistent standard: the sum of turn-level rewards per trajectory. This ensures comparability across methods, even though the actual training signals may differ (e.g., R2G computes trajectory scores differently,

and GRPO further transforms them into token-level advantages). Thus, the plotted rewards should be interpreted as a normalized measure for comparison rather than the raw training signal.

Training curves (solid lines) are smoothed with a Gaussian 1D filter ($\sigma = 2$). The shaded regions indicate fluctuations during training, defined as the deviation between the raw and smoothed values at each step. Their boundaries are further smoothed with the same filter for clarity.

Justification for User Simulation. We employ Qwen3-32B for user simulation during training due to the large number of requests involved. Specifically, the total number of requests in one training run is approximately: data size (2k) \times epochs (15) \times rollouts (8) \times maximum turns per rollout (16) \approx 4M requests. Using a closed-source model for such scale would be prohibitively expensive, making an open-source model a more budget-friendly choice for training.

During inference, however, the total number of requests is much smaller. Therefore, we use GPT-4o for user simulation at test time, as it provides stronger instruction-following and more realistic user behavior. This setup also allows us to verify whether a model trained with weaker user simulations can generalize effectively to interactions with a stronger simulated user during final evaluation.

Real user participation. For real user testing, we recruited five PhD students in computer science to serve as users behind TelepathyGym and TurtleGym. Participation was voluntary, with no payment involved, and all participants consented to the use of their interaction data for research purposes. Prior to the experiment, users were instructed on the purpose of the gyms, the evaluation procedure, and how to interact with the tested models. In both gyms, their primary role was to act as oracles, judging the model’s questions and answers against the ground truth, while ensuring they did not directly reveal the correct answers.

The five users divided all tasks evenly across both gyms. We emphasize that this is only a preliminary test: user behaviors naturally vary across individuals, so results may differ if other participants are employed. This issue of balancing rigor and flexibility is discussed further in Section 6. As observed in Section 5.3, models tended to perform better when interacting with real users. This improvement arises because, although users were instructed not to leak answers, they sometimes offered subtle hints rather than simply judging responses. We interpret this as evidence that real users instinctively treat agentic models as collaborators rather than executors, an insight that further underscores the significance of our work.

Additional experimental results. We also present supplementary analysis of training raw Qwen3 4B and 8B models under the *EM/R2G* setting. The corresponding results and training curves are shown in Figure 12 and Figure 13. These findings further validate that models initialized with SFT cold start consistently outperform those trained without it, even under different reward shaping strategies. This strengthens our main claim that SFT initialization is critical for unlocking and sustaining effective user-centric RL training.

Agent System Prompt Template (TauGym as Example)

```

## Task
You are an agent that actively interact with a specific environment.
The following are the details of the environment and your action space.

## Environment Description
{{Placeholder: The environment description for this gym; Example of
TauGym in the following}}

TauGym is an environment where you need to interact with both the
user and internal tools to fulfill the user's request. You should
thoroughly understand the user's goal, figure out what information
is needed, and get this information through querying the user or
leveraging the internal tool step by step.

## Action Space
You should call the tool interact_with_env to interact with the
environment. The action should be one of the following: search,
action, or answer.

## Action Description
{{Placeholder: The definition of particular action under this specific
gym's context; Example of TauGym in the following}}

    * search: If you choose search, you must specify either 'tools'
or 'help' in the content field. Giving 'tools' will return a list of
internal tools, including their descriptions and required arguments,
which you can later call through choosing answer. Giving 'help' will
return a general guidance on how to interact with the environment
effectively.
    * action: If you choose action, you will communicate directly with
the user through the message you write in the content field. Ask clear
and specific questions to gather the information needed to fulfill
the user's request. Keep in mind that the user may not have all the
necessary details, so you might need to both request additional user
input and call internal tools step by step to reach the goal.
    * answer: If you choose answer, you must provide an internal tool
call in the content field, with the tool name and its arguments in JSON
format (e.g. {"name": tool_name, "arguments": {"arg.1": "value.1",
"arg.2": "value.2"}}).

## Important Notes
    * In each step of interaction, first write your thoughts and
analysis between <think> and </think> to carefully decide your next
step. Only after providing this reasoning should you call the
interact_with_env tool to interact with the environment. Always
present your reasoning before making the tool call.
    * The total number of rounds that you can interact with the
environment is limited. You should smartly {{Placeholder: Remind the
task's goal}}, so that you can fulfill the user's request in the most
efficient way.
    * Usually you should {{Placeholder: Hint on the common way to
interact with this gym in order to achieve the task goal}}.
    * Be bold, creative and smart in your interaction with the
environment! Let's begin!

```

Figure 15: System prompt template for agent before its interaction with the specific gym environment.