

Rethinking the Role of Text Complexity in Language Model Pretraining

Dan John Velasco* and Matthew Theodore Roque*

Samsung R&D Institute Philippines
{dj.velasco, roque.mt}@samsung.com

*Equal Contribution

Abstract

Improving pretraining data quality and size is known to boost downstream performance, but the role of text complexity is less explored. Text complexity refers to how hard a text is to read, and is typically estimated from surface cues such as sentence length, word choice, and sentence structure. We reduce surface-level complexity—shorter sentences, simpler words, simpler structure—while keeping core text content close to constant, and ask: (1) How does complexity affect language modeling across model sizes? (2) Can useful representations be learned from simpler text alone? (3) How does pretraining text complexity influence downstream language understanding? To answer these questions, we simplify human-written texts using a large language model, then pre-train causal models (28M-500M) from scratch on both original and simplified data, and evaluate them in finetuning and zero-shot setups. We find that perplexity is sensitive to the interaction between model capacity and text complexity—smaller models degrade far less on simpler texts—while text complexity has little impact on finetuning evaluations, with zero-shot evaluations indicating that simpler texts benefit performance on linguistic knowledge tasks, whereas more complex texts favor tasks requiring world knowledge and entity tracking.

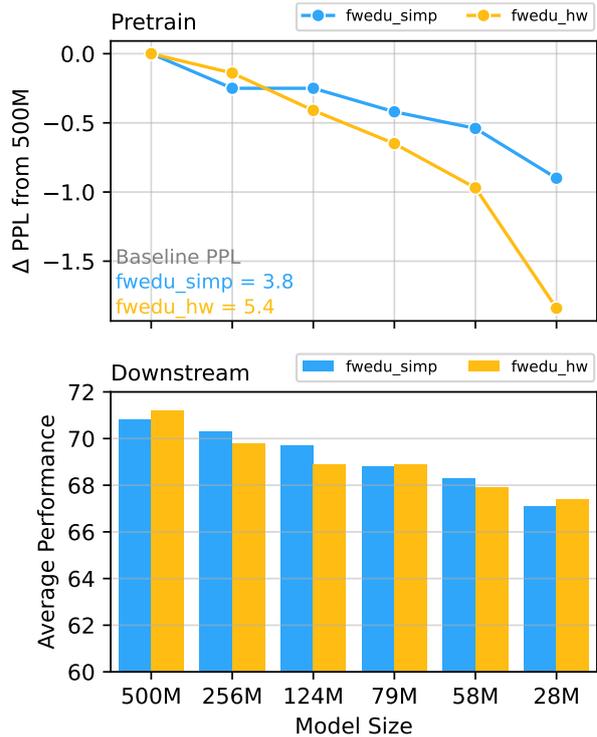


Figure 1: **(Top)** Perplexity (PPL) degrades faster for models trained on fwedu_hw (human-written) than on fwedu_simp (simplified) as model size decreases, suggesting that smaller models handle lower-complexity text more effectively. **(Bottom)** Average performance across 7 language tasks remains similar across data setups suggesting text complexity has limited impact on general language understanding.

1 Introduction

Let’s compare two versions of text:

- (A) As the sunset cast its warm orange glow over Manila Bay, people relaxed on the sideline benches, enjoying the peaceful view of the sunset.
- (B) The sunset gave Manila Bay a warm, orange light. People sat on the benches and enjoyed the view of the sunset.

The two versions convey the same core meaning, but one uses more nuanced, complex language, whereas the other is simpler and less nuanced. This can be likened to lossy compression, where version (B) requires fewer bits to represent the information in (A) but loses some nuance. It compresses by using common words and simpler sentence structures while retaining the core information.

What if our corpus is more like (B)? Can we still learn useful representations by training solely on simplified text with a simpler vocabulary and sentence structure? To answer this, we manipulate surface-level complexity—shorter sentences, simpler words, simpler structures—while keeping the semantics close to constant, and measure downstream performance.

It is well-known that language models acquire world knowledge during pretraining (Petroni et al., 2019; Roberts et al., 2020; Zhang et al., 2021; Wei et al., 2022), and transfer learning is more effective when the pretraining corpus aligns with the target task domain (Ruder and Plank, 2017; Gururangan et al., 2020). For example, pretraining on medical-related texts leads to better performance on medical domain tasks than using finance-related texts. This highlights that a model’s knowledge base strongly affects downstream results. To isolate the effect of text complexity, it’s essential to control for core content. In this paper, we ask three core questions:

- (1) How does text complexity affect language modeling performance across models of varying capacity?
- (2) Can we learn useful representations by training solely on simpler text, with simpler vocabulary and sentence structure?
- (3) How does the text complexity of pretraining data affect downstream performance on language understanding tasks?

We collected human-written texts and used a Large Language Model (LLM) to produce simplified versions while preserving core content. Causal language models (28M-500M) were then pretrained from scratch in two setups: on the original texts and on their simplified counterparts. We evaluated language understanding through finetuning, and linguistic knowledge and commonsense reasoning in zero-shot settings.

Our empirical evidence shows that reducing surface-level complexity features does not significantly impact performance on general language understanding tasks (Figure 1). These results suggest that text complexity is not the primary driver of performance; instead, knowledge coverage may matter more. However, zero-shot evaluations (Table 4 and 5) suggest that text simplicity can boost performance in linguistic knowledge tasks, while greater complexity tends to aid world knowledge and entity tracking.

2 Related Work

Text complexity or readability. It refers to how difficult a text is to understand (DuBay, 2004), influenced by linguistic factors such as word choice (e.g., "utilize" vs. "use"), sentence structure (complex vs. simple), and content type (academic vs. children’s books) (Dale and Chall, 1948; Graesser et al., 2004). Other factors such as the reader’s knowledge affect readability (Ozuru et al., 2009). In this work, we focus solely on linguistic aspects.

Common readability metrics—such as Flesch Reading Ease (FRE) (Flesch, 1948), Dale-Chall (Dale and Chall, 1948), and SMOG (Mc Laughlin, 1969)—use surface features like sentence length and word complexity. These measures overlook deeper dimensions such as coherence and style, motivating machine learning and deep learning approaches (Hancke et al., 2012; Meng et al., 2020; Imperial, 2021; Chatzipanagiotidis et al., 2021). Recent work applies LLMs to readability estimation (Trott and Rivière, 2024; Lee and Lee, 2023; Rooein et al., 2024), achieving strong alignment with human judgments even without finetuning. However, LLM-based scoring is computationally costly at corpus scale, so we use FRE to estimate readability.

Text simplification (TS). It aims to make text easier to understand while preserving its content (Agrawal and Carpuat, 2023; Alva-Manchego et al., 2019; Truică et al., 2023). While simplified texts tend to be shorter, this is not always the case (Shardlow, 2014). This is different from Text Summarization, where the goal is to shorten the text even if it changes the organization and content. Early approaches used word substitution with lexicons (Saggion and Hirst, 2017; Shardlow, 2014; Kriz et al., 2018), while others framed TS as statistical machine translation (SMT) (Wubben et al., 2012; Scarton et al., 2018; Specia, 2010; Xu et al., 2016). Subsequent work applied deep learning encoder-decoder models (Zhang and Lapata, 2017; Alva-Manchego et al., 2019; Agrawal and Carpuat, 2023), and recent studies explore LLMs (Trott and Rivière, 2024; Imperial and Tayyar Madabushi, 2023; Farajidizaji et al., 2024; Padovani et al., 2024). While some research targets specific grade levels, we follow Trott and Rivière (2024) in simplifying complex texts without grade constraints, leveraging LLMs for this task.

Pretraining language models on simple texts.

Recent work has explored pretraining small language models (SLMs) on simple texts. Huebner et al. (2021) showed that models trained on child-directed speech match larger models on probing tasks. Eldan and Li (2023) found that SLMs trained on synthetic short stories using only words familiar to 3-4-year-olds can generate coherent, fluent text. Other studies (Deshpande et al., 2023; Muckatira et al., 2024) reported that SLMs pretrained on simplified language perform comparably to larger models when problems are reformulated in simpler terms. The BabyLM Challenge (Warstadt et al., 2023; Hu et al., 2024) pretrains language models on <100M words from child-directed and simplified texts, using provided or custom datasets within the budget.

Pretraining dataset design. Large-scale pretraining is a key driver of modern language model performance (Brown et al., 2020; Kaplan et al., 2020; Hoffmann et al., 2022). Dataset design choices—domain composition, quality and toxicity filtering, and collection date—affect performance in ways that finetuning cannot fully correct (Longpre et al., 2024).

The work most related to ours, Agrawal and Singh (2023), finds that models trained on more complex text (e.g., Wikipedia) outperform those trained on simpler text (e.g., children’s books), with complexity measured by Flesch Reading Ease. However, because they compare entirely different corpora, complexity is confounded with other factors such as topic breadth, register, discourse structure, and domain diversity. We instead manipulate complexity within the same source texts, preserving core content while varying only surface-level features. This controlled setup isolates the effect of textual complexity, complementing the broader correlation observed by Agrawal and Singh (2023).

Although prior work reports positive results for simple-text pretraining, no study has directly examined the impact of surface-level complexity at larger scales (e.g., 2B tokens). Our experiments address this gap, providing empirical evidence on whether useful models can be trained solely on simplified text.

3 Creating the Pretraining Datasets

3.1 Human-Written Corpus

We took a subset of FineWeb-Edu (Penedo et al., 2024), a collection of high-quality English web

pages specifically optimized for educational content. This dataset is known for its permissive license¹ and its quality since it has gone through rigorous processing such as filtering, deduplication, and curation. The subset has 2 billion tokens², denoted as **fwedu_hw** (short for FineWeb-Edu human-written). The choice of dataset size is motivated by Chinchilla Compute-Optimal guideline of 1:20 parameter-tokens ratio (Hoffmann et al., 2022) and practical reasons (e.g. training under fixed compute budget). While this size is not exactly compliant to the Chinchilla guideline for the 124M, 256M and 500M models, it is at least Chinchilla Optimal for the smaller models (e.g. 28M, 58M, 79M).

3.2 Simplified Corpus

We prompt Llama 3.1 8B (Grattafiori et al., 2024) to transform fwedu_hw into simplified texts. For efficient inference, we use the INT8 quantized version³ of the model and vLLM (Kwon et al., 2023) as our LLM serving system. We discuss more about the prompt engineering and include the final prompt in Appendix B.

We split the documents from fwedu_hw into paragraphs⁴. Transformation is done at the **paragraph level** because the model tends to summarize rather than simplify if the input is a multi-paragraph document. However, not all paragraphs are transformed. This can happen under three conditions: (1) when a paragraph is too short relative to its full document (e.g. title, headers); (2) when a paragraph is too long (e.g. tables, lists); or (3) when the transformation is significantly shorter or longer than the original text (e.g. incorrect simplification). In all of these cases, we **removed these paragraphs from both datasets**. This allows for more control on text complexity of the datasets while controlling for text content by keeping both datasets perfectly parallel. On both datasets, the paragraphs were not reconstructed back to document-level and instead, pretraining is done at the paragraph-level. We include a more detailed breakdown of these conditions in Appendix C.

¹ODC-By 1.0

²Token counts derived from Llama 2 tokenizer (Touvron et al., 2023)

³Model accessed at:

<https://huggingface.co/neuralmagic/Meta-Llama-3.1-8B-Instruct-quantized.w8a8>

⁴We use the term "paragraph" to refer to the smallest unit of block of text in our data pipeline. It is **not** always the case that the smallest unit is an actual paragraph. It can be a single sentence, table, heading, author lists, or other text artifacts.

The final simplified corpus, denoted as `fwedu_simp` (short for FineWeb-Edu simplified), has around 1.71B tokens. To get a rough idea of what the simplified texts look like, see the following example:

Original: Your comment really helped me feel better the most. I was sitting in my office, feeling so bad that I didn't say how inappropriate and out of line his comments were, and this helped.

Simplified: Your comment really helped me feel better. I was feeling bad because I didn't speak up when someone made inappropriate comments.

4 Experimental Setup

In our study, we investigate the effect of text complexity on pretraining and downstream performance of language models across varying model capacity. We compare models trained on `fwedu_hw` (human-written) with those trained on `fwedu_simp` (simplified).

4.1 Model Architecture

Our model architecture is based on the design choices of MobileLLM (Liu et al., 2024): deep-and-thin architectures, SwiGLU activation (Shazeer, 2020), grouped-query attention (Ainslie et al., 2023), and embeddings sharing (Press and Wolf, 2017). All models share the same set of architectural details and hyperparameters as MobileLLM except where explicitly varied. We removed embeddings sharing for the sole purpose of making the results more generalizable to most contemporary causal language models which do not use embeddings sharing. Architectural details are summarized in Table 1.

4.2 Pretraining Configurations

All models are trained for one epoch on either `fwedu_hw` or `fwedu_simp`. Both use the LLaMA-2 BPE tokenizer (Touvron et al., 2023) with a 32k vocabulary. Training examples are individual paragraphs, with no concatenation or sequence packing.

Inputs are right-padded to 512 tokens with the EOS token (identical to BOS) and use a causal attention mask. Each corpus is trained on independently and remains perfectly parallel after filtering, ensuring differences in model behavior stem solely from surface-level complexity.

#Params (Non-Emb)	#Layer	#Head	#KV	Emb Dim	#Params
500M	40	18	6	1044	~531M
256M	30	9	3	846	~283M
124M	30	9	3	576	~143M
79M	30	9	3	450	~94M
58M	30	9	3	378	~70M
28M	30	9	3	252	~36M

Table 1: Model architecture configurations. Emb Dim is the embedding size, Non-Emb refers to non-embedding parameters, and #KV denotes key-value heads. The number of layers and attention heads is fixed for models up to 256M and increased for the 500M model. This design maintains a consistent deep-and-thin architecture while scaling parameter count.

Optimization uses AdamW (Loshchilov and Hutter, 2019) with default hyperparameters, a peak learning rate of $3e-4$ (28M models) or $5e-4$ (all other models), linearly decayed, 5% warm-up, and no dropout. Models with 28M-124M parameters use an effective batch size of 256 (8 examples/GPU \times 8 GPUs \times 4 gradient accumulation steps). Models with 256M-500M parameters use 4 examples/GPU with 8 accumulation steps to match the batch size. Training is performed in FP16 mixed precision on 8 \times NVIDIA P100 GPUs; gradient checkpointing is enabled only for the 500M model.

Validation is run on a held-out corpus slice after 300M tokens and at every subsequent doubling. Results are from the final checkpoint. Implementation uses PyTorch and Hugging Face Transformers. All runs fix the random seed to 42 for data shuffling and initialization.

4.3 Finetuning Tasks

To assess the downstream impact of text complexity during pretraining, we fine-tune our models on a suite of seven language understanding tasks drawn from GLUE and SuperGLUE: BoolQ, MNLI, MRPC, MultiRC, QQP, RTE, and WSC. This set follows the evaluation configuration of the BabyLM Challenge, and we use the same preprocessed datasets provided in the BabyLM evaluation pipeline for both training and validation (Charpentier et al., 2025).

All models are trained with an added classification head. For tasks involving multiple input sequences (e.g., premise-hypothesis or sentence pairs), we concatenate the two sequences with a separator token before feeding them into the model. We perform two fine-tuning regimes for

each model-task pair: (1) Full-model fine-tuning, where all model parameters and the classification head are updated; and (2) Linear probing, where only the classification head is updated.

Fine-tuning uses 8×P100 GPUs without gradient accumulation. Batch size is determined by GPU memory constraints: for BoolQ and MultiRC we use 2 examples per GPU (effective batch size of 16), and for all other tasks we use 8 examples per GPU (effective batch size of 64). For each task, we perform a grid search over learning rates $1e-4$, $5e-5$, $2e-5$, $1e-5$, $5e-6$ and training epochs 1, 2, 3, 4, 5.

We use the same task metrics as the BabyLM evaluations, namely: 3-class accuracy for MNLI; binary accuracy for BoolQ, MultiRC, and WSC; and F1-Score for MRPC and QQP. All experiments are run with three random seeds; we report the mean and standard deviation of the best-performing configuration for each seed. Fine-tuning is performed for all model sizes on all tasks under both training regimes.

4.4 Zero-shot Tasks

To further evaluate the quality of representations, we conduct zero-shot evaluations on eight multiple-choice benchmarks, grouped into two categories:

Linguistic knowledge, entity tracking, and world knowledge: BLiMP (Warstadt et al., 2020) and the BLiMP Supplement (as provided in the BabyLM evaluation pipeline), probe syntactic and morphological phenomena. Entity Tracking (Kim and Schuster, 2023) and EWoK (Elements of World Knowledge Ivanova et al., 2024), measure a model’s ability to follow discourse entities and recall factual knowledge. The models were evaluated on these tasks using the BabyLM evaluation pipeline (Charpentier et al., 2025).

Commonsense reasoning: ARC-Easy and ARC-Challenge (Clark et al., 2018), HellaSwag (Zellers et al., 2019), and PIQA (Bisk et al., 2020), require reasoning over everyday scenarios and physical commonsense. The models were evaluated on these tasks using the lm-evaluation-harness (Gao et al., 2024).

All tasks are multiple-choice. For each evaluation instance, we format the input according to the benchmark’s specifications and score each candidate option by the sum of log-probabilities of its tokens given the prompt. The option with the highest score is selected as the model’s prediction.

We report accuracy for all zero-shot tasks. Evalu-

ation is deterministic, as predictions depend solely on model likelihoods and not on sampling.

5 Results and Discussion

We performed three independent runs with different random seeds. For each run, we selected the best result over our fixed hyperparameter grid, and report the average of those three best scores. Random seeds were fixed for full reproducibility.

5.1 Dataset Complexity Verification

Is the simplified corpus truly simpler? To answer, we compute per-dataset and cross-dataset metrics (Table 2) and analyzed their distributions (Figure 2). The simplified corpus has fewer tokens, a smaller vocabulary (Types), lower lexical diversity (Type-Token Ratio), and reduced unpredictability (Unigram Entropy)—all indicating lower text complexity. Cross-dataset metrics show that 26.62% of the data are more concise, 92% exhibits low to medium lexical overlap (ROUGE-2), and 79% retains at least 80% semantic similarity (Cosine Similarity). These results suggest that the simplified dataset **differs in form while preserving core content**.

Feature	Simplified	Human-written
PER-DATASET STATS		
Total tokens	1.71B	2.00B
Total words	1.44B	1.57B
Types (unique words)	2.76M	5.23M
Type-token ratio (%)	0.19%	0.33%
Unigram entropy (bits)	9.87	10.58
CROSS-DATASET STATS		
Compression (<80%)	26.62%	—
Exact match	2.51%	—
High lexical overlap	6.47%	—
Medium lexical overlap	31.13%	—
Low lexical overlap	61.75%	—
Exact mismatch	1.56%	—
Semantic Sim (>80%)	79.00%	—

Table 2: Per-dataset and Cross-dataset statistics. Reduced per-dataset stats in Simplified indicate lower complexity compared to Human-written. Lexical overlap is measured using ROUGE-2 (R2), with the following thresholds: exact match ($R2 = 1$), high ($0.8 < R2 < 1$), medium ($0.4 < R2 \leq 0.8$), low ($0 < R2 \leq 0.4$), and exact mismatch ($R2 = 0$). Semantic Sim is computed as cosine similarity of paragraph embeddings. Cross-dataset stats suggest Simplified texts differ in form but preserve core content.

Figure 2 compares the distributions of paired metrics for `fwedu_simp` and `fwedu_hw`, labeled as “Paired”. The first-row metrics are adapted

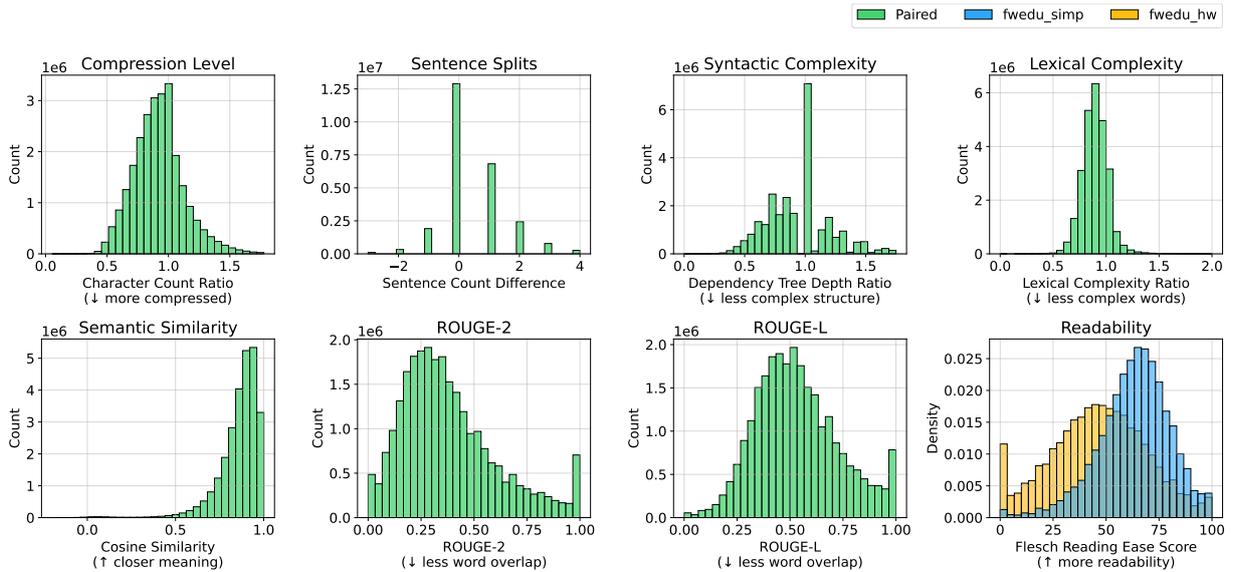


Figure 2: Corpus Features distribution. First row shows metrics of `fwdedu_simp` to `fwdedu_hw`. Second row are pairwise metrics except for Flesch Reading Ease (FRE) which only requires one input. The first row suggests `fwdedu_simp` is shorter, has more sentences, uses simpler structures, and more common words. The second row shows that `fwdedu_simp` is semantically similar to `fwdedu_hw`, with low word-order overlap (low ROUGE-2), moderate preservation of idea flow and structure (moderate ROUGE-L), and clearly higher FRE, indicating systematic differences in readability. For visualization, we removed outliers, which account for only 2.9% of the data (see Appendix F.2 for definition and examples of outliers).

from ASSET’s text complexity evaluation (Alva-Manchego et al., 2020):

- **Compression Level:** ratio of character counts; values < 1.0 indicate more concise texts.
- **Sentence Splits:** difference in sentence counts; values > 0 indicate splitting of complex sentences into simpler ones.
- **Syntactic Complexity:** ratio of maximum dependency-tree depth; values < 1.0 indicate shallower (simpler) sentence structures.
- **Lexical Complexity:** mean squared log-rank of non-stopword tokens, based on the top 50k words in FastText embeddings⁵ (Mikolov et al., 2018); values < 1.0 indicate use of more frequent words.

The second row of Figure 2 shows semantic similarity, word overlap, and readability. We used all-MiniLM-L6-v2 to encode paragraph embeddings, optimized for tasks like sentence similarity and clustering⁶. High scores near 1.0 indicate most

⁵2 million word vectors trained on Common Crawl (600B tokens), <https://fasttext.cc/docs/en/english-vectors.html>

⁶all-MiniLM-L6-v2 ranks 1st and 17th on the MTEB leaderboard (Muennighoff et al., 2023) for $<100M$ and $<1B$ parameter models.

simplified paragraphs retain the original meaning.

ROUGE was computed with the Evaluate tool (Von Werra et al., 2022), scoring from 0 to 1. ROUGE-2 measures exact bigram overlap, reflecting local phrasing; most examples score 0-0.4, indicating low lexical overlap. This confirms high cosine similarity reflects shared meaning, not surface form. ROUGE-L, measuring longest in-order subsequences, shows more varied scores, suggesting moderate structural similarity.

Readability was measured using Flesch Reading Ease (FRE), which factors text length, word count, and syllables. Higher FRE means simpler text: easy (60+), fairly difficult (50-60), hard (<50) (Scott, 2024). `fwdedu_hw` skews lower, `fwdedu_simp` higher, indicating systematic readability differences.

Together, these results show our simplified dataset is **simpler in form while preserving core content**. For examples, see Appendix D and E.

5.2 Main Comparison: Human-Written vs. Simplified

5.2.1 Language-Modeling Performance

How does text complexity affect language modeling performance across models of varying capacity? To answer this, we measured each model’s perplexity degradation—defined as the absolute dif-

Model	boolq	mnli	mrpc	multirc	qqp	rte	wsc	Avg.
Majority Baseline	64.0	33.1	68.1	57.5	62.7	53.9	61.5	57.3
28M								
from_scratch	66.9 ± 0.8	36.0 ± 0.5	70.4 ± 1.0	59.0 ± 0.3	71.3 ± 0.3	58.3 ± 2.1	65.5 ± 2.1	61.1
fwedu_hw	69.9 ± 0.2	61.9 ± 0.7	79.0 ± 1.7	59.1 ± 0.2	78.6 ± 0.3	60.6 ± 2.6	62.5 ± 4.7	67.4
fwedu_simp	69.3 ± 0.6	61.8 ± 0.2	78.2 ± 1.5	58.8 ± 0.2	78.8 ± 0.2	60.0 ± 2.0	63.1 ± 2.7	67.1
58M								
from_scratch	67.5 ± 0.7	37.7 ± 1.2	70.8 ± 0.7	58.8 ± 0.4	71.8 ± 0.3	57.4 ± 2.9	64.9 ± 1.0	61.3
fwedu_hw	69.6 ± 0.4	63.2 ± 0.5	79.6 ± 1.5	58.5 ± 0.3	79.6 ± 0.1	60.2 ± 1.4	64.3 ± 1.8	67.9
fwedu_simp	69.6 ± 0.1	63.6 ± 0.2	77.9 ± 1.0	58.2 ± 0.4	80.2 ± 0.0	66.4 ± 2.4	61.9 ± 5.5	68.3
79M								
from_scratch	67.4 ± 0.8	38.7 ± 0.3	70.0 ± 0.3	58.3 ± 0.3	72.1 ± 0.4	56.2 ± 3.7	65.5 ± 1.0	61.2
fwedu_hw	69.9 ± 0.3	64.0 ± 0.3	79.5 ± 1.1	58.7 ± 0.2	80.4 ± 0.4	66.2 ± 2.1	63.7 ± 4.1	68.9
fwedu_simp	69.3 ± 1.0	65.2 ± 0.3	80.3 ± 1.4	58.2 ± 0.4	80.7 ± 0.1	67.4 ± 2.5	60.7 ± 0.0	68.8
124M								
from_scratch	68.0 ± 0.8	39.5 ± 1.4	70.8 ± 0.7	58.3 ± 0.5	71.9 ± 0.1	57.4 ± 4.2	65.5 ± 2.1	61.6
fwedu_hw	70.7 ± 0.2	65.9 ± 0.2	80.3 ± 1.4	59.2 ± 0.0	80.7 ± 0.2	65.5 ± 3.2	60.1 ± 1.0	68.9
fwedu_simp	70.3 ± 0.4	66.9 ± 0.5	82.1 ± 0.7	58.8 ± 0.3	81.2 ± 0.1	67.6 ± 1.7	61.3 ± 2.7	69.7
256M								
from_scratch	68.0 ± 0.7	40.5 ± 0.9	71.0 ± 1.0	58.5 ± 0.7	72.1 ± 0.2	57.6 ± 1.0	65.2 ± 1.3	61.8
fwedu_hw	70.8 ± 0.4	67.9 ± 0.4	80.6 ± 2.0	59.1 ± 0.2	81.4 ± 0.2	66.0 ± 0.7	62.5 ± 1.8	69.8
fwedu_simp	70.8 ± 0.7	67.0 ± 0.5	81.7 ± 1.0	58.6 ± 0.4	81.5 ± 0.1	70.8 ± 0.7	61.3 ± 2.1	70.3
500M								
from_scratch	68.6 ± 0.3	39.6 ± 0.4	72.4 ± 0.3	58.5 ± 0.0	72.5 ± 0.0	60.6 ± 2.0	65.5 ± 1.0	62.5
fwedu_hw	70.5 ± 0.5	67.6 ± 0.1	83.4 ± 1.0	58.8 ± 0.2	82.1 ± 0.0	71.5 ± 0.7	64.3 ± 3.1	71.2
fwedu_simp	70.1 ± 0.5	67.4 ± 0.5	82.7 ± 0.7	58.7 ± 0.3	81.6 ± 0.1	71.8 ± 1.1	63.1 ± 2.1	70.8

Table 3: Full Finetuning performance on 7 NLU tasks. Average accuracy across tasks is reported over 3 runs. The Avg. column reports mean accuracy over available tasks. Task metrics are as follows: 3-class accuracy (MNLI), Binary Accuracy (BoolQ, MultiRC, WSC), and F1-Score (MRPC, QQP). Overall results shows minimal performance difference across pretraining setups regardless of model size which suggests text complexity have minimal impact on general language understanding tasks.

ference in perplexity between the 500M model and smaller models. Figure 1 shows that models trained on fwedu_hw degrade faster than those trained on fwedu_simp as capacity decreases, with a sharp drop for the 28M model on fwedu_hw. This interaction between model capacity and data complexity suggests that future model design and selection should account for the complexity of the training data.

5.2.2 Finetuning Evaluation

Full-model Finetuning results are summarized in Table 3. To contextualize the impact of pretraining, we include scores from the Majority baseline and models finetuned from random weights (from_scratch). Notably, MNLI shows the greatest gain from pretraining. More broadly, similar from_scratch performance across tasks and model sizes suggests an upper bound imposed by the training data on this specific architecture—model scaling alone does not improve performance. On MultiRC, all models perform only slightly above the majority baseline, suggesting failure to learn the task. We suspect this stems from paragraph-level pretraining, which may lack sig-

nals for skills like coreference resolution which is important to succeed in MultiRC. The same likely applies to WSC.

Overall, fwedu_hw and fwedu_simp yield similar performance across model sizes in Full-model Finetuning. This pattern holds under Linear Probing as well (Table 6 in Appendix A), reinforcing the observation. Full-model Finetuning also confirms the well-established trend that larger models perform better, regardless of data complexity. These results suggest that text complexity is not the primary driver of performance; instead, knowledge coverage may matter more.

5.2.3 Zero-shot Evaluation

Linguistic Knowledge, Entity Tracking, and World Knowledge. Table 4 summarizes the zero-shot performance on linguistic knowledge and entity tracking benchmarks. BLiMP performance improves with model size, with both setups performing similarly overall, though fwedu_simp has a clear edge on BLiMP-supplement. Entity tracking performance varies widely with model size; fwedu_hw often leads, while fwedu_simp surpasses random chance (20%) only from 79M on-

Model	blimp	blimp-supp	ewok	entity
28M				
fwedu_hw	67.83	55.90	52.79	16.15
fwedu_simp	66.90	57.47	52.67	18.78
58M				
fwedu_hw	69.69	59.03	52.69	26.35
fwedu_simp	70.73	62.15	53.81	18.36
79M				
fwedu_hw	70.67	60.47	54.09	28.89
fwedu_simp	70.44	61.55	53.09	20.73
124M				
fwedu_hw	71.64	62.61	54.07	25.09
fwedu_simp	71.30	63.27	54.01	21.79
256M				
fwedu_hw	72.37	62.61	56.18	29.71
fwedu_simp	72.53	63.65	55.09	22.58
500M				
fwedu_hw	72.23	61.85	56.72	20.81
fwedu_simp	72.60	63.79	54.85	22.05

Table 4: Zero-shot evaluations on grammatical knowledge (blimp), world knowledge (ewok), and Entity Tracking (entity) show consistent improvement with model size. Both setups perform similarly on BLiMP, fwedu_simp scores higher on BLiMP-supplement, whereas fwedu_hw leads on Entity and slightly on EWoK.

ward. EWoK performance improves consistently with model size, with fwedu_hw often slightly outperforming fwedu_simp.

Commonsense Reasoning. Table 5 summarizes zero-shot performance on commonsense reasoning benchmarks. Performance generally improves with increased model size, especially on ARC-Easy and PIQA. ARC-Challenge remains difficult across all setups, with accuracies near random chance (20%). This may be simply due to the pretraining data not containing the knowledge that ARC-Challenge is designed to test. On ARC-Easy, fwedu_hw consistently outperforms fwedu_simp, reaching a peak accuracy of 42.09% at 256M—3 points higher than fwedu_simp. On HellaSwag, both setups perform comparably across model sizes. While for PIQA, fwedu_simp slightly outperforms fwedu_hw consistently. Interestingly, 500M models perform worse than 256M models across tasks. We suspect this is due to the limited data size—2B tokens for fwedu_hw and 1.71B for fwedu_simp—bottlenecking the larger models.

6 Conclusion

In this work, we investigate how text complexity affects language model pretraining. Specifically, we

Model	arc_e	arc_chl	hellaswag	piqa
28M				
fwedu_hw	33.33	20.22	26.99	56.20
fwedu_simp	31.94	21.59	26.40	55.93
58M				
fwedu_hw	39.10	19.54	27.38	57.89
fwedu_simp	33.59	21.42	27.50	58.22
79M				
fwedu_hw	38.80	21.25	27.69	58.71
fwedu_simp	38.05	20.65	27.43	59.52
124M				
fwedu_hw	38.09	19.37	28.08	58.16
fwedu_simp	38.85	21.50	28.36	60.77
256M				
fwedu_hw	42.09	22.70	28.85	60.99
fwedu_simp	38.80	20.82	28.94	61.10
500M				
fwedu_hw	40.99	21.25	28.30	58.16
fwedu_simp	33.96	18.43	27.52	57.99

Table 5: Zero-shot accuracy on commonsense reasoning benchmarks shows that ARC-Challenge (arc_chl) remains near random chance (20%) across all setups. All other tasks improve consistently with model size. fwedu_hw performs best on ARC-Easy (arc_e), while fwedu_simp slightly outperforms on PIQA. Both setups perform similarly on HellaSwag. All 500M models show a performance drop relative to 256M across tasks.

ask whether simplified language—while preserving core content—can lead to representations that perform as well as those learned from more complex, human-written text. We pretrained causal language models of varying sizes (28M-500M parameters) on both simplified and human-written corpora. Our results show that simplifying surface-level features does not significantly hurt downstream performance on a range of language understanding tasks. However, models trained on more complex text show an advantage in zero-shot settings on benchmarks requiring reasoning and knowledge of the world—such as Entity Tracking, EWoK, and ARC-Easy—while performing similarly on BLiMP, HellaSwag, and PIQA. Although our study is limited to 2B-token corpora and a subset of benchmarks, the results indicate that surface complexity affects the quality of learned representations in certain evaluation settings, highlighting the need for further analysis across data scales, model scales, and architectures.

Limitations

Our study has several limitations. First, the LLM-based simplification process is imperfect and may

introduce subtle inconsistencies in core content due to hallucinations. Second, the 2B-token corpora are relatively small by today’s pretraining standards, potentially limiting model performance. Third, our finetuning evaluation focuses on a narrow set of classification and multiple-choice benchmarks, which may not capture the full range of model capabilities, particularly in open-ended or generative tasks. Fourth, our zero-shot evaluation may not fully reflect the targeted capabilities, as it is constrained by limited training data and model capacity. Fifth, we focus solely on causal language models, leaving open the possibility that different patterns may emerge with encoder models like BERT. Lastly, we did not conduct a per-phenomenon analysis of BLiMP, leaving open the possibility that certain linguistic constructions are more sensitive to simplification.

References

- Ameeta Agrawal and Suresh Singh. 2023. [Corpus complexity matters in pretraining language models](#). In *Proceedings of The Fourth Workshop on Simple and Efficient Natural Language Processing (SustaiNLP)*, pages 257–263, Toronto, Canada (Hybrid). Association for Computational Linguistics.
- Sweta Agrawal and Marine Carpuat. 2023. [Controlling pre-trained language models for grade-specific text simplification](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 12807–12819, Singapore. Association for Computational Linguistics.
- Joshua Ainslie, James Lee-Thorp, Michiel de Jong, Yury Zemlyanskiy, Federico Lebron, and Sumit Sanghai. 2023. [GQA: Training generalized multi-query transformer models from multi-head checkpoints](#). In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 4895–4901, Singapore. Association for Computational Linguistics.
- Fernando Alva-Manchego, Louis Martin, Antoine Bordes, Carolina Scarton, Benoît Sagot, and Lucia Specia. 2020. [ASSET: A dataset for tuning and evaluation of sentence simplification models with multiple rewriting transformations](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4668–4679, Online. Association for Computational Linguistics.
- Fernando Alva-Manchego, Carolina Scarton, and Lucia Specia. 2019. [Cross-sentence transformations in text simplification](#). In *Proceedings of the 2019 Workshop on Widening NLP*, pages 181–184, Florence, Italy. Association for Computational Linguistics.
- Yonatan Bisk, Rowan Zellers, Ronan Le Bras, Jianfeng Gao, and Yejin Choi. 2020. [Piqa: Reasoning about physical commonsense in natural language](#). In *Thirty-Fourth AAAI Conference on Artificial Intelligence*.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. [Language models are few-shot learners](#). In *Advances in Neural Information Processing Systems*, volume 33, pages 1877–1901. Curran Associates, Inc.
- Lucas Charpentier, Leshem Choshen, Ryan Cotterell, Mustafa Omer Gul, Michael Hu, Jaap Jumelet, Tal Linzen, Jing Liu, Aaron Mueller, Candace Ross, Raj Sanjay Shah, Alex Warstadt, Ethan Wilcox, and Adina Williams. 2025. [Babylm turns 3: Call for papers for the 2025 babylm workshop](#). *Preprint*, arXiv:2502.10645.
- Savvas Chatzipanagiotidis, Maria Giagkou, and Detmar Meurers. 2021. [Broad linguistic complexity analysis for greek readability classification](#). In *Proceedings of the 16th Workshop on Innovative Use of NLP for Building Educational Applications*, pages 48–58.
- Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. 2018. [Think you have solved question answering? try arc, the ai2 reasoning challenge](#). *arXiv:1803.05457v1*.
- Edgar Dale and Jeanne S Chall. 1948. [A formula for predicting readability: Instructions](#). *Educational research bulletin*, pages 37–54.
- Vijeta Deshpande, Dan Pechi, Shree Thatte, Vladislav Lialin, and Anna Rumshisky. 2023. [Honey, I shrunk the language: Language model behavior at reduced scale](#). In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 5298–5314, Toronto, Canada. Association for Computational Linguistics.
- William H DuBay. 2004. [The principles of readability](#). *Impact Information*.
- Ronen Eldan and Yuanzhi Li. 2023. [Tinystories: How small can language models be and still speak coherent english?](#) *Preprint*, arXiv:2305.07759.
- Asma Farajidizaji, Vatsal Raina, and Mark Gales. 2024. [Is it possible to modify text to a target readability level? an initial investigation using zero-shot large language models](#). In *Proceedings of the 2024 Joint International Conference on Computational Linguistics, Language Resources and Evaluation (LREC-COLING 2024)*, pages 9325–9339, Torino, Italia. ELRA and ICCL.

Rudolph Flesch. 1948. A new readability yardstick. *Journal of applied psychology*, 32(3):221.

Leo Gao, Jonathan Tow, Baber Abbasi, Stella Biderman, Sid Black, Anthony DiPofi, Charles Foster, Laurence Golding, Jeffrey Hsu, Alain Le Noac'h, Haonan Li, Kyle McDonnell, Niklas Muennighoff, Chris Ociepa, Jason Phang, Laria Reynolds, Hailey Schoelkopf, Aviya Skowron, Lintang Sutawika, Eric Tang, Anish Thite, Ben Wang, Kevin Wang, and Andy Zou. 2024. [The language model evaluation harness](#).

Arthur C Graesser, Danielle S McNamara, Max M Louwerse, and Zhiqiang Cai. 2004. Coh-matrix: Analysis of text on cohesion and language. *Behavior research methods, instruments, & computers*, 36(2):193–202.

Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, Amy Yang, Angela Fan, Anirudh Goyal, Anthony Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark, Arun Rao, Aston Zhang, Aurelien Rodriguez, Austen Gregerson, Ava Spataru, Baptiste Roziere, Bethany Biron, Binh Tang, Bobbie Chern, Charlotte Caucheteux, Chaya Nayak, Chloe Bi, Chris Marra, Chris McConnell, Christian Keller, Christophe Touret, Chunyang Wu, Corinne Wong, Cristian Canton Ferrer, Cyrus Nikolaidis, Damien Alonsoius, Daniel Song, Danielle Pintz, Danny Livshits, Danny Wyatt, David Esiobu, Dhruv Choudhary, Dhruv Mahajan, Diego Garcia-Olano, Diego Perino, Dieuwke Hupkes, Egor Lakomkin, Ehab AlBadawy, Elina Lobanova, Emily Dinan, Eric Michael Smith, Filip Radenovic, Francisco Guzmán, Frank Zhang, Gabriel Synnaeve, Gabrielle Lee, Georgia Lewis Anderson, Govind Thattai, Graeme Nail, Gregoire Mialon, Guan Pang, Guillem Cucurell, Hailey Nguyen, Hannah Korevaar, Hu Xu, Hugo Touvron, Iliyan Zarov, Imanol Arrieta Ibarra, Isabel Kloumann, Ishan Misra, Ivan Evtimov, Jack Zhang, Jade Copet, Jaewon Lee, Jan Geffert, Jana Vranes, Jason Park, Jay Mahadeokar, Jeet Shah, Jelmer van der Linde, Jennifer Billock, Jenny Hong, Jenya Lee, Jeremy Fu, Jianfeng Chi, Jianyu Huang, Jiawen Liu, Jie Wang, Jiecao Yu, Joanna Bitton, Joe Spisak, Jongsoo Park, Joseph Rocca, Joshua Johnstun, Joshua Saxe, Junteng Jia, Kalyan Vasuden Alwala, Karthik Prasad, Kartikeya Upasani, Kate Plawiak, Ke Li, Kenneth Heafield, Kevin Stone, Khalid El-Arini, Krithika Iyer, Kshitiz Malik, Kuenley Chiu, Kunal Bhalla, Kushal Lakhotia, Lauren Rantala-Yearly, Laurens van der Maaten, Lawrence Chen, Liang Tan, Liz Jenkins, Louis Martin, Lovish Madaan, Lubo Malo, Lukas Blecher, Lukas Landzaat, Luke de Oliveira, Madeline Muzzi, Mahesh Pasupuleti, Mannat Singh, Manohar Paluri, Marcin Kardas, Maria Tsimpoukelli, Mathew Oldham, Mathieu Rita, Maya Pavlova, Melanie Kambadur, Mike Lewis, Min Si, Mitesh Kumar Singh, Mona Hassan, Naman Goyal, Narjes Torabi, Nikolay Bashlykov, Nikolay Bogoychev, Niladri Chatterji, Ning Zhang, Olivier Duchenne, Onur Çelebi, Patrick

Alrassy, Pengchuan Zhang, Pengwei Li, Petar Vasic, Peter Weng, Prajjwal Bhargava, Pratik Dubal, Praveen Krishnan, Punit Singh Koura, Puxin Xu, Qing He, Qingxiao Dong, Ragavan Srinivasan, Raj Ganapathy, Ramon Calderer, Ricardo Silveira Cabral, Robert Stojnic, Roberta Raileanu, Rohan Maheswari, Rohit Girdhar, Rohit Patel, Romain Sauvestre, Ronnie Polidoro, Roshan Sumbaly, Ross Taylor, Ruan Silva, Rui Hou, Rui Wang, Saghar Hosseini, Sahana Chennabasappa, Sanjay Singh, Sean Bell, Seohyun Sonia Kim, Sergey Edunov, Shaoliang Nie, Sharan Narang, Sharath Rapparthi, Sheng Shen, Shengye Wan, Shruti Bhosale, Shun Zhang, Simon Vandenhende, Soumya Batra, Spencer Whitman, Sten Sootla, Stephane Collot, Suchin Gururangan, Sydney Borodinsky, Tamar Herman, Tara Fowler, Tarek Sheasha, Thomas Georgiou, Thomas Scialom, Tobias Speckbacher, Todor Mihaylov, Tong Xiao, Ujjwal Karn, Vedanuj Goswami, Vibhor Gupta, Vignesh Ramanathan, Viktor Kerkez, Vincent Gouget, Virginie Do, Vish Vogeti, Vitor Albiero, Vladan Petrovic, Weiwei Chu, Wenhan Xiong, Wenyin Fu, Whitney Meers, Xavier Martinet, Xiaodong Wang, Xiaofang Wang, Xiaoqing Ellen Tan, Xide Xia, Xinfeng Xie, Xuchao Jia, Xuwei Wang, Yaelle Goldschlag, Yashesh Gaur, Yasmine Babaei, Yi Wen, Yiwen Song, Yuchen Zhang, Yue Li, Yuning Mao, Zacharie Delpierre Coudert, Zheng Yan, Zhengxing Chen, Zoe Papanikos, Aaditya Singh, Aayushi Srivastava, Abha Jain, Adam Kelsey, Adam Shajnfeld, Adithya Gangidi, Adolfo Victoria, Ahuva Goldstand, Ajay Menon, Ajay Sharma, Alex Boesenberg, Alexei Baevski, Allie Feinstein, Amanda Kallet, Amit Sangani, Amos Teo, Anam Yunus, Andrei Lupu, Andres Alvarado, Andrew Caples, Andrew Gu, Andrew Ho, Andrew Poulton, Andrew Ryan, Ankit Ramchandani, Annie Dong, Annie Franco, Anuj Goyal, Aparajita Saraf, Arkabandhu Chowdhury, Ashley Gabriel, Ashwin Bharambe, Assaf Eisenman, Azadeh Yazdan, Beau James, Ben Maurer, Benjamin Leonhardi, Bernie Huang, Beth Loyd, Beto De Paola, Bhargavi Paranjape, Bing Liu, Bo Wu, Boyu Ni, Braden Hancock, Bram Wasti, Brandon Spence, Brani Stojkovic, Brian Gamido, Britt Montalvo, Carl Parker, Carly Burton, Catalina Mejia, Ce Liu, Changan Wang, Changkyu Kim, Chao Zhou, Chester Hu, Ching-Hsiang Chu, Chris Cai, Chris Tindal, Christoph Feichtenhofer, Cynthia Gao, Damon Civin, Dana Beaty, Daniel Kreymer, Daniel Li, David Adkins, David Xu, Davide Testuggine, Delia David, Devi Parikh, Diana Liskovich, Didem Foss, DingKang Wang, Duc Le, Dustin Holland, Edward Dowling, Eissa Jamil, Elaine Montgomery, Eleonora Presani, Emily Hahn, Emily Wood, Eric-Tuan Le, Erik Brinkman, Esteban Arcaute, Evan Dunbar, Evan Smothers, Fei Sun, Felix Kreuk, Feng Tian, Filippos Kokkinos, Firat Ozgenel, Francesco Caggioni, Frank Kanayet, Frank Seide, Gabriela Medina Florez, Gabriella Schwarz, Gada Badeer, Georgia Swee, Gil Halpern, Grant Herman, Grigory Sizov, Guangyi, Zhang, Guna Lakshminarayanan, Hakan Inan, Hamid Shojanazeri, Han Zou, Hannah Wang, Hanwen Zha, Haroun Habeeb, Harrison Rudolph, Helen Suk, Henry Aspegren, Hunter Goldman, Hongyuan Zhan, Ibrahim

- Damlaj, Igor Molybog, Igor Tufanov, Ilias Leontiadis, Irina-Elena Veliche, Itai Gat, Jake Weissman, James Geboski, James Kohli, Janice Lam, Japhet Asher, Jean-Baptiste Gaya, Jeff Marcus, Jeff Tang, Jennifer Chan, Jenny Zhen, Jeremy Reizenstein, Jeremy Teboul, Jessica Zhong, Jian Jin, Jingyi Yang, Joe Cummings, Jon Carvill, Jon Shepard, Jonathan McPhie, Jonathan Torres, Josh Ginsburg, Junjie Wang, Kai Wu, Kam Hou U, Karan Saxena, Kartikay Khandelwal, Katayoun Zand, Kathy Matosich, Kaushik Veeraraghavan, Kelly Michelena, Keqian Li, Kiran Jagadeesh, Kun Huang, Kunal Chawla, Kyle Huang, Lailin Chen, Lakshya Garg, Lavender A, Leandro Silva, Lee Bell, Lei Zhang, Liangpeng Guo, Licheng Yu, Liron Moshkovich, Luca Wehrstedt, Madian Khabsa, Manav Avalani, Manish Bhatt, Martynas Mankus, Matan Hasson, Matthew Lennie, Matthias Reso, Maxim Groshev, Maxim Naumov, Maya Lathi, Meghan Keneally, Miao Liu, Michael L. Seltzer, Michal Valko, Michelle Restrepo, Mihir Patel, Mik Vyatskov, Mikayel Samvelyan, Mike Clark, Mike Macey, Mike Wang, Miquel Jubert Hermoso, Mo Metanat, Mohammad Rastegari, Munish Bansal, Nandhini Santhanam, Natascha Parks, Natasha White, Navyata Bawa, Nayan Singhal, Nick Egebo, Nicolas Usunier, Nikhil Mehta, Nikolay Pavlovich Laptev, Ning Dong, Norman Cheng, Oleg Chernoguz, Olivia Hart, Omkar Salpekar, Ozlem Kalinli, Parkin Kent, Parth Parekh, Paul Saab, Pavan Balaji, Pedro Rittner, Philip Bontrager, Pierre Roux, Piotr Dollar, Polina Zvyagina, Prashant Ratanchandani, Pritish Yuvraj, Qian Liang, Rachad Alao, Rachel Rodriguez, Rafi Ayub, Raghotham Murthy, Raghu Nayani, Rahul Mitra, Rangaprabhu Parthasarathy, Raymond Li, Rebekkah Hogan, Robin Battey, Rocky Wang, Russ Howes, Ruty Rinott, Sachin Mehta, Sachin Siby, Sai Jayesh Bondu, Samyak Datta, Sara Chugh, Sara Hunt, Sargun Dhillon, Sasha Sidorov, Satadru Pan, Saurabh Mahajan, Saurabh Verma, Seiji Yamamoto, Sharadh Ramaswamy, Shaun Lindsay, Shaun Lindsay, Sheng Feng, Shenghao Lin, Shengxin Cindy Zha, Shishir Patil, Shiva Shankar, Shuqiang Zhang, Shuqiang Zhang, Sinong Wang, Sneha Agarwal, Soji Sajuyigbe, Soumith Chintala, Stephanie Max, Stephen Chen, Steve Kehoe, Steve Satterfield, Sudarshan Govindaprasad, Sumit Gupta, Summer Deng, Sungmin Cho, Sunny Virk, Suraj Subramanian, Sy Choudhury, Sydney Goldman, Tal Remez, Tamar Glaser, Tamara Best, Thilo Koehler, Thomas Robinson, Tianhe Li, Tianjun Zhang, Tim Matthews, Timothy Chou, Tzook Shaked, Varun Vontimitta, Victoria Ajayi, Victoria Montanez, Vijai Mohan, Vinay Satish Kumar, Vishal Mangla, Vlad Ionescu, Vlad Poenaru, Vlad Tiberiu Mihailescu, Vladimir Ivanov, Wei Li, Wenchen Wang, Wenwen Jiang, Wes Bouaziz, Will Constable, Xiaocheng Tang, Xiaojian Wu, Xiaolan Wang, Xilun Wu, Xinbo Gao, Yaniv Kleinman, Yanjun Chen, Ye Hu, Ye Jia, Ye Qi, Yenda Li, Yilin Zhang, Ying Zhang, Yossi Adi, Youngjin Nam, Yu, Wang, Yu Zhao, Yuchen Hao, Yundi Qian, Yunlu Li, Yuzi He, Zach Rait, Zachary DeVito, Zef Rosnbrick, Zhaoduo Wen, Zhenyu Yang, Zhiwei Zhao, and Zhiyu Ma. 2024. [The llama 3 herd of models](#). *Preprint*, arXiv:2407.21783.
- Suchin Gururangan, Ana Marasović, Swabha Swayamdipta, Kyle Lo, Iz Beltagy, Doug Downey, and Noah A. Smith. 2020. [Don’t stop pretraining: Adapt language models to domains and tasks](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8342–8360, Online. Association for Computational Linguistics.
- Julia Hancke, Sowmya Vajjala, and Detmar Meurers. 2012. Readability classification for german using lexical, syntactic, and morphological features. In *Proceedings of COLING 2012*, pages 1063–1080.
- Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, Tom Hennigan, Eric Noland, Katie Millican, George van den Driessche, Bogdan Damoc, Aurelia Guy, Simon Osindero, Karen Simonyan, Erich Elsen, Jack W. Rae, Oriol Vinyals, and Laurent Sifre. 2022. [Training compute-optimal large language models](#). *Preprint*, arXiv:2203.15556.
- Michael Y. Hu, Aaron Mueller, Candace Ross, Adina Williams, Tal Linzen, Chengxu Zhuang, Ryan Cotterell, Leshem Choshen, Alex Warstadt, and Ethan Gotlieb Wilcox. 2024. [Findings of the second babylm challenge: Sample-efficient pretraining on developmentally plausible corpora](#). *Preprint*, arXiv:2412.05149.
- Philip A. Huebner, Elinor Sulem, Fisher Cynthia, and Dan Roth. 2021. [BabyBERTa: Learning more grammar with small-scale child-directed language](#). In *Proceedings of the 25th Conference on Computational Natural Language Learning*, pages 624–646, Online. Association for Computational Linguistics.
- Joseph Marvin Imperial. 2021. Bert embeddings for automatic readability assessment. *arXiv preprint arXiv:2106.07935*.
- Joseph Marvin Imperial and Harish Tayyar Madabushi. 2023. [Flesch or fumble? evaluating readability standard alignment of instruction-tuned language models](#). In *Proceedings of the Third Workshop on Natural Language Generation, Evaluation, and Metrics (GEM)*, pages 205–223, Singapore. Association for Computational Linguistics.
- Anna A. Ivanova, Aalok Sathe, Benjamin Lipkin, Unnathi Kumar, Setayesh Radkani, Thomas H. Clark, Carina Kauf, Jennifer Hu, R. T. Pramod, Gabriel Grand, Vivian Paulun, Maria Ryskina, Ekin Akyurek, Ethan Wilcox, Nafisa Rashid, Leshem Choshen, Roger Levy, Evelina Fedorenko, Joshua Tenenbaum, and Jacob Andreas. 2024. [Elements of world knowledge \(ewok\): A cognition-inspired framework for evaluating basic world knowledge in language models](#). *arXiv preprint arXiv:2405.09605*.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. 2020.

- Scaling laws for neural language models. *Preprint*, arXiv:2001.08361.
- Najoung Kim and Sebastian Schuster. 2023. [Entity tracking in language models](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3835–3855, Toronto, Canada. Association for Computational Linguistics.
- Reno Kriz, Eleni Miltsakaki, Marianna Apidianaki, and Chris Callison-Burch. 2018. Simplification using paraphrases and context-based lexical substitution. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 207–217.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. 2023. [Efficient memory management for large language model serving with pagedattention](#). *Preprint*, arXiv:2309.06180.
- Bruce W. Lee and Jason Lee. 2023. [Prompt-based learning for text readability assessment](#). In *Findings of the Association for Computational Linguistics: EACL 2023*, pages 1819–1824, Dubrovnik, Croatia. Association for Computational Linguistics.
- Zechun Liu, Changsheng Zhao, Forrest Iandola, Chen Lai, Yuandong Tian, Igor Fedorov, Yunyang Xiong, Ernie Chang, Yangyang Shi, Raghuraman Krishnamoorthi, Liangzhen Lai, and Vikas Chandra. 2024. [Mobilellm: Optimizing sub-billion parameter language models for on-device use cases](#). *Preprint*, arXiv:2402.14905.
- Shayne Longpre, Gregory Yauney, Emily Reif, Katherine Lee, Adam Roberts, Barret Zoph, Denny Zhou, Jason Wei, Kevin Robinson, David Mimno, and Daphne Ippolito. 2024. [A pretrainer’s guide to training data: Measuring the effects of data age, domain coverage, quality, & toxicity](#). In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 3245–3276, Mexico City, Mexico. Association for Computational Linguistics.
- Ilya Loshchilov and Frank Hutter. 2019. [Decoupled weight decay regularization](#). *Preprint*, arXiv:1711.05101.
- G Harry Mc Laughlin. 1969. Smog grading—a new readability formula. *Journal of reading*, 12(8):639–646.
- Changping Meng, Muhao Chen, Jie Mao, and Jennifer Neville. 2020. Readnet: A hierarchical transformer framework for web article readability analysis. In *Advances in Information Retrieval: 42nd European Conference on IR Research, ECIR 2020, Lisbon, Portugal, April 14–17, 2020, Proceedings, Part I 42*, pages 33–49. Springer.
- Tomas Mikolov, Edouard Grave, Piotr Bojanowski, Christian Puhresch, and Armand Joulin. 2018. Advances in pre-training distributed word representations. In *Proceedings of the International Conference on Language Resources and Evaluation (LREC 2018)*.
- Sherin Muckatira, Vijeta Deshpande, Vladislav Lialin, and Anna Rumshisky. 2024. [Emergent abilities in reduced-scale generative language models](#). In *Findings of the Association for Computational Linguistics: NAACL 2024*, pages 1242–1257, Mexico City, Mexico. Association for Computational Linguistics.
- Niklas Muennighoff, Nouamane Tazi, Loic Magne, and Nils Reimers. 2023. [MTEB: Massive text embedding benchmark](#). In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, pages 2014–2037, Dubrovnik, Croatia. Association for Computational Linguistics.
- Yasuhiro Ozuru, Kyle Dempsey, and Danielle S McNamara. 2009. Prior knowledge, reading skill, and text cohesion in the comprehension of science texts. *Learning and instruction*, 19(3):228–242.
- Francesca Padovani, Caterina Marchesi, Eleonora Pasqua, Martina Galletti, and Daniele Nardi. 2024. [Automatic text simplification: A comparative study in Italian for children with language disorders](#). In *Proceedings of the 13th Workshop on Natural Language Processing for Computer Assisted Language Learning*, pages 176–186, Rennes, France. LiU Electronic Press.
- Guilherme Penedo, Hynek Kydlíček, Loubna Ben al-lal, Anton Lozhkov, Margaret Mitchell, Colin Raffel, Leandro Von Werra, and Thomas Wolf. 2024. [The fineweb datasets: Decanting the web for the finest text data at scale](#). *Preprint*, arXiv:2406.17557.
- Fabio Petroni, Tim Rocktäschel, Sebastian Riedel, Patrick Lewis, Anton Bakhtin, Yuxiang Wu, and Alexander Miller. 2019. [Language models as knowledge bases?](#) In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 2463–2473, Hong Kong, China. Association for Computational Linguistics.
- Ofir Press and Lior Wolf. 2017. [Using the output embedding to improve language models](#). In *Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 2, Short Papers*, pages 157–163, Valencia, Spain. Association for Computational Linguistics.
- Adam Roberts, Colin Raffel, and Noam Shazeer. 2020. [How much knowledge can you pack into the parameters of a language model?](#) In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5418–5426, Online. Association for Computational Linguistics.

- Donya Rooein, Paul Röttger, Anastassia Shaitarova, and Dirk Hovy. 2024. [Beyond flesch-kincaid: Prompt-based metrics improve difficulty classification of educational texts](#). In *Proceedings of the 19th Workshop on Innovative Use of NLP for Building Educational Applications (BEA 2024)*, pages 54–67, Mexico City, Mexico. Association for Computational Linguistics.
- Sebastian Ruder and Barbara Plank. 2017. [Learning to select data for transfer learning with Bayesian optimization](#). In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 372–382, Copenhagen, Denmark. Association for Computational Linguistics.
- Horacio Saggion and Graeme Hirst. 2017. *Automatic text simplification*, volume 32. Springer.
- Carolina Scarton, Gustavo Paetzold, and Lucia Specia. 2018. Text simplification from professionally produced corpora. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*.
- Bryan Scott. 2024. [Learn about the flesch reading ease formula](#).
- Matthew Shardlow. 2014. A survey of automated text simplification. *International Journal of Advanced Computer Science and Applications*, 4(1):58–70.
- Noam Shazeer. 2020. [Glu variants improve transformer](#). *Preprint*, arXiv:2002.05202.
- Lucia Specia. 2010. Translating from complex to simplified sentences. In *Computational Processing of the Portuguese Language: 9th International Conference, PROPOR 2010, Porto Alegre, RS, Brazil, April 27-30, 2010. Proceedings 9*, pages 30–39. Springer.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher, Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn, Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee, Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra, Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi, Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic, Sergey Edunov, and Thomas Scialom. 2023. [Llama 2: Open foundation and fine-tuned chat models](#). *Preprint*, arXiv:2307.09288.
- Sean Trott and Pamela Rivière. 2024. [Measuring and modifying the readability of English texts with GPT-4](#). In *Proceedings of the Third Workshop on Text Simplification, Accessibility and Readability (TSAR 2024)*, pages 126–134, Miami, Florida, USA. Association for Computational Linguistics.
- Ciprian-Octavian Truică, Andrei-Ionuț Stan, and Elena-Simona Apostol. 2023. Simplex: a lexical text simplification architecture. *Neural Computing and Applications*, 35(8):6265–6280.
- Leandro Von Werra, Lewis Tunstall, Abhishek Thakur, Sasha Luccioni, Tristan Thrush, Aleksandra Piktus, Felix Marty, Nazneen Rajani, Victor Mustar, and Helen Ngo. 2022. [Evaluate & evaluation on the hub: Better best practices for data and model measurements](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 128–136, Abu Dhabi, UAE. Association for Computational Linguistics.
- Alex Warstadt, Aaron Mueller, Leshem Choshen, Ethan Wilcox, Chengxu Zhuang, Juan Ciro, Rafael Mosquera, Bhargavi Paranjabe, Adina Williams, Tal Linzen, and Ryan Cotterell. 2023. [Findings of the BabyLM challenge: Sample-efficient pretraining on developmentally plausible corpora](#). In *Proceedings of the BabyLM Challenge at the 27th Conference on Computational Natural Language Learning*, pages 1–34, Singapore. Association for Computational Linguistics.
- Alex Warstadt, Alicia Parrish, Haokun Liu, Anhad Mohananey, Wei Peng, Sheng-Fu Wang, and Samuel R Bowman. 2020. Blimp: The benchmark of linguistic minimal pairs for english. *Transactions of the Association for Computational Linguistics*, 8:377–392.
- Jason Wei, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama, Maarten Bosma, Denny Zhou, Donald Metzler, Ed H. Chi, Tatsunori Hashimoto, Oriol Vinyals, Percy Liang, Jeff Dean, and William Fedus. 2022. [Emergent abilities of large language models](#). *Preprint*, arXiv:2206.07682.
- Sander Wubben, Antal Van Den Bosch, and Emiel Krahmer. 2012. Sentence simplification by monolingual machine translation. In *Proceedings of the 50th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1015–1024.
- Wei Xu, Courtney Napoles, Ellie Pavlick, Quanze Chen, and Chris Callison-Burch. 2016. Optimizing statistical machine translation for text simplification. *Transactions of the Association for Computational Linguistics*, 4:401–415.
- Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. 2019. Hellaswag: Can a machine really finish your sentence? In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*.

Xingxing Zhang and Mirella Lapata. 2017. [Sentence simplification with deep reinforcement learning](#). In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 584–594, Copenhagen, Denmark. Association for Computational Linguistics.

A Linear Probing Results

Yian Zhang, Alex Warstadt, Xiaocheng Li, and Samuel R. Bowman. 2021. [When do you need billions of words of pretraining data?](#) In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1112–1125, Online. Association for Computational Linguistics.

Model	boolq	mnli	mrpc	multirc	qqp	rte	wsc	Avg.
Baseline								
majority	64.0	33.1	68.1	57.5	62.7	53.9	61.5	57.3
28M								
fwedu_hw	65.1 ± 0.9	42.9 ± 0.3	69.9 ± 0.7	57.2 ± 0.6	69.7 ± 0.3	53.9 ± 2.6	50.6 ± 5.7	58.5
fwedu_simp	65.7 ± 1.6	43.0 ± 2.2	70.7 ± 1.0	54.8 ± 0.5	69.8 ± 0.2	56.0 ± 3.4	59.5 ± 3.7	59.9
58M								
fwedu_hw	64.4 ± 0.5	45.2 ± 0.5	69.4 ± 0.6	54.8 ± 0.6	69.2 ± 0.2	49.5 ± 2.9	62.5 ± 4.7	59.3
fwedu_simp	64.2 ± 0.5	45.6 ± 0.3	69.2 ± 0.0	54.8 ± 0.2	68.1 ± 0.6	56.2 ± 1.8	56.5 ± 9.2	59.2
79M								
fwedu_hw	66.0 ± 0.3	44.4 ± 1.2	70.7 ± 0.8	55.9 ± 0.3	69.0 ± 0.5	55.3 ± 3.6	55.4 ± 8.9	59.5
fwedu_simp	64.5 ± 0.3	46.8 ± 0.5	69.7 ± 1.0	55.8 ± 1.6	68.5 ± 0.2	53.2 ± 1.4	57.1 ± 3.1	59.4
124M								
fwedu_hw	64.5 ± 0.2	45.2 ± 0.4	70.5 ± 1.5	54.2 ± 0.7	69.9 ± 0.6	50.5 ± 4.0	57.1 ± 4.7	58.9
fwedu_simp	64.5 ± 0.1	46.3 ± 0.2	70.0 ± 0.3	54.8 ± 0.4	70.3 ± 0.8	53.0 ± 3.3	57.1 ± 4.7	59.4
256M								
fwedu_hw	65.1 ± 0.1	48.3 ± 0.5	69.7 ± 0.8	56.1 ± 0.9	68.8 ± 0.2	55.8 ± 1.7	60.7 ± 3.6	60.6
fwedu_simp	65.8 ± 1.0	48.9 ± 0.8	70.0 ± 0.6	55.3 ± 1.3	70.1 ± 0.2	57.2 ± 2.4	57.1 ± 3.6	60.6
500M								
fwedu_hw	64.9 ± 0.7	49.1 ± 0.7	70.7 ± 0.5	56.0 ± 0.9	70.1 ± 0.5	49.5 ± 2.4	63.1 ± 2.7	60.5
fwedu_simp	65.0 ± 0.2	48.9 ± 0.4	71.3 ± 1.0	56.0 ± 1.7	69.2 ± 0.6	57.6 ± 6.7	59.5 ± 6.8	61.1

Table 6: Linear Probe performance on 7 NLU tasks. Average accuracy across tasks is reported over 3 runs. The Avg. column reports mean accuracy over available tasks. Overall results shows minimal performance differences between pretraining setups across model sizes. This supports the Full Finetuning findings (Table 3), suggesting that text complexity has limited impact on general language understanding tasks.

B Text Simplification Prompt

The prompt engineering is done through trial-and-error and judged by the authors according to the following qualitative criteria:

- Does it use simpler words? By "simpler words," we mean commonly used words.
- Does it convert compound or complex sentences into simple sentences?
- Does it preserve the original content and organization of thoughts?

Once we found a prompt that can reliably do all those things on a small sample, we used that prompt to transform the whole corpus.

The final prompt is shown below:

```

---

Role Description:
You are an experienced educator and linguist specializing in simplifying complex texts without losing any key information or changing the content. Your focus is to make texts more accessible and readable for primary and secondary school students, ensuring that the essential information is preserved while the language and structure are adapted for easier comprehension.
```

```

---

Task Instructions:
1. Read the Following Text Carefully:
  - Thoroughly understand the content, context, and purpose of the text to ensure all key information is retained in the simplified version.
2. Simplify the Text for Primary/Secondary School Students:
  - Rewrite the text to make it more accessible and easier to understand.
  - Use age-appropriate language and simpler sentence structures.
  - Maintain all key information and do not omit any essential details.
  - Ensure that the original meaning and intent of the text remain unchanged.
3. Preserve Key Information:
  - Identify all essential points, facts, and ideas in the original text.
  - Ensure these elements are clearly presented in the simplified version.
4. Avoid Adding Personal Opinions or Interpretations:
  - Do not introduce new information or personal views.
  - Focus solely on simplifying the original content.

---

Simplification Guidelines:
```

Sentence Structure:

- Use simple or compound sentences.
- Break down long or complex sentences into shorter ones.
- Ensure each sentence conveys a clear idea.

Vocabulary:

- Use common words familiar to primary and secondary school students.
- Replace advanced or technical terms with simpler synonyms or provide brief explanations.
- Avoid jargon unless it is essential, and explain it if used.

Clarity and Coherence:

- Organize the text logically with clear paragraphs.
- Use transitional words to connect ideas smoothly.
- Ensure pronouns clearly refer to the correct nouns to avoid confusion.
- Eliminate redundancies and unnecessary repetitions.

Tone and Style:

- Maintain a neutral and informative tone.
- Avoid overly formal language.
- Write in the third person unless the text requires otherwise.

Output Format:

- Provide the simplified text in clear, well-organized paragraphs.
- Do not include the original text in your output.
- Do not add any additional commentary or notes.
- Ensure the final output is free of grammatical errors and is easy to read.
- Output `<|eot_id|>` right after the simplified text.

Example Simplifications:

Example 1:

Original Text:

"Photosynthesis is the process by which green plants and some other organisms use sunlight to synthesize foods from carbon dioxide and water. Photosynthesis in plants generally involves the green pigment chlorophyll and generates oxygen as a byproduct."

Simplified Text:

"Photosynthesis is how green plants make food using sunlight, carbon dioxide, and water. They use a green substance called chlorophyll, and the process produces oxygen."`<|eot_id|>`

Example 2:

Original Text:

"Global warming refers to the long-term rise in the average temperature of the Earth's climate system, an aspect of climate change shown by temperature measurements and by multiple effects of the warming."

Simplified Text:

"Global warming means the Earth's average temperature is increasing over a long time. This is part of climate change and is shown by temperature records and various effects."`<|eot_id|>`

Example 3:

Original Text:

"The mitochondrion, often referred to as the powerhouse of the cell, is a double-membrane-bound organelle found in most eukaryotic organisms, responsible for the biochemical processes of respiration and energy production through the generation of adenosine triphosphate (ATP)."

Simplified Text:

"A mitochondrion is a part of most cells that acts like a powerhouse. It has two membranes and makes energy for the cell by producing something called ATP."`<|eot_id|>`

Text to Simplify:
<Insert Text Here>

Your Output:

C Skipping or Rejecting Simplification

We choose to tag as `to_skip` or `to_reject` the simplification step under the following conditions: (1) the paragraph is too short relative to its full document; (2) the paragraph is too long; or (3) the transformation is significantly shorter or longer than the original text.

Condition (1) is based on two key observations. First, some textual artifacts, like titles and author names, don't require simplification. Second, very short inputs often trigger text completion instead of simplification. For example, the input "MAHATMA GANDHI" generates a passage about the person rather than a simplified version. To handle such cases, we use heuristics to determine whether a document or paragraph should be tagged as `to_skip`. First, we apply a hard rule: a docu-

ment is tagged as `to_skip` if there is only one paragraph or the minimum paragraph length is greater than or equal to the standard deviation of paragraph token counts within a document. Otherwise, each paragraph in the document is evaluated based on two criteria: it is tagged as `to_skip` if it contains **10 or fewer space-separated words** or if its **token count falls below the quantile threshold of 0.15**. Meaning, paragraphs with token counts below the 15th percentile will be tagged as `to_skip`.

Condition (2) is based on the observation that paragraphs exceeding **1,500 tokens** tend to be structured texts like tables, name lists, or tables of contents, which do not need simplification. To handle such cases, we simply skip the paragraph if it exceeds 1,500 tokens. While quantile heuristics could be used, we chose the simpler heuristic.

Condition (3) is motivated by two observations. First, we observed that when asked to simplify a long input, the model tends to summarize it, significantly shortening the text and losing its original structure. Second, the model tends to append extra text, such as explanations after the answer. To detect cases where the output is too short or too long relative to the source, we compute the paragraph length ratio (`output_length/source_length`) and tag as `to_reject` outputs with a ratio below 0.5 or above 1.5 (i.e. a change of more than 50%).

For isolation of text complexity and to keep both datasets perfectly aligned at the example level, all examples tagged as `to_skip` or `to_reject` are **removed from both datasets**.

D Examples from Human-written and Simplified Data by Semantic Similarity

As shown in Table 2, 79% of datasets have semantic similarity of greater than 80%. We show examples here of texts with varying semantic similarity scores with their corresponding ROUGE-2 scores. Examples of semantic similarity > 0.8:

```
SEMANTIC SIMILARITY: 0.90, ROUGE-2: 0.27;
fvedu_hw:important officials and well
known persons who visited the islands
wrote
fvedu_simp:important visitors to the
islands wrote
SEMANTIC SIMILARITY: 0.95, ROUGE-2: 0.41;
fvedu_hw:Also, the authors now expect to
apply their approach to other regions
. They have a lot of work to do.
After all, arid landscapes occupy
about 65 million square kilometers of
the earth's surface (this is almost
four areas of Russia).
```

```
fvedu_simp:The authors now plan to use
their method in other areas. They
have a lot of work ahead of them.
Arid landscapes cover almost 65
million square kilometers of the
Earth's surface, which is roughly
four times the size of Russia.
SEMANTIC SIMILARITY: 0.84, ROUGE-2: 0.24;
fvedu_hw:Users frequently ask "how big
should I make the pagefile?" There is
no single answer to this question
because it depends on the amount of
installed RAM and on how much virtual
memory that workload requires. If
there is no other information
available, the typical recommendation
of 1.5 times the installed RAM is a
good starting point. On server
systems, you typically want to have
sufficient RAM so that there is never
a shortage and so that the pagefile
is basically not used. On these
systems, it may serve no useful
purpose to maintain a really large
pagefile. On the other hand, if disk
space is plentiful, maintaining a
large pagefile (for example, 1.5
times the installed RAM) does not
cause a problem, and this also
eliminates the need to worry over how
large to make it.
fvedu_simp:The size of the pagefile
depends on how much RAM your computer
has and how much virtual memory your
work requires. A good starting point
is to make the pagefile 1.5 times
the size of your RAM. If you have a
server, you should have enough RAM so
that the pagefile is not used. In
this case, it might not be useful to
have a large pagefile. However, if
you have plenty of disk space, you
can make the pagefile 1.5 times the
size of your RAM without any problems
.
SEMANTIC SIMILARITY: 0.90, ROUGE-2: 0.19;
fvedu_hw:On its face, the USDA's decision
to have participation in the NAIS be
voluntary seems to solve all of the
major concerns. Small and organic
farmers will be able to "opt out" of
participation in the NAIS if they
have objections to its methodology. [
FN203]
fvedu_simp:The USDA made the NAIS
voluntary. This means that small and
organic farmers can choose not to
participate if they don't agree with
how the NAIS works.
SEMANTIC SIMILARITY: 0.96, ROUGE-2: 0.43;
fvedu_hw:The ICD-11 includes a revised
definition for alcohol use disorders
(AUDs) and, more specifically, for
alcohol dependence and the "harmful
patterns of alcohol use."
fvedu_simp:The ICD-11 has changed how it
defines alcohol use disorders (AUDs).
It now includes a new definition for
alcohol dependence and for when
alcohol use causes harm.
```

SEMANTIC SIMILARITY: 0.95, ROUGE-2: 0.75;
 fwedu_hw:Feel free to check out more of this website. Our goal is to provide rebuttals to the bad science behind young earth creationism, and honor God by properly presenting His creation.
 fwedu_simp:Our goal is to provide rebuttals to the bad science behind young earth creationism, and honor God by properly presenting His creation. You can find more information on this website.

SEMANTIC SIMILARITY: 0.82, ROUGE-2: 0.50;
 fwedu_hw:separate trees you simply set the CODEBASE attributes of each applet
 fwedu_simp:set the CODEBASE attribute of each applet

SEMANTIC SIMILARITY: 0.93, ROUGE-2: 0.31;
 fwedu_hw:Using samples taken from young and old horses, which have similar tendon properties to those of humans, the researchers performed a range of tests to profile the types, quantities, and proportions of proteins present in the tendon. Ultimately, the team found marked differences in the proteins in young and old horses.
 fwedu_simp:The researchers took samples from young and old horses. They wanted to know about the proteins in the tendons of these horses. Tendons are similar in humans. The team did a series of tests to see what proteins were in the tendons. They found that young and old horses have different proteins in their tendons.

SEMANTIC SIMILARITY: 0.90, ROUGE-2: 0.80;
 fwedu_hw:- Painful muscle cramps, spasms or pain in the abdomen, arms and legs
 fwedu_simp:- Muscle cramps, spasms, or pain in the abdomen, arms, and legs can be very painful.

SEMANTIC SIMILARITY: 0.84, ROUGE-2: 0.13;
 fwedu_hw:"We also felt it important to highlight where the use of the sea, such as bottom material extraction, aquaculture or wind energy, can be allowed," says Virtanen.
 fwedu_simp:"We also think it's important to mention where we can use the sea in a good way, like taking sand or gravel from the bottom, farming fish, or making energy from wind," says Virtanen.

SEMANTIC SIMILARITY: 0.94, ROUGE-2: 0.49;
 fwedu_hw:ThinkProgress noted that many states have refused to expand Medicaid coverage offered through the federal Affordable Care Act, thus preventing around 1.2 million Americans from receiving mental health care, according to the National Alliance on Mental Health.
 fwedu_simp:ThinkProgress said that many states have not expanded Medicaid, which is a part of the Affordable Care Act. This means about 1.2

million Americans cannot get mental health care, according to the National Alliance on Mental Health.

SEMANTIC SIMILARITY: 0.97, ROUGE-2: 0.61;
 fwedu_hw:latent heat -- the energy needed to melt solids or boil liquids. This energy is somewhat similar to chemical energy, since it is the energy associated with breaking or making molecular bonds, rather than atomic bonds. The total energy (heat) needed to melt a solid or boil a liquid is just $Q = mL$, where m is the mass of the liquid or solid, and L is the latent heat factor (given in either J or cal per kg) of melting or boiling.
 fwedu_simp:latent heat is the energy needed to melt solids or boil liquids. This energy is similar to chemical energy because it involves breaking or making molecular bonds. The total energy needed to melt a solid or boil a liquid is calculated by multiplying the mass of the liquid or solid by the latent heat factor.

SEMANTIC SIMILARITY: 0.93, ROUGE-2: 0.51;
 fwedu_hw:The glare of publicity that swirled about Yellow Thunder Camp last September when the government ordered its occupants to leave their chosen spot has faded like the leaves of autumn. The traditional but transient tepees have been supplemented with a geodesic dome. The legal battle which will determine the camp's future drags on in nearby Rapid City.
 fwedu_simp:The glare of publicity that swirled around Yellow Thunder Camp last September when the government ordered its occupants to leave their chosen spot has faded. The campers have added a new, dome-shaped shelter to their traditional tepees. The legal fight about the camp's future is still going on in Rapid City.

SEMANTIC SIMILARITY: 0.98, ROUGE-2: 0.74;
 fwedu_hw:The U.S. Geological Survey's National Wildlife Health Center verified the disease in a little brown bat found this month in North Bend, about 30 miles east of Seattle.
 fwedu_simp:The U.S. Geological Survey's National Wildlife Health Center found a disease in a little brown bat in North Bend, which is about 30 miles east of Seattle.

SEMANTIC SIMILARITY: 0.94, ROUGE-2: 0.40;
 fwedu_hw:Replacing native species with non-native species does not necessarily cause biotic homogenization. If different communities of non-native species replace native species at cities around the world then biotic differentiation rather than homogenization will have occurred. However, there is no evidence that this is happening. Many studies have

shown that the extirpation of native species in urban environments and the influx and non-native invasive species is leading to global biotic homogenization. For example a study of urban bird populations from two distant locations (Ohio and California) found urban populations to be much more similar to each other than rural populations the same distance apart (19). Similarly, a study in Canada found that the ecology of cities across the country was becoming increasingly alike with many of the same species found in cities nationwide (14).

fwedu_simp: Biotic homogenization is when different areas start to have the same species. This can happen if non-native species replace native species in cities around the world. However, this is not happening. Many studies have shown that native species are disappearing from cities and non-native species are moving in. This is causing biotic homogenization worldwide. For example, a study found that urban bird populations in Ohio and California are much more alike than bird populations in rural areas that are the same distance apart. Another study in Canada found that cities across the country are becoming more alike, with many of the same species found in cities everywhere.

SEMANTIC SIMILARITY: 0.91, ROUGE-2: 0.19;

fwedu_hw: An independent panel of technical experts convened by the American Chemical Society Green Chemistry Institute formally judged the 2017 submissions from among scores of nominated technologies and made recommendations to EPA for the 2017 winners. The 2017 awards event will be held in conjunction with the 21st Annual Green Chemistry and Engineering Conference.

fwedu_simp: An independent group of experts looked at many technologies and chose the best ones for the 2017 awards. They recommended these winners to the EPA. The 2017 awards ceremony will be held at the same time as a conference on green chemistry.

SEMANTIC SIMILARITY: 0.94, ROUGE-2: 0.38;

fwedu_hw: Only \$24.00 and a pair of high boots was all it took for the first property owner to purchase the land where the now renowned Pioneer Courthouse Square is located. The block was the site for Portland's first school. Shortly thereafter, it became the Portland Hotel where it served as a social center. The hotel was demolished in 1951 to make room for the automobile with installation of a full city block of parking. Due to progressive civic leadership in

the 1970's, Portland worked to revitalize its downtown, including a move away from the use of automobiles and back toward mass transit. The demolition of the parking garage and creation of Pioneer Courthouse Square remains a major landmark of this effort.

fwedu_simp: Only \$24.00 and a pair of boots was all it took for the first person to buy the land where Pioneer Courthouse Square is now. This block was once home to Portland's first school. Later, it became the Portland Hotel, where people would meet and socialize. The hotel was torn down in 1951 to make room for cars. In the 1970s, Portland's leaders decided to make the city more people-friendly. They wanted to reduce the use of cars and increase the use of public transportation. As part of this effort, the parking garage was removed, and Pioneer Courthouse Square was created.

SEMANTIC SIMILARITY: 0.95, ROUGE-2: 0.39;

fwedu_hw: The wearing of gowns at formals is compulsory at some colleges and various other traditions are usually observed, including grace said in Latin or English. The wearing of gowns may sometimes constitute the only dress code; in other cases, formal wear (for example, a lounge suit for men or equivalent for women) is required in addition to, or instead of, the gown.

fwedu_simp: The wearing of gowns at formals is required at some colleges and some other traditions are followed, like saying grace in Latin or English. In some places, wearing a gown is the only dress code, while in others, you also need to wear formal clothes (like a suit for men or something similar for women) along with the gown.

Examples of semantic similarity < 0.5:

SEMANTIC SIMILARITY: 0.42, ROUGE-2: 0.04;

fwedu_hw: and wife, between teacher and pupil, between friend and friend, between employer and employee, and between religious teacher and disciple. It no longer means honoring the gods which inhabit the six different directions.

fwedu_simp: The concept of "reverence" has changed over time. It used to mean showing respect to gods in different directions.

SEMANTIC SIMILARITY: 0.09, ROUGE-2: 0.00;

fwedu_hw: - Press Ctrl + 2 to add more text boxes. Press Ctrl + shift + 2 to adjust text box.

fwedu_simp: (Note: Please provide your output in the format specified above, ensuring it is free of grammatical errors and easy to read.)

SEMANTIC SIMILARITY: 0.38, ROUGE-2: 0.00;
 fwedu_hw:his bark is worse than his bite, he is bad-tempered but harmless
 fwedu_simp:This person is grumpy, but he won't hurt you.

SEMANTIC SIMILARITY: 0.44, ROUGE-2: 0.00;
 fwedu_hw:said to have sworn, under duress, that he
 fwedu_simp:The person was forced to say something, but he didn't really mean it.

SEMANTIC SIMILARITY: 0.42, ROUGE-2: 0.18;
 fwedu_hw:Woolworth's sit-in-a photograph that has become the image used in history books and
 fwedu_simp:Woolworth's sit-in was a protest where African American students sat at a lunch counter to demand equal rights.

SEMANTIC SIMILARITY: 0.48, ROUGE-2: 0.35;
 fwedu_hw:Sadly, as Hentoff points out, the American Civil Liberties Union has remained silent on this latest gross violation of our rights. So, too, has most of the fifth estate.
 fwedu_simp:The American Civil Liberties Union has not spoken out against this big mistake of our rights. Most of the news media has also been quiet.

SEMANTIC SIMILARITY: 0.35, ROUGE-2: 0.24;
 fwedu_hw:and operated at 33 MHz and 20 MIPS. ...Many thanks to Robert B Garner - who
 fwedu_simp:The computer was made by Intel and operated at 33 million cycles per second and 20 million instructions per second.

SEMANTIC SIMILARITY: 0.41, ROUGE-2: 0.03;
 fwedu_hw:3) Low investment costs of about ~900Euro and a simple construction with locally available materials. (Costs were about 300 Euro in Kenya in 2004, but now with raising steel prices costs increased...) .
 fwedu_simp:The cost of building a simple water filter is relatively low. It costs about 900 Euro. The construction is also simple and can be made using materials that are easily available locally.

SEMANTIC SIMILARITY: 0.48, ROUGE-2: 0.32;
 fwedu_hw:you are near the surface of the Earth, regardless of what the object is
 fwedu_simp:The surface of the Earth is the outermost solid layer of our planet.

SEMANTIC SIMILARITY: 0.36, ROUGE-2: 0.09;
 fwedu_hw:upon his visage, rather than pure devotion, such as one might
 fwedu_simp:The person's face showed more of a sense of duty than pure love.

SEMANTIC SIMILARITY: 0.14, ROUGE-2: 0.00;
 fwedu_hw:- Genetic screens in human cells using the CRISPR-Cas9 system. Science 343, 80-84 (2014) , , &
 fwedu_simp:Simplification of the text should be provided in the format specified above.

SEMANTIC SIMILARITY: 0.11, ROUGE-2: 0.00;

fwedu_hw:Strategies you implement are usually defined as the tone of your information. Here is the summary of tone types:
 fwedu_simp:(Note: Please provide your output in the format specified above, ensuring it is clear, well-organized, and free of grammatical errors.)

SEMANTIC SIMILARITY: 0.08, ROUGE-2: 0.00;
 fwedu_hw:- Mathematics - Knowledge of arithmetic, algebra, geometry, calculus, statistics, and their applications.
 fwedu_simp:Simplification of the text should be done in the same format as the examples provided.

SEMANTIC SIMILARITY: 0.14, ROUGE-2: 0.00;
 fwedu_hw:Art. 304, consists of two clauses, and each clause operates as a proviso to Arts. 301 and 303.
 fwedu_simp:The law has two parts. Each part is connected to other laws.

SEMANTIC SIMILARITY: 0.17, ROUGE-2: 0.00;
 fwedu_hw:See also: What is the meaning of Jurisdiction, Lawyer, Court, Law, State?
 fwedu_simp:Simplification of the text goes here.

SEMANTIC SIMILARITY: 0.43, ROUGE-2: 0.00;
 fwedu_hw:as an art form, let alone to caricature.34 De Bruycker is to Ghent perhaps what the
 fwedu_simp:Art is a way of expressing oneself, but it's not just about making something look funny or different.

SEMANTIC SIMILARITY: 0.44, ROUGE-2: 0.12;
 fwedu_hw:Figure 5. Mass fluctuations and collapse thresholds in cold dark matter models. The horizontal dotted lines show the value of the extrapolated collapse overdensity crit(z) at the indicated redshifts. Also shown is the value of (M) for the cosmological parameters given in the text (solid curve), as well as (M) for a power spectrum with a cutoff below a mass $M = 1.7 \times 10^8 M$ (short-dashed curve), or $M = 1.7 \times 10^{11} M$ (long-dashed curve). The intersection of the horizontal lines with the other curves indicate, at each redshift z, the mass scale (for each model) at which a 1 - fluctuation is just collapsing at z (see the discussion in the text).
 fwedu_simp:The diagram shows how the mass of objects in the universe changes over time. The horizontal lines show the point at which a group of objects would start to collapse under their own gravity. The solid line shows how the mass of objects changes in the universe based on the given information. The other lines show how the mass of objects would change if there were a limit to the size of objects in the universe. The points where the horizontal lines intersect with the other lines show the mass of

objects at each point in time that would just start to collapse.
 SEMANTIC SIMILARITY: 0.45, ROUGE-2: 0.00;
 fwedu_hw:- Can you think of other cases where a government has addressed its previous wrongdoing?
 fwedu_simp:- Yes, there are several examples.
 SEMANTIC SIMILARITY: 0.06, ROUGE-2: 0.00;
 fwedu_hw:- Wages - A comparison of wages between men and women, children and adults.
 fwedu_simp:Simplification of the text should be provided in the format specified above.

E Examples from Human-written and Simplified Data by ROUGE-2

In Table 2, we used ROUGE-2 (R2) thresholds to define the level of lexical overlap.

Examples of low lexical overlap ($0 < R2 \leq 0.4$):

ROUGE-2: 0.19;
 fwedu_hw:An independent panel of technical experts convened by the American Chemical Society Green Chemistry Institute formally judged the 2017 submissions from among scores of nominated technologies and made recommendations to EPA for the 2017 winners. The 2017 awards event will be held in conjunction with the 21st Annual Green Chemistry and Engineering Conference.
 fwedu_simp:An independent group of experts looked at many technologies and chose the best ones for the 2017 awards. They recommended these winners to the EPA. The 2017 awards ceremony will be held at the same time as a conference on green chemistry.
 ROUGE-2: 0.38;
 fwedu_hw:Only \$24.00 and a pair of high boots was all it took for the first property owner to purchase the land where the now renowned Pioneer Courthouse Square is located. The block was the site for Portland's first school. Shortly thereafter, it became the Portland Hotel where it served as a social center. The hotel was demolished in 1951 to make room for the automobile with installation of a full city block of parking. Due to progressive civic leadership in the 1970's, Portland worked to revitalize its downtown, including a move away from the use of automobiles and back toward mass transit. The demolition of the parking garage and creation of Pioneer Courthouse Square remains a major landmark of this effort.
 fwedu_simp:Only \$24.00 and a pair of boots was all it took for the first person to buy the land where Pioneer

Courthouse Square is now. This block was once home to Portland's first school. Later, it became the Portland Hotel, where people would meet and socialize. The hotel was torn down in 1951 to make room for cars. In the 1970s, Portland's leaders decided to make the city more people-friendly. They wanted to reduce the use of cars and increase the use of public transportation. As part of this effort, the parking garage was removed, and Pioneer Courthouse Square was created.
 ROUGE-2: 0.10;
 fwedu_hw:- 2002 - 2011 is the ten years preceding the ratings evaluation, and
 fwedu_simp:- 2002 to 2011 was the time before the ratings were checked.
 ROUGE-2: 0.39;
 fwedu_hw:The wearing of gowns at formals is compulsory at some colleges and various other traditions are usually observed, including grace said in Latin or English. The wearing of gowns may sometimes constitute the only dress code; in other cases, formal wear (for example, a lounge suit for men or equivalent for women) is required in addition to, or instead of, the gown.
 fwedu_simp:The wearing of gowns at formals is required at some colleges and some other traditions are followed, like saying grace in Latin or English. In some places, wearing a gown is the only dress code, while in others, you also need to wear formal clothes (like a suit for men or something similar for women) along with the gown.

Examples of medium lexical overlap ($0.4 < R2 \leq 0.8$):

ROUGE-2: 0.68;
 fwedu_hw:HDTV technology is estimated that this will be the future of television standards, so a senior researcher in the field of systems and management strategies Dr. Indu Singh predicts that the world market for HDTV would reach 250 billion dollars per year (year 2010).
 fwedu_simp:HDTV technology is expected to be the future of television standards. Dr. Indu Singh, a senior researcher in the field of systems and management strategies, predicts that the world market for HDTV will reach \$250 billion per year by 2010.
 ROUGE-2: 0.74;
 fwedu_hw:Prophetically, he feels the need to plead for ten years of life so that:
 fwedu_simp:Prophetically, he feels the need to ask for ten more years of life so that:
 ROUGE-2: 0.47;
 fwedu_hw:Most common palm species are

Elaeis guineensis and Borassus aethiopicum (rhun palm).

fwedu_simp:The two most common types of palm trees are Elaeis guineensis and Borassus aethiopicum, also known as the rhun palm.

ROUGE-2: 0.43;

fwedu_hw:The old man almost immediately fell asleep; but the boy, Minokichi, lay awake a long time, listening to the awful wind, and the continual slashing of the snow against the door . The river was roaring; and the hut swayed and creaked like a junk at sea . It was a terrible storm; and the air was every moment becoming colder; and Minokichi shivered under his rain-coat. But at last, in spite of the cold, he too fell asleep.

fwedu_simp:The old man fell asleep right away. But the boy, Minokichi, lay awake for a long time. He listened to the strong wind and the snow hitting the door. The river was making a loud noise, and the hut was swaying and creaking like a boat at sea. It was a very bad storm, and the air was getting colder every minute. Minokichi was shivering under his raincoat. But eventually, despite the cold, he fell asleep too.

ROUGE-2: 0.51;

fwedu_hw:The glare of publicity that swirled about Yellow Thunder Camp last September when the government ordered its occupants to leave their chosen spot has faded like the leaves of autumn. The traditional but transient tepees have been supplemented with a geodesic dome. The legal battle which will determine the camp's future drags on in nearby Rapid City.

fwedu_simp:The glare of publicity that swirled around Yellow Thunder Camp last September when the government ordered its occupants to leave their chosen spot has faded. The campers have added a new, dome-shaped shelter to their traditional tepees. The legal fight about the camp's future is still going on in Rapid City.

ROUGE-2: 0.41;

fwedu_hw:Also, the authors now expect to apply their approach to other regions . They have a lot of work to do. After all, arid landscapes occupy about 65 million square kilometers of the earth's surface (this is almost four areas of Russia).

fwedu_simp:The authors now plan to use their method in other areas. They have a lot of work ahead of them. Arid landscapes cover almost 65 million square kilometers of the Earth's surface, which is roughly four times the size of Russia.

ROUGE-2: 0.75;

fwedu_hw:Feel free to check out more of this website. Our goal is to provide

rebuttals to the bad science behind young earth creationism, and honor God by properly presenting His creation.

fwedu_simp:Our goal is to provide rebuttals to the bad science behind young earth creationism, and honor God by properly presenting His creation. You can find more information on this website.

Examples of high lexical overlap ($0.8 < R2 < 1$):

ROUGE-2: 0.85;

fwedu_hw:That same year, the FDA and EPA issued a recommendation that pregnant women and young children eat no more than two servings, or 12 ounces, of salmon and other low-mercury fish each week.

fwedu_simp:The FDA and EPA suggested that pregnant women and young children eat no more than two servings, or 12 ounces, of salmon and other low-mercury fish each week.

ROUGE-2: 0.84;

fwedu_hw:With a little imagination, other services could be provided as well.

fwedu_simp:With a little imagination, other services could be provided too.

ROUGE-2: 0.82;

fwedu_hw:o Suggests questions to help facilitate professional development group discussions, especially among peers

fwedu_simp:o Suggests questions to help facilitate group discussions, especially among peers

ROUGE-2: 0.90;

fwedu_hw:tendonitis. The flattened arch pulls on calf muscles and keeps the Achilles tendon under tight strain. This constant mechanical stress on the heel and tendon can cause inflammation, pain and swelling

fwedu_simp:tendonitis. The flattened arch pulls on calf muscles and keeps the Achilles tendon under tight strain. This constant stress on the heel and tendon can cause pain and swelling.

Examples of exact match ($R2 = 1$):

ROUGE-2: 1.00;

fwedu_hw:- Does the modal not show a coupon code? Then you can click directly in the big blue button " VISIT Hidden24 VPN

fwedu_simp:- Does the modal not show a coupon code? Then you can click directly in the big blue button " VISIT Hidden24 VPN"

ROUGE-2: 1.00;

fwedu_hw:- IVF through implanting multiple embryos can be one way of getting science to help with the process

fwedu_simp:IVF through implanting multiple embryos can be one way of

```

    getting science to help with the
    process.
ROUGE-2: 1.00;
    fvedu_hw:For more information about the
    program contact Stoughton at
    435-259-7985 or email email@example.
    com.
    fvedu_simp:For more information about the
    program, contact Stoughton at
    435-259-7985 or email email@example.
    com.
ROUGE-2: 1.00;
    fvedu_hw:An earthworm's home, and the
    dirt around it, can be called a
    factory. This factory makes a special
    kind of dirt called topsoil.
    fvedu_simp:An earthworm's home and the
    dirt around it can be called a
    factory. This factory makes a special
    kind of dirt called topsoil.
ROUGE-2: 1.00;
    fvedu_hw:Tim Wilson will be speaking to
    The New Zealand Initiative in:
    fvedu_simp:Tim Wilson will be speaking to
    The New Zealand Initiative in:
ROUGE-2: 1.00;
    fvedu_hw:- extending far in width; broad:
    deep lace; a deep border.
    fvedu_simp:- extending far in width;
    broad: deep lace; a deep border.

```

Examples of exact mismatch ($R2 = 0$):

```

ROUGE-2: 0.00;
    fvedu_hw:ensure that every medical issue
    receives attention.
    fvedu_simp:Medical issues should get
    attention.
ROUGE-2: 0.00;
    fvedu_hw:- Press Ctrl + 2 to add more
    text boxes. Press Ctrl + shift + 2 to
    adjust text box.
    fvedu_simp:(Note: Please provide your
    output in the format specified above,
    ensuring it is free of grammatical
    errors and easy to read.)
ROUGE-2: 0.00;
    fvedu_hw:judicial decorum when expressing
    himself on conservation matters. . .
    "
    fvedu_simp:The judge spoke about
    conservation in a respectful and
    proper way.
ROUGE-2: 0.00;
    fvedu_hw:his bark is worse than his bite,
    he is bad-tempered but harmless
    fvedu_simp:This person is grumpy, but he
    won't hurt you.
ROUGE-2: 0.00;
    fvedu_hw:*An earlier version of this
    article misstated the study's
    benchmark for deficit reduction.
    fvedu_simp:The article previously
    mentioned the wrong target for
    reducing the deficit.
ROUGE-2: 0.00;
    fvedu_hw:said to have sworn, under duress
    , that he
    fvedu_simp:The person was forced to say
    something, but he didn't really mean

```

```

    it.
ROUGE-2: 0.00;
    fvedu_hw:and resulted in considerable
    damage.
    fvedu_simp:The hurricane caused a lot of
    damage.
ROUGE-2: 0.00;
    fvedu_hw:- Thomas, B. 2009. Did Humans
    Evolve from 'Ardi'? Acts & Facts. 38
    (11): 8-9.
    fvedu_simp:Simplified Text:
    "Thomas wrote about a discovery called 'Ardi' in
    2009. He asked if humans evolved from this
    ancient creature.
ROUGE-2: 0.00;
    fvedu_hw:Strategies you implement are
    usually defined as the tone of your
    information. Here is the summary of
    tone types:
    fvedu_simp:(Note: Please provide your
    output in the format specified above,
    ensuring it is clear, well-organized
    , and free of grammatical error

```

F Outliers

To improve visualizations, we clipped outliers (Flesch Reading Ease) which only accounts for 3.85% (fvedu_hw) and 1.25% (fvedu_simp), and also removed outliers (Sentence Split Difference, Compression Level, Dependency Tree Depth Ratio) which only accounts 2.91% as a whole. Total examples for each dataset is 26,315,220. This section defines, quantifies, and illustrates the outliers.

F.1 Outliers: Flesch Reading Ease

Flesch Reading Ease (FRE) is interpreted as 0 to 100 but the FRE formula does not enforce boundaries, for this reason we clip negative values to 0 and clip to 100 if FRE is beyond 100. Negative FRE values can happen for dense paragraphs with very long sentences (typically, complex sentences) with long words. While FRE of greater than 100 can happen for paragraphs with very short sentences with short words. The percentage of outliers are as follows: 3.85% for fvedu_hw and 1.25% for fvedu_simp examples.

Examples of outliers are provided below.

```

# fvedu_hw
FRE: 100.00; "Come out of her, my people, lest
you take part of her sins, lest you share in
FRE: 112.09; - Press Ctrl + 2 to add more text
boxes. Press Ctrl + shift + 2 to adjust text
box.
FRE: 102.53; Do you know the name of the bird
group you are looking for?

# fvedu_simp
FRE: 103.01; - 2002 to 2011 was the time before
the ratings were checked.

```

FRE: 103.70; - As these experts say, we need to start

FRE: 103.65; The eastern part of the bridge weighs over 3,800 tons. The western part weighs over 1,000 tons.

#fwedu_hw

FRE: -15.65; Zambia started its accelerated malaria control campaign in 2003 when approximately 500,000 insecticide-treated nets were distributed and artemisinin-based combination therapy (ACT) started in seven pilot districts through a grant from the UN-backed Global Fund to fight AIDS, Tuberculosis and Malaria.

FRE: -11.91; NASA Image: ISS015E13648 - View of Expedition 15 astronaut and Flight Engineer, Clayton Anderson, working with test samples in the Human Research Facility - 2 Refrigerated Centrifuge for the Nutritional Status Assessment experiment to help understand human physiologic changes during long-duration space flight.

FRE: -1.59; o Suggests questions to help facilitate professional development group discussions, especially among peers

fwedu_simp

FRE: -53.65230769230766; Interconnectedness, empowerment, cooperation, relationships, partnership, flexibility, and diversity are key to realizing opportunities and creating sustainable systems. This includes nations, organizations, and communities working together effectively.

FRE: -18.449999999999996; Environmental engineers with experience in project management, regulatory compliance, environmental compliance, and engineering design tend to earn more, according to data from PayScale (2017).

FRE: -8.098461538461521; Occupational therapists help people do everyday activities by giving them exercises and practice.

F2 Outliers: Sentence Split Difference, Compression Level, Dependency Tree Depth Ratio

For these metrics, we identified outliers by computing the interquartile range (IQR). We compute bounds as $lower_bound = Q1 - 3 * IQR$ and $upper_bound = Q3 + 3 * IQR$, where $IQR = Q3 - Q1$ and $Q1$ and $Q3$ stands for Quartile 1 and 3, respectively. Usually, 1.5 was used to compute the bounds but we increased it to 3 to widen the threshold and make the tagging of outliers less aggressive. The percentage for each outlier type are as follows: sentence split difference (0.93%), compression level (0.42%), dependency tree depth ratio (1.74%). Combined and without duplicates, it accounts for 2.91% of data. **We removed these outliers for the visualization** in Figure 2. We give

examples of outliers below.

Example of Compression Level outliers:

Compression level: 1.84;
fwedu_hw:Reproduction - Ovoviviparous. Embryos are ovophagous; smaller siblings are consumed by larger siblings. Litters range from 4 to 6 pups, and size at birth is 1.9 to 2.6 ft [60 to 80 cm].

fwedu_simp:Reproduction - Ovoviviparous. This means that the mother gives birth to live young, but they develop inside eggs. The babies eat the eggs they hatch from, and if there are smaller siblings, the bigger ones might eat them too. The litter size is usually between 4 and 6 pups, and they are born after about 1.9 to 2.6 feet [60 to 80 cm] long.

Compression level: 1.80;
fwedu_hw:- Centers for Disease Control and Prevention. Update: respiratory syncytial virus activity - United States, 1998-1999 Season. MMWR Morb Mortal Wkly Rep. 1999;48:1104-15.

fwedu_simp:Simplified Text:
"The Centers for Disease Control and Prevention (CDC) reported on the respiratory syncytial virus (RSV) activity in the United States for the 1998-1999 season. RSV is a virus that affects the respiratory system. The CDC monitored RSV activity and reported the findings in a weekly report.

Compression level: 2.48;
fwedu_hw:Koh, L.P. and Wilcove, D.S. (2008) 'Is oil palm agriculture really dest

fwedu_simp:Koh and Wilcove studied the impact of oil palm agriculture on the environment. They found that oil palm plantations can lead to deforestation and habitat loss for many species.

Compression level: 2.12;
fwedu_hw:LEEDS, A. Introduction. In: WILBERT, J. (Ed.). The evolution of horticultural systems in native south America: causes and consequences - A Symposium. Caracas: Sociedad de Ciencias Naturales La Salle, 1961. p. 1-12. [Links]

fwedu_simp:The evolution of horticultural systems in native South America is a topic of great interest. This symposium aims to explore the causes and consequences of these changes. The book you are reading is a collection of papers presented at this symposium. It covers various aspects of horticulture in South America, from the early days to the present. The authors of these papers are experts in their fields and have contributed significantly to our understanding of this subject.

Compression level: 1.81;
fwedu_hw:of the legion to carry out special duties. Marius thus created a fully

fwedu_simp:Marius created a special group of soldiers within the Roman legion. This group was responsible for carrying out specific tasks.

Example of Dependency Tree Depth Ratio outliers:

Max Dependency Tree Depth Ratio: 1.83;
fwedu_hw:The wearing of gowns at formals is compulsory at some colleges and various other traditions are usually observed, including grace said in Latin or English. The wearing of gowns may sometimes constitute the only dress code; in other cases, formal wear (for example, a lounge suit for men or equivalent for women) is required in addition to, or instead of, the gown.
fwedu_simp:The wearing of gowns at formals is required at some colleges and some other traditions are followed, like saying grace in Latin or English. In some places, wearing a gown is the only dress code, while in others, you also need to wear formal clothes (like a suit for men or something similar for women) along with the gown.

Max Dependency Tree Depth Ratio: 2.33;
fwedu_hw:- Press Ctrl + 2 to add more text boxes. Press Ctrl + shift + 2 to adjust text box.
fwedu_simp:(Note: Please provide your output in the format specified above, ensuring it is free of grammatical errors and easy to read.)

Max Dependency Tree Depth Ratio: 2.00;
fwedu_hw:Reade, Julian. Assyrian Sculpture. London: The British Museum ; and Cambridge, MA: Harvard University Press, 1983, repr. 1994.
fwedu_simp:Julian Reade wrote a book about Assyrian sculpture. It was published by the British Museum in London and Harvard University Press in Cambridge, MA. The book was first published in 1983 and then again in 1994.

Max Dependency Tree Depth Ratio: 1.80;
fwedu_hw:- Centers for Disease Control and Prevention. Update: respiratory syncytial virus activity - United States, 1998-1999 Season. MMWR Morb Mortal Wkly Rep. 1999;48:1104-15.
fwedu_simp:Simplified Text:
"The Centers for Disease Control and Prevention (CDC) reported on the respiratory syncytial virus (RSV) activity in the United States for the 1998-1999 season. RSV is a virus that affects the respiratory system. The CDC monitored RSV activity and reported the findings in a weekly report.

Max Dependency Tree Depth Ratio: 2.00;
fwedu_hw:Clarke disclosed no relevant relationships with industry. Co-authors disclosed multiple relevant relationships with industry.
fwedu_simp:Clarke did not have any relationships with companies that could affect the study. The other authors had relationships with companies that could affect the study

Example of Sentence Split Difference outliers:

sentence_splits_diff: 54.00;
 fwedu_hw:1 cross-section anisotropically etched groove in (100) silicon 2 schematic of reflux reactor 3 enlarged section of full-mask as laid out on L-edit 4 full mask as laid out on L-edit 5 enlarged section of full-mask showing large springs as laid out on L-edit 6 grid which lines up with circles on alignment mask as laid out on L-edit 7 alignment mask as laid out on L-edit 8 enlarged section of full mask showing diaphragms as laid out on L-edit 9 two lines , one is obviously more undercut than the other (mic.) 10 feature 'lines' after 40 minutes of etching in ecolite (SEM) 11 blown-up view of feature 'lines' after 40 min. etching in ecolite (SEM) 12 200\B5\m diameter circle etched out to form square (mic.) 13 200\B5\m diameter circle which has been etched out to form square (SEM) 14 400\B5\m diameter circle which has been etched out to form square (SEM) 15 silicon dioxide capillary bridges (mic.) 16 square oxide feature etched away at its convex corners (SEM) 17 square oxide feature etched away at its convex corners (SEM) 18 cluster of etch holes in the oxide layer on back side of the wafer (SEM) 19 pinholes in boron-doped silicon channel under capillaries (mic.) 20 silicon channel etched under a broken-off cantilever (mic.) 21 pitted silicon surface of an incompletely -etched diaphragm (SEM) 22 square of boron-doped Si formed by etching a trough around it (SEM) 23 blown-up view of the boron-doped silicon square (SEM) 24 diaphragm etched through to boron-doped rough side of wafer (mic.) 25 boron-doped silicon capillary bridges (SEM) 26 blown-up view of free boron -doped silicon bridge (SEM) 27 silicon dioxide capillary bridges (SEM) 28 free boron-doped silicon little spring (SEM) 29 free silicon-dioxide cantilever (SEM) 30 boron-doped silicon cantilevers showing (111) crystal planes (SEM) 31 smooth (polished side of wafer) boron-doped silicon diaphragm (SEM)Literature Cited
 fwedu_simp:1. A groove was cut into a silicon wafer in a special way so that it would be etched differently in different directions.
 2. This is a picture of a special machine used to make chemicals mix together in a certain way.
 3. This is a close-up of the full design for making the silicon wafer, as seen on a computer screen.
 4. This is the full design for making the silicon wafer, as seen on a computer screen.

5. This is a close-up of the full design for making the silicon wafer, showing the big springs, as seen on a computer screen.
 6. This is a grid that lines up with circles on another design, as seen on a computer screen
 .
 7. This is the design for lining up the circles, as seen on a computer screen.
 8. This is a close-up of the full design for making the silicon wafer, showing the diaphragms, as seen on a computer screen.
 9. These are two lines, one of which is more worn away than the other.
 10. This is a picture of lines that were etched into the silicon wafer after 40 minutes of etching.
 11. This is a close-up of the lines that were etched into the silicon wafer after 40 minutes of etching.
 12. This is a circle that was etched out to form a square.
 13. This is a picture of a circle that was etched out to form a square.
 14. This is a picture of a circle that was etched out to form a square.
 15. These are small bridges made of silicon dioxide.
 16. This is a square feature that was etched away at its corners.
 17. This is a picture of a square feature that was etched away at its corners.
 18. These are small holes in the oxide layer on the back of the wafer.
 19. These are small holes in the silicon channel under the capillaries.
 20. This is a silicon channel that was etched under a broken-off cantilever.
 21. This is a pitted silicon surface of a diaphragm that was not fully etched.
 22. This is a square of boron-doped silicon that was formed by etching a trough around it.
 23. This is a close-up of the boron-doped silicon square.
 24. This is a diaphragm that was etched through to the rough side of the wafer.
 25. These are small bridges made of boron-doped silicon.
 26. This is a close-up of a free boron-doped silicon bridge.
 27. These are small bridges made of silicon dioxide.
 28. This is a small, free boron-doped silicon spring.
 29. This is a small, free silicon dioxide cantilever.
 30. These are boron-doped silicon cantilevers that show the crystal planes.
 31. This is a smooth, polished side of a boron-doped silicon diaphragm.
 sentence_splits_diff: 55.00;
 fwedu_hw:55 new units: Huscarls (Spear), Huscarls (Axe), Mounted Huscarls, Berserkers, Well-Equipped Shieldwall (Offensive), Shieldwall (Offensive), Hirdsmen, Dismounted Hirdsmen, Picked Irish Foot (Axe), Irish Foot (Axe), Irish Kerns, (Dark Age) Armoured Lancers, Dismounted Armoured Lancers, (Dark Age) Lancers, Dismounted Lancers, (Dark Age) Armoured Cavalry

(Light Spear), Dismounted Armoured Cavalry, (Dark Age) Cavalry (Light Spear), Dismounted Cavalry, Crossbowmen, Light Crossbowmen, Byzantine Kataphraktoi, Tagmatic Lancers & Archers, Thematic Lancers & Archers, Varangian Guard (Early), Byzantine Skutatoi, Byzantine Raw Skutatoi, Byzantine Massed Archers, Byzantine Light Archers, Byzantine Skutatoi & Archers, Raw Byzantine Skutatoi & Archers, Light Horse Archers (Pecheneg/Cuman), Horse Archers (Pecheneg/Cuman), Muslim Spearmen, Raw Muslim Spearmen, Veteran Muslim Spearmen, 'Abid al-shira, Muslim Irregular Foot, Armoured Muslim Lancers (Superior), Dismounted (Superior) Armoured Muslim Lancers, Armoured Muslim Lancers (Average), Dismounted (Average) Armoured Muslim Lancers, Muslim Lancers, Ghilman, Dismounted Ghilman, Muslim Cavalry (Light Spear), Muslim War Elephants, Muslim Light Horse (Javelins), Muslim Light Foot Archers, Muslim Light Javelinmen, Naffatun, Veteran Dailami Foot, Dailami Foot, Superior Indian Lancers, Indian Lancers.

fwedu_simp:1. Huscarls (Spear)

2. Huscarls (Axe)
3. Mounted Huscarls
4. Berserkers
5. Well-Equipped Shieldwall (Offensive)
6. Shieldwall (Offensive)
7. Hirdsmen
8. Dismounted Hirdsmen
9. Picked Irish Foot (Axe)
10. Irish Foot (Axe)
11. Irish Kerns
12. (Dark Age) Armoured Lancers
13. Dismounted Armoured Lancers
14. (Dark Age) Lancers
15. Dismounted Lancers
16. (Dark Age) Armoured Cavalry (Light Spear)
17. Dismounted Armoured Cavalry
18. (Dark Age) Cavalry (Light Spear)
19. Dismounted Cavalry
20. Crossbowmen
21. Light Crossbowmen
22. Byzantine Kataphraktoi
23. Tagmatic Lancers & Archers
24. Thematic Lancers & Archers
25. Varangian Guard (Early)
26. Byzantine Skutatoi
27. Byzantine Raw Skutatoi
28. Byzantine Massed Archers
29. Byzantine Light Archers
30. Byzantine Skutatoi & Archers
31. Raw Byzantine Skutatoi & Archers
32. Light Horse Archers (Pecheneg/Cuman)
33. Horse Archers (Pecheneg/Cuman)
34. Muslim Spearmen
35. Raw Muslim Spearmen
36. Veteran Muslim Spearmen
37. 'Abid al-shira
38. Muslim Irregular Foot
39. Armoured Muslim Lancers (Superior)
40. Dismounted (Superior) Armoured Muslim

Lancers

41. Armoured Muslim Lancers (Average)
42. Dismounted (Average) Armoured Muslim Lancers
43. Muslim Lancers
44. Ghilman
45. Dismounted Ghilman
46. Muslim Cavalry (Light Spear)
47. Muslim War Elephants
48. Muslim Light Horse (Javelins)
49. Muslim Light Foot Archers
50. Muslim Light Javelinmen
51. Naffatun
52. Veteran Dailami Foot
53. Dailami Foot
54. Superior Indian Lancers
55. Indian Lancers

sentence_splits_diff: 70.00;

fwedu_hw:No of Right Mag. the ascension
Declination of the Stars deg ' ' d '
" Stars 1 149 48 55 6 7 45 S 6 A new
Star, the Comet compared May 18 and
19 at night 22 151 25 27 6 52 25 6 A
Star of the Sextant, Comet compared
May 14, 15, 16, and 17 2 153 25 25 5
50 36 7 A new Star, Comet compared
May 17, 18, 19, and 20 3 153 33 8 5
12 52 8 A new Star, Comet compared
May 20, 21, 22, 23, and 24 27 153 35
49 3 10 3 6 A Star of the Sextant,
Comet compared June 3 4 153 42 34 4
28 35 10 A new Star, Comet compared
May 24, 25, 26, 27, and 28 5 153 42
34 5 21 5 10 A new Star, Comet
compared May 20 6 153 46 21 7 58 55 8
A new Star, Comet compared May 14 7
153 47 22 7 12 32 10 A new Star,
Comet compared May 14 8 153 57 40 8
19 29 10 A new Star, Comet compared
May 13 9 154 7 39 4 13 20 10 A new
Star, Comet compared May 30 10 154 47
30 12 21 11 7 A new Star, Comet
compared May 7 11 154 52 21 11 52 46
9 A new Star, Comet compared May 8 12
154 57 2 13 39 6 7 A new Star, Comet
compared May 6 1 156 8 56 15 5 53 6
A Star of the Hydra Phi2, Comet
compared May 5 13 156 8 15 11 1 27 7
A new Star, Comet compared May 9 2
156 43 56 15 37 38 5 Phi3 of the
Hydra, Comet compared May 5 14 156 58
8 19 36 31 9 A new Star, Comet
compared May 13 15 157 40 41 9 21 39
8 A new Star, Comet compared May 3 16
159 25 32 8 34 41 6 A new Star,
Comet compared May 12 17 159 26 5 25
31 55 7 A new Star, Comet compared
May 1 17.1 160 0 28 25 36 24 9 A new
Star 18 322 3 15 20 52 19 8 A new
Star, Comet compared April 17 in the
Morning 19 322 25 3 20 41 56 7 A new
Star, Comet compared April 17 in the
Morning 49 323 25 38 17 12 5 3 Delta
of Capricorn, Comet estimated April
14 and 15 in the Morning 20 325 10 5
11 26 3 7 A new Star, Comet compared
April 7 and 8 in the Morning 21 326
12 50 9 42 0 7 A new Star, Comet
compared April 6 in the Morning 30
327 41 29 7 40 52 6 A Star of
Aquarius, Comet compared April 1 in

the Morning 22 329 11 24 8 41 31 7 A new Star, Comet compared April 2 in the Morning 5 344 4 32 0 48 0 N 6 A of Pisces, Comet compared and estimated February 14 23 348 33 20 1 7 28 8 A new Star, Comet compared January 31 and February 1 8 348 38 36 0 3 40 S 5 Kappa' of Pisces, Comet compared February 3 and 4 24 348 49 10 0 32 29 N 8 A new Star, Comet compared February 1 25 349 40 54 1 1 14 8 A new Star, Comet compared January 27 and 28 26 350 44 16 0 50 56 10 A new Star, Comet compared January 25 27 350 52 16 1 5 8 10 A new Star, Comet compared January 23 16 351 0 1 0 44 48 6 A Star of Pisces, Comet estimated January 25, 27, and 28 28 352 13 5 1 6 40 8 A new Star, Comet compared January 21 and 22 18 352 26 6 0 25 53 5 Lambda of Pisces, Comet estimated January 21

fwedu_simp:1. 149 48 55 6 7 45 S A new Star was seen on May 18 and 19 at night.

2. 153 25 27 6 52 25 6 A Star of the Sextant was seen on May 14, 15, 16, and 17.
3. 153 33 8 5 12 52 8 A new Star was seen on May 17, 18, 19, and 20.
4. 153 35 49 3 10 3 6 A Star of the Sextant was seen on June 3 and 4.
5. 153 42 34 5 21 5 10 A new Star was seen on May 24, 25, 26, 27, and 28.
6. 153 46 21 7 58 55 8 A new Star was seen on May 14.
7. 153 47 22 7 12 32 10 A new Star was seen on May 14.
8. 153 57 40 8 19 29 10 A new Star was seen on May 13.
9. 154 7 39 4 13 20 10 A new Star was seen on May 30.
10. 154 47 30 12 21 11 7 A new Star was seen on May 7.
11. 154 52 21 11 52 46 9 A new Star was seen on May 8.
12. 154 57 2 13 39 6 7 A new Star was seen on May 6.
13. 156 8 56 15 5 53 6 A Star of the Hydra Phi2 was seen on May 5.
14. 156 8 15 11 1 27 7 A new Star was seen on May 9.
15. 156 43 56 15 37 38 5 Phi3 of the Hydra was seen on May 5.
16. 156 58 8 19 36 31 9 A new Star was seen on May 13.
17. 157 40 41 9 21 39 8 A new Star was seen on May 3.
18. 159 25 32 8 34 41 6 A new Star was seen on May 12.
19. 159 26 5 25 31 55 7 A new Star was seen on May 1.
20. 160 0 28 25 36 24 9 A new Star was seen.
21. 322 3 15 20 52 19 8 A new Star was seen on April 17 in the Morning.
22. 322 25 38 17 12 5 3 Delta of Capricorn was seen on April 14 and 15 in the Morning.
23. 325 10 5 11 26 3 7 A new Star was seen on April 7 and 8 in the Morning.
24. 326 12 50 9 42 0 7 A new Star was seen on April 6 in the Morning.

25. 327 41 29 7 40 52 6 A Star of Aquarius was seen on April 1 in the Morning.
26. 329 11 24 8 41 31 7 A new Star was seen on April 2 in the Morning.
27. 344 4 32 0 48 0 N A of Pisces was seen and estimated on February 14.
28. 348 33 20 1 7 28 8 A new Star was seen on January 31 and February 1.
29. 348 38 36 0 3 40 S Kappa' of Pisces was seen on February 3 and 4.
30. 348 49 10 0 32 29 N A new Star was seen on February 1.
31. 349 40 54 1 1 14 8 A new Star was seen on January 27 and 28.
32. 350 44 16 0 50 56 10 A new Star was seen on January 25.
33. 350 52 16 1 5 8 10 A new Star was seen on January 23.
34. 351 0 1 0 44 48 6 A Star of Pisces was seen and estimated on January 25, 27, and 28.
35. 352 13 5 1 6 40 8 A new Star was seen on January 21.
36. 352 26 6 0 25 53 5 Lambda of Pisces was seen and estimated on January 21.