

Foundation Models for Cross-Domain EEG Analysis Application: A Survey

Hongqi Li *Member, IEEE*, Yitong Chen, Yujuan Wang, Weihang Ni, Haodong Zhang*

Abstract—Electroencephalography (EEG) analysis stands at the forefront of neuroscience and artificial intelligence research, where foundation models are reshaping the traditional EEG analysis paradigm by leveraging their powerful representational capacity and cross-modal generalization. However, the rapid proliferation of these techniques has led to a fragmented research landscape, characterized by diverse model roles, inconsistent architectures, and a lack of systematic categorization. To bridge this gap, this study presents the first comprehensive modality-oriented taxonomy for foundation models in EEG analysis, systematically organizing research advances based on output modalities of the native EEG decoding, EEG-text, EEG-vision, EEG-audio, and broader multimodal frameworks. We rigorously analyze each category’s research ideas, theoretical foundations, and architectural innovations, while highlighting open challenges such as model interpretability, cross-domain generalization, and real-world applicability in EEG-based systems. By unifying this dispersed field, our work not only provides a reference framework for future methodology development but accelerates the translation of EEG foundation models into scalable, interpretable, and online actionable solutions.

Index Terms—Neural decoding, Foundation models, modality oriented, cross modal integration

I. INTRODUCTION

ELECTROENCEPHALOGRAPHY (EEG) is a non-invasive technique for recording electrical activity in the brain. It employs scalp electrode arrays to capture multi-channel time-series voltage signals at various sampling frequencies, typically exhibiting low signal-to-noise ratios, non-stationarity, and substantial inter-subject variability. Consequently, developing a robust decoding model with strong cross-subject generalization capabilities is of paramount importance for identifying user intentions and the further brain-machine interactions [1], [2].

Traditional machine learning approaches [3] rely on manually designed features, limiting their adaptability to complex spatiotemporal patterns. In contrast, end-to-end deep learning (DL) architectures, such as convolutional neural networks (CNNs), recurrent neural networks (RNNs), Transformers, and graph neural networks (GNNs), have demonstrating superior

performance by autonomously learning hierarchical representations [4], [5]. Nevertheless, their efficacy often necessitate large amounts of high-quality labeled data, which are scarce for EEG due to acquisition costs and inter-individual variability.

To mitigate data scarcity, researchers are increasingly turning to the transfer learning and pre-training strategies. In recent years, the paradigm of foundation models [6] has emerged, wherein neural networks are initially pre-trained on large-scale text, visual, or audio datasets and subsequently adapted to downstream tasks by minimal fine-tuning or direct extraction of intermediate representations. Notable examples include GPT [7] and LLaMA [8] in the realm of language processing, ViT [9] and Swin Transformer [10] in computer vision, Wav2Vec [11] and Whisper [12] in audio processing, CLIP [13] and Flamingo [14] as vision-language models, and Gemini [15] PaLM-E [16] as fully multimodal architectures, etc. Owing to the powerful representation learning capabilities, zero- or few-shot transfer abilities, and effective cross-modal alignment mechanisms, these mentioned models have exhibited remarkable performance across their respective fields.

Inspired by these successful cases, researchers began to explore the feasibility of foundation model-based EEG analysis [17]. Preliminary studies suggest that the employment of these pre-trained models can significantly enhance the decoding effects of EEG-to-text [18], [19], EEG-to-image [20], and EEG-to-audio tasks [21]. As a result, a large number of related studies are being produced in an explosive manner, and task has evolved from traditional closed-set classification toward open-ended generation and cross-modal semantic alignment. But, at the same time, serious fragmentation problems in model roles, architectures, and application domains have also emerged. One primary factor lies in the black-box nature of DL architectures, which allows for extensive customization in signal preprocessing, feature extraction, and classification modules. Meanwhile, foundation models have attempted different roles during the process of task paradigm transition. In particular, apart from serving as feature extractors, large-scale pretrained models can also be used as alignment tools (bridging EEG with textual, visual, or auditory representations via contrastive learning) and as generative backbones (enabling neural signal-driven content synthesis). However, to the best of our knowledge, the rapid adoption of foundation models in EEG analysis has outpaced existing reviews [5], [22], which predominantly focus on the models trained by existing EEG datasets. To date, the field still lacks a specialized summary of the increasingly wide-spread application of non-EEG pre-trained foundation models, especially in light of the explosive

Manuscript received Aug 12, 2025. This work was supported in part by the Natural Science Basic Research Program of Shaanxi Province under Grant 2024JC-YBQN-0659, in part by the Student Innovation Foundation of Northwestern Polytechnical University Taicang Innovation Harbor under Grant TCCX250103, and in part sponsored by the Practice and Innovation Funds for Graduate Students of Northwestern Polytechnical University under Grant PF2025013. (*Corresponding author: Haodong Zhang.*)

H. Li, Y. Chen, Y. Wang, W. Ni, and H. Zhang are with the School of Software, Northwestern Polytechnical University, Xi’an 710729, China (e-mail: lihongqi@nwpu.edu.cn, chenyt@mail.nwpu.edu.cn, wangyujuan12@mail.nwpu.edu.cn, niweihang@mail.nwpu.edu.cn, zhang_haodong@mail.nwpu.edu.cn)

TABLE I
TAXONOMY AND PURPOSE OF FOUNDATION MODELS-BASED EEG ANALYSIS [ER: EMOTION RECOGNITION; AAD: AUDITORY ATTENTION DETECTION]

Modality	Task Taxonomy	Purpose or Function Description	Representative Research
Unimodal EEG Decoding	Intention recognition	Motion assistance Human-computer interaction	[23] [24], [25], [26], [27], [28], [29], [31], [32]
	Cognitive state decoding	Assessment of cognitive load Recognition of affective and perceptual states Monitoring of attention and alertness	[32], [33] [34], [35], [36], [37], [38], [44] [29], [30], [31], [35], [39]
	Physiological/Neural state monitoring	Neurological and psychiatric disorder monitoring Physiological rhythm and behavioral state analysis Anomaly detection and health monitoring	[40], [41], [42], [43], [44], [49], [50] [29], [44], [46], [47], [48] [32], [39], [45], [46]
EEG-Text	Text alignment and semantic retrieval	Text retrieval and open-vocabulary matching	[51], [52], [53], [54], [55], [56]
	Text generation	End-to-end EEG-based text generation Semantics-enhanced and modality-aligned text generation Multi-task joint text generation and language understanding	[57], [58], [59], [60], [61] [52], [53], [55], [56], [62], [63], [64] [65]
	Domain-specific text understanding	Semantic understanding, particularly in specialized domains such as healthcare.	[34], [65], [66], [67]
EEG-Vision	Cross-modal alignment and image retrieval	Cross-modal alignment between EEG signals and images for visual classification and retrieval	[20], [68], [69], [70], [71], [72], [73]
	Image reconstruction	Latent-space aligned EEG-driven generative modeling Semantically-constrained high-fidelity EEG-to-image Exploration of the interpretability of generation mechanisms	[75], [76], [77] [74], [78], [79], [80], [81] [82], [83]
	Video and 3D image generation	The extended spatiotemporal expansion of image decoding	[84], [85], [86]
EEG-Audio	Audio decoding	Extracting semantic information from EEG signals	AAD [92], ER [93], [94], Perception [21]
	Audio generation	Audio/Speech/Music generation	[96], [97]
	Audio reconstruction	Audio/speech/music reconstruction	[98], [99], [100], [101], [104], [105]
Multi-modal EEG Fusion	MultiModal perception	Detail completion and contextual enhancement Cross-modal synergy and robustness	[109], [110], ER [111], Semantic Consistency [71]
	Multimodal output	Simultaneously generate outputs across multiple modalities	[112], [113]
	Cross-Modal representation	Alignment and integration of multiple neural signals such as EEG, fMRI, and calcium imaging at the semantic level.	[114], [115], [116], [117], [118], [119], [120], [121]
	Assisted enhancement	Auxiliary modality in multimodal perception and inference	[111], [122]

research in the nearest three years, to clarify the transferability of techniques across domains.

Therefore, in this pilot study, we try to focus and summarize exclusively on foundation models that have been pre-trained on large-scale non-EEG data and directly applied to EEG analysis tasks. Specifically, we exclude models fine-tuned on EEG datasets to focus exclusively on cross-domain transfer, and proposed a function-driven, modality-oriented taxonomy for involved foundation models. To this end, as concluded in TABLE I, the existing research advances of the off-the-shelf foundation models applied in EEG analysis are categorized into five domains: native unimodal EEG decoding, EEG-to-text alignment and generation, EEG-to-vision reconstruction and retrieval, EEG-to-audio decoding and generation, and multi-modal EEG fusion. Within each category, we systematically review representative explorations, with the used models, new architecture characteristics, and application scenarios highlighted in the following sections. Our main contributions are:

1) This survey provides the first and latest comprehensive taxonomy of foundation models pre-trained on non-EEG data and applied to EEG analysis, where the progress of unimodal EEG decoding, EEG-to-text, EEG-to-vision, EEG-to-audio, and multi-modal EEG fusion under foundation models is clearly presented. Such the effort clarifies the latest EEG research application, and helps to explicitly express the rich connotation and practical value of the foundation model;

2) It elaborates in detail on the different roles played by the foundation model in the EEG decoding paradigm shift, including the noise-robust representation learning, cross-modal

alignment mechanism, and zero-shot generalization strategies, providing a clear technical framework for newcomers and domain experts in the progress of foundation model reshaping the conventional EEG decoding;

3) We discussed the existing challenges and potential future research directions, aiming to provide clearer and more feasible guidance for the development of scalable, interpretable and widely applicable EEG decoding systems. The remainder of this paper is organized as follows: Section II VI describes the taxonomy of how foundation models can be adapted to classified EEG decoding applications, respectively. Section VII highlights current challenges and future directions, and the conclusion are given in Section VIII.

II. UNIMODAL EEG DECODING

The unimodal EEG decoding tasks refer to those that rely solely on EEG signals to infer a user's internal cognitive states, behavioral intentions, or task labels. This fundamental process can be conceptually represented as a mapping function $\hat{y} = f_{FM}(X_{EEG})$, where X_{EEG} represents the input raw EEG signals, $f_{FM}(\cdot)$ denotes the Foundation Model for unimodal EEG decoding, and \hat{y} is the model's final predicted output.

As the earliest and most well-established form for the brain signal analysis, the unimodal EEG decoding based on foundation models benefits from the availability of standardized experimental paradigms, well-curated public datasets, and mature evaluation protocols. Therefore, it has been widely applied in fields such as brain-computer interfaces (BCI), neurorehabilitation, and cognitive monitoring, which mainly

consists of the intention recognition (IR), cognitive state decoding (CD), and physiological and neurological state monitoring (PNM), as illustrated in Fig. 1.

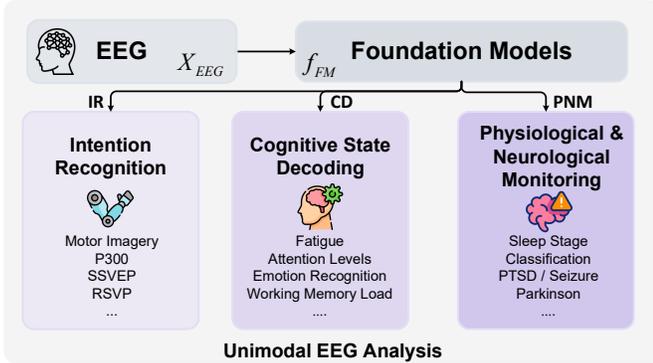


Fig. 1 Unimodal EEG decoding tasks based on Foundation Models.

A. Intention Recognition (IR)

The objective of IR is to translate neural EEG activity into structured commands for the use in the actual wheelchair navigation [2], robotic control [23], virtual keyboard systems [24]–[26], and other real-world BCI-driven interactions. More specifically, the line of such research primarily concerns with decoding user intentions or movement commands with the help of foundation models based on the inputted EEG. Currently, the typical foundation model-based IR scenario have been used to EEG paradigms of the motor imagery (MI) [27], [28], rapid serial visual presentation (RSVP), steady-state visual evoked potentials (SSVEP), and event-related potential (ERP)-based paradigms such as P300 [24], [25], [29]. For instance, as listed in TABLE II, Lim et al. [28] converted the MI features into JSON format and inputted them into the fine-tuned of GPT-4o model to obtain the relevant user intention classes. By leveraging large language models (LLMs) as informative

priors to adaptively select stimuli, the developed Sequential Top-Two Thompson Sampling (STTS) method significantly enhances the efficiency of P300-based BCI spellers, reducing the required flashes by 25-50% [25].

B. Cognitive Stage Decoding (CD)

Tasks under this domain aim to interpret dynamic mental or neural states during various forms of cognitive engagement. Commonly, the related states of these tasks include attention levels [30], [31], fatigue [32], working memory load [33], emotional responses [34]–[38], and error-related potentials [29]. The decoding efforts of foundation model-based CD support applications such as adaptive human-machine systems (e.g., driver monitoring [32], [39]), e-learning personalization [33], and operator state assessment [29]. As an example, Chen et al. developed a lightweight, locally-executable LLM (EEG Emotion Copilot), optimized through model pruning and fine-tuning to accurately interpret EEG signals for emotion recognition and generate personalized treatment plans, while ensuring computational efficiency and patient privacy [34].

C. Physiological and Neurological State Monitoring (PNM)

PNM focuses on identifying long-term or slowly evolving EEG patterns, particularly in medical and clinical settings. Representative tasks encompass the detection and monitoring of neurological or psychiatric conditions including Parkinson’s disease [40], post-traumatic stress disorder (PTSD) [41], and mood disorders [42], [43]. Additionally, considerable research has been devoted to seizure detection and prediction [44], [45], sleep stage classification [46]–[48], anomaly detection [39], attentional state estimation [32], [42], and early diagnosis of cognitive impairment [49], [50]. Studies of general foundation model based PNM have been summarized in TABLE II, and one should note that due to the complexity of brain dynamics and high inter-subject variability in clinical

TABLE II

RESEARCH TAXONOMY OF UNIMODAL EEG ANALYSIS WITH FOUNDATION (FNDN) MODELS [EFMPT: EEG FOUNDATION MODEL PRE-TRAINING & TRANSFER; DGLA: DECODING GUIDED LLM AUGMENTATION; EEGI: EEG-EMBEDDED LLM INFERENCE]

Year	Ref	Task	FNDN Models	Datasets	Idea	Specific Method Details of the Novel Contributions
2021	[29]	IR&CD&PNM	wav2vec 2.0	TUEG	EFMPT	Self-supervised learning based BENDR for EEG classification
2022	[40]	PNM	BERT	Private	EEGI	Treat raw EEG as sequential data like text and input to BERT
2024	[28]	IR	GPT-4o	BCI Comp. III A	EEGI	Convert EEG features into JSON format and input into LLM
2024	[24]	IR	GPT-3.5	-	DGLA	Conducts word completion and prediction with LLM API
2024	[25]	IR	GPT-2 & 3	-	DGLA	STTS with LLM prior for BCI arm selection
2024	[26]	IR	BART	Private	DGLA	CNN-encoder with a curriculum-driven LLM to decode letters
2024	[30], [31]	IR & CD	GPT-3.5 & GPT-4	ZuCo 1.0	DGLA	Combining LLM, EEG, and eye-tracking data to predict word-level relevance in reading comprehension tasks
2024	[37]	CD	Conformer / LLM (e.g., Llama-2)	SEED SEED-IV	DGLA	Conformer extracts labeled EEG features; LLM handles unlabeled data for semi-supervised similarity classification
2024	[41]	PNM	Multimodal LLM	Private	DGLA	Use multimodal LLM-powered wearables to further verify classification results and improve accuracy
2024	[42]	PNM	Brainwave	Multiple Datasets	EFMPT	Combining adaptive spectrogram embeddings with cross-modal attention and jointly pretraining on EEG and iEEG
2024	[44]	CD & PNM	GPT-2 Swin Transformer	Three benchmark	EEGI	Through plug-and-play adapters to convert time-series data into spatio-temporal 2D pseudo-images (AdaCT-I) or text (AdaCT-T)
2024	[45]	PNM	GPT-3	TUSZ	EEGI	Segment EEG, extract features, convert to text for model input
2025	[23]	IR	Motion-GPT	Private, AMASS	DGLA	Two-stage approach of decoding EEG into semantic motion keywords and using LLM-based motion generation and precise control
2025	[32]	IR&CD&PNM	CBraMod	TUEG	EFMPT	Criss-cross transformer and asymmetric conditional positional encoding (ACPE) scheme for up to 10 downstream BCI tasks
2025	[33]	CD	GPT-4-turbo	-	DGLA	Real-time EEG engagement monitoring with generative AI

2025	[34]	CD	Qwen-2	FACED	EEGI	Prompt + demographics + compressed EEG as input to the LLM
2025	[38]	CD	GPT-4o	SEED	EEGI	Convert EEG data into vector format for LLM to classify emotions
2025	[39]	CD & PNM	Pre-trained Mamba-2	TUAB	EFMPT	A self-supervised framework of EEGM2 for pretraining; downstream tasks are 5 real-world Emotiv scenarios
2025	[49]	PNM	OTiS	LEMON, Epilepsy, TUEV	EEGI	EEG input OTiS as a time series data for extracting features
2025	[50]	PNM	LEAD	EEG-AD (Private)	EFMPT	Leveraging self-supervised contrastive pre-training and unified fine-tuning for EEG-based Alzheimer's Disease detection

EEG signals, models in this context need to exhibit strong temporal modeling capabilities and robust generalization across individuals.

Summarizing the research progress listed in **TABLE II**, the process of above unimodal EEG decoding is similar to that of traditional EEG decoding. That is, the foundation model can be regarded as a more effective feature extractor or classifier, whose function is similar to that of traditional machine learning or advanced deep learning algorithms, to obtain more accurate user intentions, emotional states or health anomalies. To further leverage the pre-trained alignment capabilities, the recent development are searching cross-modal integration with images, sounds, or text to facilitate more flexible, efficient, and interpretable EEG decoding. The following sections delve into these emerging paradigms in greater detail.

III. EEG-TO-TEXT RESEARCH

As a highly structured semantic modality, text enables rich expressive flexibility and an open-ended output space, making it worth exploring in EEG analysis tasks. The EEG-to-Text (E2T) tasks aim to project brain signals into the semantic space of natural language, thereby enabling the generation, matching, or recognition of textual content [18], [19].

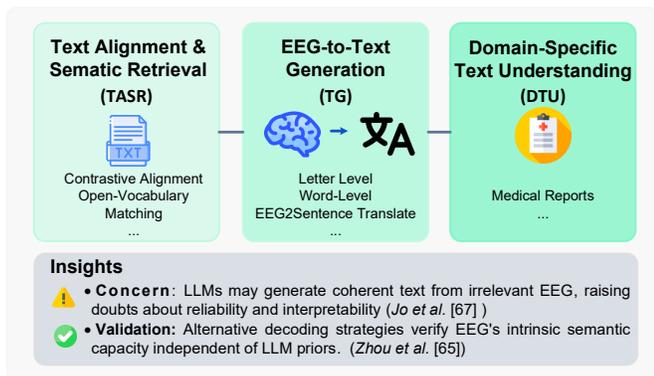


Fig. 2 EEG-to-Text analysis tasks based on Foundation Models.

Specifically, on the one hand, EEG signals can be used to decode linguistic content perceived or generated by the subjects, such as descriptive sentences or conversational responses. The inherent sequential nature of both EEG and textual data enables effective temporal alignment, making generation-based paradigms particularly prominent in this field. On the other hand, text can also serve as semantic anchor points for aligning EEG embeddings, thereby enabling tasks such as retrieval and similarity-based classification. As summarized in Fig. 2, the rapid development of LLMs has opened new avenues for integrating foundation models into EEG decoding, with three key research directions emerging as promising entry points.

A. Text Alignment and Semantic Retrieval (TASR)

A key challenge in EEG-to-text decoding lies in establishing a robust semantic alignment between neural signals and textual representations. To address this, recent studies have leveraged contrastive learning frameworks to project EEG signals and text into a shared embedding space, thereby enabling tasks such as open-vocabulary matching and neural-guided text retrieval. The specific cross-entropy within the framework is

$$\mathcal{L}_{\text{contrast}} = - \sum_{i=1}^N \log \frac{\exp(\text{sim}(z_{\text{EEG}}^{(i)}, z_{\text{Text}}^{(i)}/\tau))}{\sum_{j=1}^N \exp(\text{sim}(z_{\text{EEG}}^{(i)}, z_{\text{Text}}^{(j)}/\tau))}$$

where τ is a temperature hyperparameter and $f_{\text{sim}}(\cdot)$ is the cosine similarity, z is average vector of the pre-encoder output. Specifically, early attempts of MTAM [51] introduced dual encoders with cross-modal interaction mechanisms to jointly learn EEG-text embeddings. This architecture facilitates coherent semantic representations by modeling inter-modal relationships. Extending this approach, CET-MAE [52] incorporated a hybrid training objective that combines contrastive alignment with generative pretext tasks, further enhancing semantic consistency in downstream applications.

To overcome the challenge of subject variability inherent in EEG, several works have proposed subject-invariant training strategies. For example, Feng et al. [53] applied curriculum semantic-aware contrastive learning (C-SCL) to progressively construct semantically aligned EEG-text pairs across individuals. Zhou et al. [54] proposed a two-stage alignment pipeline to reinforce EEG-language matching, yielding notable gains in zero-shot retrieval tasks. Liu et al. [55] focused on disentangling subject-specific and semantic features, enabling effective decoding on unseen participants. In addition to instance-level alignment, recent studies have explored hierarchical modeling strategies. BELT [56], for instance, performs semantic alignment across word, sentence, and document levels, offering a flexible framework that supports both retrieval and generation.

Building on foundation model principles like contrastive alignment and hierarchical representation, these approaches collectively demonstrate the viability of bridging EEG signals with complex semantic structures, which sets the stage for more interpretable and generalizable brain-language interfaces.

B. EEG-based Text Generation (TG)

Unlike alignment-based approaches that focus on matching EEG to predefined textual categories, EEG-to-text generation aims to convert neural signals into natural language, enabling applications such as free-form communication, semantic expression, and cognitive decoding. Generally, generation task requires modeling more complex temporal dependencies and open-ended semantic spaces, which poses unique challenges

TABLE III
RESEARCH TAXONOMY OF EEG-TO-TEXT ANALYSIS WITH FOUNDATION (FNDN) MODELS [PTR: PRETRAINED TRANSFERABLE REPRESENTATIONS]

Year	Ref	Task	FNDN Models	Datasets	Architecture Characteristics and Main Contributions
2020	[57]	TG	BART	-	Bidirectional encoder and autoregressive decoder with flexible noising strategies
2022	[58]	TG	BART	-	Open vocabulary EEG-Text decoding and zero-shot EEG-based sentiment classification
2023	[53]	TASR&TG	Transformer	ZuCo	C-SCL framework to bridge the EEG-text semantic gap with easy-to-hard contrastive pairs
2023	[51]	TASR	BERT	K-EmoCon ZuCo	MTAM: EEG encoder + language encoder + cross-alignment Semantic alignment enables sentiment analysis and relation detection
2023	[64]	TG	BART	ZuCo 1.0 / 2.0	Discrete encoding + BART with contrastive learning; Translate raw EEG to text by vectorizing features without event markers
2024	[52]	TASR&TG	BART	ZuCo	CET-MAE: Transformer encoder + BART + E2T-PTR and support reconstruction
2024	[54]	TASR	Conformer	ZuCo	Conformer-based EEG encoder via masked contrastive learning for word-level classification
2024	[56]	TASR&TG	BART	ZuCo	D-Conformer with bootstrapping strategy, support alignment at word and sentence levels
2024	[63]	TG	BART	ZuCo	CNN-Transformer: Sentence-level EEG multi-view encoding, Transformer for brain regions
2025	[55]	TASR&TG	BERT	ChineseEEG	Using LLM and mapping EEG latent vectors to text embeddings with a multi-layer perceptron EEG encoder (using CNN model Deep4) + Clinical BERT
2025	[66]	DTU	BERT	TUAB	TUH abnormal dataset and other domain-specific unstructured data as auxiliary Providing a flexible framework for zero-shot and data-efficient EEG analysis

in language grounding and generalization. One mainstream approach involves combining EEG encoders (e.g., based on CNN, Transformer, or hybrid architectures) with pretrained language generation models such as BART or

GPT. For example, BART-based frameworks [57], [58] utilize encoded EEG vectors as input to the decoder, enabling fluent and stylistically coherent text generation. The Brain2Qwerty system [59], [60] integrates a deep EEG encoder with GPT-2 to achieve letter-level generation from EEG/MEG data, demonstrating robust generalization. GPT-4 has also been employed as a post-processing module to refine sentence fluency and semantic correctness [61].

Some studies introduce cross-modal alignment mechanisms [52], [53], [62] to further enhance consistency between EEG representations and textual semantic spaces, significantly improving generation quality. Beyond alignment-based models, some approaches adopt self-supervised learning or discrete encoding strategies. For example, EEG2TEXT [63] employs multi-view Transformers and pretraining objectives to enhance EEG semantic representation without requiring textual supervision. DeWave [64] introduces discrete latent representations to bridge EEG signals and token-level language embeddings. BELT-2 [65] proposes a unified multitask framework leveraging byte pair encoding (BPE) and a shared decoder for text generation, translation, and affective recognition, highlighting the transferability of EEG-derived semantics across tasks.

Collectively, as we see from **TABLE III**, these mentioned EEG-to-text research leverages BART, BERT, and hybrid architectures (e.g., Conformer) with contrastive learning for semantic alignment. Trends show a shift toward generalization (zero-shot learning) and clinical applications (TUAB dataset). Future work should explore multimodal integration, interpretability, and low-resource adaptation to enhance scalability and practical utility across diverse domains.

C. EEG-based Domain-Specific Text Understanding (DTU)

Recent studies have explored how EEG signals can support fine-grained text comprehension in domain-specific applications, particularly in high-stakes fields such as medicine that demand nuanced semantic interpretation [34], [66]. One notable work is EEG-CLIP [66], which jointly models EEG and clinical annotations (e.g., medical records) using contrastive

learning. This approach enhances the semantic discrimination capacity of EEG embeddings, verifying how neural signals can augment professional language understanding and extend the applicability of EEG-text modeling into specialized domains.

TABLE III concludes the details of above typical EEG-to-text research. Despite these promising advances across alignment, generation, and domain-specific modeling, several studies have raised important concerns about the reliability and interpretability of EEG-text decoding pipelines. Jo et al. [67] argued that the generative power of large language models may produce coherent outputs even when given random or semantically irrelevant EEG inputs, casting doubt on whether such outputs truly reflect brain signal content. To address this issue, Zhou et al. [65] proposed an alternative decoding strategy that avoids direct generation from EEG. Instead, their model focuses on validating the intrinsic semantic capacity of EEG representations without over-relying on language model priors.

In summary, EEG-to-text decoding represents a rapidly emerging paradigm that integrates neural signals with language modeling to achieve open-ended generation, semantic retrieval, and domain-specific understanding. Powered by foundation models, this field is transitioning from closed-set classification toward more expressive and human-aligned interactions. However, ensuring interpretability, robustness, and fidelity to underlying neural content remains an open challenge, and thus calling for more principled evaluation frameworks and neurocognitively grounded modeling approaches.

IV. EEG-TO-VISION RESEARCH

Visual perception is one of the primary pathways for humans to interact with and interpret the environment. EEG-based visual decoding aims to uncover the neural activation patterns behind visual content processing and utilize these patterns to reconstruct, recognize, or retrieve the images that a user is viewing, imagining, or attending to. Except for its theoretical significance for deepening our understanding of visual cognition and neural information processing, such task also provides a foundation for practical applications such as brain-visual interaction systems and nonverbal communication interfaces. Overall, as summarized in **TABLE IV**, the existing research on EEG-to-vision decoding can mainly be classified

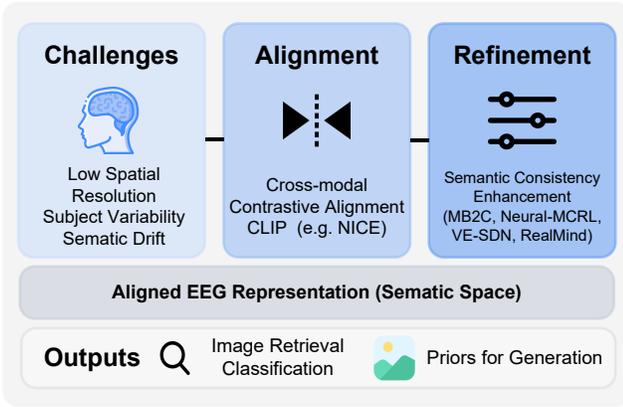


Fig. 3 The challenge and research idea of cross-modal alignment and image retrieval tasks for EEG based on Foundation Models.

into three categories, namely the cross-modal alignment and image retrieval (IRT), EEG-based image reconstruction (IRC), and video and 3D image generation (3DG) from EEG, respectively.

A. Cross-Modal Alignment and Image Retrieval (IRT)

As shown in **Fig. 3**, EEG-based modeling of high-level visual semantics remains challenging because of the low spatial resolution and significant inter-subject variability inherent in EEG. To address these issues, current related approaches generally leverage visual backbone models such as CLIP to construct structured semantic spaces and learn mappings from EEG to image-level semantics for cross-modal alignment. Such the strategy not only improves performance in discriminative tasks (e.g., image retrieval and classification) but also provides semantic and structural priors that can be utilized for generative tasks (e.g., image reconstruction). Typical examples

include NICE [20], which employs contrastive learning to align visual stimuli with corresponding EEG responses. Similarly, as shown in TABLE IV, study [68] adopted a comparable alignment mechanism, while [69] further introduced human-in-the-loop alignment strategies to facilitate rapid semantic capture.

Since models like NICE often reduce EEG-image alignment to a straightforward cross-modal pairing problem, neglecting semantic consistency within each modality, several enhanced strategies have been proposed. MB2C [70] applies bidirectional cyclic consistency via GAN-based training to reduce both inter- and intra-modal discrepancies. Neural-MCRL [71] integrates semantic bridging with cross-attention mechanisms to preserve intra-modal semantic integrity while ensuring inter-modal coherence. VE-SDN [72] applies semantic de-coupling to focus alignment on relevant components and in-corporates geometric consistency to improve intra-class compactness. RealMind [73] further combines semantic constraints with geometric regularization to strengthen feature representations and improve alignment quality across multiple tasks.

B. EEG-based Image Reconstruction (IRC)

In image reconstruction tasks, several studies aim to recover visual content that the subjects view or imagine from EEG. As shown in **Fig. 4**, the related studies typically adopt a two-stage framework, wherein EEG signals are first semantically encoded and then used to guide a generative model to reconstruct corresponding image. Although the reconstructed image quality remains limited by EEG resolution and model capacity, recognizable images can be produced under controlled paradigms.

As for the specific studies, diffusion models have shown superior performance over traditional generative adversarial

TABLE IV

RESEARCH TAXONOMY OF EEG-TO-VISION ANALYSIS WITH FOUNDATION (FNDN) MODELS [TSCONV: TEMPORAL-SPATIAL CONVOLUTION; SA: SELF-ATTENTION; GA: GRAPH ATTENTION; LDM: LATENT DIFFUSION MODEL; DANA: DYNAMIC-AWARE NOISE-ADDING; NERF: NEURAL RADIANCE FIELD]

Task	Year	Ref	Datasets	FNDN Models	Architecture Characteristics and Main Contributions
IRT	2024	[20]	Things-EEG2 + MEG	CLIP	NICE: TSCONV + SA + GA as EEG Encoder; Pre-trained ViT/ResNet as Image Encoder; Contrastive learning aligns two modalities by constraining their similarity
	2024	[68]	EEGCVPR40 ThoughtViz Object	CLIP	Multi-layer LSTM as EEG Encoder; Pretrained ResNet-50 as Image Encoder; Combines triplet-loss EEG features with StyleGAN-ADA to synthesize high-fidelity images from EEG and leverages CLIP-inspired EEGClip for joint EEG-image representation learning
	2024	[71]	THINGS-EEG	CLIP	Neural Encoder with Spectral-Temporal Adaptation (NESTA) as EEG Encoder; Pre-trained ViT as Image Encoder; EITRA module addresses semantic gap with interaction matrix
	2024	[73]	THINGS-EEG	CLIP	Channel Attention + Conv as EEG Encoder; Pre-trained ViT as Image Encoder; Using semantic and geometric consistency learning to improve feature representation
IRC	2023	[75]	EEG-ImageNet	CLIP, Diffusion Model	DreamDiffusion: Pretrained EEG Encoders (CNN + ViT Large) and CLIP Image Encoder, using Stable Diffusion 1.5 as the generative model
	2023	[78]	EEG-image	CLIP, BLIP, LDM	NeuroImagen: Embedding pixel-level semantic and sample-level semantic features from EEG into a generative model (combined with a latent diffusion model)
	2024	[74]	THINGS-EEG/ MEG	CLIP, GIT, LDM	Channel wise attention + Adaptive Thinking Mapper (ATM) as EEG encoder, CLIP Image Encoder, with a two-stage diffusion-based generation strategy by latent Diffusion Model
	2024	[79]	Brain2Image	CLIP, Stable Diffusion, LLaVA BLIP	BrainDecoder: LSTM as EEG Encoder, CLIP Image Encoder, Capture both high-level semantics and fine-grained stylistic features; a pretrained latent diffusion model (Stable Diffusion) for high-fidelity image reconstruction
	2025	[76]	EEGCVPR40 ThoughtViz	Stable Diffusion	GWIT: 1D CNN + LSTM as EEG Encoder, Integrates signal with a frozen Stable Diffusion model 2.1 via ControlNet's zero-convolution mechanism for efficient conditioning
	2025	[81]	BDVE	CLIP, BLIP, Stable Diffusion	BrainVis: LSTM as EEG Encoder, ViT-Large as Image Encoder, Aligns the embeddings with interpolated coarse (category labels) and fine-grained (BLIP-2-generated captions) CLIP semantics via a specialized network, and uses cascaded diffusion models
	2025	[77]	THINGS-EEG	CLIP	Dual-branch with spherical manifold encoding + Clip-based image encoder

3DG	2024	[84]	SEED-DV	BLIP/Stable Diffusion	Seq2seq aligns motion with EEG; semantic prediction links EEG to semantics; DANA adds temporal cues for diffusion video generation (inflated diffusion model).
	2024	[85]	EEG-ImageNet Things-EEG2	NeRF, LDM	Neural encoder learns the latent EEG features; LDM and NeRF combine visual stimulus patterns to generate 3D objects.
	2025	[86]	EEG-3D	3D Diffusion Model, CLIP	Dynamic / Static EEG Encoder + Neural Aggregator extracts neural Features; Colored Point Cloud Decoder decoupled geometry and appearance EEG features

networks (GANs), emerging as the dominant approach. For example, DreamDiffusion [75] aligns EEG representations with the CLIP space to drive Stable Diffusion without text input, while GWIT [76] leverages ControlNet to directly fine-tune latent diffusion models using EEG. To improve semantic control and structural fidelity, NeuroImagen [78] incorporates sample-level semantic cues, saliency maps, and textual descriptions to guide multimodal image generation. Similarly, Li et al. [74] introduce a two-stage decoding strategy built upon a novel EEG encoder (ATM) to enhance alignment and reconstruction accuracy. For finer image details, BrainDecoder [79] integrates EEG with both image and text modalities to improve texture and style restoration, whereas BrainDreamer [80] embeds positional and color information to achieve high-quality and controllable image synthesis. Additionally, Fu et al. in [81] maps EEG frequency features into CLIP’s multi-scale semantic space, enabling high-fidelity image reconstruction through cascaded diffusion.

posed a sequence-to-sequence architecture that encodes EEG signals and generates continuous video frames. By integrating a Dynamic Adversarial Noise Addition module, this framework substantially improved both the temporal consistency and the visual quality of the generated video sequences. Compared to conventional image-level generation methods, EEG2Video achieved higher performance on evaluation metrics such as semantic classification accuracy and structural similarity, thereby extending image decoding into the temporal domain and demonstrating EEG’s potential for modeling dynamic visual understanding.

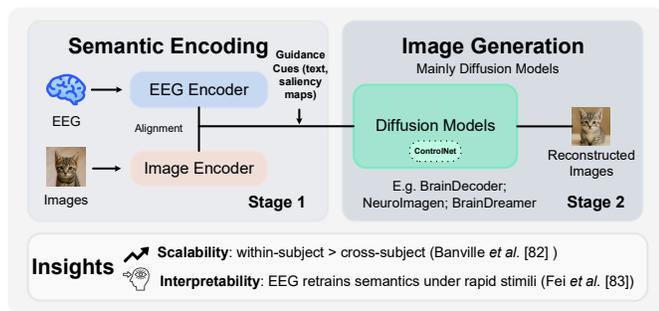


Fig. 4 EEG-to-Image generation tasks based on Foundation Models.

Recent studies have also examined the scalability and neural interpretability of EEG-based image reconstruction. Specifically, Banville et al. [82] proposed a scaling law for brain image decoding, demonstrating that increasing within-subject data provides greater benefits than cross-subject fusion and highlighting EEG as a cost-effective alternative to fMRI. Fei et al. [83] investigated both the feasibility and the limitations of EEG-based reconstruction, showing that even under rapid visual stimulation, EEG retains meaningful semantic information despite persistent challenges in recovering fine details and color. Together, these aforementioned findings offer valuable insights into multimodal integration and advance our understanding of human visual encoding.

C. EEG-based Video and 3D Image Generation (3DG)

The spatiotemporal extension of image decoding has further stimulated research on EEG-driven video and 3D reconstruction, indicating the progress to perceive dynamic changes. The basic idea of related research has been depicted in Fig. 5.

Specifically, the EEG2Video framework [84] introduced a large-scale video-evoked EEG dataset (SEED-DV) and pro-

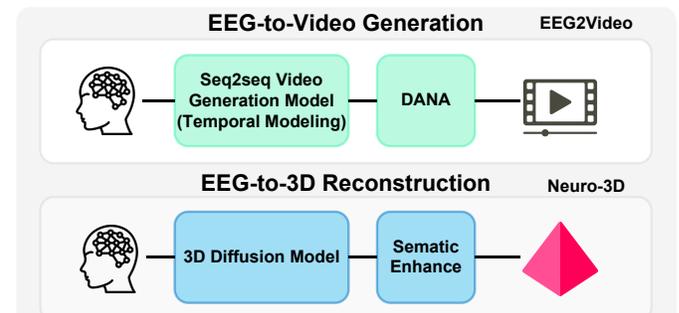


Fig. 5 EEG to Video & 3D Generation Tasks based on Foundation Models.

In the area of 3D reconstruction, Neuro-3D [86] pioneered EEG-to-3D modeling by recording brain signals while participants observed 3D objects. They developed a neural modeling framework that could recognize and reconstruct both the shape and attributes of the viewed objects. Moreover, study [85] introduced a method that combines a region-aware semantic encoder with a diffusion-based rendering strategy. This approach extracts position-sensitive EEG representations through multi-task semantic learning and employs NeRF [87] together with diffusion models to guide 3D generation. The resulting outputs demonstrate high fidelity in both object geometry and stylistic coherence, advancing EEG-based semantic modeling into three-dimensional space.

In conclusion, these 3DG advances extend EEG-based visual decoding from static frames to spatiotemporally enriched representations, offering a forward-looking direction for multimodal spatial modeling and laying the groundwork for next-generation BCI systems designed for complex and interactive environments.

V. EEG-TO-AUDIO RESEARCH

Here we conclude the related EEG-Audio research application with foundation models in Fig. 6 and TABLE V.

A. EEG-based Audio Decoding (AD)

Traditional high-fidelity audio decoding studies has relied more on invasive neural recordings such as electrocorticography (ECoG) and stereo-EEG (sEEG) [88], [89], due to

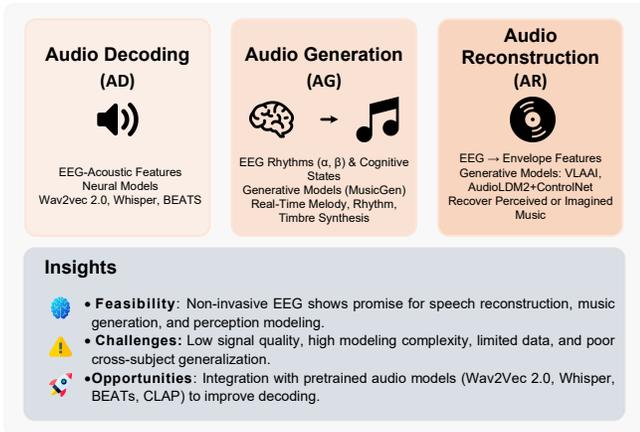


Fig. 6 EEG-to-Audio analysis tasks based on Foundation Models.

their superior spatial resolution and signal-to-noise ratio for obtaining detailed speech dynamics. With the continuous technique progress, especially the development of foundation models, recent findings have demonstrated the feasibility and growing potential of non-invasive EEG for audio decoding [90]. Similar to EEG-Vision task, EEG-to-audio decoding focuses on identifying or reconstructing semantically relevant auditory information from EEG, encompassing speech and music that a user is listening to, imagining, or preparing to articulate. This research direction has been widely explored in automatic speech recognition and reconstruction [91], auditory attention detection [92], and music-related affective modeling [93]. Typically, a Transformer-based autoregressive model of Generative Infinite-Vocabulary Transformer (GIVT) operating on compressed audio representations was proposed in [93] to estimate musical surprisal (IC) directly from raw audio. Moreover, by leveraging a contrastive learning framework that aligns self-supervised speech representations through a shared convolutional architecture, study [21] successfully decodes speech perception from non-invasive MEG and EEG recordings.

Beyond the above speech decoding, EEG-to-music decoding has also emerged as a complementary research direction that extends auditory decoding into creative and affective domains. Recent studies have explored music emotion recognition, leveraging multimodal fusion approaches with pretrained models such as CLAP and RoBERTa to jointly encode EEG, music audio, and lyrics, thereby enabling hierarchical cross-modal semantic alignment for affective modeling [94].

B. EEG-based Audio Generation (AG)

Research of generating sounds or melodies directly from EEG rhythms dates back to the early 21st century, marking the typical explorations of “Neuro-Music” [95]. Unlike traditional decoding tasks that rely on specific auditory stimuli, these studies typically use rhythmic neural activities (e.g., alpha and beta oscillations) or cognitive states (e.g., attention and emotion) as conditioning inputs. These brain-derived features are then mapped to control signals for music generation models, enabling the real-time synthesis of melody, rhythm, and timbre. This paradigm functions more as a brain-music creative

interface, emphasizing interactive and generative applications rather than stimulus-driven decoding. As an example, Wijethunge et al. [96] proposed a personalized music generation system that integrates EEG-based audio analysis with user music preferences. The system first analyzes EEG signals to detect neural activity patterns associated with relaxation in response to auditory stimuli, thereby identifying preferred music segments. It then employs the pretrained MusicGen model [97] to generate personalized musical content aimed at stress reduction, verifying the potential of combining EEG-driven neural decoding with modern generative models for affective music creation.

C. EEG-based Audio Reconstruction (AR)

The audio reconstruction (AR) from EEG typically involves constructing mapping models from EEG signals to intermediate acoustic representations, such as Mel spectrograms or vocoder parameters, followed by speech synthesis. Traditional methods employ neural architectures of CNNs, GANs, long short-term memory (LSTM) networks, and Transformer-based models to reconstruct speech from EEG [98]–[101]. For example, Mizuno et al. [98] proposed a framework that integrates a Transformer encoder with a pretrained WaveGAN module to reconstruct Mel spectrograms from EEG, followed by a Voice Transformer for waveform synthesis. Other studies [99], [100] enhanced this pipeline by inputting EEG-derived spectrograms into HuBERT [102], thereby improving phonetic modeling and intelligibility.

Compared to generative approaches, EEG-based music reconstruction tasks typically rely on real musical stimuli and aim to recover the actual audio content that users are listening to or imagining from their brain signals, with an emphasis on modeling the reproducibility of the auditory perception process. Early work by Bellier et al. [103] employed intracranial EEG (iEEG) recordings from 29 participants who listened to Pink Floyd’s “Another Brick in the Wall, Part 1.” Using a nonlinear multilayer perceptron (MLP) model, they successfully reconstructed recognizable audio fragments, thereby demonstrating the feasibility of reconstructing complex musical stimuli from short-term neural responses. Ankitha et al. [104] proposed the VLAAI model, pretrained on large-scale audio datasets, to reconstruct the envelope features of musical stimuli from non-invasive EEG signals. This approach effectively addressed the limitations of traditional linear modeling in capturing complex temporal and spectral structures, thereby deepening our understanding of the mapping between brain activity and music perception. More recently, a diffusion-based generative paradigm has been applied to EEG-music reconstruction. Specifically, a framework combining AudioLDM2 and ControlNet [100], [105] uses EEG-derived features as conditional guidance to construct an end-to-end latent diffusion model without the need for manual channel selection or extensive preprocessing. Trained on the NMED-T natural music dataset, this method achieved significant improvements over multiple baselines in both perceptual quality and structural consistency of reconstructed audio.

Overall, as concluded in TABLE V, EEG-to-audio research are increasingly adopting transformer-based SSL models (e.g.,

TABLE V
RESEARCH TAXONOMY OF EEG-TO-AUDIO DECODING WITH FOUNDATION MODELS [SSL: SELF-SUPERVISED LEARNING; PR: PROPRIETARY MULTI-STEMDATASET; ME: MEDLEY DB 2.0; MU: MUSDB18; ASR: AUTOMATIC SPEECH RECOGNITION]

Year	Ref	Task	Dataset	FNDN Models	Architecture Characteristics and Main Contributions
2021	[102]	AR	LibriSpeech, Libri-Light	BERT	7-layer CNN as waveform encoder to extract features, Transformer Encoder processes masked sequences, Uses unlabeled data with k-means clusters
2023	[21]	AD	Four public datasets	wav2vec, Transformer-based	A convolutional network processes MEG/EEG signals through spatial attention and participant-specific layers, aligning them with wav2vec 2.0 speech embeddings
2023	[99]	AR	Private	NeuroTalk	Voice reconstruction from imagined speech EEG by common spatial pattern + GAN; Vocoder: Universal v1; ASR: HuBERT
2024	[98]	AR	ATR 503	Large-v3 model	Transformer-based Text-To-Speech (TTS) system + Parallel WaveGAN vocoder + Whisper ASR to reconstruct speech and distinguish speakers
2024	[92]	AD	Fuglsang & Etard & Zhang	ALBERT	Evaluates 12 deep SSL representations (e.g., Wav2Vec 2.0, HuBERT, TERA) against traditional shallow features (envelope, spectrogram) for AAD
2024	[100]	AR	Private	NeuroTalk	Synthesizes denoised speech and Wav2Lip for real faces/avatars generation
2024	[101]	AR	MOCHA-TIMIT	HiFi-GAN, DeepSpeech	A deep generative model with bidirectional GRU (bi-GRU) captures feature Synthesized speech via HiFi-GAN vocoder; text output via DeepSpeech ASR
2024	[96]	AG	Private	MusicGen	Source separation (melody extraction by Wave-U-Net) + Brain activation analysis of frontal alpha asymmetry + Music generation pretrained model
2024	[104]	AR	OpenMIIR	VLAAl	Support vector classifier, Reconstruction: CNN, Dense Neural Network, VLAAl
2025	[93]	AD	PR, ME, MU	Transformer-based	Music2Latent for audio encoding and GIVT for surprisal modeling
2025	[94]	AD	EREMUS	BENDR LaBraM, CLAP, RoBERTa	A two-stage multimodal fusion framework with multi-task learning to disentangle emotion
2025	[105]	AR	NMED-T	LDM	Projection network + ControlNet + Pretrained diffusion model (based on AudioLDM2)

wav2vec, LDM) and generative architectures (GANs, diffusion models) for speech/music reconstruction and attention decoding. The research trends include multimodal fusion (e.g., ControlNet) and emotion-aware synthesis, but reliance on private datasets poses reproducibility challenges. Future work should prioritize open benchmarks, standardized evaluation, and integration of EEG with other modalities (e.g., visual cues) to advance real-world applications like neuroprosthetics and affective computing.

VI. MULTI-MODAL EEG ANALYSIS TASKS

Recently, multimodal EEG modeling has emerged as a hot focus in foundational research and has been widely applied to emotion recognition, semantic generation, and cognitive state modeling [106]–[108]. Specifically, EEG-based multimodal fusion tasks aim to integrate two or more modalities into a unified computational framework for collaborative modeling. Such the integration enables joint inference and multi-tasks learning. Since the relevant research leverages diverse information sources to improve model generalization in complex cognitive contexts, it places stronger emphasis on semantic complementarity, structural alignment, and cross-modal consistency. As summarized in **Fig. 7** and TABLE VI, according to the role of EEG signals, this section reviews four representative categories of related multimodal fusion tasks, highlighting their frameworks, key application, and used datasets.

A. Multimodal Perception

Due to the inherent difference between the foundation model purpose and the EEG task, introducing a new signal other than EEG during pre-training or use for the analysis (dual-modal approach) has become the basic idea of the field research.

Introducing a third or more modalities, such as text, audio, or physiological signals, on top of conventional EEG-language or EEG-vision bimodal framework can further enhance contextual understanding and semantic representation. For instance,

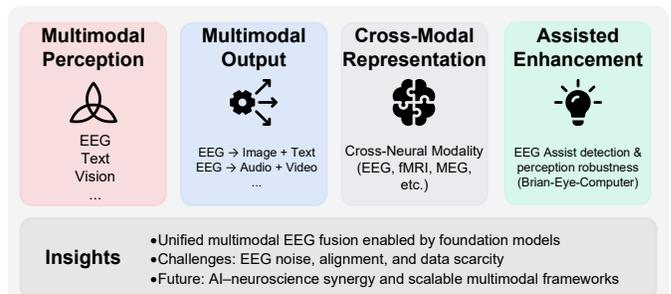


Fig. 7 Multi-modal EEG analysis tasks based on Foundation Models.

CognitionCapturer of [109] has integrated textual descriptions as semantic guidance supplements into the image reconstruction task, significantly improving scene completeness and reconstruction accuracy. Indeed, in the domain of music emotion recognition [94], we can also regard it combines music audio with corresponding modality of lyrics to facilitate hierarchical modeling of emotional dynamics. A reversed strategy has also been attempted. As an illustration, Thought2Text [110] incorporates auxiliary image inputs during training to guide semantic alignment with EEG but relies solely on EEG during inference for text generation. Such the design underscores EEG’s autonomous capacity to express subjective thought while broadening the scope of multimodal fusion.

Moreover, the third modality can also serve as a supervisory signal to enforce semantic consistency across modalities, mitigating issues such as drift or misalignment between EEG and visual or linguistic representations (e.g., semantic bridging combined with cross-attention mechanisms in [71] can simultaneously preserve intra-modal integrity and ensure inter-modal coherence). In terms of robustness, the third modality provides redundancy and complementary information when one modality suffers from noise or signal loss. The Milmer framework [111], as an illustration, integrates visual and physiological signals with a fine-tuned Swin Transformer, yielding substantial gains in emotion recognition accuracy and

TABLE VI
RESEARCH TAXONOMY OF MULTIMODAL EEG ANALYSIS WITH FOUNDATION MODELS

Task	Year	Ref	Input	Output	Architecture Characteristics	Dataset	Application
Multi-modal Perception	2024	[110]	EEG, image, text	Text modality	EEG encoder: ChannelNet Visual encoder CLIP + projection layer LLMs: LLAMA-V3 & GPT-4	CVPR2017	Decoding EEG signals to text
	2025	[109]	EEG, image, text, and depth	Visual modality	Build image-text-depth dataset: BLIP2+DepthAnything EEG: lightweight Transformer + STConv Encoder: OpenCLIP-ViT-H/14 Generation: SDXL-turbo + IP-Adapter	Thing-EEG	Decoding and reconstructing visual information
	2025	[111]	Visual and EEG	-	EEG preprocessing + fine-tuned 6-layer Swin Transformer+ Cross-modal fusion: modality & positional embeddings with a classification (CLS) token	DEAP	Emotion recognition
Multi-modal Output	2024	[112]	EEG	Visual and speech modality	RYM + CEBRA audio generation: MusicGen-melody + video generation: Table Diffusion v1.5	EEG-Affective Memory	Audio and video generation
	2025	[113]	EEG	Visual and speech modality	DDPM: time-conditioned U-Net architecture Conditional Autoencoder: CAE Viseme decoding: KAN	Experimental data collection	Decoding visemes (visual speech units)
Cross-Modal	2024	[115]	EEG, MEG, and fMRI + Visual	-	A versatile framework for multimodal neural data analysis: EEG and MEG use CNNs for spatiotemporal data, fMRI uses MLP for high-dimensional data + CLIP	ImageNetEEG THINGS-MEG and NSD	Image decoding and modality conversion
	2024	[117]	EOG and EEG + Visual	-	Visual encoder+ Query Former (Q-Former) + SALM Projector + SRI-Aware Language Model (SALM), and SAL-HL Module.	SRI-ADV	Emotion recognition
	2024	[119]	EEG, MEG, and fMRI	-	Phase 1: Tokenize neural signals with NeuTokenizer (encoder, quantizer, decoder) Phase 2: Fine-tune QWEN2-1.5B for cross-modal	MEG-MASC	Multimodal unified
	2025	[116]	fMRI and EEG	Visual and speech modality	Dual transformer + CLIP alignment Video reconstruction: CogVideoX audio reconstruction: F5-TTS, LoRA to fine-tune	CineBrain	Reconstruct video and audio stimuli
	2025	[120]	EEG, MEG, and fMRI	-	CATD framework: Transformer + Diffusion Model Conditionally Aligned Blocks (CAB) + Dynamic Time-Frequency Segmentation (DTFS) module	Motor imagery, NODDI dataset	Modality conversion and disease recognition
	2025	[121]	fMRI and EEG	-	Multi-modal Cross-domain Self-supervised Pre-training (MCSP) Model: Spatial domain: Graph Transformer temporal and frequency domains: Transformer	ADHD-200, ABIDE I/II, EMBARC	Disease recognition
Enhance	2024	[122]	Visual and EEG	-	Encoder: EfficientNet for vision, MCGRAM for EEG + Fusion: multi-head self-attention to combine EEG and visual features + OKD + Adaptive modality balancing	ESSVP	Object detection

noise resilience, and demonstrating the practical benefits of tri-modal fusion.

B. Multimodal Output

This category of tasks employs EEG signals as the primary input to simultaneously generate multiple output modalities, such as images and text, with the aim of reconstructing a subject’s internal perceptions, imagined content, or semantic experiences. Compared to general unimodal generation tasks, this task highlights EEG’s potential to encode complex semantic structures and investigates how brain activity can be translated into multimodal representations. By doing so, it provides an indirect pathway to model cognitive states and mental experiences. Noting that although EEG remains the central input, several methods also integrate auxiliary signals, such as task descriptions or prompt labels, to improve controllability and enhance semantic coherence during generation.

Kwon et al. [112] proposed the Recall Your Memory (RYM) framework, which advances EEG-driven multimodal generation by focusing on autobiographical emotional memory reconstruction. As a result, a novel EEG Affective-Memory dataset, comprising EEG recordings paired with textual descriptions, visual representations, and music, was created.

Using RYM, EEG-based emotional dynamics act as control signals to guide the synchronous generation of emotionally congruent audio and video outputs. The framework underscores EEG’s capacity to reconstruct personalized emotional memory trajectories and further validates its representational power for modeling complex internal experiences. Besides, Park et al. [113] combined denoising diffusion probabilistic models (DDPMs) with a conditional autoencoder (CAE) and a Kolmogorov-arnold network (KAN) classifier to decode visemes from noisy EEG signals. The results demonstrated the potential of EEG-based dynamic neural communication and speech neuro-prostheses for individuals with speech impairments.

C. Cross-Modal Representation

This research direction focuses on constructing a unified semantic representation space for neural signals, enabling the alignment and integration of multiple modalities such as EEG, fMRI, and calcium imaging at the semantic level. By embedding diverse neural signals into a shared semantic space, several relevant studies facilitate joint modeling with foundational modalities such as vision and language,

thereby enhancing both expressiveness and generalizability in cognitive decoding. For instance, NeuroBind [114] aligns EEG, fMRI, and calcium imaging data within a pretrained visual encoder space and incorporates large language models and text-to-image diffusion techniques for zero-shot image synthesis and neural semantic interpretation. Ferrante et al. [115] propose a unified representation across EEG, MEG, and fMRI to support encoding, decoding, and modality conversion, demonstrating effective semantic alignment across neuroimaging modalities. CineBrain [116] leveraged joint EEG-fMRI recordings combined with multimodal encoders and LoRA-tuned latent decoders to reconstruct natural video stimuli and used the Cine-Benchmark dataset for systematic evaluation.

Expanding beyond imaging-based integration, Wu et al. [117] developed a multimodal system that combines EEG, eye-tracking, and video inputs, using a hypergraph-based language model to generate text reflecting subjective video comprehension. Inspired by multimodal AI frameworks such as AnyGPT [118], NeuGPT [119] introduces a unified interface capable of mapping various neural signals to language and speech. Similarly, the Condition-Aligned Temporal Diffusion (CATD) framework [120] synthesizes fMRI-detected Blood Oxygen Level Dependent (BOLD) signals from EEG using a Diffusion Transformer for cross-modal neural representation, while MCSP [121] integrates EEG and fMRI across spatial, temporal, and frequency domains to advance multimodal neuroimaging analysis.

D. Assisted Enhancement

In certain studies, EEG signals are not utilized as the primary information source for semantic modeling or generation. Instead, they function as an auxiliary modality within multimodal systems to help collaborative perception and decision-making. Such tasks typically focus on domains centered on images, audio, or other external modalities, while EEG contributes complementary signals that encode implicit information related to individual cognitive states, attentional mechanisms, or neural responses. By incorporating these cues, models can achieve enhanced discriminative capability in complex scenarios, illustrating a strong intersection between cognitive modeling and engineering-driven augmentation.

As shown in the recently proposed Brain-Eye-Computer framework [122], EEG and eye-tracking data are integrated as auxiliary modalities within an image detection model to improve accuracy and robustness in weak target detection for remote sensing imagery. The framework establishes a tri-modal data channel encompassing brain, eye, and image inputs, and employs an online knowledge distillation (OKD) mechanism to guide the image encoder toward human attention regions, thereby achieving a detection strategy aligned with perceptual pathways observed in human vision. Although such approaches do not directly generate semantic outputs from EEG, they effectively highlight the role of EEG in improving perception accuracy and reliability through cross-modal fusion.

In summary, as we concluded in **TABLE VI**, multimodal EEG analysis with foundation models have demonstrated a

clear trend toward integrating diverse inputs (EEG, fMRI, text) using transformer-based architectures and cross-modal fusion. As a matter of fact, through the use of cross-modal alignment techniques, the research area with foundation models is transitioning toward unified frameworks that support perception, generation, and neurocognitive interpretation, while light-weight designs entailed in each architecture are designed to enable real-time applications.

VII. DISCUSSION

With the entry of foundation models in recent years, the EEG analysis has fundamentally transformed from traditional signal processing and pattern recognition pipelines, signifying a paradigm shift in EEG tasks of single-modality signal decoding toward multimodal integration and high-level cognitive inference. This survey systematically review the study of applying foundation models to EEG analysis across multiple tasks, including unimodal EEG decoding, EEG-to-Text, EEG-to-Vision, EEG-to-Audio, and multimodal EEG fusion.

By integrating the contents of **TABLE II**, **TABLE III**, **TABLE IV**, **TABLE V**, and **TABLE VI**, we can summarize that a typical paradigm of foundation model based EEG analysis comprises three core components: the EEG encoder, the cross-modal alignment module, and the generative or discriminative decoder. Specifically for the architectural design, the EEG encoder is responsible for mapping raw signals into robust and separable feature spaces. Early approaches relied on CNNs, which are highly effective in capturing local spatiotemporal patterns but less capable of modeling long-range dependencies and inter-channel interactions. Transformer-based architectures, as well as hybrid CNN-Transformer designs, have gradually become dominant due to their ability to balance global dependency modeling and local detail preservation through multi-head attention [5].

The cross-modal alignment module serves as the semantic bridge between EEG and the target modality, directly influencing downstream performance. Current alignment strategies include static mapping approaches that project features into a shared embedding space with contrastive losses [20], [52], [53], [90], as well as dynamic methods leveraging cross-attention or Q-Former [117] architectures to explicitly model token-level interactions. The latter demonstrates superior adaptability in generation tasks requiring fine-grained semantic control. In the decoding and generation stage, the text-related tasks benefit from LLMs to improve fluency and coherence [58]. Vision tasks often integrate semantic priors from CLIP [74], BLIP [79], [81], or diffusion models [76], [84], while in audio tasks, pre-trained backbones such as MusicGen [96] and AudioLDM2 [105] show notable advantages in emotional consistency and perceptual fidelity.

From a training methodology perspective, foundation model-based EEG analysis typically follows a multi-stage paradigm of “self- or unsupervised pretraining, cross-modal alignment, task-specific fine-tuning.” In the self-supervised stage, methods such as contrastive learning [20], masked reconstruction [52], and multi-view consistency [63] are used to learn cross-subject robust representations from large-scale unlabeled EEG data. The cross-modal alignment stage leverages

limited paired data to align semantic spaces [112], often incorporating curriculum learning [26], [53], cycle consistency [70], or semantic consistency regularization [71] to reduce modality gaps. In the task-specialization stage, re-searchers balance performance and computational cost by choosing between full fine-tuning and parameter-efficient adaptation techniques such as LoRA [116], adapters [44], or prompt tuning [34]. The unification of representation spaces not only enhances task transferability but also lays the groundwork for multi-task learning [46], domain adaptation, and data augmentation [122], and ultimately mitigating challenges related to data scarcity and domain shifts.

VIII. CHALLENGES

Despite the notable progress brought by foundation models in EEG decoding, several critical challenges remain unresolved. The first challenge lies in insufficient cross-subject generalization, which continues to hinder real-world deployment. Due to differences in brain anatomy, cognitive strategies, and recording conditions, EEG signals exhibit substantial variability across individuals [55], [82]. Even with powerful pre-training, the learned representations often overfit to specific subject distributions, leading to significant performance degradation when applied to unseen individuals. The nonstationarity within the subjects further exacerbates this problem, where session-to-session variability can be as pronounced as inter-subject differences, limiting the reliability of zero-shot or few-shot transfer in practical applications. Besides, referring to the current field progress, rigorous cross-paradigm benchmarks and standardized evaluation protocols remain lacking [123]. Another key challenge concerns the authenticity and interpretability of cross-modal alignment mechanisms. As EEG signals fundamentally differ from high-level modalities such as text or vision in both structure and semantics. Existing pipelines often rely on post-hoc contrastive alignment or feature mapping, which may inadequately capture the neuro-semantic correspondence needed for robust decoding or analysis. Furthermore, the growing use of generative modeling raises concerns about semantic authenticity. While EEG-driven text, image, and music generation produce compelling outputs, it is unclear whether these outputs truly reflect EEG-encoded content or are predominantly shaped by the strong priors embedded in pretrained language and vision models [67]. This ambiguity underscores the need for interpretability frameworks and neurophysiological validation to ensure that generative outputs are grounded in genuine neural representations [65].

Moreover, there remains a lack of research on EEG generative and inverse modeling. Most current research focuses on decoding EEG into other modalities, while the reverse process of generating EEG from visual, linguistic, or auditory inputs remains underexplored. Indeed, advancing such inverse modeling could enable closed-loop neurofeedback, facilitate hypothesis-driven neuroscientific studies, and provide new tools that validate neurocognitive theories through synthetic EEG reconstruction [124]. However, relevant research attempts with fundamental models have not yet been widely carried out.

A. Future Direction

Addressing these challenges will require a concerted effort in architectural design, training methodology, evaluation protocols, and application development. Architecturally, future EEG encoders should integrate multi-scale time-frequency analysis, dynamic channel selection, and brain-region priors to more effectively capture discriminative neural patterns while maintaining robustness across different subjects and sessions. For the cross-modal alignment, developing EEG-specific interaction mechanisms, such as biologically constrained attention layers, neuro-symbolic reasoning modules, and hierarchical semantic alignment frameworks, can reduce semantic drift and ensure that generated outputs remain closely tied to the underlying neural activity. Plus, incorporating neurophysiological priors into alignment objectives may also enhance interpretability. One should instigate more effective generative or discriminative decoder. Finally, lightweight yet adaptive module designs, without compromising accuracy, could further enable real-time deployment in wearable BCI systems [125].

In terms of the training methodology, combining large-scale self-supervised pretraining on heterogeneous EEG corpora with domain-specific regularization techniques, such as cross-modal consistency, temporal coherence, and subject-aware parameter modulation, can improve robustness and transferability. Federated and continual learning strategies may additionally facilitate adaptation to new subjects and recording environments without catastrophic forgetting.

As for the evaluation, unified cross-task and cross-modal benchmarks [123] incorporating both authenticity metrics (e.g., correlation with ground-truth neural patterns) and interpretability measures (e.g., attention alignment with known neuroanatomical structures), are essential for reproducibility and fair comparison. Furthermore, longitudinal evaluation protocols could further assess stability over extended periods, which is critical for deployment in real-world scenarios.

Finally, in the application development, we envision the emergence of EEG Digital Twins [126], with the personalized neural models trained on individual EEG recordings to replicate subject-specific cognitive and physiological dynamics. Meanwhile, the development of generative EEG models could bridge forward and reverse modeling, enabling not only “EEG-to-X” analysis but “X-to-EEG” synthesis for neuro-scientific simulation. On these basis, the integration of EEG-based systems with foundation model architectures holds strong potential for precise cognitive modeling, adaptive BCIs, and personalized neurorehabilitation.

IX. CONCLUSION

The fusion of EEG decoding with foundation models has initiated a paradigm shift from signal-centric methods toward semantically rich, multimodal, and generative frameworks. This paper presents a modality-oriented review of foundation models applied to EEG analysis. By consolidating advances across unimodal EEG decoding, EEG-to-text, EEG-to-vision, EEG-to-audio, and multimodal integration, this survey underscores both the feasibility, transformative potential, challenges, and future directions of this emerging research direction.

REFERENCES

- [1] H. Li, H. Zhang and Y. Chen, "Dual-TSST: A dual-branch temporal-spectral-spatial Transformer model for EEG decoding," *J. Biomed. Health Inform.*, doi: 10.1109/JBHI.2025.3577611.
- [2] H. Li, X. Li and J. d. R. Millán, "Noninvasive EEG-based intelligent mobile robots: a systematic review," *IEEE Trans. Autom. Sci. Eng.*, vol. 22, pp. 6291-6315, 2025.
- [3] M. Saeidi *et al.*, "Neural decoding of EEG signals with machine learning: a systematic review," *Brain Sci.*, vol. 11, no. 11, pp. 1524-1569, 2021.
- [4] Yannick *et al.*, "Deep learning-based electroencephalography analysis: A systematic review," *J. Neural Eng.*, vol. 16, 2019, Art. no. 051001.
- [5] H. Zhang, and H. Li, "Transformer-based EEG decoding: A survey," 2025, *arXiv:2507.02320*.
- [6] R. Bommasani, *et al.*, "On the opportunities and risks of foundation models," 2021, *arXiv:2108.07258*.
- [7] A. Radford, and K. Narasimhan, "Improving language understanding by generative pre-training," 2018.
- [8] H. Touvron *et al.*, "LLaMA: Open and efficient foundation language models," 2023, *arXiv:2302.13971*.
- [9] A. Dosovitskiy *et al.*, "An image is worth 16x16 words: Transformers for image recognition at scale," in *Proc. Int. Conf. Learn. Represent.*, 2021, pp. 1-21.
- [10] Z. Liu *et al.*, "Swin Transformer: Hierarchical vision transformer using shifted windows," in *Proc. IEEE/CVF Int. Conf. Comput. Vis.*, 2021, pp. 10012-10022.
- [11] S. Schneider, A. Baevski, R. Collobert, and M. Auli, "Wav2Vec: Un-supervised pre training for speech recognition," in *Proc. Interspeech*, 2019, pp. 3465-3469.
- [12] A. Radford *et al.*, "Whisper: Robust speech recognition via large scale weak supervision," *arXiv:2212.04356*, 2022.
- [13] A. Radford *et al.*, "Learning transferable visual models from natural language supervision," in *Proc. Int. Conf. Mach. Learn.*, 2021, pp. 8748-8763.
- [14] J.B. Alayrac *et al.*, "Flamingo: a visual language model for few-shot learning," *Adv. Neural Inf. Process. Syst.*, vol. 35, 2022, pp. 23716-23736.
- [15] N. Goyal *et al.*, "Gemini: Efficient multimodal pretraining for vision and language," 2024, *arXiv:2401.01234*.
- [16] D. Driess *et al.*, "PaLM-E: An embodied multimodal language model," 2023, *arXiv:2303.13971*.
- [17] S. Shukla *et al.*, "A survey on bridging EEG signals and generative AI: From image and text to beyond," 2025, *arXiv:2502.12048*.
- [18] Y. Wang, *et al.*, "Decoding linguistic representations of human brain," 2024, *arXiv:2407.20622*.
- [19] S. A. Murad and N. Rahimi, "Unveiling thoughts: A review of advancements in EEG brain signal decoding into text," *IEEE Trans. Cogn. Dev. Syst.*, vol. 17, no. 1, pp. 61-76, Feb. 2025.
- [20] Y. Song *et al.*, "Decoding natural images from EEG for object recognition," in *Proc. Int. Conf. Learn. Represent. (ICLR)*, May 2024, pp. 1-6.
- [21] A. Défossez *et al.*, "Decoding speech perception from non-invasive brain recordings," *Nat. Mach. Intell.*, vol. 5, no. 10, pp. 1097-1107, Oct. 2023.
- [22] M. H. Rafiei, *et al.*, "Self-supervised Learning for Electroencephalography," *IEEE Trans. Neural Netw. Learn. Syst.*, Vol. 35, no. 2, 2024, pp. 1457-1471.
- [23] Y. Duan *et al.*, "E2H: A two-stage non-invasive neural signal driven humanoid robotic whole-body control framework," 2024, *arXiv:2410.02141*.
- [24] J. Hong *et al.*, "ChatBCI: A P300 speller BCI leveraging large language models for improved sentence composition in realistic scenarios," 2024, *arXiv: 2411.15395*.
- [25] X. Zhou *et al.*, "Sequential best-arm identification with application to P300 Speller," *Transact. Mach. Learn. Res.*, Aug. 2024.
- [26] X. Jiang *et al.*, "Neural spelling: A spell-based BCI system for language neural decoding," 2025, *arXiv:2501.17489*.
- [27] M. Kapitnova and T. Ball, "Human-AI teaming using large language models: Boosting brain-computer interfacing (BCI) and brain research," 2025, *arXiv: 2501.01451*.
- [28] D. Lim, M. Cho and H. Kim, "Classification of non-invasive EEG signals during motor imagery tasks using a large language model," in *Proc. Int. Conf. Cyberworlds (CW)*, Oct. 2024, pp. 378-379.
- [29] D. Kostas, S. Aroca-Ouellette and F. Rudzicz, "BENDR: Using transformers and a contrastive self-supervised learning task to learn from massive amounts of EEG data," *Front. Hum. Neurosci.*, vol. 15, pp. 253, Jun. 2021.
- [30] Y. Zhang *et al.*, "From word embedding to reading embedding using large language model, EEG and eye-tracking," in *Proc. IEEE Eng. Med. Biol. Soc. (EMBC)*, Jul. 2024, pp. 1-4.
- [31] Y. Zhang *et al.*, "Integrating large language model, EEG, and eye-tracking for word-level neural state classification in reading comprehension," *IEEE Trans. Neural Syst. Rehabil. Eng.*, vol. 32, pp. 3465-3475, Aug. 2024.
- [32] J. Wang *et al.*, "CBraMod: A criss-cross brain foundation model for EEG decoding," in *Proc. Int. Conf. Learn. Represent. (ICLR)*, Apr. 2025, pp. 62056-62092.
- [33] D. Baradari *et al.*, "NeuroChat: A neuroadaptive AI chatbot for customizing learning experiences," 2025, *arXiv:2503.07599*.
- [34] H. Chen *et al.*, "EEG emotion copilot: Pruning LLMs for emotional EEG interpretation with assisted medical record generation," *Neural Netw.*, 107848, pp. 1-17, Jul. 2025.
- [35] Y. Hu *et al.*, "Exploring large-scale language models to evaluate EEG-based multimodal data for mental health," in *Proc. ACM Int. Jt. Conf. Pervasive Ubiquitous Comput. (UbiComp)*, Oct. 2024, pp. 412-417.
- [36] Y. Zhang *et al.*, "LLM-enhanced multi-teacher knowledge distillation for modality-incomplete emotion recognition in daily healthcare," *IEEE J. Biomed. Health Inform.*, pp. 1-11, Sep. 2024.
- [37] S. Yao *et al.*, "Advancing semi-supervised EEG emotion recognition through feature extraction with mixup and large language models," in *Proc. IEEE Int. Conf. Bioinform. Biomed. (BIBM)*, Dec. 2024, pp. 2772-2779.
- [38] S.-Y. Ji, M.-K. Kim and H.-J. Jun, "Emotion analysis AI model for sensing architecture using EEG," *Appl. Sci.*, vol. 15, no.5, pp. 1-21, Mar. 2025.
- [39] J. Hong *et al.*, "EEGM2: An efficient mamba-2-based self-supervised framework for long-sequence EEG modeling," 2025, *arXiv:2502.17813*.
- [40] A. Nogales *et al.*, "BERT learns from electroencephalograms about Parkinson's disease: Transformer-based models for aid diagnosis," *IEEE Access*, vol. 10, pp. 101672-101682, Aug. 2022.
- [41] E. H. Wang and C. X. Wen, "When neural implant meets multimodal LLM: A dual-loop system for neuromodulation and naturalistic neuralbehavioral research," 2025, *arXiv:2503.12334*.
- [42] Z. Yuan *et al.*, "BrainWave: A brain signal foundation model for clinical applications," 2024, *arXiv:2402.10251*.
- [43] C. Kalantarpour *et al.*, "Clinical grade prediction of therapeutic dosage for electroconvulsive therapy (ECT) based on patient's pre-ictal EEG using fuzzy causal transformers," in *Proc. 3rd Int. Conf. Elect. Comput. Commun. Mechatronics Eng. (ICECCME)*, Jul. 2023, pp. 1-6.
- [44] B. Wang *et al.*, "Large transformers are better EEG learners," 2023, *arXiv:2308.11654*.
- [45] J. W. Kim, A. Alaa and D. Bernardo, "EEG-GPT: Exploring capabilities of large language models for EEG classification and interpretation," 2024, *arXiv:2401.18006*.
- [46] W. B. Jiang *et al.*, "NeuroLM: A universal multi-task foundation model for bridging the gap between language and EEG signals," in *Proc. Int. Conf. Learn. Represent. (ICLR)*, Apr. 2025, pp. 46232-46253.
- [47] H. Yao *et al.*, "A spatial-temporal transformer architecture using multi-channel signals for sleep stage classification," *IEEE Trans. Neural Syst. Rehabil. Eng.*, vol. 31, pp. 3353-3362, Aug. 2023.
- [48] A. Sano *et al.*, "Exploration of LLMs, EEG and behavioral data to measure and support attention and sleep," 2024, *arXiv:2408.07822*.
- [49] Ö. Turgut *et al.*, "Are foundation models useful feature extractors for electroencephalography analysis?," 2025, *arXiv:2502.21086*.
- [50] Y. Wang *et al.*, "LEAD: Large foundation model for EEG-based Alzheimer's disease detection," 2025, *arXiv:2502.01678*.
- [51] J. Qiu *et al.*, "Can brain signals reveal inner alignment with human languages?," in *Proc. Find. Assoc. Comput. Linguist (EMNLP)*, Dec. 2023, pp. 1789-2804.
- [52] J. Wang *et al.*, "Enhancing EEG-to-text decoding through transferable representations from pre-trained contrastive EEG-text masked auto-encoder," in *Proc. Annu. Meet. Assoc. Comput. Linguist. (ACL)*, Aug. 2024, pp. 7278-7292.
- [53] X. Feng *et al.*, "Aligning semantic in brain and language: A curriculum contrastive method for electroencephalography-to-text generation," *IEEE Trans. Neural Syst. Rehabil. Eng.*, vol.31, pp. 3874-3883, Sep. 2023.
- [54] J. Zhou *et al.*, "Towards linguistic neural representation learning and sentence retrieval from electroencephalogram recordings," in *Proc. Int. Workshop Brain-Comput. Interfaces (BCI) Multimed. Underst. (BCIMM)*, Oct. 2024, pp. 19-28.
- [55] Y. Liu, H. Ye and S. Li, "LLMs help alleviate the cross-subject variability in brain signal and language alignment," 2025, *arXiv:2501.02621*.

- [56] J. Zhou *et al.*, “BELT: Bootstrapped EEG-to-language training by natural language supervision,” *IEEE Trans. Neural Syst. Rehabil. Eng.*, vol. 32, pp. 3278-3288, Aug. 2024.
- [57] M. Lewi *et al.*, “BART: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension,” in *Proc. Annu. Meet. Assoc. Comput. Linguist. (ACL)*, Jul. 2020, pp. 7871-7880.
- [58] Z. Wang, and H. Ji, “Open vocabulary electroencephalography-to-text decoding and zero-shot sentiment classification,” in *Proc. AAAI Conf. Artif. Intell. (AAAI)*, Jun. 2022, pp. 5350-5358.
- [59] J. Lévy *et al.*, “From thought to action: How a hierarchy of neural dynamics supports language production,” 2025, *arXiv:2502.07429*.
- [60] J. Lévy, *et al.*, “Brain-to-text decoding: A non-invasive approach via typing,” 2025, *arXiv:2502.17480*.
- [61] H. Amrani, D. Micucci and P. Napolitano, “Deep representation learning for open vocabulary electroencephalography-to-text decoding,” *IEEE J. Biomed. Health Inform.*, pp. 1-12, Jun. 2024.
- [62] Y. Tao *et al.*, “SEE: Semantically aligned EEG-to-text translation,” in *Proc. IEEE Int. Conf. Acoust. Speech Signal Process. (ICASSP)*, Apr. 2025, pp. 1-5.
- [63] H. Liu *et al.*, “EEG2TEXT: Open vocabulary EEG-to-text decoding with EEG pre-Training and multi-view transformer,” 2024, *arXiv:2405.02165*.
- [64] Y. Duan *et al.*, “Dewave: Discrete EEG waves encoding for brain dynamics to text translation,” in *Proc. Int. Conf. Neural Inf. Process. Syst. (NeurIPS)*, Dec. 2023, pp. 1-22.
- [65] J. Zhou, *et al.*, “BELT-2: Bootstrapping EEG-to-language representation alignment for multi-task brain decoding,” 2024, *arXiv:2409.00121*.
- [66] T. C. Ndir and R. T. Schirrmester, “EEG-CLIP: Learning EEG representations from natural language descriptions,” 2025, *arXiv:2503.16531*.
- [67] H. Jo *et al.*, “Are EEG-to-text models working?,” 2024, *arXiv:2405.06459*.
- [68] P. Singh *et al.*, “Learning robust deep visual representations from EEG brain recordings,” in *Proc. IEEE Winter Conf. Appl. Comput. Vis. (WACV)*, Jan. 2024, pp. 7553-7562.
- [69] N. Rajabi *et al.*, “Human-aligned image models improve visual decoding from the brain,” 2025, *arXiv: 2502.03081*.
- [70] Y. Wei *et al.*, “MB2C: Multimodal bidirectional cycle consistency for learning robust visual neural representations,” in *Proc. ACM Int. Conf. Multimed. (MM)*, Oct. 2024, pp. 8992-9000.
- [71] Y. Li *et al.*, “Neural-MCRL: Neural multimodal contrastive representation learning for EEG-based visual decoding,” 2024, *arXiv:2412.17337*.
- [72] H. Chen *et al.*, “Visual neural decoding via improved visual-EEG semantic consistency,” 2024, *arXiv:2408.06788*.
- [73] D. Li *et al.*, “RealMind: Advancing visual decoding and language interaction via EEG signals,” 2024, *arXiv:2410.23754*.
- [74] D. Li *et al.*, “Visual decoding and reconstruction via EEG embeddings with guided diffusion,” in *Proc. 38th Int. Conf. Neural Inf. Process. Syst. (NeurIPS)*, Dec. 2024, pp. 1-35.
- [75] Y. Bai *et al.*, “DreamDiffusion: Generating high-quality images from brain EEG signals,” 2023, *arXiv:2306.16934*.
- [76] E. Lopez *et al.*, “Guess what I think: Streamlined EEG-to-image generation with latent diffusion models,” in *Proc. IEEE Int. Conf. Acoust. Speech Signal Process. (ICASSP)*, Apr. 2025, pp. 13-18.
- [77] X. Xiao *et al.*, “EEG decoding and visual reconstruction via 3D geometric with nonstationarity modelling,” in *Proc. IEEE Int. Conf. Acoust. Speech Signal Process. (ICASSP)*, Apr. 2025, pp. 1-5.
- [78] Y.-T. Lan *et al.*, “Seeing through the brain: Image reconstruction of visual perception from human brain signals,” 2023, *arXiv:2308.02510*.
- [79] M. Choi and H. Ishikawa, “BrainDecoder: Style-based visual decoding of EEG signals,” 2024, *arXiv: 2409.05729*.
- [80] L. Wang, C. Wu and L. Wang, “BrainDreamer: Reasoning-coherent and controllable image generation from EEG brain signals via language guidance,” 2024, *arXiv: 2409.14021*.
- [81] H. Fu *et al.*, “BrainVis: Exploring the bridge between brain and visual signals via image reconstruction,” in *Proc. IEEE Int. Conf. Acoust. Speech Signal Process. (ICASSP)*, Apr. 2025, pp. 4-5.
- [82] H. Banville *et al.*, “Scaling laws for decoding images from brain activity,” 2025, *arXiv: 2501.15322*.
- [83] T. Fei *et al.*, “Perceptogram: Reconstructing visual percepts from EEG,” 2024, *arXiv: 2404.01250*.
- [84] X. Liu *et al.*, “EEG2Video: Towards decoding dynamic visual perception from EEG signals,” in *Proc. Int. Conf. Neural Inf. Process. Syst. (NeurIPS)*, Dec. 2024, pp. 72245-72273.
- [85] X. Xiang, W. Zhou and G. Dai, “EEG-driven 3D object reconstruction with style consistency and diffusion prior,” 2024, *arXiv:2410.20981*.
- [86] Z. Guo *et al.*, “Neuro-3D: Towards 3D visual decoding from EEG signals,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2025, pp. 23820-23880.
- [87] B. Mildenhall, *et al.*, NeRF: Representing scenes as neural radiance fields for view synthesis,” *Commun. ACM*, vol. 65, no. 1, pp. 99–106, Jan. 2021.
- [88] G. Mischler *et al.*, “Contextual feature extraction hierarchies converge in large language models and the brain,” *Nat. Mach. Intell.*, vol. 6, no. 12, pp.1467-1477, Dec. 2024.
- [89] S. L. Metzger *et al.*, “A high-performance neuroprosthesis for speech decoding and avatar control,” *Nature*, vol. 620, no. 7976, pp. 1037-1046, Aug. 2023.
- [90] B. Accou *et al.*, “Decoding of the speech envelope from EEG using the VLAAI deep neural network,” *Sci. Rep.*, vol. 13, no. 1, pp. 1-12, Jan. 2023.
- [91] J. Tang *et al.*, “Imagined speech reconstruction from neural signals—an overview of sources and methods,” *IEEE Trans. Instrum. Meas.*, vol. 73, pp. 1-21, Oct. 2024.
- [92] K. Thakkar, J. Hia and M. Elhilali, “Investigating self-supervised deep representations for EEG-based auditory attention decoding,” in *Proc. IEEE Int. Conf. Acoust. Speech Signal Process. (ICASSP)*, Apr. 2024, pp. 1241-1245.
- [93] M. R. Bjare *et al.*, “Estimating musical surprisal in audio,” in *Proc. IEEE Int. Conf. Acoust. Speech Signal Process. (ICASSP)*, Apr. 2025, pp. 1-5.
- [94] S. Huang *et al.*, “Multimodal fusion for EEG emotion recognition in music with a multi-task learning framework,” in *Proc. IEEE Int. Conf. Acoust. Speech Signal Process. (ICASSP)*, Apr. 2025, pp. 1-2.
- [95] Y. Ji *et al.*, “A review on EEG neural music system and application,” in *Proc. IEEE Int. Conf. Unmanned Syst. (ICUS)*, Oct. 2024, pp. 453-459.
- [96] V. Wijethuge *et al.*, “Generative AI and EEG-based music personalization for work stress reduction,” in *Proc. Annu. Conf. IEEE Ind. Electron. Soc. (IECON)*, Nov. 2024, pp.1-6.
- [97] J. Copet *et al.*, “Simple and controllable music generation,” in *Proc. Int. Conf. Neural Inf. Process. Syst. (NIPS)*, Dec. 2023, pp. 47704-47720.
- [98] T. Mizuno *et al.*, “An investigation on the speech recovery from EEG signals using transformer,” in *Proc. Asia Pac. Signal Inf. Process. Assoc. Annu. Summit Conf. (APSIPA ASC)*, Dec. 2024, pp. 1-6.
- [99] Y.-E. Lee *et al.*, “Towards voice reconstruction from EEG imagined speech,” in *Proc. AAAI Conf. Artif. Intell. (AAAI)*, Jun. 2023, pp. 6030-6038.
- [100] J.-H. Park, S.-H. Lee and S.-W. Lee. “Towards EEG-based talking-face generation for brain signal-driven dynamic communication,” in *Proc. Annu. Int. Conf. IEEE Eng. Med. Biol. Soc. (EMBC)*, Jul. 2024, pp. 1-5.
- [101] D.-S. Kim *et al.*, “Towards speech synthesis of unconstrained sentences from speech-related biosignals,” in *Proc. Annu. Int. Conf. IEEE Eng. Med. Biol. Soc. (EMBC)*, Jul. 2024, pp. 52-57.
- [102] W.-N. Hsu *et al.*, “Hubert: Self-supervised speech representation learning by masked prediction of hidden units,” *IEEE/ACM Trans. Audio, Speech, Lang. Process.*, vol. 29, pp. 3451-3460, Oct. 2021.
- [103] L. Bellier *et al.*, “Music can be reconstructed from human auditory cortex activity using nonlinear decoding models,” *PLOS Biol.*, vol. 21, no. 8, pp. 1-27, Aug. 2023.
- [104] C. Ankitha *et al.*, “Musical brainwaves: Decoding electroencephalography signals elicited by musical stimuli,” in *Proc. Int. Conf. Comput., Sci. Commun. (ICCCSC)*, Oct. 2024, pp. 1-7.
- [105] E. Postolache *et al.*, “Naturalistic music decoding from EEG data via latent diffusion models,” in *Proc. IEEE Int. Conf. Acoust. Speech Signal Process. (ICASSP)*, Apr. 2025, pp. 1-5.
- [106] W. Mai *et al.*, “Brain-conditional multimodal synthesis: A survey and taxonomy,” *IEEE Trans. Artif. Intell.*, vol. 6, no. 5, pp. 1080-1099, May. 2025.
- [107] W. Lei *et al.*, “VIT-LENS: Towards omni-modal representations,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2024, pp. 26637-26647.
- [108] R. Girdhar *et al.*, “Imagebind: One embedding space to bind them all,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2023, pp. 15180-15190.
- [109] K. Zhang *et al.*, “CognitionCapturer: Decoding visual stimuli from human EEG signal with multimodal information,” in *Proc. AAAI Conf. Artif. Intell. (AAAI)*, Apr. 2025, pp. 14486-14493.
- [110] Mishra *et al.*, “Thought2Text: Text generation from EEG signal using large language models (LLMs),” 2024, *arXiv:2410. 07507*.
- [111] Z. Wang *et al.*, “Milmer: A framework for multiple instance learning based multimodal emotion recognition,” 2025, *arXiv:2502.00547*.

- [112] J. Kwon *et al.*, “Revisiting your memory: Reconstruction of affect-contextualized memory via EEG guided audiovisual generation,” 2024, *arXiv:2412.05296*.
- [113] J.-H. Park *et al.*, “Towards dynamic neural communication and speech neuroprosthesis based on viseme decoding,” in *Proc. IEEE Int. Conf. Acoust. Speech Signal Process. (ICASSP)*, Apr. 2025, pp. 1-5.
- [114] F. Yang *et al.*, “Neurobind: Towards unified multimodal representations for neural signals,” 2024, *arXiv:2407.14020*.
- [115] M. Ferrante *et al.*, “Towards neural foundation models for vision: Aligning EEG, MEG, and fMRI representations for decoding, encoding, and modality conversion,” 2024, *arXiv: 2411.09723*.
- [116] J. Gao *et al.*, “CineBrain: A large-scale multi-modal brain dataset during naturalistic audiovisual narrative processing,” 2025, *arXiv:2503:06940*.
- [117] J. Gao *et al.*, “CineBrain: A large-scale multi-modal brain dataset during naturalistic audiovisual narrative processing,” 2025, *arXiv:2503:06940*.
- [118] J. Zhan *et al.*, “AnyGPT: Unified multimodal LLM with discrete sequence modeling,” in *Proc. Annu. Meet. Assoc. Comput. Linguist. (ACL)*, Aug. 2024, pp. 9637-9662.
- [119] Y. Yang *et al.*, “NeuGPT: Unified multi-modal neural GPT,” 2024, *arXiv:2410.20916*.
- [120] W. Yao *et al.*, “CATD: Unified representation learning for EEG-to-fMRI cross-modal generation,” *IEEE Trans. Med. Imag.*, vol. 44, no. 7, pp. 2757-2767, Mar. 2025.
- [121] X. Wei *et al.*, “Multi-modal cross-domain self-supervised pre-training for fMRI and EEG fusion,” *Neural Networks*, vol. 184, pp. 1-15, Apr. 2025.
- [122] Z. Li *et al.*, “Adaptive modality balanced online knowledge distillation for brain-eye-computer based dim object detection,” 2024, *arXiv: 2407.01894*.
- [123] J. Wu, *et al.*, “AdaBrain-bench: Benchmarking brain foundation models for brain-computer interface applications,” 2025, *arXiv: 2507.09882*.
- [124] H. Li, Y. Wang, and P. Fu, “A novel multi-dynamic coupled neural mass model of SSVEP,” *Biomimetics*, vol. 10, no. 3, pp. 171, 2025.
- [125] Y. Ding, C. Udompanyawit, Y. Zhang, and B. He, “EEG-based brain-computer interface enables real-time robotic hand control at individual finger level,” *Nat. Commun.*, 16, 5401, 2025.
- [126] D. Pathak, R. Herrema, N. Heffer, and H. Yang, “Building a digital twin framework for EEG neurofeedback in cricket batting motor imagery using simulated data,” in *Proc. 2024 IEEE Smart World Congr. (SWC)*, 2024, pp. 2010-2017.