

A Multimodal Conversational Assistant for the Characterization of Agricultural Plots from Geospatial Open Data

Juan Cañada* 

Dept. AI & Data Analytics
CTIC Technology Center
Gijón, Spain

juan.canada@fundacionctic.org

Raúl Alonso

Dept. IT
CTIC Technology Center
Gijón, Spain

raul.alonso@fundacionctic.org

Julio Molleda 

Dept. Comp. Sci. and Eng.
University of Oviedo
Gijón, Spain

jmolleda@uniovi.es

Fidel Díez 

Dept. R&D
CTIC Technology Center
Gijón, Spain

fidel.diez@fundacionctic.org

Abstract—The increasing availability of open Earth Observation (EO) and agricultural datasets holds great potential for supporting sustainable land management. However, their high technical entry barrier limits accessibility for non-expert users. This study presents an open-source conversational assistant that integrates multimodal retrieval and large language models (LLMs) to enable natural language interaction with heterogeneous agricultural and geospatial data. The proposed architecture combines orthophotos, Sentinel-2 vegetation indices, and user-provided documents through retrieval-augmented generation (RAG), allowing the system to flexibly determine whether to rely on multimodal evidence, textual knowledge, or both in formulating an answer. To assess response quality, we adopt an LLM-as-a-judge methodology using Qwen3-32B in a zero-shot, unsupervised setting, applying direct scoring in a multi-dimensional quantitative evaluation framework. Preliminary results show that the system is capable of generating clear, relevant, and context-aware responses to agricultural queries, while remaining reproducible and scalable across geographic regions. The primary contributions of this work include an architecture for fusing multimodal EO and textual knowledge sources, a demonstration of lowering the barrier to access specialized agricultural information through natural language interaction, and an open and reproducible design.

Index Terms—Earth Observation, Large Language Models, Agriculture, Remote Sensing

I. INTRODUCTION AND RELATED WORKS

Earth Observation (EO) programs have generated a vast volume of open-source geospatial data in recent years. Initiatives such as the Copernicus program with Sentinel satellites or national mapping agencies make available extensive repositories of optical, multispectral, and thematic data. At the same time, an increasing number of open-access documents, reports, and scientific publications related to agriculture and land management are freely accessible. However, despite their availability, these resources remain underutilized due to the high entry barrier: accessing, processing, and interpreting EO data requires specialized knowledge, technical skills, and dedicated software pipelines. Consequently, non-expert users—such as farmers,

This work was partially supported by Project PID2021-124383OB-I00 of the Spanish National Plan for Research, Development and Innovation.

 AgroBot

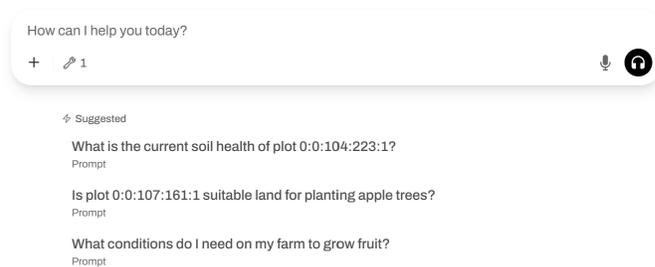


Fig. 1. Conversational assistant user interface (developed over OpenWebUI [8]). It includes input text box, voice input button, and suggested prompts.

local stakeholders, or small companies—often lack the ability to extract actionable insights from this information.

With the rapid development of artificial intelligence, and in particular the emergence of multimodal large language models (MLLMs), agricultural practices have encountered a major opportunity for transformation. Several approaches have attempted to use these technologies to bridge the data accessibility gap by developing conversational or multimodal assistants in specific agricultural contexts. The authors of [1] and [2] illustrate how large language models (LLMs) can answer farmers' questions from scientific or agronomic documents, while [3] explores ChatGPT-based interactions for agricultural queries. In the visual domain, [4] extends multimodal LLMs to crop pest and disease identification. Beyond agriculture, the potential of dialog systems grounded in EO data has been shown in works such as [5], [6], and [7], which explore multisensory EO-to-dialog pipelines. Although these systems demonstrate the promise of conversational interfaces in their respective domains, they are often limited to a single modality or a narrow scope, and do not fully exploit the breadth of heterogeneous open EO data available.

In this work, we present a conversational assistant (Fig. 1) that integrates heterogeneous open data sources for agriculture and territorial analysis. The system combines (i) descrip-

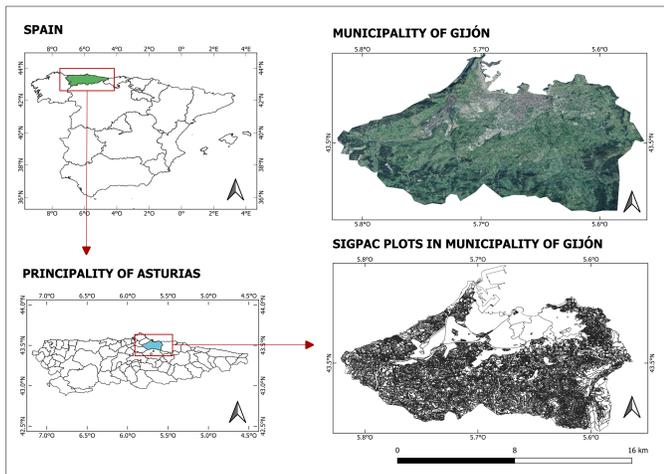


Fig. 2. The study region is the municipality of Gijón, in Asturias, Spain, with an area of approximately 182 km². SIGPAC registry is the official system for agriculture and farmer parcel identification.

tive information of the terrain given by multimodal LLM processing of 25 cm-resolution ortophotos, (ii) multispectral Sentinel-2 imagery to derive vegetation indices such as NDVI or EVI, and (iii) retrieval-augmented generation (RAG) over domain-specific documents, including both public repositories and user-provided PDFs. By aggregating these diverse data streams, the assistant allows users to query a parcel of land in natural language and receive a contextualized, multi-source answer. Our contribution lies in the architecture and integration strategy of this system: we demonstrate how multimodal LLMs, open EO pipelines, and retrieval methods can be orchestrated into a single interface that lowers the barrier to access and creates value from open geospatial data. The approach is validated through preliminary use cases, showing its potential to support decision-making in agriculture and land management. The study area for this pilot is the municipality of Gijón, in northern Spain (Fig. 2), which has a mixed urban and agricultural landscape. The delimitation of the agricultural plots is given by the SIGPAC (Geographic Information System for Agricultural Plots) registry, created by the Spanish Ministry of Agriculture, Fisheries and Food.

II. SYSTEM ARCHITECTURE

The proposed system is designed to combine several interconnected modules, which integrate heterogeneous data sources. The overall architecture, included in Fig. 3, is composed of two main layers: user interface and backend processing, which includes the LLM reasoning. The aim of the data flow is to provide the final LLM with the most rich context regarding the area of interest (a specific parcel) in order for it to give the best possible answer to the user’s query.

A. User interface

The interaction with the system takes place through a conversational interface, where the user submits a query in natural language along with a plot identifier (Plot ID). This

ID is obtained by concatenating the Province, Municipality, District, Zone, Polygon, and Parcel field codes in SIGPAC. For example: “Is plot 0:0:107:161:1 adequate land for planting apple trees?”. The interface includes voice-to-text mode, contributing to its accessibility.

B. Backend

The backend consists of five different blocks, which conform a data stream from the user query to the final LLM, and then back to the user with the answer: (i) plot info retrieval, which is responsible for fetching, from the SIGPAC registry, both plot data -as slope, elevation, area, perimeter or land use-, and the geo-referenced geometry. Once known the area of interest, the (ii) context retrieval block performs two parallel tasks, each leveraging different open-source data sources to enrich the context: (a) an ortophoto of the plot, obtained from aerial imagery, is processed through a multimodal LLM along with the plot data, generating a detailed description of the terrain. In addition, (b) satellite multispectral data, specifically from Sentinel-2 (Copernicus mission, European Space Agency) are retrieved. After spacial and temporal processing combining multiple spectral bands, an array of vegetation and water indices that reflect biophysical conditions of the land are obtained. In parallel, (iii) the system queries a document repository through a retrieval-augmented generation mechanism, which provides relevant textual knowledge such as agronomic guidelines, regulations, or best practices. All these multi-domain data are then fused through (iv) an aggregator, which converts all data to natural language, and prepares the information into an encapsulated prompt that provides the (v) final LLM with the overall context of the plot and the query. Several open-source models were evaluated, including Qwen3-32B, Llama-3.3-70B or Mistral-Small-3.2-24B, being Qwen the one chosen for the final implementation due to its superior performance. Regarding the LLMs framework, the model inference is managed with the inference engine vLLM [9], orchestrated through the liteLLM proxy [10], which agglutinates all models in one port. Besides from the multimodal and final LLMs, there are also embeddings, reranker, and tool-triage models working together. The infrastructure runs in a 8x80GB cluster of NVIDIA GPUs.

III. ASSESSMENT

Evaluating the quality of the response in domain-specific scenarios, as geospatial and agriculture, is challenging, as no significant benchmarks are available. In this work, we adopt an LLM-as-a-judge methodology [11], which has become a standard practice for preliminary assessment of LLM responses. After testing different variants of the Qwen model family, such as Qwen3-8B-AWQ, which applies activation-aware weight quantization, or Qwen3-4B, we decided to employ the Qwen3-32B model, which delivers better-quality answers compared to its smaller versions. The evaluation was performed in an unsupervised, zero-shot setup, where the judge model was provided with a prompt explaining the assessment criteria but no example answers. Following an

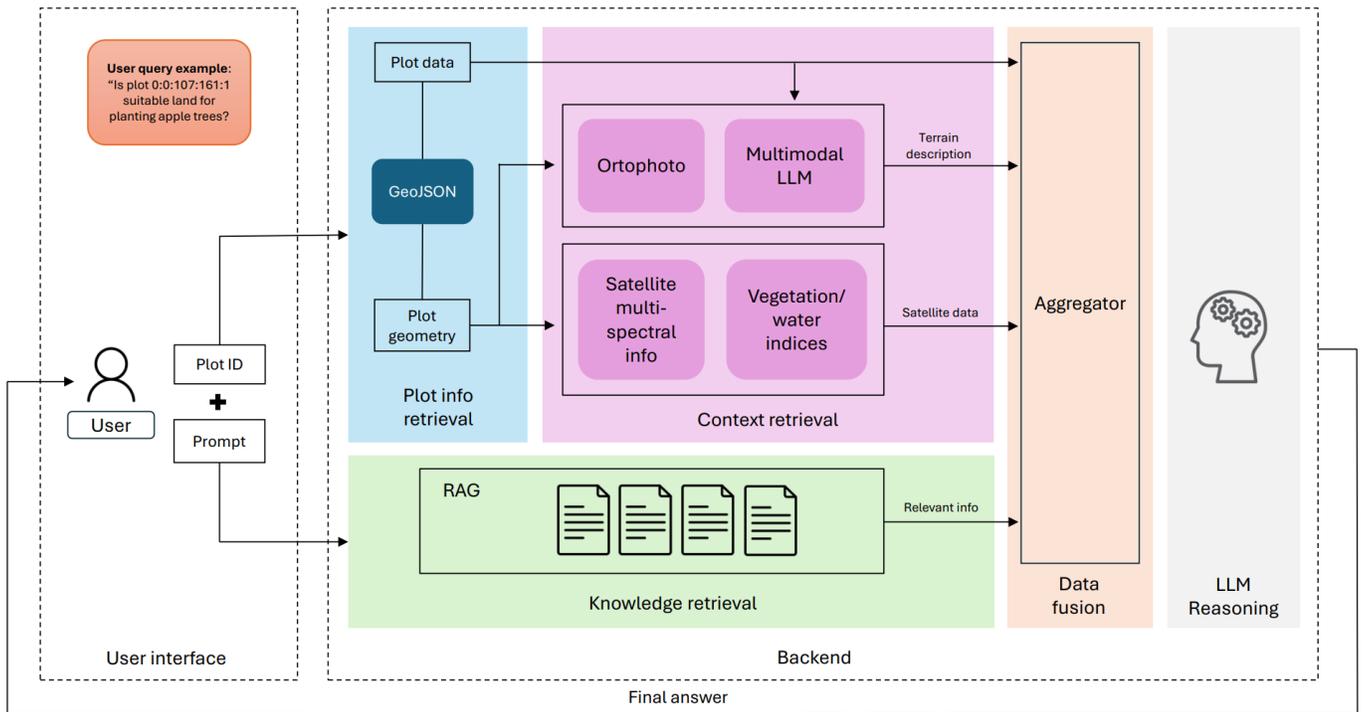


Fig. 3. The system architecture is composed of two main modules: the conversational interface, where the user-assistant interaction takes place, and the backend processing of the query. Several blocks, responsible for multimodal data retrieving, are interconnected, and then fused through a multi-domain aggregator, which delivers the processed context to the final LLM.

approach of direct scoring in multi-dimensional quantitative evaluation, the LLM-as-a-judge was fed with the user’s query, the retrieved context and the assistant’s answer. Each system response was assessed through four dimensions: *correctness* (accuracy with respect to the context), *relevance* (focus on the query), *clarity* (readability and accessibility), and *completeness* (extent to which the user’s query is fully answered). The judge provided scores on a 1-5 scale, along with a short justification.

A. Preliminary results

The evaluation process included 45 experiments. In order to assess separately both retrieval techniques, 30 experiments focused on triggering multimodal retrieval and 15 were RAG-based queries¹. Table I contains the average score of the four evaluation dimensions for the 45 experiments, grouped into multimodal and RAG, and the global average. For the seek of simplicity, five queries, along with their evaluation, are presented in Table II. The first of them is RAG-based, while the remaining four rely on multimodal retrieval. Table III in the appendix complements these results, extending a comprehensive evaluation for two of the experiments considered relevant (one for each query focus mode) with all the information: user’s query, retrieved context, assistant’s response and LLM-as-a-judge assessment. Regarding the interface display, Fig. 4

¹A tool-triage model is responsible for deciding whether to use one, another, both or neither of the them, being the multimodal retrieval only applicable when providing a plot ID.

includes a system response to the query "I am a farmer. My parcel is 0:0:107:161:1. How can I maximize economic and environmental sustainability?". The response layout is divided into the following elements: the parcel ortophoto is fetched and embedded in the answer as a base64 image, the response is formatted in Markdown and displayed below, along with the citations of the retrieved context, and finally a "Follow up" section with suggested prompts is included at the bottom.

IV. DISCUSSION

The results presented in Table I show that overall, the system produces top-quality responses. Dimensions *correctness* and *relevance* are the ones with the higher average score, achieving 4.5+ out of 5 points, while *clarity* and *completeness* remain slightly lower. Regarding the query focus mode, multimodal retrieval-based queries tend to achieve better quality responses than RAG-based queries across all evaluation dimensions, being *relevance* the largest difference. Table II depicts five different user queries that produce a high quality answer. It can be seen how the system is able to respond consistently to different topics and user intentions, as planting trees, maximizing environmental sustainability or evaluating a parcel for its potential purchase. Given the specificity of the action domain of the system, the degree of completeness and correctness of the answers inherently relies on how well the query is aligned with the assistant’s capabilities. For instance, a request about local fauna would yield a less complete response compared to an agriculture-based query. Likewise, RAG-based

TABLE I
AVERAGE SCORE IN MULTI-DIMENSIONAL QUANTITATIVE EVALUATION FOR THE 45 EXPERIMENTS, GROUPED INTO MULTIMODAL RETRIEVAL (30) AND RAG-BASED (15).

Query Focus Mode	Correctness	Relevance	Clarity	Completeness
Multimodal retrieval	4.867	4.767	4.567	4.367
RAG-based	4.733	4.400	4.267	4.333
Total	4.800	4.583	4.417	4.350

TABLE II
QUERY AND ASSESSMENT RESULTS FOR FIVE EXAMPLES. THE FIRST ONE IS RAG-BASED, AND THE NEXT FOUR ARE FOCUSED ON MULTIMODAL RETRIEVAL.

User's query	Assessment
"What conditions do I need on my farm to grow fruit?"	"correctness: 5, relevance: 5, clarity: 4, completeness: 5, justification: ""The response accurately extracts key conditions for fruit cultivation from the context (e.g., cultivar selection, pollination, rootstocks, NAA application) and addresses the user's query. While most technical terms are explained, concepts like 'clonal rootstocks' or 'renewal pruning' could be clarified further for non-experts. It integrates all critical context elements, including challenges like spring frost and resource inefficiency.""
"Is plot 0:0:107:55:1 suitable land for planting apple trees?"	"correctness: 5, relevance: 5, clarity: 5, completeness: 5, justification: The response correctly identifies the plot as pastureland with a 21.6% slope, aligns with the NDVI data to highlight vegetation health, and provides actionable recommendations (rootstocks, irrigation, terracing) while addressing the user's question about apple tree suitability and integrating all key context elements.""
"What is the current soil health of plot 0:0:104:223:1?"	"correctness: 5, relevance: 5, clarity: 5, completeness: 5, justification: The response accurately acknowledges the absence of direct soil health metrics (pH, nutrients) in the context while using NDVI data (mean 0.868, max 0.903) and terrain features (drainage channels, water bodies) to infer indirect indicators of soil health. It clearly explains limitations and connects vegetation health to pastureland management, ensuring both relevance and completeness.""
"I want to buy terrain for planting raspberries. Is plot 0:0:105:9000:1 a good option?"	"correctness: 4, relevance: 5, clarity: 4, completeness: 5, justification: ""The response correctly identifies the urban classification, NDVI values, and potential infrastructure challenges but assumes soil type (loamy/organic matter) not explicitly stated in the context. It addresses raspberry-specific concerns like zoning and climate compatibility while integrating key context elements (NDVI, slope, altitude).""
"I am a farmer. My parcel is 0:0:107:161:1. How can I maximize economic and environmental sustainability?"	"correctness: 4, relevance: 5, clarity: 4, completeness: 5, justification: The response correctly uses the flat terrain (3% slope), irrigation channels, and NDVI metrics (mean 0.758, stdDev 0.093) to suggest intercropping, water optimization, and mechanization. It links environmental sustainability to soil/water conservation and economic gains to organic certification. However, assumptions like intercropping with sunflower/beans and specific resources (COPAE, MAPA) are not explicitly supported by the context, slightly reducing correctness. Clarity is strong but could simplify terms like 'green manure.'""

queries depend on the provided knowledge database, which we consider a strength, enabling flexible customization for every user need. Table III allows to see how the model is able to retrieve relevant context regarding the user's query, for both modalities, and produce an accurate response. The multimodal retrieval example exhibits the capacity of the model to fetch a generated-description of the terrain, and vegetation indices information, to enrich the quality of the answer.

V. CONCLUSION

This study aimed to explore how open-source LLMs and multimodal retrieval can be combined into a conversational assistant for agricultural and geospatial applications. By lowering the barrier of access to complex EO and agronomic data, the proposed system enables users to query heterogeneous open data sources through natural language interactions. The primary contributions of this work include: (i) an architecture that fuses information from multiple modalities and domains—satellite imagery, vegetation indices, orthophotos, and textual documentation—into a unified conversational framework, (ii) a demonstration of how open-source LLMs can make highly specialized EO and agricultural information more accessible, delivering precise and context-aware answers for land management tasks, and (iii) an open, reproducible and scalable

design. The presented results demonstrate that our proposed system is capable of producing complete, accurate, clear and correct responses to agro-related queries by retrieving and integrating relevant information regarding each desired plot, with LLM-as-a-judge evaluation confirming the utility of integrating multimodal and RAG-based retrieval strategies. Although this study was conducted in a specific region, the design is not tailored to local landscape features, making it both reproducible in other geographic areas and scalable to larger regions. Although the evaluation remains preliminary, it provides evidence that conversational interfaces can effectively bridge the gap between highly technical EO datasets and end users without specialized training. Future work will focus on expanding to more context retrieval sources, optimizing the computational efficiency, and assessing further state-of-the-art open-source models.

CREDiT AUTHOR STATEMENT

CRedit roles and contributions: **Juan Cañada:** Conceptualization, Data curation, Formal Analysis, Investigation, Methodology, Software, Validation, Visualization, and Writing – original draft. **Raúl Alonso:** Resources and Writing – review & editing. **Julio Molleda:** Writing – review & editing

I am a farmer. My parcel is 0:0:107:161:1. How can I maximize economic and environmental sustainability?

AgroBot



Thought for 10 seconds

To maximize **economic and environmental sustainability** for your parcel (0:0:107:161:1), consider the following strategies based on the provided context:

1. **Adopt Intercropping with Green Manure Crops:**

Incorporate sunflower or bean crops in the early years of your fruit tree plantation. This improves soil texture and nutrient status while reducing reliance on synthetic fertilizers, lowering costs and enhancing long-term soil health [Apple_cultivation.pdf](#).

2. **Optimize Water Management:**

The parcel has irrigation/drainage channels and a flat topography (3% average slope). Ensure these channels are maintained to prevent water waste and erosion, and use the flat terrain to maximize efficient water distribution. High NDVI values (mean = 0.758) suggest healthy vegetation, but the standard deviation (0.093) indicates variability—monitor lower NDVI areas for potential irrigation adjustments [TOOL:territorio/get_plot](#).

3. **Transition to Organic Farming:**

Organic production can boost market competitiveness and personal satisfaction, as noted in studies on rural sustainability. Access resources like the COPAE database or the Spanish Ministry of Agriculture's website ([www.mapa.es](#)) for certified organic seeds and potatoes [guia-agricultura_ecologica.pdf](#).

4. **Leverage Flat Terrain for Scalability:**

The flat landscape allows for mechanization and large-scale operations, reducing labor costs. Use the existing dirt paths and roads to streamline machinery access and reduce operational disruptions [TOOL:territorio/get_plot](#).

For environmental benefits, prioritize soil and water conservation. For economic gains, explore organic certification and market opportunities. Let me know if you need further details on any step!

[TOOL:territorio/get_plot](#) [Apple_cultivation.pdf](#) [guia-agricultura_ecologica.pdf](#)

🔗 📄 🗨️ 📧 📧 📧

Follow up

↳ How can I intercrop sunflowers and beans without disrupting fruit trees?

↳ What are the typical costs for organic certification here?

↳ How do I monitor NDVI to adjust irrigation?

Fig. 4. Example of an assistant response to user's query "I am a farmer. My parcel is 0:0:107:161:1. How can I maximize economic and environmental sustainability?"

and Supervision. **Fidel Díez:** Funding acquisition, Project administration and Writing – review & editing.

REFERENCES

- [1] Bevan Koopman, Ahmed Mourad, Hang Li, Anton van der Vegt, Shengyao Zhuang, et al. "AgAsk: an agent to help answer farmer's questions from scientific documents". en. In: *International Journal on Digital Libraries* 25.4 (Dec. 2024), pp. 569–584. ISSN: 1432-1300. DOI: 10.1007/s00799-023-00369-y. URL: <https://doi.org/10.1007/s00799-023-00369-y> (visited on 07/23/2025).

- [2] Bruno Silva, Leonardo Nunes, Roberto Estevão, Vijay Aski, and Ranveer Chandra. "GPT-4 as an Agronomist Assistant? Answering Agriculture Exams Using Large Language Models". In: (Oct. 2023). arXiv:2310.06225 [cs]. DOI: 10.48550/arXiv.2310.06225. URL: <http://arxiv.org/abs/2310.06225> (visited on 07/23/2025).
- [3] Biao Zhao, Weiqiang Jin, Javier Del Ser, and Guang Yang. "ChatAgri: Exploring potentials of ChatGPT on cross-linguistic agricultural text classification". In: *Neurocomputing* 557 (Nov. 2023), p. 126708. ISSN: 0925-2312. DOI: 10.1016/j.neucom.2023.126708. URL: <https://www.sciencedirect.com/science/article/pii/S0925231223008317> (visited on 09/12/2025).
- [4] Liqiong Wang, Teng Jin, Jinyu Yang, Ales Leonardis, Fangyi Wang, et al. "Agri-LLaVA: Knowledge-Infused Large Multimodal Assistant on Agricultural Pests and Diseases". In: (Dec. 2024). arXiv:2412.02158 [cs]. DOI: 10.48550/arXiv.2412.02158. URL: <http://arxiv.org/abs/2412.02158> (visited on 07/23/2025).
- [5] Sagar Soni, Akshay Dudhane, Hiyam Debary, Mustansar Fiaz, Muhammad Akhtar Munir, et al. "EarthDial: Turning Multi-sensory Earth Observations to Interactive Dialogues". In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. 2025, pp. 14303–14313.
- [6] Zhuoning Xu, Jian Xu, Mingqing Zhang, Peijie Wang, Chao Deng, et al. "Multimodal Agricultural Agent Architecture (MA3): A New Paradigm for Intelligent Agricultural Decision-Making". In: (Apr. 2025). arXiv:2504.04789 [cs]. DOI: 10.48550/arXiv.2504.04789. URL: <http://arxiv.org/abs/2504.04789>.
- [7] Kartik Kuckreja, Muhammad Sohail Danish, Muza-mmil Naseer, Abhijit Das, Salman Khan, et al. "GeoChat: Grounded Large Vision-Language Model for Remote Sensing". In: *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. 2024, pp. 27831–27840. DOI: 10.1109/CVPR52733.2024.02629.
- [8] *Open WebUI*. 2024. URL: <https://openwebui.com/>.
- [9] Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, et al. "Efficient Memory Management for Large Language Model Serving with Page-dAttention". In: (Sept. 2023). arXiv:2309.06180 [cs]. DOI: 10.48550/arXiv.2309.06180. URL: <http://arxiv.org/abs/2309.06180>.
- [10] *LiteLLM*. 2023. URL: <https://www.litellm.ai/>.
- [11] Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, et al. "Judging LLM-as-a-Judge with MT-Bench and Chatbot Arena". In: (Dec. 2023). arXiv:2306.05685 [cs]. DOI: 10.48550/arXiv.2306.05685. URL: <http://arxiv.org/abs/2306.05685> (visited on 09/02/2025).

APPENDIX

TABLE III

ASSESSMENT RESULTS ARE DIVIDED INTO TWO GROUPS: MULTIMODAL RETRIEVAL CASES, AND RAG-BASED CASES (ALTHOUGH IT IS COMMON THAT BOTH ARE INCLUDED AT THE SAME TIME). AN EXAMPLE OF EACH CASE IS LISTED IN THE TABLE.

Multi-modal retrieval example	RAG example
<p>User's query Is plot 0:0:107:55:1 suitable land for planting apple trees?</p> <p>Retrieved context Terrain description: The image shows a plot of land classified as "PASTIZAL" (pastureland), which typically indicates grassy areas used for grazing livestock. Here are the geographic and terrain features visible in the image: 1. Grassy Field: The majority of the plot is covered with green grass, which is characteristic of pastureland. The grass appears to be well-maintained and uniform in color, suggesting it is actively managed. 2. Dirt Paths or Roads: There are several winding dirt paths or roads that traverse the plot. These paths are likely used for accessing different parts of the pasture, moving livestock, or for maintenance purposes. 3. Vegetation Patches: There are a few patches of denser vegetation or possibly small trees scattered throughout the plot. These could be natural features or planted for shade or windbreaks. 4. Topography: The terrain appears relatively flat with slight undulations. The paths follow the natural contours of the land, which suggests gentle slopes rather than steep terrain. 5. Water Bodies or Wet Areas: There are a few darker areas that could indicate wetter sections of the pasture, possibly seasonal water accumulation or low-lying areas that retain moisture. 6. Fencing: There is no clear evidence of fencing in the image, but the paths might be used to guide livestock within the pasture. Overall, the image depicts a typical pastureland with grassy areas, paths for access, and some patches of denser vegetation, set on relatively flat terrain.. Area in ha = 0.763, Perimeter in meters = 375.35, Average slope = 21.6 %, Altitud in meters= 94, Land use (in spanish) = PASTIZAL. The NDVI statistics are 'NDVI_max': 0.9097, 'NDVI_mean': 0.8468, 'NDVI_min': 0.6066, 'NDVI_stdDev': 0.0527) in range [0-1]. Response The plot 0:0:107:55:1 is classified as pastureland ("PASTIZAL") with a 21.6% average slope, which may pose challenges for apple cultivation. Apple trees typically require flat to gently sloping terrain (ideally ;15-20%) for proper irrigation and erosion control. However, the high NDVI values (mean 0.847, max 0.91) indicate healthy vegetation and fertile soil, which are beneficial for apple growth To determine suitability, consider: - Rootstock selection: Rootstocks like MM 111 or Merton 793 are recommended for sloped or hilly areas and offer drought tolerance and pest resistance. - Water management: The plot would need a robust irrigation system (e.g., drip irrigation) to address the higher slope and ensure consistent water supply. - Soil preparation: Terracing or contour farming might be necessary to prevent erosion and optimize water retention. While the land has favorable vegetation health, the slope and lack of existing fencing suggest careful planning would be required for successful apple cultivation. Assessment "correctness": 5, "relevance": 5, "clarity": 5, "completeness": 5, "justification": "The response correctly identifies the plot as pastureland with a 21.6% slope, aligns with the NDVI data to highlight vegetation health, and provides actionable recommendations (rootstocks, irrigation, terracing) while addressing the user's question about apple tree suitability and integrating all key context elements."</p>	<p>User's query What conditions do I need on my farm to grow fruit?</p> <p>Retrieved context "Relevance 82.21% (0.8221) Content Life cycle of apple fruit crop Source Apple_cultivation.pdf (page 68) Relevance 79.67% (0.7967) Content Constraint in apple cultivation Large number of old orchards (more than 30 years old) are showing decline in terms of growth and fruit yield. Choice of wrong pollinizers and their inadequacy in number often result to low productivity . The need for injecting new blood into the apple industry through spread of new cultivars (spur types, color mutants, Red Fuji; scab resistant cultivars, bud sport selections of Royal Delicious, and some of the promising hybrids) is urgently felt . The low chilling cultivars and promising cultivars identified need further spread. Technologies like use of clonal rootstocks, introduction of renewal pruning techniques and micro nutrient applications have not been transferred and adopted at a satisfactory level. The water and fertilizer use efficiency is generally poor . Also, spring frost and hailstorms are adverse weather parameters leading to low productivity Source Apple_cultivation.pdf (page 51) Relevance 77.86% (0.7786) Content Plant growth regulator Use of growth hormones is essential for good flowering and proper colouration in fruits. NAA @ 10 -20 ppm at petal fall may be applied for the purpose." Response "To grow fruit successfully on your farm, consider the following conditions based on the context: Cultivar Selection: Use modern, high-yielding cultivars (e.g., Red Fuji, scab-resistant varieties) and avoid old orchards beyond 30 years, which show declining productivity. Pollination: Ensure suitable pollinizers are planted in adequate numbers to avoid low productivity due to poor pollination. Climate Adaptation: Address adverse weather risks like spring frost and hailstorms, which reduce yields. Low-chill cultivars may be suitable if your region has mild winters. Agronomic Practices: Adopt technologies such as clonal rootstocks, renewal pruning, and micronutrient applications to improve growth and fruit quality. Resource Efficiency: Optimize water and fertilizer use, as inefficiencies in these areas are common challenges in fruit farming Growth Regulators: Apply plant growth regulators like NAA (10–20 ppm) at petal fall to enhance flowering and fruit coloration [2]. Adjust these factors to your local conditions and specific fruit type. Let me know if you need details on a particular aspect! " Assessment "correctness": 5,"relevance": 5, "clarity": 4, "completeness": 5, "justification": "The response accurately extracts key conditions for fruit cultivation from the context (e.g., cultivar selection, pollination, rootstocks, NAA application) and addresses the user's query. While most technical terms are explained, concepts like 'clonal rootstocks' or 'renewal pruning' could be clarified further for non-experts. It integrates all critical context elements, including challenges like spring frost and resource inefficiency."</p>