
WolBanking77: Wolof Banking Speech Intent Classification Dataset

Abdou Karim KANDJI^{1*} Frédéric Precioso² Cheikh Ba¹ Samba Ndiaye³

Augustin Ndione³

¹University of Gaston Berger (UGB), BP: 234 Saint-Louis, Senegal

²Inria, Université Côte d'Azur (UniCA), Maasai team, Nice, France

³Cheikh Anta Diop University, Dakar, Senegal

{kandji.abdou-karim1, cheikh2.ba}@ugb.edu.sn

frederic.precioso@univ-cotedazur.fr

{samba.ndiaye, augustin.ndione}@ucad.edu.sn

Abstract

Intent classification models have made a lot of progress in recent years. However, previous studies primarily focus on high-resource languages datasets, which results in a gap for low-resource languages and for regions with a high rate of illiterate people where languages are more spoken than read or written. This is the case in Senegal, for example, where Wolof is spoken by around 90% of the population, with an illiteracy rate of 42% for the country. Wolof is actually spoken by more than 10 million people in West African region. To tackle such limitations, we release a Wolof Intent Classification Dataset (WolBanking77), for academic research in intent classification. WolBanking77 currently contains 9,791 text sentences in the banking domain and more than 4 hours of spoken sentences. Experiments on various baselines are conducted in this work, including text and voice state-of-the-art models. The results are very promising on this current dataset. This paper also provides detailed analyses of the contents of the data. We report baseline f1-score and word error rate metrics respectively on NLP and ASR models trained on WolBanking77 dataset and also comparisons between models. We plan to share and conduct dataset maintenance, updates and to release open-source code.

1 Introduction

Wolof is spoken in Senegal, Gambia and Mauritania by more than 10 million people. Most of the population in Senegal speaks Wolof (around 90%)¹ which is essentially a language of communication between several ethnic groups. More details on Wolof language are presented in the appendix section D.

The lack of digital resources on Wolof motivated us to build the WolBanking dataset. Wolof, being an oral language, it is essential to establish voice assistants that allow the population access to digital services and to meet several challenges such as improving financial inclusion and access to digital public services. The trade sector, for instance, which plays an important role in the economy of African countries, is predominantly occupied by the informal sector [Ouattara et al., 2025]. We can also cite the agriculture, livestock, fishing, and transport sectors, which are all related to commercial activity and provide more jobs compared to the formal sector [Martínez and Short, 2022]. Recent

¹<https://www.axl.cefan.ulaval.ca/afrique/senegal.htm>

advances in the field of artificial intelligence provide an excellent opportunity for these populations to benefit from the technology. They can gain better control over financial transactions and minimize the risk of fraud due to language barriers. In fact, the language barrier often forces business owners in the informal sector to trust a third party to consult their balance or make payments on their behalf. This potentially exposes them to the risk of fraud [Anthony et al., 2024, Ouattara et al., 2025].

However, to build such a virtual assistant, it is necessary to understand the human request to be able to provide an appropriate response. In Natural Language Processing (NLP), the field that deals with the understanding of human language, is Natural Language Understanding (NLU). More particularly in our case, we propose to work with both text and speech given that our objective is to work with African languages which are based on oral tradition. Before doing an NLU task, the first step is to understand the information contained in speech using Spoken Language Understanding (SLU). According to the World Bank Bank [2022], the rate of adult illiterate population in Senegal is 42%, which means that to facilitate access to a virtual assistant for these populations, it is essential to offer voice processing solutions. To determine the intent of a user request, Coucke et al. [2018] approach the problem as an intent detection classification task, carried out from a text or an audio transcription.

Models based on neural networks has emerged in recent years in the field of intent detection [Gerz et al., 2021, Krishnan et al., 2021, Si et al., 2023b]. However, very few datasets in African languages Conneau et al. [2022a], Mastel et al. [2023], Moghe et al. [2023], Mwangela et al. [2023], Kasule et al. [2024] have been explored. Even less in the field of e-banking for Sub-Saharan languages. Most datasets are in English Coucke et al. [2018] because development costs are very high, and substantial effort is required for their creation. This paper presents an intent classification dataset in Wolof, an African and Sub-Saharan language, based on the Banking77 dataset Casanueva et al. [2020a] which originally comprises both 13,083 customer service queries labeled with 77 intents and an audio dataset based on MINDS-14 Gerz et al. [2021] with 14 intents derived from a commercial e-banking system.

2 Related work

2.1 Existing datasets

Several datasets, both monolingual and multilingual, for NLU conversational question-answering system, have been published in the last decade. For instance, The Chatbot Corpus dataset composed of questions and answers and also The StackExchange Corpus based on the StackExchange platform both available on GitHub ² and evaluated by [Braun et al., 2017]. More recently, MINDS-14 Gerz et al. [2021] a multilingual dataset in the field of e-banking has been made publically available. When considering multilingual intent classification benchmarking, we can mention for instance the MultiATIS++ dataset Xu et al. [2020], which pertains to the aviation field, and has been expanded upon the original English ATIS dataset Price [1990] to six additional languages. More recently, the XTREME-S benchmark Conneau et al. [2022a] aims at evaluating several tasks such as speech recognition, translation, classification and retrieval. XTREME-S brings together several datasets covering 102 various languages, including 20 languages of Sub-Saharan Africa.

Concerning the Wolof language, datasets have been published in the literature, particularly in the field of NLP and Automatic Speech Recognition (ASR). We can cite some datasets that contain Wolof texts such as afriqa dataset Ogundepo et al. [2023] which deals with the question answering (QA) task, masakhaner versions 1 and 2 Adelani et al. [2021, 2022b] which targets the Name Entity Recognition (NER) task, UD_Wolof-WTB ³ or even MasakhaPOS ⁴ which deals with the part-of-speech tagging (POS) task. In addition, several datasets for the machine translation (MT) task such as OPUS, ⁵ FLORES 200 team et al. [2022], NTREX-128 Federmann et al. [2022] and MAFAND-MT [Adelani et al., 2022a]. Datasets in the field of ASR containing Wolof such as ALFFA Gauthier et al. [2016], fleurs Conneau et al. [2022b] and more recently KALLAAMA Gauthier et al. [2024] have been published. The cited datasets cover various fairly general areas from news or religion. However, to date, there is only one text dataset dedicated to the banking sector named INJONGO Yu et al. [2025]

²<https://github.com/sebischair/NLU-Evaluation-Corpora>

³https://github.com/UniversalDependencies/UD_Wolof-WTB

⁴https://github.com/masakhane-io/lacuna_pos_ner

⁵<https://opus.nlpl.eu/>

(with other domains such as home, kitchen and dining, travel and utility). This dataset includes slot-filling and intent classification for 16 African languages including Wolof.

The authors Casanueva et al. [2020b] explored few-shot learning scenario in addition to the creation of the Banking77 dataset with 77 intents and 13,083 examples. ArBanking77 Jarrar et al. [2023] is the Arabic language version of the Banking77 dataset Casanueva et al. [2020a] in which the authors carried out simulations in low-resource settings scenario by training their model on a subset of the dataset. Other recent contributions to low-resource languages have been made, the authors Mastel et al. [2023] used Google Cloud Translation API to translate the ATIS dataset Price [1990] in Kinyarwanda and Swahili which are languages spoken by approximately 100 million people in East Africa. Moghe et al. [2023] publish a dataset called MULTI3NLU++ for several languages including Amharic. Kasule et al. [2024] propose a voice command dataset containing 20 intents in Luganda with the aim of being deployed on an IoT device.

2.2 Summary of contributions

In this work, 9,791 customer service queries from the Banking77 dataset Casanueva et al. [2020a] have been translated to French and Wolof by a team of linguistic experts from the Centre de Linguistique Appliquée de Dakar (CLAD). Additionally, this work releases another dataset based on MINDS-14 Gerz et al. [2021], with each query accompanied by audio data recorded from several speakers with varying accents and ages. The dataset covers 10 associated intentions with text and audio examples. The open source tool Lig-Aikuma Blachon et al. [2016] has been used to make the voice recordings. Our contributions include:

- An audio dataset containing 263 sentences covering 10 intents in the banking and transport domains with varied voices and accents making this dataset the first of its kind in the Wolof language at the time of writing.
- A text dataset with 9,791 sentences translated from English to French and Wolof covering 77 intents in banking domain.
- Training and evaluation codes to facilitate the reproducibility of experimental benchmarks.
- The results obtained with state-of-the-art models in various tasks such as Automatic Speech Recognition (ASR) and Intent Detection.
- A dataset documentation (datasheets) for WolBanking77.

All datasets and source codes are released under a CC BY 4.0 license to stimulate research in the field of NLP for low-resource African languages.

3 Data collection

We present in this section the main information on the creation of WolBanking77, a more detailed description can be found in Appendix E.

3.1 Textual data

The text dataset contains a total of 9,791 sentences and 77 intents from the English train set of Banking77 Casanueva et al. [2020a], manually translated to French and Wolof thanks to a team of linguistic experts from the Centre de Linguistique Appliquée de Dakar (CLAD). The Wolof version has been translated and localized according to the local context, for instance, "ATM" and "app" translated as "GAB" and "aplikaasiyoy", see the example in figure 1.

Duplicated sentences translated in Wolof has been removed for the Intent Detection task to avoid many-to-one translations from English to Wolof. Two versions of the dataset are reported on table 2. The first version is comprised of 5k samples which is a sub-sample of the second version of 9,791 samples. Train set is 80% of both versions and test set represents 20%. Note that intents are unbalanced, the most represented intent has a frequency of 200 while the least represented one has a frequency of 24.

Some statistics were collected on the data translated into French and Wolof. Statistics on table 1 show a slightly higher number of words per query for French (83) compared to Wolof (81).

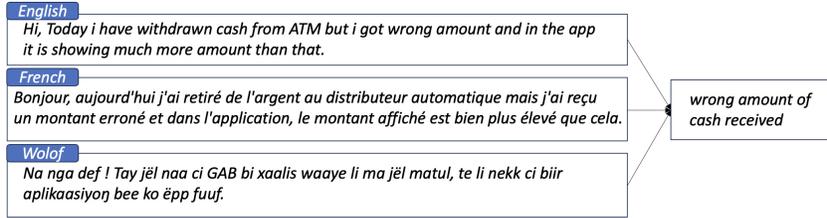


Figure 1: A query translated in French and Wolof

Table 1: WolBanking77 dataset statistics

	WOLOF	FRENCH
Min Word Count	2	2
Max Word Count	81	83
Mean Word Count	12.22	12.47
Median Word Count	10	10

Table 2: WolBanking77 dataset split

SPLIT	5k sample	all
TRAIN SET	4,000	7,832
TEST SET	1,000	1,959

3.2 Audio recordings and transcriptions

The audio corpus based on MINDS-14 Gerz et al. [2021] is made up of 186 queries and 77 responses initially translated from French into English thanks to a team of linguistic experts from the Centre de Linguistique Appliquée de Dakar (CLAD). The dataset also includes a phonetic transcription of the text in Wolof in order to facilitate the correct pronunciation of the sentences by the different speakers. Additional intents have been added to the initial MINDS-14 dataset which are *OPEN_ACCOUNT* for information when opening a bank account, *BUS_RESERVATION* for reserving a transport bus, *TECHNICAL_VISIT* for reserving an appointment for a technical inspection of a vehicle. *TRANSFER_MONEY* for the intention to transfer money and *AMOUNT* to specify the amount to transfer. See table 3 for the complete list of intents of the audio dataset.

Figure 2 shows the top 5 most frequent words in the dataset after excluding stopwords. The dataset has 272 unique words and 3204 audio clips. The audio clips are in wav format using a single channel with a sampling rate of 16 kHz. Sentences have an average duration of 4815 ms. The intents '*CASH_DEPOSIT*', '*FREEZE*', '*LATEST_TRANSACTIONS*' contain the longest queries, while '*AMOUNT*', '*BUS_RESERVATION*', '*OPEN_ACCOUNT*' and '*TRANSFER_MONEY*' generally have a low query duration. The total duration of the dataset is around 4 hours and 17 minutes.

Table 3: List of intents.

intent	domain
BALANCE	e-banking
CASH_DEPOSIT	
FREEZE	
LATEST_TRANSACTIONS	
PAY_BILL	
OPEN_ACCOUNT	
TRANSFER_MONEY	
AMOUNT	
BUS_RESERVATION	transport
TECHNICAL_VISIT	

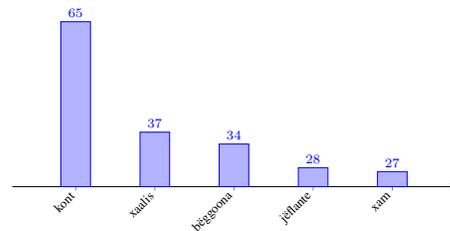


Figure 2: Top 5 most frequent words: kont (account), xaalis (money), bëggoona (I wanted to), jëflante (operation), xam (know).

The dataset was collected thanks to the participation of students from Cheikh Anta Diop University in Dakar (UCAD), more precisely at the Faculty of Letters and Human Sciences. Each participant recorded their voice using the elicitation mode of the Lig-Aikuma software [Blachon et al., 2016]. 186 utterances were pronounced by the participants in a closed environment. The elicitation mode of the Lig-Aikuma software was installed on an Android tablet. To start a session, information about the participant are requested such as native language, region of origin (see figure 3), gender, year of birth

and name. This information is subsequently stored as metadata on the tablet’s memory card. More details on demographic data and distribution information can be found in Appendix A.1.

To anonymize the name of the participants, the system generates a user_id which is used to replace the user name (more details on the ethical collection and processing of personal data are provided in Appendices A.6 and C). Then, a txt format file that contains the sentences to be pronounced is selected. One sentence at a time is presented during recording with the option to cancel recording if there is a mispronunciation at any stage. In terms of gender diversity, a total of 31 recording sessions were conducted including 14 males, 14 females and 3 unspecified. Text and audio data were split with 80% reserved for train set and 20% for test set. Before data splitting, some data preprocessing was made such as, removal of punctuation marks and numbers, lowercase text transformation. Corrupted audio files were removed from the dataset.

4 Tasks & Settings

4.1 Automatic Speech Recognition

Automatic Speech Recognition (ASR) refers to the technology that enables a model to recognize and convert spoken language into text. ASR systems are widely used in various applications such as voice assistants, transcription services, customer service automation and more, whose researchers have done significant work such as Listen Attend and Spell by Chan et al. [2015] which is an end-to-end model for speech recognition based on a sequence-to-sequence neural network model. Graves et al. [2006] proposed Connectionist Temporal Classification (CTC) model used for training deep neural networks in speech recognition as well as other sequential problems where there is no explicit alignment information between the input and output. More recently, the NVIDIA team Želasko et al. [2025] developed the Canary Flash model, which is one of the Canary Puvvada et al. [2024] variants and has the particularity of being multilingual and multitask. This model was able to achieve state-of-the-art results on several benchmarks including ASR.

Another state-of-the-art model published by Microsoft and named Phi-4-multimodal-instruct Microsoft et al. [2025] has recently been made available to address ASR tasks as well as in vision and text. Phi-4-multimodal shows an average word error rate score of 6.14% and occupies second place on Huggingface’s OpenASR leaderboard ⁶ at the time of writing. To evaluate ASR models, Word Error Rate (WER) scores are reported in Section 5.4.

4.2 Intent Detection

Intent detection is an NLP task which consists of classifying a sentence in order to detect its intention. Several contributions have been made in the field, such as Gerz et al. [2021] who published

⁶https://huggingface.co/spaces/hf-audio/open_asr_leaderboard

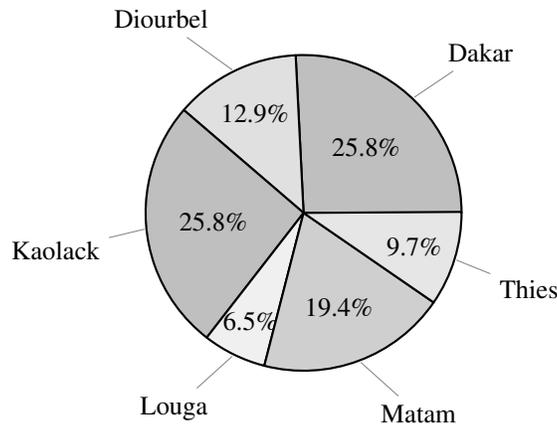


Figure 3: Senegal region repartition by speaker

MINDS-14 which is the first training and evaluation dataset for the intent detection task using spoken data. It includes 14 intents derived from e-banking domain, with spoken examples in 14 different languages. Si et al. [2023a] presented SpokenWOZ, a large-scale speech-text dataset for spoken Task-Oriented Dialogue (TOD) in 8 domains and 249 hours of audio. Casanueva et al. [2020b] published BANKING77, a dataset made of 13,083 examples across 77 intents, in banking domain.

In this article, we want to estimate the challenging potential of our dataset to better highlight its interest for the community by evaluating downstream tasks with increasingly sophisticated ML Workflows. We first consider classic machine learning algorithms such as k-nearest neighbor (KNN), support vector machine (SVM), linear regression (LR) and naive bayes (NB) as first baselines. The results are reported in Appendix A.4. We then consider slightly more sophisticated solutions, with the LASER sentence encoder Heffernan et al. [2022] pre-trained on several languages, including Wolof, for sentence encoding, followed by standard classification models such as MultiLayer Perceptron (MLP) and Convolution Neural Networks (CNN). We report results in Appendix A.5. Then, more advanced models based on BERT are evaluated in zero-shot-classification and few-shot-classification mode, and these same models are fine-tuned on the WolBanking77 dataset for comparison. Finally, several benchmarking of recent Small Language Models (SLM) such as **Llama-3.2-3B-Instruct**⁷ and **Llama-3.2-1B-Instruct**⁸ are reported. To evaluate intention detection models, *f1*, *precision* and *recall* metrics are reported in Section 5.4.

5 Dataset evaluation & Experiments

In this section, pre-trained models on different languages, including African ones, are presented for Intent Detection and for Automatic Speech Recognition tasks. The details of the hyperparameter settings for the experiments in this section can be found in Appendix A.2. The results show the interest of the WolBanking77 dataset for the community in order to improve intent detection for Wolof and provide an approach for extension to other low-ressource languages.

5.1 Intent detection models

The next sections present and detail the pre-trained models used in the intent detection task. Experiments for zero and few shot classification are also discussed.

5.1.1 Zero-shot classification with WolBanking77

Zero-shot text classification is a natural language processing task in which a model, trained on labeled data from certain classes, is capable of classifying text from entirely new, unseen classes without additional training. In this experiments WolBanking77 provides the new, unseen dataset. To simulate Zero-shot text classification, following pre-trained models are considered:

BERT base (uncased): A transformers model pre-trained on English introduced by Devlin et al. [2018], using a Masked Language Modeling (MLM) objective.

Afro-xlmr-large: Based on XLM-R-large Conneau et al. [2020] using MLM objective, this model has been published by Alabi et al. [2022] and pre-trained on 17 African languages but not Wolof, while still demonstrating in the original paper good scores for NER task on Wolof.

AfroLM active learning: Based on XLM-RoBERTa (XLM-R) using MLM objective Ogueji et al. [2021], this model has been published by [Dossou et al., 2022]. AfroLM_active_learning is a Self-Active Learning-based Multilingual Pretrained Language Model for 23 African Languages including Wolof.

mDeBERTa-v3-base-mnli-xnli: Based on DeBERTaV3-base He et al. [2021a,b], this model has been published by Moritz et al. [2022] and pre-trained on the CC100 multilingual dataset Conneau et al. [2020], Wenzek et al. [2020] with 100 different languages including Wolof. This model can perform Natural Language Inference (NLI) on 100 languages.

AfriTeVa V2 Base: A multilingual T5 model released by Oladipo et al. [2023] and pre-trained on WURA dataset Oladipo et al. [2023] covering 16 African Languages not including Wolof.

⁷<https://huggingface.co/meta-llama/Llama-3.2-3B-Instruct>

⁸<https://huggingface.co/meta-llama/Llama-3.2-1B-Instruct>

F1-score metrics for Zero-shot text classification are reported in Section 5.4.

5.1.2 Few-shot classification with WolBanking77

Given the results obtained on zero-shot classification, it seems relevant to use manually annotated data in order to improve the generalization capacity of existing models on the data presented in this article, WolBanking77. All pre-trained models cited in section 5.1.1 are selected for the few-shot classification to measure the gap between large pre-trained models with and without providing few Wolof samples from WolBanking77 for fine-tuning. F1-score metrics for zero-shot text classification are reported in Section 5.4.

5.2 ASR System

State-of-the-art ASR are chosen as baselines models pre-trained on several languages with the possibility of fine-tuning them on a specific language and domain. Below is the description of the models with more details:

Canary Flash: Canary Flash Żelasko et al. [2025] has been pre-trained on several languages (English, German, French, Spanish) and on various tasks such as ASR and translation. Canary Flash is based on Canary Puvvada et al. [2024] that is an encoder-decoder model whose encoder is based on the FastConformer model Rekish et al. [2023] and the decoder on the Transformer architecture [Vaswani et al., 2017]. Canary has the particularity of concatenating tokenizers Dhawan et al. [2023] of different languages from SentencePiece.⁹ In this reported work, English, Spanish, French and Wolof languages are concatenated with Canary’s Tokenizer. These tokens are then transformed into token embedding before feeding it into the Transformer Decoder. In addition to the tokens of each language, Canary uses 1152 tokens for special tokens representation. Canary has at the time of writing this article, 3 variants such as canary-1b, canary-1b-flash, and canary-180m-flash. Canary-1b-flash version is chosen for conducting experiments because of its multilingual support. The canary-1b-flash model was trained on 85K hours of speech data, including 31K public data (FLEURS Conneau et al. [2022b], CoVOST v2 Wang et al. [2020]) and the rest on private data. The Mozilla CommonVoice 12 dataset Ardila et al. [2020] is used as validation data for each language.

Phi-4-multimodal-instruct: Phi-4-multimodal is a multimodal Small Language Model (SLM) supporting image, text and audio within a single model. Phi-4-multimodal has the ability to handle multiple modalities without interference thanks to the Mixture of LoRAs [Hu et al., 2021]. To support multilingual inputs and outputs, the tiktoken tokenizer¹⁰ is used with a vocabulary size of approximately 200K. The model is based on a Transformer decoder Vaswani et al. [2017] and supports a context length of 128K based on LongRoPE [Ding et al., 2024]. Regarding the Speech/Audio modality, several modules have been introduced including the audio encoder composed of 3 CNN layers and 24 Conformer blocks [Gulati et al., 2020]. To map the dimension (1024-d) of audio features to the text embedding space (3072-d), 2 MLP layers are used in the Audio Projector module. Note that LoRA_A was used on all attention and MLP layers with a rank of 320. Phi-4-multimodal was trained on 2M hours of private speech-text pairs in 8 languages. A second post-training phase by Supervised Fine Tuning (SFT) of speech/audio data pairs was conducted. For the ASR task, it includes 20k hours of private data as well as 20k hours of public data covering 8 languages. The SFT data follows the following format:

```
< |user| >> audio > {task prompt} < |end| >> |assistant| > {label} < |end| >
```

Task prompt designates the task on which the model is to be fine-tuned.

Phi-4-multimodal outperforms nvidia/canary-1b-flash Żelasko et al. [2025], WhisperV3 1.5B Radford et al. [2022b], SeamlessM4T-V2 2.3B Communication et al. [2023], Qwen2-audio 8B Chu et al. [2024], Gemini-2.0-Flash Team et al. [2023] and GPT-4o OpenAI et al. [2024] on the OpenASR dataset leaderboard¹¹ with a WER score of 6.14.

⁹Google Sentencepiece Tokenizer

¹⁰Tiktoken Tokenizer

¹¹https://huggingface.co/spaces/hf-audio/open_asr_leaderboard

Distil-whisper-large-v3.5: Distil-whisper-large-v3.5 is based on Whisper introduced by Radford et al. [2022a], which underwent training through supervised learning using 680,000 hours of labeled audio data. The authors showed that models trained with this volume of data could generalize to any dataset through zero-shot learning, meaning it can adapt without requiring fine-tuning for any specific dataset. Note that the training data encompassed 97 different languages. Several versions of Whisper followed in the last years including version 3 on which the distil-whisper-large-v3.5 model was built by knowledge-distillation following the methodology described by Gandhi et al. [2023]. Distil-whisper-large-v3.5 is trained on 98k hours of diverse filtered datasets such as Common Voice Ardila et al. [2020], LibriSpeech Panayotov et al. [2015], VoxPopuli Wang et al. [2021], TED-LIUM Hernandez et al. [2018], People’s Speech Galvez et al. [2021], GigaSpeech Chen et al. [2021], AMI Carletta et al. [2006], and Yodas [Li et al., 2023].

5.3 Model training

All models presented in this article are based on *Pytorch* library [Paszke et al., 2019]. All experiments were run on Runpod¹², and Kaggle.¹³ P100 GPU (16GB VRAM) was used to finetune BERT base (uncased), mDeBERTa-v3-base, Afro-xlmr-large and AfroLM_active_learning. RTX 4090 GPU for AfriteVa V2. For Zero-shot and few-shot classification, RTX 2000 Ada GPU (16 GB VRAM) was used. Few-shot classification is done with *SetFit huggingface* library [Tunstall et al., 2022]. *2-shots* refers to 2 samples per intent while *8-shots* represents 8 samples per intent. All pre-trained text models are hosted on *huggingface platform*, they are fine-tuned using *transformers* library Wolf et al. [2020] except for Llama-3.2 which is fine-tuned using *torch tune* library [torch tune maintainers and contributors, 2024].

MPL and CNN models are trained from scratch on 200 epochs with a single 800-dimension hidden layer, ReLU activation layer and a fully connected output layer for MLP. For CNN, a Conv1d followed by a ReLU activation layer and a fully connected layer for output classification. The Wolbanking77 data was structured in the form of a prompt illustrated in Appendix A.3 in order to allow the Llama-3.2 model to generate the correct intent.

Canary Flash and Phi-4-multimodal-instruct ASR models are fine-tuned on the Wolbanking77 audio dataset using respectively the *NVIDIA NEMO* framework Kuchaiev et al. [2019] and *huggingface Transformers* on A100 SXM GPU (80GB VRAM). In the other hand, Distil-whisper-large-v3.5 is fine-tuned using the *Huggingface Transformers* framework on RTX 2000 Ada GPU (16 GB VRAM). All ASR models are fine-tuned on 1000 steps.

5.4 Results and Discussions

Figure 4: Zero-shot, few-shot and fine-tuning (FT) results (in % for F1-score) of multilingual pre-trained models on WolBanking77.

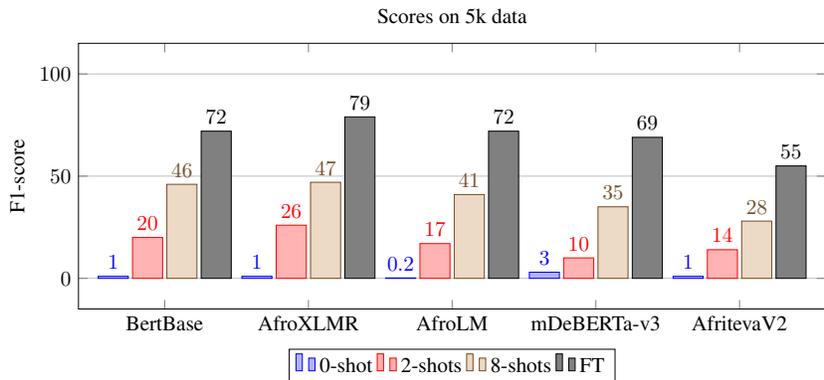



Figure 4 shows weighted average F1-score results for zero-shot and few-shot classification. AfroXLMR model outperforms all multilingual pre-trained models on few-shot and fine-tuning (with an

¹²<https://www.runpod.io/>

¹³<https://www.kaggle.com/>

F1-scores of 79%) on 5k samples followed by BertBase and AfroLM. This results also show that existing models even when pre-trained on Wolof do not perform well and that our dataset provides specific challenges.

Figure 5: Zero-shot and fine-tuning (FT) results (in %) on multilingual pre-trained models.

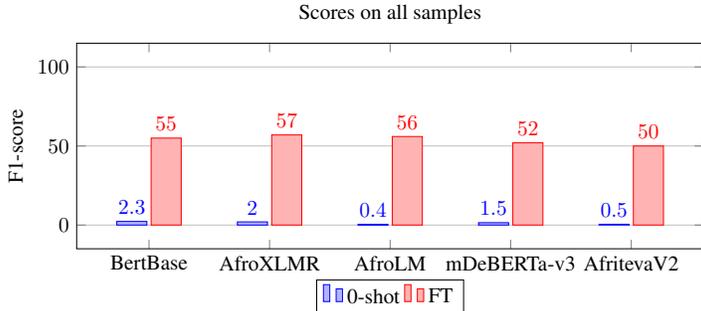

Experiments have been conducted on the entire WolBanking77 dataset and reported on figure 5. Similar to previous experiments conducted on 5k sub-sample of the WolBanking77 dataset, results shows that AfroXLMR achieves slightly better scores compared to BertBase and AfroLM. These results show that intent detection for low-resource languages remains a challenging task even for state-of-the-art small language models, as shown by the results reported in table 4. A comparison

Table 4: Precision, recall and f1-score scores for Small Language Models on WolBanking77. Best models are highlighted in lightgray.

Model	5k samples			All samples		
	Precision	Recall	F1	Precision	Recall	F1
Llama-3.2-1B-Instruct	0.74	0.71	0.72	0.52	0.45	0.46
Llama-3.2-3B-Instruct	0.76	0.75	0.75	0.56	0.55	0.55

is also conducted for ASR models on the audio part of WolBanking77 dataset. Special characters have been removed from the text and then reduced to lowercase. We can observe from the results with 4 hours of speech data in Table 5 that Canary-1b-flash with a wer score of 0.59% outperforms Phi-4-multimodal-instruct (wer 3.1%) and more particularly Distil-whisper-large-v3.5 (wer 4.63%). All pre-trained ASR models have been fine-tuned on the audio part of WolBanking77 dataset with 1000 steps. The results obtained following the experiments show that it is possible to obtain good results with little data, which is favorable for our WolBanking77 dataset and in low-resource language contexts.

Table 5: Word Error Rates (WER) with 4 hours of speech. Training time is reported in minutes.

Model	Parameters	Training time	Steps	WER
Phi-4-multimodal-instruct	5.6B	32	1000	3.1%
Distil-whisper-large-v3.5	756M	44	1000	4.63%
Canary-1b-flash	1B	20	1000	0.59%

6 Long-term Support and Future Work

Long term support includes updates to the text and audio recordings, improvements of the simulation setup script, and possible bug fixes. Free access is offered to various versions of the dataset and source code under a CC BY 4.0 license to accelerate research in the field. It is planned to add more audio recordings in various environments to make the models more robust. Text data of possible responses to each intent will be shared for possible usage in Text-To-Speech. The dataset can also be annotated for slot-filling task.

7 Conclusion

Access to financial services or public transportation services can be facilitated for illiterate people by providing them with voice interfaces in their language of communication. In this paper, an

intent detection dataset is presented in Wolof language in two modalities which are voice and text. Additionally, dataset description and benchmarks are presented. WolBanking77 is published and shared freely under CC BY 4.0 license along with the code and datasheets Gebru et al. [2021] with the aim of inspiring low budget research into low-resource languages.

Acknowledgments and Disclosure of Funding

This work is supported by the Partnership for Skills in Applied Sciences, Engineering and Technology (PASET) - Regional Scholarship and Innovation Fund (RSIF) under Grant No.:B8501L10014. We also thank the entire CLAD team and in particular: Professor Souleymane Faye and all the translators who participated in this project.

References

- D. Adelani, Jade Abbott, Graham Neubig, Daniel D’Souza, Julia Kreutzer, Constantine Lignos, Chester Palen-Michel, Happy Buzaaba, Shruti Rijhwani, Sebastian Ruder, Stephen Mayhew, Israel Abebe Azime, S. Muhammad, Chris C. Emezue, Joyce Nakatumba-Nabende, Perez Ogayo, Anuoluwapo Aremu, Catherine Gitau, Derguene Mbaye, J. Alabi, Seid Muhie Yimam, Tajuddeen R. Gwadabe, Ignatius Ezeani, Rubungo Andre Niyongabo, Jonathan Mukiibi, V. Otiende, Iroro Orife, Davis David, Samba Ngom, Tosin P. Adewumi, Paul Rayson, Mofetoluwa Adeyemi, Gerald Muriuki, Emmanuel Anebi, C. Chukwuneke, N. Odu, Eric Peter Wairagala, S. Oyerinde, Clemencia Siro, Tobius Saul Bateesa, Temilola Oloyede, Yvonne Wambui, Victor Akinode, Deborah Nabagereka, Maurice Katusiime, Ayodele Awokoya, Mouhamadane Mboup, D. Gebreyohannes, Henok Tilaye, Kelechi Nwaike, Degaga Wolde, Abdoulaye Faye, Blessing Sibanda, Orevaoghene Ahia, Bonaventure F. P. Dossou, Kelechi Ogueji, Thierno Ibrahima Diop, A. Diallo, Adewale Akinfaderin, T. Marengereke, and Salomey Osei. Masakhaner: Named entity recognition for african languages. *ArXiv*, abs/2103.11811, 2021.
- David Adelani, Jesujoba Alabi, Angela Fan, Julia Kreutzer, Xiaoyu Shen, Machel Reid, Dana Ruitter, Dietrich Klakow, Peter Nabende, Ernie Chang, Tajuddeen Gwadabe, Freshia Sackey, Bonaventure F. P. Dossou, Chris Emezue, Colin Leong, Michael Beukman, Shamsuddeen Muhammad, Guyo Jarso, Oreen Yousuf, Andre Niyongabo Rubungo, Gilles Hacheme, Eric Peter Wairagala, Muhammad Umair Nasir, Benjamin Ajibade, Tunde Ajayi, Yvonne Gitau, Jade Abbott, Mohamed Ahmed, Millicent Ochieng, Anuoluwapo Aremu, Perez Ogayo, Jonathan Mukiibi, Fatoumata Ouoba Kabore, Godson Kalipe, Derguene Mbaye, Allahsera Auguste Tapo, Victoire Memdjokam Koagne, Edwin Munkoh-Buabeng, Valencia Wagner, Idris Abdulmumin, Ayodele Awokoya, Happy Buzaaba, Blessing Sibanda, Andiswa Bukula, and Sam Manthalu. A few thousand translations go a long way! leveraging pre-trained models for African news translation. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 3053–3070, Seattle, United States, July 2022a. Association for Computational Linguistics. doi: 10.18653/v1/2022.naacl-main.223. URL <https://aclanthology.org/2022.naacl-main.223>.
- David Ifeoluwa Adelani, Graham Neubig, Sebastian Ruder, Shruti Rijhwani, Michael Beukman, Chester Palen-Michel, Constantine Lignos, Jesujoba Oluwadara Alabi, Shamsuddeen Hassan Muhammad, Peter Nabende, Cheikh M. Bamba Dione, Andiswa Bukula, Rooweither Mabuya, Bonaventure F. P. Dossou, Blessing K. Sibanda, Happy Buzaaba, Jonathan Mukiibi, Godson Kalipe, Derguene Mbaye, Amelia Taylor, Fatoumata Kabore, Chris C. Emezue, Anuoluwapo Aremu, Perez Ogayo, Catherine W. Gitau, Edwin Munkoh-Buabeng, Victoire Memdjokam Koagne, Allahsera Auguste Tapo, Tebogo Macucwa, Vukosi Marivate, Elvis Mboning, Tajuddeen R. Gwadabe, Tosin P. Adewumi, Orevaoghene Ahia, Joyce Nakatumba-Nabende, Neo L. Mokono, Ignatius M Ezeani, Chiamaka Ijeoma Chukwuneke, Mofetoluwa Adeyemi, Gilles Hacheme, Idris Abdulmumin, Odunayo Ogundepo, Oreen Yousuf, Tatiana Moteu Ngoli, and Dietrich Klakow. Masakhaner 2.0: Africa-centric transfer learning for named entity recognition. *ArXiv*, abs/2210.12391, 2022b.
- Jesujoba O. Alabi, David Ifeoluwa Adelani, Marius Mosbach, and Dietrich Klakow. Adapting Pre-trained Language Models to African Languages via Multilingual Adaptive Fine-Tuning. In *Proceedings of the 29th International Conference on Computational Linguistics*, pages 4336–4349, Gyeongju, Republic of Korea, October 2022.

- ANSD. Recensement général de la population et de l’habitat, de l’agriculture et de l’élevage. Technical report, Agence Nationale de la Statistique et de la Démographie, 2013.
- Aubra Anthony, Nanjira Sambuli, and Lakshmee Sharma. Security and Trust in Africa’s Digital Financial Inclusion Landscape. Technical report, Carnegie Endowment for International Peace, 2024.
- Rosana Ardila, Megan Branson, Kelly Davis, Michael Henretty, Michael Kohler, Josh Meyer, Reuben Morais, Lindsay Saunders, Francis M. Tyers, and Gregor Weber. Common Voice: A Massively-Multilingual Speech Corpus. 2020. doi: 10.48550/arXiv.1912.06670.
- Mikel Artetxe and Holger Schwenk. Margin-based parallel corpus mining with multilingual sentence embeddings. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3197–3203, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1309. URL <https://aclanthology.org/P19-1309>.
- World Bank. World Bank Open Data. *World Bank Open Data*, 2022. URL <https://data.worldbank.org>.
- David Blachon, Elodie Gauthier, Laurent Besacier, Guy-Noël Kouarata, Martine Adda-Decker, and Annie Riolland. Parallel Speech Collection for Under-resourced Language Studies Using the Lig-Aikuma Mobile Device App. *Procedia Computer Science*, 81:61–66, January 2016. ISSN 1877-0509. doi: 10.1016/j.procs.2016.04.030. URL <https://www.sciencedirect.com/science/article/pii/S1877050916300448>.
- Daniel Braun, Adrian Hernandez Mendez, Florian Matthes, and Manfred Langen. Evaluating Natural Language Understanding Services for Conversational Question Answering Systems. In *Proceedings of the 18th Annual SIGdial Meeting on Discourse and Dialogue*, pages 174–185, Saarbrücken, Germany, August 2017. Association for Computational Linguistics. doi: 10.18653/v1/W17-5522. URL <https://aclanthology.org/W17-5522>.
- Jean Carletta, Simone Ashby, Sebastien Bourban, Mike Flynn, Mael Guillemot, Thomas Hain, Jaroslav Kadlec, Vasilis Karaiskos, Wessel Kraaij, Melissa Kronenthal, Guillaume Lathoud, Mike Lincoln, Agnes Lisowska, Iain McCowan, Wilfried Post, Dennis Reidsma, and Pierre Wellner. The ami meeting corpus: A pre-announcement. In Steve Renals and Samy Bengio, editors, *Machine Learning for Multimodal Interaction*, pages 28–39, Berlin, Heidelberg, 2006. Springer Berlin Heidelberg. ISBN 978-3-540-32550-5.
- Iñigo Casanueva, Tadas Temčinas, Daniela Gerz, Matthew Henderson, and Ivan Vulić. Efficient Intent Detection with Dual Sentence Encoders. In *Proceedings of the 2nd Workshop on Natural Language Processing for Conversational AI*, pages 38–45, Online, July 2020a. Association for Computational Linguistics. doi: 10.18653/v1/2020.nlp4convai-1.5.
- Iñigo Casanueva, Tadas Temčinas, Daniela Gerz, Matthew Henderson, and Ivan Vulić. Efficient Intent Detection with Dual Sentence Encoders. March 2020b. doi: 10.48550/arXiv.2003.04807. URL <http://arxiv.org/abs/2003.04807>. arXiv:2003.04807 [cs].
- William Chan, Navdeep Jaitly, Quoc V. Le, and Oriol Vinyals. Listen, attend and spell. 2015.
- Guoguo Chen, Shuzhou Chai, Guanbo Wang, Jiayu Du, Wei-Qiang Zhang, Chao Weng, Dan Su, Daniel Povey, Jan Trmal, Junbo Zhang, Mingjie Jin, Sanjeev Khudanpur, Shinji Watanabe, Shuaijiang Zhao, Wei Zou, Xiangang Li, Xuchen Yao, Yongqing Wang, Yujun Wang, Zhao You, and Zhiyong Yan. Gigaspeech: An evolving, multi-domain asr corpus with 10,000 hours of transcribed audio. 2021. URL <https://arxiv.org/abs/2106.06909>.
- Yunfei Chu, Jin Xu, Qian Yang, Haojie Wei, Xipin Wei, Zhifang Guo, Yichong Leng, Yuanjun Lv, Jinzheng He, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen2-audio technical report. 2024. URL <https://arxiv.org/abs/2407.10759>.
- Seamless Communication, Loïc Barrault, Yu-An Chung, Mariano Cora Meglioli, David Dale, Ning Dong, Paul-Ambroise Duquenne, Hady Elsahar, Hongyu Gong, Kevin Heffernan, John Hoffman, Christopher Klaiber, Pengwei Li, Daniel Licht, Jean Maillard, Alice Rakotoarison, Kaushik Ram Sadagopan, Guillaume Wenzek, Ethan Ye, Bapi Akula, Peng-Jen Chen, Naji El Hachem, Brian

- Ellis, Gabriel Mejia Gonzalez, Justin Haaheim, Prangthip Hansanti, Russ Howes, Bernie Huang, Min-Jae Hwang, Hirofumi Inaguma, Somya Jain, Elahe Kalbassi, Amanda Kallet, Ilia Kulikov, Janice Lam, Daniel Li, Xutai Ma, Ruslan Mavlyutov, Benjamin Peloquin, Mohamed Ramadan, Abinеш Ramakrishnan, Anna Sun, Kevin Tran, Tuan Tran, Igor Tufanov, Vish Vogeti, Carleigh Wood, Yilin Yang, Bokai Yu, Pierre Andrews, Can Balioglu, Marta R. Costa-jussà, Onur Celebi, Maha Elbayad, Cynthia Gao, Francisco Guzmán, Justine Kao, Ann Lee, Alexandre Mourachko, Juan Pino, Sravya Popuri, Christophe Ropers, Safiyyah Saleem, Holger Schwenk, Paden Tomasello, Changhan Wang, Jeff Wang, and Skyler Wang. Seamless4t: Massively multilingual & multimodal machine translation. 2023. URL <https://arxiv.org/abs/2308.11596>.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. Unsupervised Cross-lingual Representation Learning at Scale. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8440–8451, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.747.
- Alexis Conneau, Ankur Bapna, Yu Zhang, Min Ma, Patrick von Platen, Anton Lozhkov, Colin Cherry, Ye Jia, Clara Rivera, Mihir Kale, Daan Van Esch, Vera Axelrod, Simran Khanuja, Jonathan H. Clark, Orhan Firat, Michael Auli, Sebastian Ruder, Jason Riesa, and Melvin Johnson. XTREME-S: Evaluating Cross-lingual Speech Representations. April 2022a. doi: 10.48550/arXiv.2203.10752. URL <http://arxiv.org/abs/2203.10752>. arXiv:2203.10752 [cs].
- Alexis Conneau, Min Ma, Simran Khanuja, Yu Zhang, Vera Axelrod, Siddharth Dalmia, Jason Riesa, Clara Rivera, and Ankur Bapna. Fleurs: Few-shot learning evaluation of universal representations of speech. *arXiv preprint arXiv:2205.12446*, 2022b. URL <https://arxiv.org/abs/2205.12446>.
- Alice Coucke, Alaa Saade, Adrien Ball, Théodore Bluche, Alexandre Caulier, David Leroy, Clément Doumouro, Thibault Gisselbrecht, Francesco Caltagirone, Thibaut Lavril, Maël Primet, and Joseph Dureau. Snips Voice Platform: an embedded Spoken Language Understanding system for private-by-design voice interfaces. December 2018. doi: 10.48550/arXiv.1805.10190. URL <http://arxiv.org/abs/1805.10190>. arXiv:1805.10190 [cs].
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: pre-training of deep bidirectional transformers for language understanding. *CoRR*, abs/1810.04805, 2018. URL <http://arxiv.org/abs/1810.04805>.
- Kunal Dhawan, Kdimating Rekesh, and Boris Ginsburg. Unified Model for Code-Switching Speech Recognition and Language Identification Based on Concatenated Tokenizer. In *Proceedings of the 6th Workshop on Computational Approaches to Linguistic Code-Switching*, pages 74–82, Singapore, December 2023. Association for Computational Linguistics.
- Yiran Ding, Li Lyna Zhang, Chengruidong Zhang, Yuanyuan Xu, Ning Shang, Jiahang Xu, Fan Yang, and Mao Yang. Longrope: Extending llm context window beyond 2 million tokens. 2024. URL <https://arxiv.org/abs/2402.13753>.
- Bonaventure F. P. Dossou, Atnafu Lambebo Tonja, Oreen Yousuf, Salomey Osei, Abigail Opong, Iyanuoluwa Shode, Oluwabusayo Olufunke Awoyomi, and Chris Emezue. AfroLM: A Self-Active Learning-based Multilingual Pretrained Language Model for 23 African Languages. In *Proceedings of the Third Workshop on Simple and Efficient Natural Language Processing (SustaiNLP)*, pages 52–64, Abu Dhabi, United Arab Emirates (Hybrid), December 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.sustainlp-1.11.
- Christian Federmann, Tom Kocmi, and Ying Xin. NTREX-128 – news test references for MT evaluation of 128 languages. In *Proceedings of the First Workshop on Scaling Up Multilingual Evaluation*, pages 21–24, Online, nov 2022. Association for Computational Linguistics. URL <https://aclanthology.org/2022.sumeval-1.4>.
- Daniel Galvez, Greg Diamos, Juan Ciro, Juan Felipe Cerón, Keith Achorn, Anjali Gopi, David Kanter, Maximilian Lam, Mark Mazumder, and Vijay Janapa Reddi. The people’s speech: A large-scale diverse english speech recognition dataset for commercial usage. *CoRR*, abs/2111.09344, 2021. URL <https://arxiv.org/abs/2111.09344>.

- Sanchit Gandhi, Patrick von Platen, and Alexander M. Rush. Distil-whisper: Robust knowledge distillation via large-scale pseudo labelling. 2023.
- Elodie Gauthier, Laurent Besacier, Sylvie Voisin, Michael Melese, and Uriel Pascal Elingui. Collecting resources in sub-saharan african languages for automatic speech recognition: a case study of wolof. LREC, 2016.
- Elodie Gauthier, Aminata Ndiaye, and Abdoulaye Guissé. Kallaama: A transcribed speech dataset about agriculture in the three most widely spoken languages in senegal. In *Proceedings of the Fifth workshop on Resources for African Indigenous Languages (RAIL 2024)*, 2024.
- Timnit Gebru, Jamie Morgenstern, Briana Vecchione, Jennifer Wortman Vaughan, Hanna Wallach, Hal Daumé III, and Kate Crawford. Datasheets for Datasets, December 2021. URL <http://arxiv.org/abs/1803.09010>. arXiv:1803.09010 [cs].
- Daniela Gerz, Pei-Hao Su, Razvan Kuszto, Avishek Mondal, Michał Lis, Eshan Singhal, Nikola Mrkšić, Tsung-Hsien Wen, and Ivan Vulić. Multilingual and Cross-Lingual Intent Detection from Spoken Data. April 2021. doi: 10.48550/arXiv.2104.08524. URL <http://arxiv.org/abs/2104.08524>. arXiv:2104.08524 [cs].
- Alex Graves, Santiago Fernandez, Faustino Gomez, and Jurgen Schmidhuber. Connectionist temporal classification: labelling unsegmented sequence data with recurrent neural networks. In *Proceedings of the 23rd International Conference on Machine Learning, ICML '06*, page 369–376, New York, NY, USA, 2006. Association for Computing Machinery. ISBN 1595933832. doi: 10.1145/1143844.1143891. URL <https://doi.org/10.1145/1143844.1143891>.
- Anmol Gulati, James Qin, Chung-Cheng Chiu, Niki Parmar, Yu Zhang, Jiahui Yu, Wei Han, Shibo Wang, Zhengdong Zhang, Yonghui Wu, and Ruoming Pang. Conformer: Convolution-augmented transformer for speech recognition. 2020. URL <https://arxiv.org/abs/2005.08100>.
- Pengcheng He, Jianfeng Gao, and Weizhu Chen. Debortav3: Improving deberta using electra-style pre-training with gradient-disentangled embedding sharing. 2021a.
- Pengcheng He, Xiaodong Liu, Jianfeng Gao, and Weizhu Chen. Deberta: Decoding-enhanced bert with disentangled attention. In *International Conference on Learning Representations*, 2021b. URL <https://openreview.net/forum?id=XPZiaotutsD>.
- Kevin Heffernan, Onur Çelebi, and Holger Schwenk. Bitext mining using distilled sentence representations for low-resource languages. In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 2101–2112, Abu Dhabi, United Arab Emirates, December 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.findings-emnlp.154. URL <https://aclanthology.org/2022.findings-emnlp.154>.
- François Hernandez, Vincent Nguyen, Sahar Ghannay, Natalia Tomashenko, and Yannick Estève. Ted-lium 3: Twice as much data and corpus repartition for experiments on speaker adaptation. In *Speech and Computer*, pages 198–208. Springer International Publishing, 2018.
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. 2021. URL <https://arxiv.org/abs/2106.09685>.
- Mustafa Jarrar, Ahmet Birim, Mohammed Khalilia, Mustafa Erden, and Sana Ghanem. ArBanking77: Intent Detection Neural Model and a New Dataset in Modern and Dialectical Arabic. October 2023. doi: 10.48550/arXiv.2310.19034. URL <http://arxiv.org/abs/2310.19034>. arXiv:2310.19034 [cs].
- John Trevor Kasule, Sudi Murindanyi, Elvis Mugume, and Andrew Katumba. Luganda Speech Intent Recognition for IoT Applications. In *5th Workshop on African Natural Language Processing*, April 2024. URL <https://openreview.net/forum?id=GBq2FsT2Us>.
- Jitin Krishnan, Antonios Anastasopoulos, Hemant Purohit, and Huzefa Rangwala. Multilingual Code-Switching for Zero-Shot Cross-Lingual Intent Prediction and Slot Filling. March 2021. doi: 10.48550/arXiv.2103.07792. URL <http://arxiv.org/abs/2103.07792>. arXiv:2103.07792 [cs].

- Oleksii Kuchaiev, Jason Li, Huyen Nguyen, Oleksii Hrinchuk, Ryan Leary, Boris Ginsburg, Samuel Kriman, Stanislav Beliaev, Vitaly Lavrukhin, Jack Cook, Patrice Castonguay, Mariya Popova, Jocelyn Huang, and Jonathan M. Cohen. Nemo: a toolkit for building ai applications using neural modules. 2019. URL <https://arxiv.org/abs/1909.09577>.
- Jacques Leclerc. «Langues principales du Sénégal» dans *Sénégal & L'aménagement linguistique dans le monde*, Québec, CEFAN, Université Laval. 2023.
- Xinjian Li, Shinnosuke Takamichi, Takaaki Saeki, William Chen, Sayaka Shiota, and Shinji Watanabe. Yodas: Youtube-oriented dataset for audio and speech. In *2023 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU)*, pages 1–8. IEEE, 2023.
- Richard Liaw, Eric Liang, Robert Nishihara, Philipp Moritz, Joseph E Gonzalez, and Ion Stoica. Tune: A research platform for distributed model selection and training. *arXiv preprint arXiv:1807.05118*, 2018.
- Lina Martínez and John Rennie Short. The informal city: Exploring the variety of the street vending economy. *Sustainability*, 14(12), 2022. ISSN 2071-1050. doi: 10.3390/su14127213. URL <https://www.mdpi.com/2071-1050/14/12/7213>.
- Pierrette MAHORO Mastel, Ester Namara, Aime Munezero, Richard Kagame, Zihan Wang, Allan Anzagira, Akshat Gupta, and Jema David Ndirwile. NATURAL LANGUAGE UNDERSTANDING FOR AFRICAN LANGUAGES. April 2023. URL <https://openreview.net/forum?id=gWuvdFMqHM>.
- Chérif Mbodj. L'activité terminologique au Sénégal. *RINT*, 11:3–8, 2014.
- Microsoft, Abdelrahman Abouelenin, Atabak Ashfaq, Adam Atkinson, Hany Awadalla, Nguyen Bach, Jianmin Bao, Alon Benhaim, Martin Cai, Vishrav Chaudhary, Congcong Chen, Dong Chen, Dongdong Chen, Junkun Chen, Weizhu Chen, Yen-Chun Chen, Yi-ling Chen, Qi Dai, Xiyang Dai, Ruchao Fan, Mei Gao, Min Gao, Amit Garg, Abhishek Goswami, Junheng Hao, Amr Hendy, Yuxuan Hu, Xin Jin, Mahmoud Khademi, Dongwoo Kim, Young Jin Kim, Gina Lee, Jinyu Li, Yunsheng Li, Chen Liang, Xihui Lin, Zeqi Lin, Mengchen Liu, Yang Liu, Gilsinia Lopez, Chong Luo, Piyush Madan, Vadim Mazalov, Arindam Mitra, Ali Mousavi, Anh Nguyen, Jing Pan, Daniel Perez-Becker, Jacob Platin, Thomas Portet, Kai Qiu, Bo Ren, Liliang Ren, Sambuddha Roy, Ning Shang, Yelong Shen, Saksham Singhal, Subhojit Som, Xia Song, Tetyana Sych, Praneetha Vaddamanu, Shuohang Wang, Yiming Wang, Zhenghao Wang, Haibin Wu, Haoran Xu, Weijian Xu, Yifan Yang, Ziyi Yang, Donghan Yu, Ishmam Zabir, Jianwen Zhang, Li Lyna Zhang, Yunan Zhang, and Xiren Zhou. Phi-4-Mini Technical Report: Compact yet Powerful Multimodal Language Models via Mixture-of-LoRAs. (arXiv:2503.01743), March 2025. doi: 10.48550/arXiv.2503.01743.
- Nikita Moghe, Evgeniia Razumovskaia, Liane Guillou, Ivan Vulić, Anna Korhonen, and Alexandra Birch. MULTI3NLU++: A Multilingual, Multi-Intent, Multi-Domain Dataset for Natural Language Understanding in Task-Oriented Dialogue. June 2023. doi: 10.48550/arXiv.2212.10455. URL <http://arxiv.org/abs/2212.10455>. arXiv:2212.10455 [cs].
- Laurer Moritz, Atteveldt Wouter van, Andreu Casas, and Kasper Welbers. Less Annotating, More Classifying – Addressing the Data Scarcity Issue of Supervised Machine Learning with Deep Transfer Learning and BERT-NLI. 2022.
- Stanlaus Mwongela, Jay Patel, Sathy Rajasekharan, Laura Wotton, Mohamed Ahmed, Gilles Hacheme, Bernard Shibwabo, and Julius Butime. Data-efficient learning for healthcare queries in low-resource and code mixed language settings. In *International Conference on Learning Representations*, 2023.
- Augustin Ndione. *Contribution à Une Étude de La Différence Entre La Réduplication et La Répétition En Français et En Wolof*. These de doctorat, Tours, November 2013.
- Kelechi Ogueji, Yuxin Zhu, and Jimmy Lin. Small data? no problem! exploring the viability of pretrained multilingual language models for low-resourced languages. In *Proceedings of the 1st Workshop on Multilingual Representation Learning*, pages 116–126, Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.mrl-1.11. URL <https://aclanthology.org/2021.mrl-1.11/>.

Ogunayo Ogundepo, Tajuddeen R. Gwadabe, Clara E. Rivera, Jonathan H. Clark, Sebastian Ruder, David Ifeoluwa Adelani, Bonaventure F. P. Dossou, Abdou Aziz DIOP, Claytone Sikasote, Gilles Hacheme, Happy Buzaaba, Ignatius Ezeani, Rooweither Mabuya, Salomey Osei, Chris Emezue, Albert Njoroge Kahira, Shamsuddeen H. Muhammad, Akintunde Oladipo, Abraham Toluwase Owodunni, Atnafu Lambebo Tonja, Iyanuoluwa Shode, Akari Asai, Tunde Oluwaseyi Ajayi, Clemencia Siro, Steven Arthur, Mofetoluwa Adeyemi, Orevaoghene Ahia, Aremu Anuoluwapo, Oyinkansola Awosan, Chiamaka Chukwuneke, Bernard Opoku, Awokoya Ayodele, Verrah Otiende, Christine Mwase, Boyd Sinkala, Andre Niyongabo Rubungo, Daniel A. Ajisafe, Emeka Felix Onwuegbuzia, Habib Mbow, Emile Niyomutabazi, Eunice Mukonde, Falalu Ibrahim Lawan, Ibrahim Said Ahmad, Jesujoba O. Alabi, Martin Namukombo, Mbonu Chinedu, Mofya Phiri, Neo Putini, Ndumiso Mngoma, Priscilla A. Amuok, Ruqayya Nasir Iro, and Sonia Adhiambo. *Afrika: Cross-lingual open-retrieval question answering for african languages*. 2023.

Akintunde Oladipo, Mofetoluwa Adeyemi, Orevaoghene Ahia, Abraham Owodunni, Ogunayo Ogundepo, David Adelani, and Jimmy Lin. Better quality pre-training data and t5 models for African languages. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 158–168, Singapore, December 2023. Association for Computational Linguistics. URL <https://aclanthology.org/2023.emnlp-main.11>.

OpenAI, :, Aaron Hurst, Adam Lerer, Adam P. Goucher, Adam Perelman, Aditya Ramesh, Aidan Clark, AJ Ostrow, Akila Welihinda, Alan Hayes, Alec Radford, Aleksander Mądry, Alex Baker-Whitcomb, Alex Beutel, Alex Borzunov, Alex Carney, Alex Chow, Alex Kirillov, Alex Nichol, Alex Paino, Alex Renzin, Alex Tachard Passos, Alexander Kirillov, Alexi Christakis, Alexis Conneau, Ali Kamali, Allan Jabri, Allison Moyer, Allison Tam, Amadou Crookes, Amin Tootoochian, Amin Tootoonchian, Ananya Kumar, Andrea Vallone, Andrej Karpathy, Andrew Braunstein, Andrew Cann, Andrew Codispoti, Andrew Galu, Andrew Kondrich, Andrew Tulloch, Andrew Mishchenko, Angela Baek, Angela Jiang, Antoine Pelisse, Antonia Woodford, Anuj Gosalia, Arka Dhar, Ashley Pantuliano, Avi Nayak, Avital Oliver, Barret Zoph, Behrooz Ghorbani, Ben Leimberger, Ben Rossen, Ben Sokolowsky, Ben Wang, Benjamin Zweig, Beth Hoover, Blake Samic, Bob McGrew, Bobby Spero, Bogo Gierler, Bowen Cheng, Brad Lightcap, Brandon Walkin, Brendan Quinn, Brian Guarraci, Brian Hsu, Bright Kellogg, Brydon Eastman, Camillo Lugaresi, Carroll Wainwright, Cary Bassin, Cary Hudson, Casey Chu, Chad Nelson, Chak Li, Chan Jun Shern, Channing Conger, Charlotte Barette, Chelsea Voss, Chen Ding, Cheng Lu, Chong Zhang, Chris Beaumont, Chris Hallacy, Chris Koch, Christian Gibson, Christina Kim, Christine Choi, Christine McLeavey, Christopher Hesse, Claudia Fischer, Clemens Winter, Coley Czarnecki, Colin Jarvis, Colin Wei, Constantin Koumouzelis, Dane Sherburn, Daniel Kappler, Daniel Levin, Daniel Levy, David Carr, David Farhi, David Mely, David Robinson, David Sasaki, Denny Jin, Dev Valladares, Dimitris Tsipras, Doug Li, Duc Phong Nguyen, Duncan Findlay, Edele Oiwoh, Edmund Wong, Ehsan Asdar, Elizabeth Proehl, Elizabeth Yang, Eric Antonow, Eric Kramer, Eric Peterson, Eric Sigler, Eric Wallace, Eugene Brevdo, Evan Mays, Farzad Khorasani, Felipe Petroski Such, Filippo Raso, Francis Zhang, Fred von Lohmann, Freddie Sulit, Gabriel Goh, Gene Oden, Geoff Salmon, Giulio Starace, Greg Brockman, Hadi Salman, Haiming Bao, Haitang Hu, Hannah Wong, Haoyu Wang, Heather Schmidt, Heather Whitney, Heewoo Jun, Hendrik Kirchner, Henrique Ponde de Oliveira Pinto, Hongyu Ren, Huiwen Chang, Hyung Won Chung, Ian Kivlichan, Ian O’Connell, Ian O’Connell, Ian Osband, Ian Silber, Ian Sohl, Ibrahim Okuyucu, Ikai Lan, Ilya Kostrikov, Ilya Sutskever, Ingmar Kanitscheider, Ishaan Gulrajani, Jacob Coxon, Jacob Menick, Jakub Pachocki, James Aung, James Betker, James Crooks, James Lennon, Jamie Kiros, Jan Leike, Jane Park, Jason Kwon, Jason Phang, Jason Teplitz, Jason Wei, Jason Wolfe, Jay Chen, Jeff Harris, Jenia Varavva, Jessica Gan Lee, Jessica Shieh, Ji Lin, Jiahui Yu, Jiayi Weng, Jie Tang, Jieqi Yu, Joanne Jang, Joaquin Quinonero Candela, Joe Beutler, Joe Landers, Joel Parish, Johannes Heidecke, John Schulman, Jonathan Lachman, Jonathan McKay, Jonathan Uesato, Jonathan Ward, Jong Wook Kim, Joost Huizinga, Jordan Sitkin, Jos Kraaijeveld, Josh Gross, Josh Kaplan, Josh Snyder, Joshua Achiam, Joy Jiao, Joyce Lee, Juntang Zhuang, Justyn Harriman, Kai Fricke, Kai Hayashi, Karan Singhal, Katy Shi, Kavin Karthik, Kayla Wood, Kendra Rimbach, Kenny Hsu, Kenny Nguyen, Keren Gu-Lemberg, Kevin Button, Kevin Liu, Kiel Howe, Krithika Muthukumar, Kyle Luther, Lama Ahmad, Larry Kai, Lauren Itow, Lauren Workman, Leher Pathak, Leo Chen, Li Jing, Lia Guy, Liam Fedus, Liang Zhou, Lien Mamitsuka, Lilian Weng, Lindsay McCallum, Lindsey Held, Long Ouyang, Louis Feувrier, Lu Zhang, Lukas Kondraciuk, Lukasz Kaiser, Luke Hewitt, Luke Metz, Lyric Doshi, Mada Aflak, Maddie Simens, Madeline Boyd, Madeleine Thompson, Marat Dukhan, Mark Chen, Mark Gray, Mark Hudnall, Marvin

- Zhang, Marwan Aljubei, Mateusz Litwin, Matthew Zeng, Max Johnson, Maya Shetty, Mayank Gupta, Meghan Shah, Mehmet Yatbaz, Meng Jia Yang, Mengchao Zhong, Mia Glaese, Mianna Chen, Michael Janner, Michael Lampe, Michael Petrov, Michael Wu, Michele Wang, Michelle Fradin, Michelle Pokrass, Miguel Castro, Miguel Oom Temudo de Castro, Mikhail Pavlov, Miles Brundage, Miles Wang, Minal Khan, Mira Murati, Mo Bavarian, Molly Lin, Murat Yesildal, Nacho Soto, Natalia Gimelshein, Natalie Cone, Natalie Staudacher, Natalie Summers, Natan LaFontaine, Neil Chowdhury, Nick Ryder, Nick Stathas, Nick Turley, Nik Tezak, Niko Felix, Nithanth Kudige, Nitish Keskar, Noah Deutsch, Noel Bundick, Nora Puckett, Ofir Nachum, Ola Okelola, Oleg Boiko, Oleg Murk, Oliver Jaffe, Olivia Watkins, Olivier Godement, Owen Campbell-Moore, Patrick Chao, Paul McMillan, Pavel Belov, Peng Su, Peter Bak, Peter Bakkum, Peter Deng, Peter Dolan, Peter Hoeschele, Peter Welinder, Phil Tillet, Philip Pronin, Philippe Tillet, Prafulla Dhariwal, Qiming Yuan, Rachel Dias, Rachel Lim, Rahul Arora, Rajan Troll, Randall Lin, Rapha Gontijo Lopes, Raul Puri, Reah Miyara, Reimar Leike, Renaud Gaubert, Reza Zamani, Ricky Wang, Rob Donnelly, Rob Honsby, Rocky Smith, Rohan Sahai, Rohit Ramchandani, Romain Huet, Rory Carmichael, Rowan Zellers, Roy Chen, Ruby Chen, Ruslan Nigmatullin, Ryan Cheu, Saachi Jain, Sam Altman, Sam Schoenholz, Sam Toizer, Samuel Miserendino, Sandhini Agarwal, Sara Culver, Scott Ethersmith, Scott Gray, Sean Grove, Sean Metzger, Shamez Hermani, Shantanu Jain, Shengjia Zhao, Sherwin Wu, Shino Jomoto, Shirong Wu, Shuaiqi, Xia, Sonia Phene, Spencer Papay, Srinivas Narayanan, Steve Coffey, Steve Lee, Stewart Hall, Suchir Balaji, Tal Broda, Tal Stramer, Tao Xu, Tarun Gogineni, Taya Christianson, Ted Sanders, Tejal Patwardhan, Thomas Cunningham, Thomas Degry, Thomas Dimson, Thomas Raoux, Thomas Shadwell, Tianhao Zheng, Todd Underwood, Todor Markov, Toki Sherbakov, Tom Rubin, Tom Stasi, Tomer Kaftan, Tristan Heywood, Troy Peterson, Tyce Walters, Tyna Eloundou, Valerie Qi, Veit Moeller, Vinnie Monaco, Vishal Kuo, Vlad Fomenko, Wayne Chang, Weiyi Zheng, Wenda Zhou, Wesam Manassra, Will Sheu, Wojciech Zaremba, Yash Patil, Yilei Qian, Yongjik Kim, Youlong Cheng, Yu Zhang, Yuchen He, Yuchen Zhang, Yujia Jin, Yunxing Dai, and Yury Malkov. Gpt-4o system card. 2024. URL <https://arxiv.org/abs/2410.21276>.
- Maimouna Ouattara, Abdoul Kader Kaboré, Jacques Klein, and Tegawendé F. Bissyandé. Bridging literacy gaps in African informal business management with low-resource conversational agents. In *Proceedings of the First Workshop on Language Models for Low-Resource Languages*, pages 193–203, Abu Dhabi, United Arab Emirates, January 2025. Association for Computational Linguistics. URL <https://aclanthology.org/2025.loreslm-1.15/>.
- Vassil Panayotov, Guoguo Chen, Daniel Povey, and Sanjeev Khudanpur. Librispeech: an asr corpus based on public domain audio books. In *Acoustics, Speech and Signal Processing (ICASSP), 2015 IEEE International Conference on*, pages 5206–5210. IEEE, 2015.
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Köpf, Edward Yang, Zach DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. Pytorch: An imperative style, high-performance deep learning library. 2019. URL <https://arxiv.org/abs/1912.01703>.
- Loïc-Michel Perrin. *Des représentations du temps en wolof*. PhD thesis, Université Paris-Diderot - Paris VII, May 2005.
- P. J. Price. Evaluation of Spoken Language Systems: the ATIS Domain. In *Speech and Natural Language: Proceedings of a Workshop Held at Hidden Valley, Pennsylvania, June 24-27, 1990*, 1990. URL <https://aclanthology.org/H90-1020>.
- Krishna C. Puvvada, Piotr Żelasko, He Huang, Oleksii Hrinchuk, Nithin Rao Koluguri, Kunal Dhawan, Somshubra Majumdar, Elena Rastorgueva, Zhehuai Chen, Vitaly Lavrukhin, Jagadeesh Balam, and Boris Ginsburg. Less is More: Accurate Speech Recognition & Translation without Web-Scale Data. (arXiv:2406.19674), June 2024. doi: 10.48550/arXiv.2406.19674.
- Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. Robust speech recognition via large-scale weak supervision. *ArXiv*, abs/2212.04356, 2022a. URL <https://api.semanticscholar.org/CorpusID:252923993>.

- Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever. Robust speech recognition via large-scale weak supervision. 2022b. URL <https://arxiv.org/abs/2212.04356>.
- Dima Rekish, Nithin Rao Koluguri, Samuel Krizan, Somshubra Majumdar, Vahid Noroozi, He Huang, Oleksii Hrinchuk, Krishna Puvvada, Ankur Kumar, Jagadeesh Balam, and Boris Ginsburg. Fast Conformer With Linearly Scalable Attention For Efficient Speech Recognition. In *2023 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU)*, pages 1–8, December 2023. doi: 10.1109/ASRU57964.2023.10389701.
- Shuzheng Si, Wentao Ma, Haoyu Gao, Yuchuan Wu, Ting-En Lin, Yinpei Dai, Hangyu Li, Rui Yan, Fei Huang, and Yongbin Li. SpokenWOZ: A large-scale speech-text benchmark for spoken task-oriented dialogue agents. In *Thirty-seventh Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2023a. URL <https://openreview.net/forum?id=viktK3n05b>.
- Shuzheng Si, Wentao Ma, Haoyu Gao, Yuchuan Wu, Ting-En Lin, Yinpei Dai, Hangyu Li, Rui Yan, Fei Huang, and Yongbin Li. SpokenWOZ: A Large-Scale Speech-Text Benchmark for Spoken Task-Oriented Dialogue Agents. *Advances in Neural Information Processing Systems*, 36: 39088–39118, December 2023b. URL https://proceedings.neurips.cc/paper_files/paper/2023/hash/7b16688a2b053a1b01474ab5c78ce662-Abstract-Datasets_and_Benchmarks.html.
- Gemini Team, Rohan Anil, Sebastian Borgeaud, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, Katie Millican, et al. *arXiv preprint arXiv:2312.11805*, 2023. URL <https://arxiv.org/abs/2312.11805>.
- Nllb team, Marta Ruiz Costa-jussà, James Cross, Onur cCelebi, Maha Elbayad, Kenneth Heafield, Kevin Heffernan, Elahe Kalbassi, Janice Lam, Daniel Licht, Jean Maillard, Anna Sun, Skyler Wang, Guillaume Wenzek, Alison Youngblood, Bapi Akula, Loïc Barrault, Gabriel Mejia Gonzalez, Prangthip Hansanti, John Hoffman, Semarley Jarrett, Kaushik Ram Sadagopan, Dirk Rowe, Shannon L. Spruit, C. Tran, Pierre Yves Andrews, Necip Fazil Ayan, Shruti Bhosale, Sergey Edunov, Angela Fan, Cynthia Gao, Vedanuj Goswami, Francisco Guzmán, Philipp Koehn, Alexandre Mourachko, Christophe Ropers, Safiyyah Saleem, Holger Schwenk, and Jeff Wang. No language left behind: Scaling human-centered machine translation. *ArXiv*, abs/2207.04672, 2022. URL <https://api.semanticscholar.org/CorpusID:250425961>.
- torchtune maintainers and contributors. torchtune: Pytorch’s finetuning library, April 2024. URL <https://github.com/pytorch/torchtune>.
- Lewis Tunstall, Nils Reimers, Unso Eun Seo Jo, Luke Bates, Daniel Korat, Moshe Wasserblat, and Oren Pereg. Efficient few-shot learning without prompts. 2022. URL <https://arxiv.org/abs/2209.11055>.
- Ashish Vaswani, Noam M. Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Neural Information Processing Systems*, 2017. URL <https://api.semanticscholar.org/CorpusID:13756489>.
- Changhan Wang, Anne Wu, and Juan Pino. CoVoST 2 and Massively Multilingual Speech-to-Text Translation. (arXiv:2007.10310), October 2020. doi: 10.48550/arXiv.2007.10310.
- Changhan Wang, Morgane Riviere, Ann Lee, Anne Wu, Chaitanya Talnikar, Daniel Haziza, Mary Williamson, Juan Pino, and Emmanuel Dupoux. VoxPopuli: A large-scale multilingual speech corpus for representation learning, semi-supervised learning and interpretation. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 993–1003, Online, August 2021. Association for Computational Linguistics. URL <https://aclanthology.org/2021.acl-long.80>.
- Guillaume Wenzek, Marie-Anne Lachaux, Alexis Conneau, Vishrav Chaudhary, Francisco Guzmán, Armand Joulin, and Edouard Grave. CCNet: Extracting High Quality Monolingual Datasets from Web Crawl Data. In *Proceedings of the Twelfth Language Resources and Evaluation Conference*, pages 4003–4012, Marseille, France, May 2020. European Language Resources Association. ISBN 979-10-95546-34-4.

Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander M. Rush. Huggingface’s transformers: State-of-the-art natural language processing. 2020. URL <https://arxiv.org/abs/1910.03771>.

Weijia Xu, Batoool Haider, and Saab Mansour. End-to-End Slot Alignment and Recognition for Cross-Lingual NLU. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5052–5063, Online, November 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.emnlp-main.410. URL <https://aclanthology.org/2020.emnlp-main.410>.

Hao Yu, Jesujoba O. Alabi, Andiswa Bukula, Jian Yun Zhuang, En-Shiun Annie Lee, Tadesse Kebede Guge, Israel Abebe Azime, Happy Buzaaba, Blessing Kudzaishe Sibanda, Godson K. Kalipe, Jonathan Mukiibi, Salomon Kabongo Kabenamualu, Mmasibidi Setaka, Lolwethu Ndolela, Nkiruka Odu, Rooweither Mabuya, Shamsuddeen Hassan Muhammad, Salomey Osei, Sokhar Samb, Juliet W. Murage, Dietrich Klakow, and David Ifeoluwa Adelani. INJONGO: A Multi-cultural Intent Detection and Slot-filling Dataset for 16 African Languages. (arXiv:2502.09814), February 2025. doi: 10.48550/arXiv.2502.09814.

Piotr Żelasko, Kunal Dhawan, Daniel Galvez, Krishna C. Puvvada, Ankita Pasad, Nithin Rao Koluguri, Ke Hu, Vitaly Lavrukhin, Jagadeesh Balam, and Boris Ginsburg. Training and Inference Efficiency of Encoder-Decoder Speech Models. 2025. URL <https://arxiv.org/abs/2503.05931v2>.

A Technical Appendices and Supplementary Material

A.1 WolBanking77 supplementary details

Does the partition illustrated in figure 3 correspond to the population of each region?

The score presented is not representative of the population of each region. We tried to cover various ethnic groups in the country in order to have diverse accents.

Are these regions fully representative of the linguistic variation that occurs in the Wolof language across Senegal?

Wolof has several dialects, including Bawol, Kajoor, Jolof, and Jander; This dialectal diversity does not prevent inter-understanding. However, there is a lesser degree of inter-understanding between these varieties and that spoken by the Lebous (an ethnic group living mainly in the Cape Verde peninsula, i.e. in certain localities in the Dakar region).

Is the Wolof language as used in Mauritania and Gambia substantially distinct from the Senegalese variety, such that the demonstrated performance on the audio dataset may not generalise to these Wolof-speaking populations?

The Wolof language used in Mauritania and Gambia is not substantially different. However, the differences are to be seen rather in linguistic evolutions and in particular with the borrowings from foreign languages present, in particular Arabic and English. These differences may pose a problem for the generalization of models trained on the audio data that do not yet cover these variants of Wolof. This is also present in the accent of the Wolof locutors which highly differs under the effect of the official language (English or Arabic). This has a strong impact on Wolof words pronunciation.

It would be useful to know the age distribution of the speakers.

The age distribution of the participants are presented on table 6.

It would also be useful to know the intersection of age and literacy in the population. If older speakers, for example, were proportionally less literate in the language, this might argue for strengthening the representation of older voices in the dataset, given that this development is aimed at improving accessibility through voice-interactive technology.

According to statistics (from Agence Nationale de la Statistique et de la Démographie ANSD [2013]), the literacy rate is higher among the younger populations of 10-14 years old and 15-19 years old, with 58.1% and 64.1% respectively. However, the literacy rate decreases among older populations over 70

years of age (between 13% and 20%). In view of these figures, we intend to take the representation of the older population in future versions of the dataset.

Table 6: Age distribution of the speakers

Stat	Age
mean	26
std	4
min	22
25%	23
50%	25
75%	27
max	36

Is the digital infrastructure (mobile or desktop internet services) sufficient in all regions to support the deployment of the proposed future technology?

The mobile phone and internet coverage is now very high in Senegal, the WhatsApp application for example is used throughout the country.

A.2 Hyperparameters

Table 7: Hyperparameters for NLP models. mDeBERTa-v3* and AfritevaV2 have same hyperparameters.

Model	bert-base-uncased	AfroXLMR	mDeBERTa-v3*	AfroLM	Llama3.2
Learning Rate	2e-05	2e-05	2e-05	2e-05	3e-4
Train Batch Size	32	4	8	16	4
Eval Batch Size	32	8	8	8	4
Warmup ratio	0.1	0.1	0.1	0.1	-
# epochs	20	20	20	20	20

NLP models hyperparameters are reported on table 7, AdamW_torch_fused is the default optimizer for NLP models except for Llama3.2 that is AdamW.

Table 8: Hyperparameters for ASR models.

Model	Canary-1b-flash	Distil-whisper-large-v3.5	Phi-4
Learning Rate	3e-4	1e-5	1e-4
Train Batch Size	-	8	16
Eval Batch Size	8	8	-
Gradient Accumulation Steps	-	1	1
Lr Scheduler Warmup Steps	2500	500	-
Optimizer	AdamW	AdamW	AdamW_torch
# steps	1000	1000	1000

Table 8 shows the hyperparameters used to train Phi-4-multimodal-instruct, Distil-whisper-large-v3.5 and Canary-1b-flash. Hyperparameters has been chosen by following HuggingFace Wolf et al. [2020] and NVIDIA Nemo Kuchaiev et al. [2019] documentations. AdamW has been used as a default optimizer.

Table 9: Best hyperparameters for LASER3+CNN.

Model	LASER3+CNN
Learning Rate	0.013364046097018405
Last size of non classification layer	128
Batch Size	2

A.3 Text prompt for Llama3.2

This prompt format was used to train the Llama3.2 model.

```

Classify the text for one of the categories:

<text>
{text}
</text>

Choose from one of the category:
{classes}
Only choose one category, the most appropriate one. Reply only with the
→ category.

```

{text} is a variable that can be one of the following sentences for example:

Dama wara yónnée xaaalis, ndax mën naa jëfandikoo sama kàrtu kredi? (I need to transfer some money, can I use my credit card?)

Jotuma xaaalis bi ma ñu ma waroon a delloo. (I have not received a refund.)

Ci lan ngeeni jëfandikoo kàrt yi ñuy sànni? (What do you use disposable cards on?)

Ndax amna anam buma mëna toppé lii? (Was there a way for me to get tracking for that?)

Ban diir la wara am ngir yonnee xaaalis Etats-Uni? (How long does it take for deliver to the US?)

A.4 Reference scores from classic Machine Learning Techniques

Machine learning models such as KNN, SVM, Logistic Regression (LR) and Naive Bayes (NB) with Bag-Of-Words are used as baselines as well as CNN and MPL with LASER3 as sentence encoder. Table 10 shows ML baselines comparison. Results shows that Bag of Words combined with Linear Regression outperforms the other ML models with an F1-score of 53%. However, LR and SVM achieve same results on 5k split.

Table 10: ML baselines models precision, recall and f1-score results on WolBanking77. Best models are highlighted in lightgray.

Model	5k samples			All samples		
	Precision	Recall	F1	Precision	Recall	F1
BoW+KNN	0.48	0.39	0.39	0.37	0.31	0.31
BoW+SVM	0.70	0.69	0.68	0.49	0.48	0.48
BoW+LR	0.70	0.69	0.68	0.54	0.53	0.53
BoW+NB	0.54	0.51	0.50	0.28	0.26	0.26

A.5 Pretrained Sentence Encoder

LASER3: Heffernan et al. [2022] propose an improvement of LASER by training the model on several languages with the aim of encoding them in the same representation space. The method used consists of training a teacher-student model by combining supervised and self-supervised approaches with the aim of training the model on low-resource languages. This allows to cover 50 African

languages including Wolof. Teacher-student training is used in order to avoid training a new model from scratch each time we need to encode a new language. Some of the African languages come from the Masakhane project ¹⁴ as well as the EMNLP’22 workshop.¹⁵ The authors made some changes to the LASER architecture such as replacing BPE with SPM (SentencePiece Model), which is an unsupervised text tokenizer and detokenizer that does not depend on language-specific pre or postprocessing, as well as adding an upsampling step for low-resource languages. The LASER sentence encoder trained on the public corpus OPUS ¹⁶ is used as a teacher model and renamed by **LASER2**, then the student model is named **LASER3**. A student model is trained for each language covered in Masked Language Modeling mode, then a multilingual distillation approach is applied by optimizing the cosine loss between the embeddings generated by the teacher and the student. The student architecture has been replaced by a 12-layer transformer instead of a 6-layer BiLSTM of the original LASER. Concerning Wolof language, the model was trained on 21k bitexts which are pairs of texts in two different languages that are translations of each other and 94k sentences using training distillation in addition to Masked Language Modeling. The results of the experiments showed a clear improvement of LASER3 encoder on Wolof with a score of 6.03 xsim error rate (a margin-based similarity score by Artetxe and Schwenk [2019]) compared to the original LASER encoder which produced a score of 70.65.

Pre-trained sentence encoder LASER3 that vectorize each sentence and all possible combinations of classification models (MPL and CNN) are compared in the reported results on Table 11. Note that all classification models have been trained from scratch. For all the evaluations, punctuation are removed and each sentence transformed in lowercase.

Table 11: LASER3 with classification models precision, recall and f1-score results on WolBanking77. LASER3+CNN (tuning) denotes LASER3+CNN with CNN hyperparameter tuning. Best models are highlighted in lightgray.

Model	5k samples			All samples		
	Precision	Recall	F1	Precision	Recall	F1
LASER3+MLP	0.56	0.56	0.55	0.43	0.42	0.42
LASER3+CNN	0.01	0.05	0.01	0.01	0.05	0.01
LASER3+CNN (tuning)	0.53	0.50	0.49	0.33	0.32	0.32

Table 11 shows weighted average results of LASER3 with classification models (MLP, CNN). LASER+MLP achieves best results with F1-score of 55% on 5k samples and 42% on all samples compared to LASER+CNN which produced poor results with a low F1-score of 1%. To improve the LASER+CNN model, we have tuned the CNN model hyperparameters relying on the Ray Tune library [Liaw et al., 2018]. The tuned hyperparameters are: the size of the last internal representation before the classification layer, the learning rate (lr) and the batch size. We have run the tuning on 10 different trials, and for each trial, Ray Library randomly sampled a combination of parameters using ASHAScheduler which terminates early the trials performing badly. Best hyperparameters obtained are reported on table 9. This leads to the results reported on table 11.

A.6 Consent form

Figure 6 presents the consent form (in French) presented to participants before the recording sessions.

B Limitations

We can note some limitations in our dataset such as intention classes imbalance which can push the model to favor majority classes to the detriment of minority ones. During the ASR evaluation, we noticed spelling errors on rare words which can be corrected with a language model.

¹⁴<https://www.masakhane.io/>

¹⁵<https://www.statmt.org/wmt22/large-scale-multilingual-translation-task.html>

¹⁶<https://opus.nlpl.eu/>

Formulaire de consentement

Je, soussigné(e) X, déclare accepter librement, et de façon éclairée, de participer comme sujet à l'étude dans le cadre du

Le linguiste, en charge de la collecte, s'engage à protéger l'intégrité du participant tout au long de l'étude. Le participant donne l'autorisation au linguiste de partager les enregistrements avec la communauté des chercheurs ou des locuteurs de la langue pour des fins culturelles et scientifiques. Le linguiste s'engage à ne pas diffuser des contenus potentiellement sensibles. Le participant peut décider à tout moment de restreindre l'accès aux enregistrements. Le consentement pour poursuivre la recherche peut être retiré à tout moment sans donner de raison et sans encourir aucune responsabilité ni conséquence. Les réponses aux questions ont un caractère facultatif et le défaut de réponse n'aura aucune conséquence pour le sujet. Le participant a la possibilité d'obtenir des informations supplémentaires concernant cette étude auprès du linguiste, et ce dans les limites des contraintes du plan d'étude. Toutes les informations concernant le participant sont conservées de façon anonyme et confidentielle. Le linguiste s'engage à préserver absolument la confidentialité pour toutes les informations concernant le participant.

Le participant : X

Le linguiste :

Fait le 24/05/2024 à :

Fait le 24/05/2024 à :

Signature :

Signature :

Figure 6: Consent form

C Ethics Statement

To protect the anonymity of participants, Personal data such as speaker name, location and androidID have been removed in the dataset. We notified each participant that the audio collected will be used as a public dataset for research purposes. Each participant read and signed a consent form in which they declare their free and informed acceptance to participate as a subject in the study as part of the data collection proposed in this project as described in section A.6. We paid the amount of \$850 to the linguists for the translation and phonetic transcription of all the sentences in Wolof.

D Wolof language

Wolof is a member of the West Atlantic sub-branch of the Niger-Congo language family. A small minority from various other ethnic groups have adopted Wolof as their first language, while more than half of non-native speakers use Wolof as their second or third language. Together, these three groups of Wolof speakers represent about 90% of the population, making Senegal one of the most linguistically unified nations in West Africa [Mbodj, 2014]. Wolof is also spoken by the majority of the population in Gambia [Ndione, 2013]. Genetically related languages are Pulaar and Serere, which are all languages of the Niger-Congo phylum, and of the Atlantic branch Ndione [2013] see figure 7.

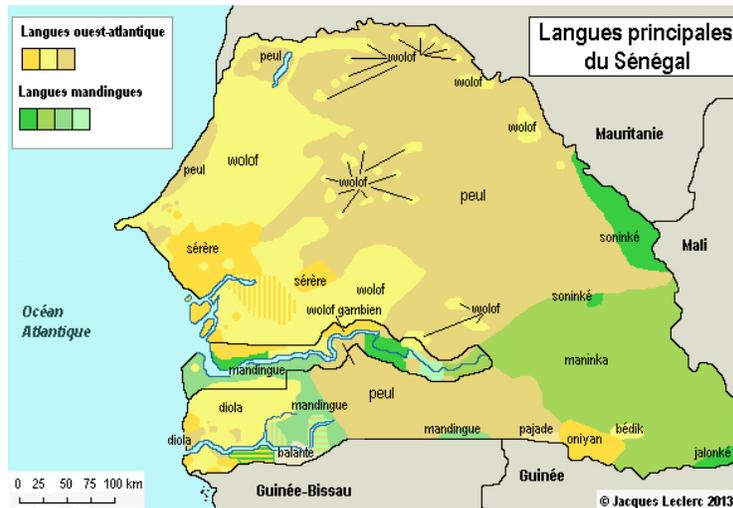


Figure 7: The main languages of Senegal Leclerc [2023]

To construct sentences in Wolof, there are several processes such as 8 class markers for words in singular form and 2 class markers for words in plural form. These markers are positioned in front of or right after the word such as: *nit ki* (to designate a person), *nit ñi* (to designate several persons). In addition, we also find other construction processes such as consonantal alternation, pre-nasalization and suffixation. For some derivations, there is the simultaneous presence of several of these processes. For example, pre-nasalization can be accompanied by suffixation [Ndione, 2013].

The conjugation in Wolof is achieved thanks to an invariable lexical base to which are added affixes holding the markers of IPAM (Index; Person Aspect-time; Mode) [Perrin, 2005, Ndione, 2013]. These inflectional markers highlight both semantic roles and grammatical relations. We mainly distinguish two types of verbs in Wolof, action verbs (expressing an action or a fact carried out or suffered by the subject) and state verbs (giving characteristics to elements, they describe a state, a way of being). There are ten conjugations in Wolof Perrin [2005], Ndione [2013] such as the perfect, the aorist, the presentative, the emphatic of the verb, the emphatic of the subject, the emphatic of the complement, the negative, the emphatic negative, the imperative and the obligative.

Depending on the grammar, in Wolof, there is generally only one auxiliary, "di", with its variants "d" and "y" which mark the unaccomplished. The variant "d" appears with the time and the negation markers (*doon, daa, daan, dee, du*).

E Datasheets for WolBanking77

E.1 Motivation

For what purpose was the dataset created? Was there a specific task in mind? Was there a specific gap that needed to be filled? Please provide a description.

This dataset was created with the aim of propelling research on intent detection in Wolof which is a language spoken in West Africa in order to allow illiterate people to be able to interact with digital systems through the voice channel. We introduce a text dataset and audio dataset including utterances accompanied by their transcription with their corresponding intent in order to be able to simulate a dialogue between the user and the system.

Who created the dataset (e.g., which team, research group) and on behalf of which entity (e.g., company, institution, organization)?

This dataset is created by researchers at Université Cheikh Anta Diop of Dakar and Université Gaston Berger of Saint-Louis in Senegal.

Who funded the creation of the dataset?

Funding was provided by the Partnership for skills in Applied Sciences, Engineering and Technology (PASET) and Regional Scholarship and Innovation Fund (RSIF).

E.2 Composition

What do the instances that comprise the dataset represent (e.g., documents, photos, people, countries)? Are there multiple types of instances (e.g., movies, users, and ratings; people and interactions between them; nodes and edges)? Please provide a description.

The dataset includes text and audio data for intent classification. For every sentence, text and annotations are provided.

How many instances are there in total (of each type, if appropriate)?

For the audio version, there are 263 instances covering 10 intents in total. 4 hours and 17 minutes of audios from spoken sentences. For the text version, there are 9,791 instances covering 77 intents in total.

Does the dataset contain all possible instances or is it a sample (not necessarily random) of instances from a larger set? If the dataset is a sample, then what is the larger set? Is the sample representative of the larger set (e.g., geographic coverage)? If so, please describe how this representativeness was validated/verified. If it is not representative of the larger set, please

describe why not (e.g., to cover a more diverse range of instances, because instances were withheld or unavailable).

The dataset contain all possible instances.

What data does each instance consist of? “Raw” data (e.g., unprocessed text or images) or features? In either case, please provide a description.

Each instance consists of the text associated with intent label. The audio data contains transcriptions of the corresponding audio files.

Is there a label or target associated with each instance? If so, please provide a description.

Yes, there is a label intent class for each instance in the dataset.

Is any information missing from individual instances? If so, please provide a description, explaining why this information is missing (e.g., because it was unavailable). This does not include intentionally removed information, but might include, e.g., redacted text.

Everything is included. There is no missing data.

Are relationships between individual instances made explicit (e.g., users’ movie ratings, social network links)? If so, please describe how these relationships are made explicit.

Each instance in WolBanking77 is relatively independent.

Are there recommended data splits (e.g., training, development/validation, testing)? If so, please provide a description of these splits, explaining the rationale behind them.

There are 80% of the data for training and 20% for validation.

Are there any errors, sources of noise, or redundancies in the dataset? If so, please provide a description.

The audio recordings were made in an uncontrolled environment and therefore contain background noise.

Is the dataset self-contained, or does it link to or otherwise rely on external resources (e.g., websites, tweets, other datasets)?

WolBanking77 is self-contained.

Does the dataset contain data that might be considered confidential (e.g., data that is protected by legal privilege or by doctor-patient confidentiality, data that includes the content of individuals’ non-public communications)? If so, please provide a description.

No.

Does the dataset contain data that, if viewed directly, might be offensive, insulting, threatening, or might otherwise cause anxiety? If so, please describe why.

No.

Does the dataset identify any subpopulations (e.g., by age, gender)? If so, please describe how these subpopulations are identified and provide a description of their respective distributions within the dataset.

The dataset identify subpopulations by age, gender and origin. The subpopulations are identified when participants fill the identification form by giving there age, gender and origin before starting a new recording session.

Is it possible to identify individuals (i.e., one or more natural persons), either directly or indirectly (i.e., in combination with other data) from the dataset? If so, please describe how.

No it is not possible to identify individuals from the dataset, names are removed from the dataset.

Does the dataset contain data that might be considered sensitive in any way (e.g., data that reveals race or ethnic origins, sexual orientations, religious beliefs, political opinions or union memberships, or locations; financial or health data; biometric or genetic data; forms of government identification, such as social security numbers; criminal history)? If so, please provide a description.

The dataset contain regions of origin showing that different voices and accents have been recorded to cover as more ethnic as possible and to make models robust to different accents.

E.3 Collection Process

How was the data associated with each instance acquired? Was the data directly observable (e.g., raw text, movie ratings), reported by subjects (e.g., survey responses), or indirectly inferred/derived from other data (e.g., part-of-speech tags, model-based guesses for age or language)? If the data was reported by subjects or indirectly inferred/derived from other data, was the data validated/verified? If so, please describe how.

Dataset collection process has been reported in section 3.

What mechanisms or procedures were used to collect the data (e.g., hardware apparatuses or sensors, manual human curation, software programs, software APIs)? How were these mechanisms or procedures validated?

Data has been recorded using Lig-Aikuma Android software [Blachon et al., 2016].

If the dataset is a sample from a larger set, what was the sampling strategy (e.g., deterministic, probabilistic with specific sampling probabilities)?

Wolbanking77 is not sampled from a larger set.

Who was involved in the data collection process (e.g., students, crowdworkers, contractors) and how were they compensated (e.g., how much were crowdworkers paid)?

The data was collected with the help of students and professional translators. Data collection cost is around \$5000.

Over what timeframe was the data collected? Does this timeframe match the creation timeframe of the data associated with the instances (e.g., recent crawl of old news articles)? If not, please describe the timeframe in which the data associated with the instances was created.

Our data collection started in March 2024. The contents of our dataset are independent of the time of collection.

Were any ethical review processes conducted (e.g., by an institutional review board)? If so, please provide a description of these review processes, including the outcomes, as well as a link or other access point to any supporting documentation.

Not applicable.

Did you collect the data from the individuals in question directly, or obtain it via third parties or other sources (e.g., websites)?

The text data is a translated version of Banking77 and the audio version from MINDS14.

Were the individuals in question notified about the data collection? If so, please describe (or show with screenshots or other information) how notice was provided, and provide a link or other access point to, or otherwise reproduce, the exact language of the notification itself.

A consent form shown in section A.6 has been provided to each individuals.

Did the individuals in question consent to the collection and use of their data? If so, please describe (or show with screenshots or other information) how consent was requested and provided, and provide a link or other access point to, or otherwise reproduce, the exact language to which the individuals consented.

Yes, see previous question.

If consent was obtained, were the consenting individuals provided with a mechanism to revoke their consent in the future or for certain uses? If so, please provide a description, as well as a link or other access point to the mechanism (if appropriate).

Yes, see A.6.

Has an analysis of the potential impact of the dataset and its use on data subjects (e.g., a data protection impact analysis) been conducted? If so, please provide a description of this analysis, including the outcomes, as well as a link or other access point to any supporting documentation.

No.

E.4 Preprocessing/cleaning/labeling

Was any preprocessing/cleaning/labeling of the data done (e.g., discretization or bucketing, tokenization, part-of-speech tagging, SIFT feature extraction, removal of instances, processing of missing values)? If so, please provide a description. If not, you may skip the remaining questions in this section. Dataset construction and cleaning has been reported in section 3. Text tokenization and removal of duplicated sentences has been done for NLP task.

Was the “raw” data saved in addition to the preprocessed/cleaned/labeled data (e.g., to support unanticipated future uses)? If so, please provide a link or other access point to the “raw” data. No. The dataset does not contain all the raw data and metadata.

Is the software used to preprocess/clean/label the instances available? If so, please provide a link or other access point.

Python programming language has been used to clean the data. All the code sources will be shared.

E.5 Uses

Has the dataset been used for any tasks already? If so, please provide a description.

Not yet.

Is there a repository that links to any or all papers or systems that use the dataset? If so, please provide a link or other access point.

No yet.

What (other) tasks could the dataset be used for?

The dataset can be used for anything related to intent classification as well as to train speech and text models.

Is there anything about the composition of the dataset or the way it was collected and preprocessed/cleaned/labeled that might impact future uses? For example, is there anything that a dataset consumer might need to know to avoid uses that could result in unfair treatment of individuals or groups (e.g., stereotyping, quality of service issues) or other risks or harms (e.g., legal risks, financial harms)? If so, please provide a description. Is there anything a dataset consumer could do to mitigate these risks or harms?

Not applicable.

Are there tasks for which the dataset should not be used? If so, please provide a description.

Not applicable.

E.6 Distribution

Will the dataset be distributed to third parties outside of the entity (e.g., company, institution, organization) on behalf of which the dataset was created?

The dataset will be distributed on the internet and publicly available.

How will the dataset will be distributed (e.g., tarball on website, API, GitHub)? Does the dataset have a digital object identifier (DOI)?

The dataset will be distributed on tarball on a website. DOI will also be available.

When will the dataset be distributed?

As soon as paper publication.

Will the dataset be distributed under a copyright or other intellectual property (IP) license, and/or under applicable terms of use (ToU)? If so, please describe this license and/or ToU, and provide a link or other access point to, or otherwise reproduce, any relevant licensing terms or ToU, as well as any fees associated with these restrictions.

WolBanking77 is distributed under the CC BY 4.0¹⁷ license. This license requires that reusers give credit to the creator. It allows reusers to distribute, remix, adapt, and build upon the material in any medium or format, even for commercial purposes.

Have any third parties imposed IP-based or other restrictions on the data associated with the instances? If so, please describe these restrictions, and provide a link or other access point to, or otherwise reproduce, any relevant licensing terms, as well as any fees associated with these restrictions.

No.

Do any export controls or other regulatory restrictions apply to the dataset or to individual instances? If so, please describe these restrictions, and provide a link or other access point to, or otherwise reproduce, any supporting documentation.

No.

E.7 Maintenance

Who is supporting/hosting/maintaining the dataset?

Maintenance will be supported by the authors.

How can the owner/curator/manager of the dataset be contacted (e.g., email address)?

Authors can be contacted by their email address.

Is there an erratum? If so, please provide a link or other access point.

Any updates will be shared via Kaggle.

Will the dataset be updated (e.g., to correct labeling errors, add new instances, delete instances)? If so, please describe how often, by whom, and how updates will be communicated to users (e.g., mailing list, GitHub)?

If necessary, any updates will be released via Kaggle.

If the dataset relates to people, are there applicable limits on the retention of the data associated with the instances (e.g., were the individuals in question told that their data would be retained for a fixed period of time and then deleted)? If so, please describe these limits and explain how they will be enforced.

N/A.

Will older versions of the dataset continue to be supported/hosted/maintained? If so, please describe how. If not, please describe how its obsolescence will be communicated to dataset consumers.

Older versions of the dataset will be kept.

If others want to extend/augment/build on/contribute to the dataset, is there a mechanism for them to do so? If so, please provide a description. Will these contributions be validated/verified? If so, please describe how. If not, why not? Is there a process for communicating/distributing these contributions to dataset consumers? If so, please provide a description.

Yes. Please contact the authors of this paper for building upon this dataset.

¹⁷<https://creativecommons.org/licenses/by/4.0/legalcode.en>