

Best-of-L: Cross-Lingual Reward Modeling for Mathematical Reasoning

Sara Rajae^{1*}, Rochelle Choenni², Ekaterina Shutova², Christof Monz¹

Language Technology Lab, University of Amsterdam¹

ILLC, University of Amsterdam²

Abstract

While the reasoning abilities of large language models (LLMs) continue to advance, it remains unclear how such ability varies across languages in multilingual LLMs and whether different languages produce reasoning paths that complement each other. To investigate this question, we train a reward model to rank generated responses for a given question across languages. Our results show that our cross-lingual reward model substantially improves mathematical reasoning performance compared to using reward modeling within a single language, benefiting even high-resource languages. While English often exhibits the highest performance in multilingual models, we find that cross-lingual sampling particularly benefits English under low sampling budgets. Our findings reveal new opportunities to improve multilingual reasoning by leveraging the complementary strengths of diverse languages.

1 Introduction

Recently, many studies have focused on improving reasoning ability (Ranaldi and Freitas, 2024; Byun et al., 2024) or discovering major factors contributing to this skill (Ko et al., 2024). Yet, reasoning research has largely centered on English models, with multilingual models receiving comparatively little attention. Among the few, Shi et al. (2023) have shown that multilingual large language models (LLMs) have strong reasoning capabilities, even for underrepresented languages. Recent work has further improved the multilingual math reasoning ability of LLMs through self-consistency (Lai et al., 2025), multilingual instruction-tuning, (Chen et al., 2024; Lai and Nissim, 2024), and preference optimization methods (She et al., 2024; Dang et al., 2024a; Yang et al., 2025). Following the proposed studies in using reward modeling to improve the performance of math reasoning in English LLMs

(Cobbe et al., 2021; Shen et al., 2021; Hosseini et al., 2024; Zhang et al., 2024; Setlur et al., 2025), Hong et al. (2025) have studied the transferability of English reward models to other languages. While Wang et al. (2025) are the first to shift attention to multilingual models, they still focus on generating and scoring in-language candidate solutions, which they refer to as multilingual reward modeling. In this paper, we instead explore the potential to generate and combine solutions in multiple different languages (see Figure 1), thereby fully exploiting the multilingual capabilities of LLMs.

To this end, we first study to what extent languages could potentially complement each other’s mathematical reasoning skills. Interestingly, we find that even low-resource languages sometimes succeed where high-resource languages fail, suggesting that their reasoning signals could provide valuable complementary information (Figure 5).

Motivated by the above finding, we develop a cross-lingual outcome reward modeling (ORM) framework to harness the *Best-of-Languages* performance, for which we train a verifier to score multilingual reasoning across languages. To the best of our knowledge, we are the first to propose a cross-lingual reward model that takes advantage of complementary reasoning skills across languages. Our experimental results demonstrate that our framework improves performance by over 10% and 15% compared to the average performance of the naive multilingual RMs and the self-consistency baseline, respectively. Our analysis shows that increasing the number of languages improves the performance of our cross-lingual ORM.

Through an ablation study, we find that cross-language sampling even benefits English, especially under low-budget settings. Our analysis verifies that, while having English in the language pool of the cross-lingual ORM positively affects the performance, some selection of non-English pools outperforms other pools containing English,

*Corresponding author: s.rajaee@uva.nl

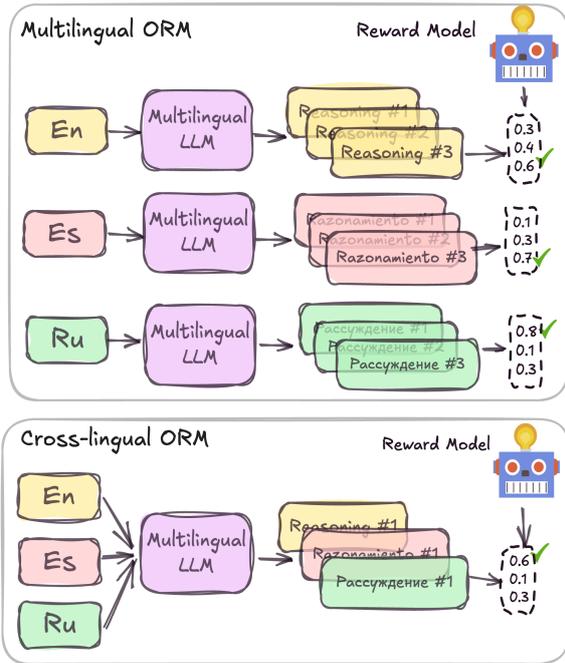


Figure 1: An illustration of multilingual outcome reward modeling (ORM) on the top, where the verifier ranks every language’s responses, and cross-lingual ORM (our framework), where the verifier ranks responses across languages for a given question.

supporting our argument that languages have complementary reasoning skills in multilingual models.

2 Methodology

A popular approach in math reasoning tasks is utilizing reward models (also known as verifiers) to evaluate the correctness of a given answer. Based on the evaluation setup, reward models can be process-based, where the model assesses the reasoning step by step (called PRMs)(Lightman et al., 2024; Luo et al., 2024). while outcome reward models (ORMs) evaluate the entire reasoning (Cobbe et al., 2021; Shen et al., 2021; Hosseini et al., 2024; Zhang et al., 2024; Setlur et al., 2025). In this work, we focus on the latter and propose a novel cross-lingual outcome reward modeling framework that leverages complementary reasoning signals across languages.

2.1 Cross-lingual Reward Modeling

Our framework is the cross-lingual version of the *Best-of-N* (Lightman et al., 2024), ranking the generated answers for a given question across a set of languages and selecting the highest-scored one.

Given a math question q and a generated candidate answer a , we train a discriminative veri-

fier to predict whether the generated reasoning is correct. More specifically, we train an LLM as the verifier using binary cross-entropy loss: $\mathcal{L}_{ORM} = -[y \cdot \log(\hat{y}) + (1 - y) \cdot \log(1 - \hat{y})]$. At inference, we use the verifier scores to rank a set of candidate answers in different languages for a given question using the probability that the model put on the correct class, and then, we select the answer with the highest probability.

Training set generation. We use the GSM8K training set, including around 7.5k examples of high-quality grade school math problems created by human writers, (Cobbe et al., 2021), to generate our verifier training set (Lai and Nissim, 2024). We use Google Translate version of GSM8K in 8 languages—English(en), Spanish(es), French(fr), German(de), Russian(ru), Chinese(zh), Japanese(ja), and Thai(th)—. We then prompt 3 models—the instruction-tuned version of Aya-Expanse 8B (Dang et al., 2024b), Llama3.1 8B (Grattafiori et al., 2024), and Qwen2.5 7B (Team, 2024)—using the GSM8K training set in our 8 languages to generate responses with step-by-step reasoning. We automatically labeled the generated reasoning paths as correct or incorrect based on the correctness of the final answer. Using generations from multiple models allows us to increase the size and diversity of the training set. To make a balanced dataset, we use the same number of correct and incorrect samples for each language, resulting in a set of around 88k samples for training.

Cross-lingual-ORM We use the multilingual Qwen2.5-Instruct 3B model (Team, 2024) as our reward model (verifier) because it has the widest officially supported language coverage among recent multilingual models. We fine-tune the verifier using the aforementioned training set for 5 epochs, with AdamW, a learning rate of $2e-4$, and a batch size of 96. Since the main task is binary classification and to make fine-tuning efficient, we fine-tune with LoRA (Hu et al., 2022) with a rank of 16 and scaling factor of 32. We use this as our cross-lingual outcome reward model for all experiments.

3 Experiments

3.1 Experimental setups

To study the chain-of-thought math reasoning ability of LLMs, we employ the MGSM (Multilingual Grade School Math) dataset (Shi et al., 2023), covering 11 languages, including English(en), Spanish(es), French(fr), German(de), Russian(ru), Chi-

	En.	Avg.	SC	Multi-ORM	Cross-ORM	Pass@8-Multi	Pass@8-Cross
Aya-Expans-8b	79.6	63.4	58.3	73.3	83.2	82.4	93.2
Llama3.1-8b	80.4	64.0	71.6	76.2	84.0	86.9	92.4
Ministral-8b	82.0	65.1	70.3	76.4	87.6	84.3	93.4
Qwen2.5-7b	85.2	72.2	74.4	81.3	92.4	87.2	96.4
Phi3-7b	90.0	69.3	74.2	79.5	92.8	85.3	96.8
Llama3.2-3b	72.4	56.0	63.0	70.3	77.2	80.3	88.8

Table 1: Summary of the results across models and baselines. The leftmost columns represent the English performance and the average performance of all the languages. *SC* denotes average self-consistency accuracy. *Pass@8-cross* outperforms the average *pass@8-multi*, indicating the complementary math reasoning skills across languages. Our proposed framework, *Cross-ORM*, also exceeds the average *Multi-ORM* accuracy by a large margin.

nese(zh), Japanese(ja), and Thai(th) with 250 examples for each. We exclude Swahili, Telugu, and Bengali, as multilingual LLMs, including our verifier model, perform poorly on these languages. Nevertheless, our selection includes languages from diverse language families and writing scripts (Lai et al., 2025). Following the original recipe of using MGSM (Shi et al., 2023), we prompt multilingual LLMs under the *Native-CoT* setting using 8-shots for all experiments¹.

Models. We have carried out our analysis and experiments using a wide range of instruction-tuned multilingual models, including Aya-Expans 8B (Dang et al., 2024b), Llama3.1 8B (Grattafiori et al., 2024), Qwen2.5 7B (Team, 2024), Ministral 8B², phi-3 7B (Abdin et al., 2024), and Llama 3.2 3b³.

3.1.1 Baselines.

We evaluate our cross-lingual ORM against the following baselines:

Self-consistency. A simple, yet effective approach in chain-of-thought (CoT) prompting is self-consistency (Wang et al., 2023; Yao et al., 2023; Kojima et al., 2022). This widely used baseline does the majority voting across a batch of sampled answers ($N = 8$) for each language.

Multilingual-ORM. Also known as *Best-of-N* technique, where the multilingual verifier scores N different samples within a language and selects the one with the highest score (Wang et al., 2025). We use $N = 8$, generated with a temperature sampling

¹We have used the evaluation harness framework for our experiments and reported exact-match scores (Gao et al., 2024).

²<https://huggingface.co/mistralai/Ministral-8B-Instruct-2410>

³<https://huggingface.co/meta-llama/Llama-3.2-3B-Instruct>

of $T = 0.7$, and truncated at the top-p ($p = 0.95$) for all experiments (including the self-consistency baseline).

3.2 Results and Findings

LLMs exhibit complementary mathematical reasoning skills across languages. To investigate the similarity of reasoning knowledge across languages, we employ *pass@k*, a well-established metric used to approximate the upper-bound performance of LLMs when generating multiple answers (Hosseini et al., 2024; Li et al., 2025). This allows us to measure the degree of potential complementarity between languages in multilingual LLMs as it considers a question solved if at least one of the answers in different languages is correct. In Table 1, we report *pass@8* scores across languages (*pass@8-Cross*) and the average *pass@8* scores across different samples within languages (*pass@8-Multi*).⁴ Interestingly, we observe that *Pass@8-Cross* outperforms the performances of individual languages, suggesting that even high-resource languages can potentially benefit from other languages.

Sampling across languages is superior to sampling within a language. Building on our analysis, we employ the cross-lingual verifier described in Sec. 2.1 to see how languages benefit each other in practice. The middle part of Table 1 summarizes the accuracy of our cross-lingual ORM under within- and across-language settings. As shown, *Cross-ORM* clearly outperforms the average performance of *ORM-Multi*, with the largest benefits for non-English languages. These results suggest

⁴The performance of individual languages can be found in the Appendix.

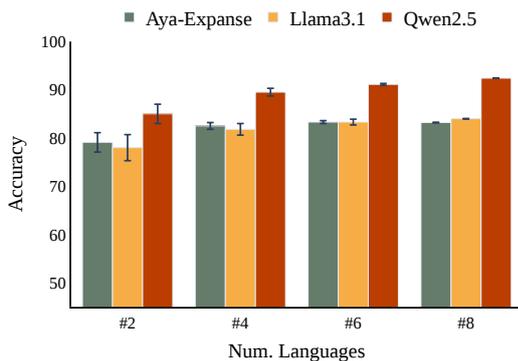


Figure 2: The mean and standard deviation cross-lingual ORM accuracy using different numbers of languages.

that leveraging cross-lingual signals is more effective than relying solely on monolingual reasoning, especially for underrepresented languages.

Increasing the pool of languages enhances the cross-lingual ORM performance. To understand the impact of language pool size, we show the average performance for all possible language combinations at different pool sizes in Figure 2. As expected, the results demonstrate that adding more languages improves cross-lingual ORM performance up to a certain point, after which the additional gains become negligible.

Sampling across languages benefits English as well. While our earlier analysis shows that cross-lingual ORM exceeds the average performance of multilingual ORM, its accuracy still lags behind that of English ORM. To better understand under what conditions other languages might benefit English, we compare the performance of English ORM (i.e., generating multiple answers in English) and cross-lingual ORM under different sampling budgets in Figure 3. Based on the results, we observe that cross-lingual ORM outperforms English ORM at low sampling budgets. However, this advantage fades as the number of samples increases. We suspect that additional sampling from other languages becomes redundant once English samples already cover a wide range of reasoning paths.

Including English in language pools is generally helpful, yet it does not always lead to superior performance. To examine the effect of including English in the language pools for the cross-lingual ORM setup, we report the mean and standard deviation of accuracy across all possible language pools with a size of 2 to 7 with and without English in Figure 4. As expected, including En-

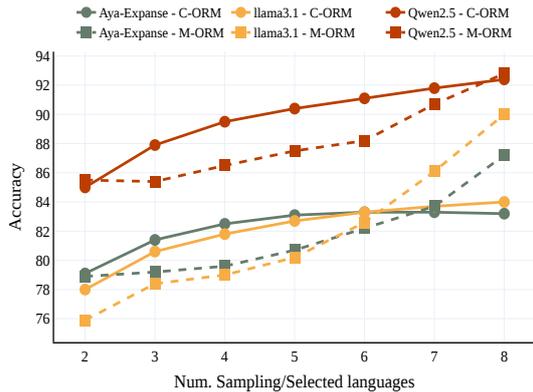


Figure 3: Comparing the accuracy of cross-lingual ORM and multilingual ORM of English using the same number of languages and samples.

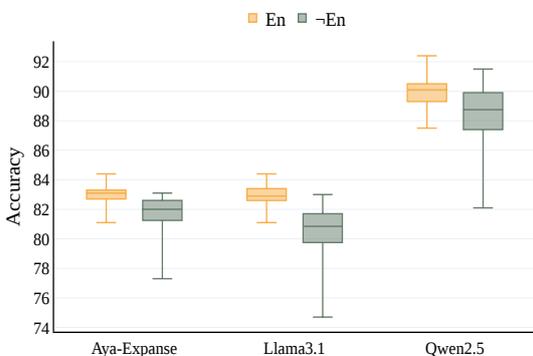


Figure 4: Average cross-lingual ORM performance across language pools of size 2–7, with and without English. English generally helps, but some non-English sets outperform English-inclusive ones.

glish generally improves cross-lingual ORM performance. However, this is not always the case; some language pools without English perform better than certain groups that include English, as reflected in the standard deviation of the non-English groups.

4 Conclusion

In this paper, we present a novel cross-lingual reward modeling framework that effectively leverages complementary mathematical reasoning skills across languages in multilingual LLMs. Our experiments show that cross-lingual reward modeling benefits even high-resource languages like English under low-budget inference settings. Furthermore, our findings show that languages mutually enhance each other’s reasoning abilities. Our results pave the way for future research into the similarities and differences of reasoning patterns across languages

to improve multilingual reasoning models.

5 Limitations

A limitation of our work is that we focused solely on math reasoning tasks, and future research could explore other downstream tasks to broaden the applicability of our approach. Additionally, we used only eight languages, so expanding the number and diversity of languages would be important to further enhance our understanding of multilingual reasoning in LLMs. Another limitation is that we did not investigate the underlying reasoning patterns across languages, which could provide valuable insights for improving multilingual reasoning performance.

References

- Marah Abdin, Jyoti Aneja, Hany Awadalla, Ahmed Awadallah, Ammar Ahmad Awan, Nguyen Bach, Amit Bahree, Arash Bakhtiari, Jianmin Bao, Harkirat Behl, Alon Benhaim, Misha Bilenko, Johan Bjorck, Sébastien Bubeck, Martin Cai, Qin Cai, Vishrav Chaudhary, Dong Chen, Dongdong Chen, and 110 others. 2024. [Phi-3 technical report: A highly capable language model locally on your phone](#). *Preprint*, arXiv:2404.14219.
- Ju-Seung Byun, Jiyun Chun, Jihyung Kil, and Andrew Perrault. 2024. [ARES: Alternating reinforcement learning and supervised fine-tuning for enhanced multi-modal chain-of-thought reasoning through diverse AI feedback](#). In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 4410–4430, Miami, Florida, USA. Association for Computational Linguistics.
- Nuo Chen, Zinan Zheng, Ning Wu, Ming Gong, Dongmei Zhang, and Jia Li. 2024. [Breaking language barriers in multilingual mathematical reasoning: Insights and observations](#). In *Findings of the Association for Computational Linguistics: EMNLP 2024*, pages 7001–7016, Miami, Florida, USA. Association for Computational Linguistics.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. 2021. [Training verifiers to solve math word problems](#). *Preprint*, arXiv:2110.14168.
- John Dang, Arash Ahmadian, Kelly Marchisio, Julia Kreutzer, Ahmet Üstün, and Sara Hooker. 2024a. [RLHF can speak many languages: Unlocking multilingual preference optimization for LLMs](#). In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 13134–13156, Miami, Florida, USA. Association for Computational Linguistics.
- John Dang, Shivalika Singh, Daniel D’souza, Arash Ahmadian, Alejandro Salamanca, Madeline Smith, Aidan Peppin, Sungjin Hong, Manoj Govindassamy, Terrence Zhao, Sandra Kublik, Meor Amer, Viraat Aryabumi, Jon Ander Campos, Yi-Chern Tan, Tom Kocmi, Florian Strub, Nathan Grinsztajn, Yannis Flet-Berliac, and 26 others. 2024b. [Aya expand: Combining research breakthroughs for a new multilingual frontier](#). *Preprint*, arXiv:2412.04261.
- Leo Gao, Jonathan Tow, Baber Abbasi, Stella Biderman, Sid Black, Anthony DiPofi, Charles Foster, Laurence Golding, Jeffrey Hsu, Alain Le Noac’h, Haonan Li, Kyle McDonell, Niklas Muennighoff, Chris Ociepa, Jason Phang, Laria Reynolds, Hailey Schoelkopf, Aviya Skowron, Lintang Sutawika, and 5 others. 2024. [The language model evaluation harness](#).
- Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, Amy Yang, Angela Fan, Anirudh Goyal, Anthony Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark, and 542 others. 2024. [The llama 3 herd of models](#). *Preprint*, arXiv:2407.21783.
- Jiwoo Hong, Noah Lee, Rodrigo Martínez-Castaño, César Rodríguez, and James Thorne. 2025. [Cross-lingual transfer of reward models in multilingual alignment](#). In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 2: Short Papers)*, pages 82–94, Albuquerque, New Mexico. Association for Computational Linguistics.
- Arian Hosseini, Xingdi Yuan, Nikolay Malkin, Aaron Courville, Alessandro Sordani, and Rishabh Agarwal. 2024. [V-STAR: Training verifiers for self-taught reasoners](#). In *First Conference on Language Modeling*.
- Edward J Hu, yelong shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2022. [LoRA: Low-rank adaptation of large language models](#). In *International Conference on Learning Representations*.
- Miyoung Ko, Sue Hyun Park, Joonsuk Park, and Minjoon Seo. 2024. [Hierarchical deconstruction of LLM reasoning: A graph-based framework for analyzing knowledge utilization](#). In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 4995–5027, Miami, Florida, USA. Association for Computational Linguistics.
- Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. 2022. [Large language models are zero-shot reasoners](#). In *Advances in Neural Information Processing Systems*.
- Huiyuan Lai and Malvina Nissim. 2024. [mCoT: Multilingual instruction tuning for reasoning consistency in language models](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational*

- Linguistics (Volume 1: Long Papers)*, pages 12012–12026, Bangkok, Thailand. Association for Computational Linguistics.
- Huiyuan Lai, Xiao Zhang, and Malvina Nissim. 2025. [Multidimensional consistency improves reasoning in language models](#). *Preprint*, arXiv:2503.02670.
- Zhong-Zhi Li, Duzhen Zhang, Ming-Liang Zhang, Jiaxin Zhang, Zengyan Liu, Yuxuan Yao, Haotian Xu, Junhao Zheng, Pei-Jie Wang, Xiuyi Chen, Yingying Zhang, Fei Yin, Jiahua Dong, Zhijiang Guo, Le Song, and Cheng-Lin Liu. 2025. [From system 1 to system 2: A survey of reasoning large language models](#). *Preprint*, arXiv:2502.17419.
- Hunter Lightman, Vineet Kosaraju, Yuri Burda, Harrison Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. 2024. [Let’s verify step by step](#). In *The Twelfth International Conference on Learning Representations*.
- Liangchen Luo, Yinxiao Liu, Rosanne Liu, Samrat Phatale, Harsh Lara, Yunxuan Li, Lei Shu, Yun Zhu, Lei Meng, Jiao Sun, and Abhinav Rastogi. 2024. [Improve mathematical reasoning in language models by automated process supervision](#). *arXiv preprint arXiv:2406.06592*.
- Leonardo Ranaldi and Andre Freitas. 2024. [Self-refine instruction-tuning for aligning reasoning in language models](#). In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 2325–2347, Miami, Florida, USA. Association for Computational Linguistics.
- Amrith Setlur, Chirag Nagpal, Adam Fisch, Xinyang Geng, Jacob Eisenstein, Rishabh Agarwal, Alekh Agarwal, Jonathan Berant, and Aviral Kumar. 2025. [Rewarding progress: Scaling automated process verifiers for LLM reasoning](#). In *The Thirteenth International Conference on Learning Representations*.
- Shuaijie She, Wei Zou, Shujian Huang, Wenhao Zhu, Xiang Liu, Xiang Geng, and Jiajun Chen. 2024. [MAPO: Advancing multilingual reasoning through multilingual-alignment-as-preference optimization](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 10015–10027, Bangkok, Thailand. Association for Computational Linguistics.
- Jianhao Shen, Yichun Yin, Lin Li, Lifeng Shang, Xin Jiang, Ming Zhang, and Qun Liu. 2021. [Generate & rank: A multi-task framework for math word problems](#). In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 2269–2279, Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Freda Shi, Mirac Suzgun, Markus Freitag, Xuezhi Wang, Suraj Srivats, Soroush Vosoughi, Hyung Won Chung, Yi Tay, Sebastian Ruder, Denny Zhou, Dipanjan Das, and Jason Wei. 2023. [Language models are multilingual chain-of-thought reasoners](#). In *The Eleventh International Conference on Learning Representations*.
- Qwen Team. 2024. [Qwen2.5: A party of foundation models](#).
- Weixuan Wang, Minghao Wu, Barry Haddow, and Alexandra Birch. 2025. [Demystifying multilingual chain-of-thought in process reward modeling](#). *arXiv preprint arXiv:2502.12663*.
- Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc V Le, Ed H. Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. 2023. [Self-consistency improves chain of thought reasoning in language models](#). In *The Eleventh International Conference on Learning Representations*.
- Wen Yang, Junhong Wu, Chen Wang, Chengqing Zong, and Jiajun Zhang. 2025. [Language imbalance driven rewarding for multilingual self-improving](#). In *The Thirteenth International Conference on Learning Representations*.
- Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Thomas L. Griffiths, Yuan Cao, and Karthik R Narasimhan. 2023. [Tree of thoughts: Deliberate problem solving with large language models](#). In *Thirty-seventh Conference on Neural Information Processing Systems*.
- Lunjun Zhang, Arian Hosseini, Hritik Bansal, Mehran Kazemi, Aviral Kumar, and Rishabh Agarwal. 2024. [Generative verifiers: Reward modeling as next-token prediction](#). In *The 4th Workshop on Mathematical Reasoning and AI at NeurIPS’24*.

A Full Results

Question:

Melanie is a door-to-door saleswoman. She sold a third of her vacuum cleaners at the green house, 2 more to the red house, and half of what was left at the orange house. If Melanie has 5 vacuum cleaners left, how many did she start with?

English Response:

Melanie sold a third of her vacuum cleaners at the green house. That means she sold 1/3 of her vacuum cleaners. 1/3 of 5 is 5/3, which is 1.67. Melanie sold 1.67 vacuum cleaners at the green house. She had 5 left, so she had 5 + 1.67 = 6.67 vacuum cleaners before the green house. She sold 2 more at the red house, so she had 6.67 - 2 = 4.67 vacuum cleaners before the red house. She sold half of what was left at the orange house. Half of 4.67 is 2.335. Melanie had 4.67 - 2.335 = 2.335 vacuum cleaners left. Melanie had 5 vacuum cleaners left, so she must have had 5 + 2.335 = 7.335 vacuum cleaners before the orange house. Melanie had 7.335 vacuum cleaners before the orange house. **The answer is 7.335.**

Japanese Response:

緑の家で3分の1の掃除機を売った場合、 $3/1 \times 3 = 9$ 個の掃除機を売ったこととなります。赤の家で2台を売ったので、合計 $9 + 2 = 11$ 台を売ったこととなります。オレンジの家で残りの半分を売った場合、残りの半分は $1/2 \times 5 = 2.5$ となり、オレンジの家で 2.5 台を売ったこととなります。合計で、メラニーは $11 + 2.5 = 13.5$ 台の掃除機を売りました。掃除機は整数でなければならないため、彼女は 13 台の掃除機を売りました。彼女は 5 台の掃除機を手元に残したため、彼女は $13 + 5 = 18$ 台の掃除機を持っていました。答えは18です。

Google translation of Japanese Response:

If she sells one-third of the vacuums at the green house, she has sold $3/1 \times 3 = 9$ vacuums. She sells two at the red house, so she has sold a total of $9 + 2 = 11$ vacuums. If she sells the other half at the orange house, the remaining half is $1/2 \times 5 = 2.5$, so she has sold 2.5 at the orange house. In total, Melanie has sold $11 + 2.5 = 13.5$ vacuums. Because vacuums must be whole numbers, she has sold 13 vacuums. She has 5 vacuums left, so she has $13 + 5 = 18$ vacuums. **The answer is 18.**

Figure 5: A cherry-picked example of Llama 3.1’s responses to the same question in English and Japanese, where the English answer is incorrect but the Japanese response is correct, illustrating the complementary reasoning skills across languages.

	en	fr	es	de	ru	zh	ja	th	avg.
Aya-Expanse-8b									
CoT	76.6 ±1.1	65.1 ±2.0	73.0 ±1.8	68.8 ±1.9	67.6 ±2.5	63.7 ±0.8	57.7 ±1.2	19.7 ±1.8	61.5
SC	84.0	70.8	76.8	76.8	73.6	71.2	67.2	23.2	58.3
Llama3.1-8b									
CoT	75.0 ±1.7	60.4 ±1.4	66.8 ±1.9	59.6 ±3.8	61.1 ±2.8	57.5 ±2.3	46.9 ±2.6	47.4 ±1.1	59.4
SC	84.8	72.4	80.0	74.0	74.0	69.6	58.8	59.2	71.6
Ministral-8b									
CoT	77.4 ±1.5	65.1 ±0.7	71.4 ±1.3	64.9 ±1.8	65.4 ±0.8	58.8 ±1.7	43.8 ±1.9	44.5 ±1.1	61.4
SC	87.2	72.0	80.0	74.0	75.2	67.6	55.2	54.0	70.3
Qwen2.5-7b									
CoT	84.3 ±1.0	70.2 ±1.8	76.3 ±2.3	63.8 ±1.2	69.0 ±1.7	67.8 ±1.7	63.7 ±1.4	51.8 ±1.3	68.4
SC	89.2	73.6	82.8	70.8	73.6	75.6	70.0	59.6	74.4
Phi3-7b									
CoT	87.6 ±1.8	77.0 ±2.3	83.7 ±1.7	77.3 ±0.9	71.6 ±1.8	69.2 ±2.3	58.0 ±1.4	18.2 ±1.3	67.8
SC	92.8	84.4	88.4	83.6	82.8	74.4	65.6	23.6	74.2
Llama3.2-3b									
CoT	65.6 ±1.1	51.0 ±2.7	56.4 ±1.0	52.4 ±1.1	53.1 ±2.4	48.8 ±2.1	32.0 ±1.7	44.1 ±1.9	50.4
SC	79.2	60.4	70.8	67.2	65.6	62.8	44.4	55.6	63.0

Table 2: Vanilla Chain-of-thought(CoT) performance and self-consistency (SC) on MGSM.

	en	fr	es	de	ru	zh	ja	th	avg.
Aya-Expanse-8b	94.4	85.6	90.8	89.2	87.6	84.4	82.4	44.4	82.3
Llama3.1-8b	94.8	85.2	92.4	89.2	92.0	86.8	74.8	80.0	86.9
Ministral-8b	94.4	85.6	91.6	85.2	86.4	86.4	73.2	71.6	84.3
Qwen2.5-7b	95.6	84.0	94.4	85.2	87.6	91.2	84.0	75.6	81.3
phi3-3b	96.4	92.0	95.6	90.8	92.0	88.4	84.8	42.0	85.3
Llama3.2-3b	91.6	78.8	85.6	83.2	82.8	80.8	66.0	73.6	80.3

Table 3: Comparison of Pass@8-Multi across different languages on the MGSM task.

	en	fr	es	de	ru	zh	ja	th	avg.
Aya-Expanse-8b	87.2	76.4	83.2	76.8	78.4	76.0	71.2	37.2	73.3
Llama3.1-8b	90.0	77.6	84.0	60.4	80.0	78.8	68.4	70.0	76.2
Ministral-8b	91.2	76.0	87.6	77.6	77.2	78.0	60.4	62.8	76.4
Qwen2.5-7b	92.8	80.0	86.4	74.8	82.4	85.2	76.0	72.4	81.3
Phi3-7b	94.0	86.8	91.2	86.0	84.0	83.2	75.6	35.2	79.5
Llama3.2-3b	83.2	70.0	76.4	62.4	75.2	70.8	56.8	67.2	70.3

Table 4: Comparison of Multi-ORM across different languages on the MGSM task.

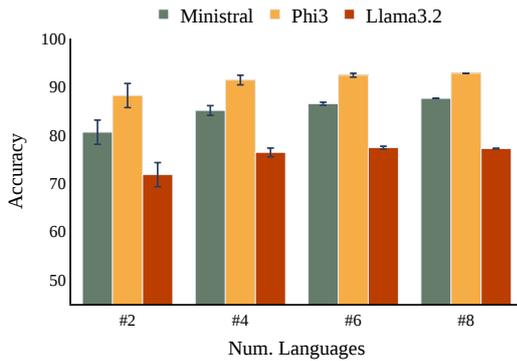


Figure 6: The average and standard deviation cross-lingual ORM performance using different numbers of languages.

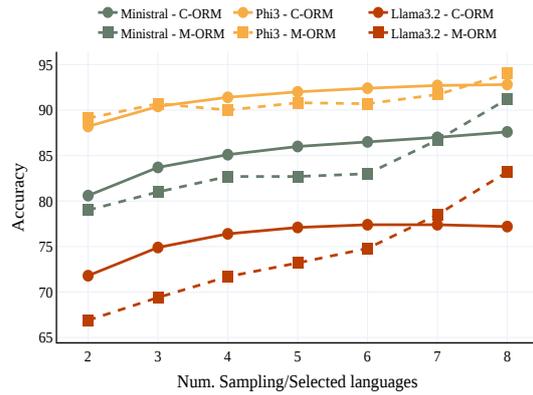


Figure 7: Comparing the accuracy of cross-lingual ORM and multilingual ORM of English using the same number of languages and samples.

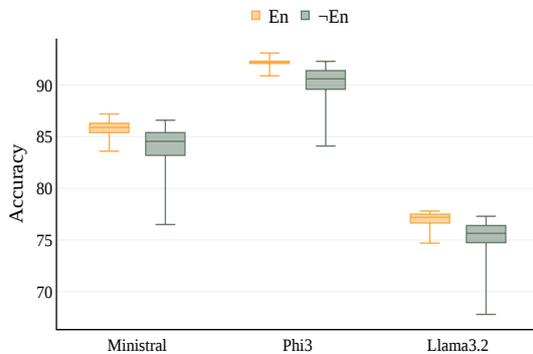


Figure 8: Comparing the role of English on the performance.