

CusEnhancer: A Zero-Shot Scene and Controllability Enhancement Method for Photo Customization via ResInversion

Maoye Ren, Praneetha Vaddamanu, Jianjin Xu, Fernando De la Torre Frade

Abstract—Recently remarkable progress has been made in synthesizing realistic human photos using text-to-image diffusion models. However, current approaches face degraded scenes, insufficient control, and suboptimal perceptual identity. We introduce CustomEnhancer, a novel framework to augment existing identity customization models. CustomEnhancer is a zero-shot enhancement pipeline that leverages face swapping techniques, pretrained diffusion model, to obtain additional representations in a zero-shot manner for encoding into personalized models. Through our proposed triple-flow fused PerGeneration approach, which identifies and combines two compatible counter-directional latent spaces to manipulate a pivotal space of personalized model, we unify the generation and reconstruction processes, realizing generation from three flows. Our pipeline also enables comprehensive training-free control over the generation process of personalized models, offering precise controlled personalization for them and eliminating the need for controller retraining for per-model. Besides, to address the high time complexity of null-text inversion (NTI), we introduce ResInversion, a novel inversion method that performs noise rectification via a pre-diffusion mechanism, reducing the inversion time by 129 \times . Experiments demonstrate that CustomEnhancer reach SOTA results at scene diversity, identity fidelity, training-free controls, while also showing the efficiency of our ResInversion over NTI. The code will be made publicly available upon paper acceptance.

Index Terms—Diffusion model, Text-to-image generation, Inversion, Photo customization, Scene diversity, Controllability, Plug-in enhancement.

I. INTRODUCTION

In recent years, personalized human photo synthesis, which aims to generate images consistent with the character’s identity in reference images, has made significant progress. Early methods, such as GANs [1], were constrained by their generation capabilities and struggled to achieve satisfactory output. With the rise of large-scale text-to-image diffusion model [2]–[4], personalized human photo Synthesis based on diffusion models has seen great success.

Current diffusion-based personalization (customization) methods can be categorized into two paradigms: Test-time adaptation and training-based methods. Test-time adaptation methods such as DreamBooth [5], Textual Inversion [6], and Low-Rank Adaptation (LoRA) [7] finetune pretrained models on input images during inference to enable identity-preserved generation. In contrast, training-based methods such as PhotoMaker [8] and InstantID [9] adopt a more scalable finetune over large-scale face-centric datasets during training

phase to learn identity preservation capabilities in the model, eliminating test-time finetuning. These methods show faster inference speeds and better identity, making them an emerging trend.

However, we observe three major bottlenecks of current training-based personalization methods: I) Degraded scene generation capability: The extensive tuning on face-centered datasets causes existing personalized models to lose scene (context excluding the face) generation capabilities. They tend to generate only faces, abandoning backgrounds and bodies. II) Control module incompatibility: The intensive training isolates these models from the control modules (ControlNet’s pose/canny guidance) trained for the pretrained SDXL model, significantly reducing controllability and necessitating inefficient control modules retraining for per-model. III) Suboptimal perceptual identity: Despite their specialization, these methods still exhibit an identity gap from reference images, due to current neural network-based extractor they rely on extracting mostly high-level features lacking concrete perceptual facial features.

Therefore, in this paper, we propose CustomEnhancer, a novel method offering diverse scenes, training-free controls, and identity fidelity. (see Fig. 1). The key innovation of our method lies in: I) A zero-shot enhancement pipeline: Our CustomEnhancer pipeline incorporates pretrained SDXL and face swap techniques to provide diverse scene representations and concrete perceptual facial representations in a zero-shot manner, respectively. After fusing them into a shared image space, these representations are encoded into the personalized models’ generation process by our pipeline. II) Bidirectionally manipulated diffusion (BiMD) method: To integrate the generation of above representations and personalized model’s customized identity representations, BiMD employs a dual-path latent manipulation paradigm that identifies and combines compatible counter-directional latent spaces: forward (generation) and backward (reconstruction) latent spaces. By intervening at a pivot flow of the personalized model through these two complementary spaces, we effectively unified the generation and reconstruction processes, endowing personalized models with additional information and capabilities. III) ResInversion: To address the high time complexity of inversion method of NTI, we introduce ResInversion, a novel inversion approach that performs noise rectification using the residual noise via a pre-diffusion mechanism, significantly reducing the time complexity of inversion by 129 \times . IIII) Training-free controls for personalized models: By integrating SDXL’s control modules into our pipeline’s SDXL component, we establish a training-free control framework that seamlessly embeds existing guidance to personalized models, enabling

Maoye Ren are with the College of Computer Science and Technology, East China University of Science and Technology, Shanghai 200237, China. This work was finished at Carnegie Mellon University

Jianjin Xu and Fernando De la Torre Frade are with the College of Computer Science, Carnegie Mellon University, Pittsburgh, 15213, Pennsylvania.

Praneetha Vaddamanu are with the Microsoft, 98052, Washington

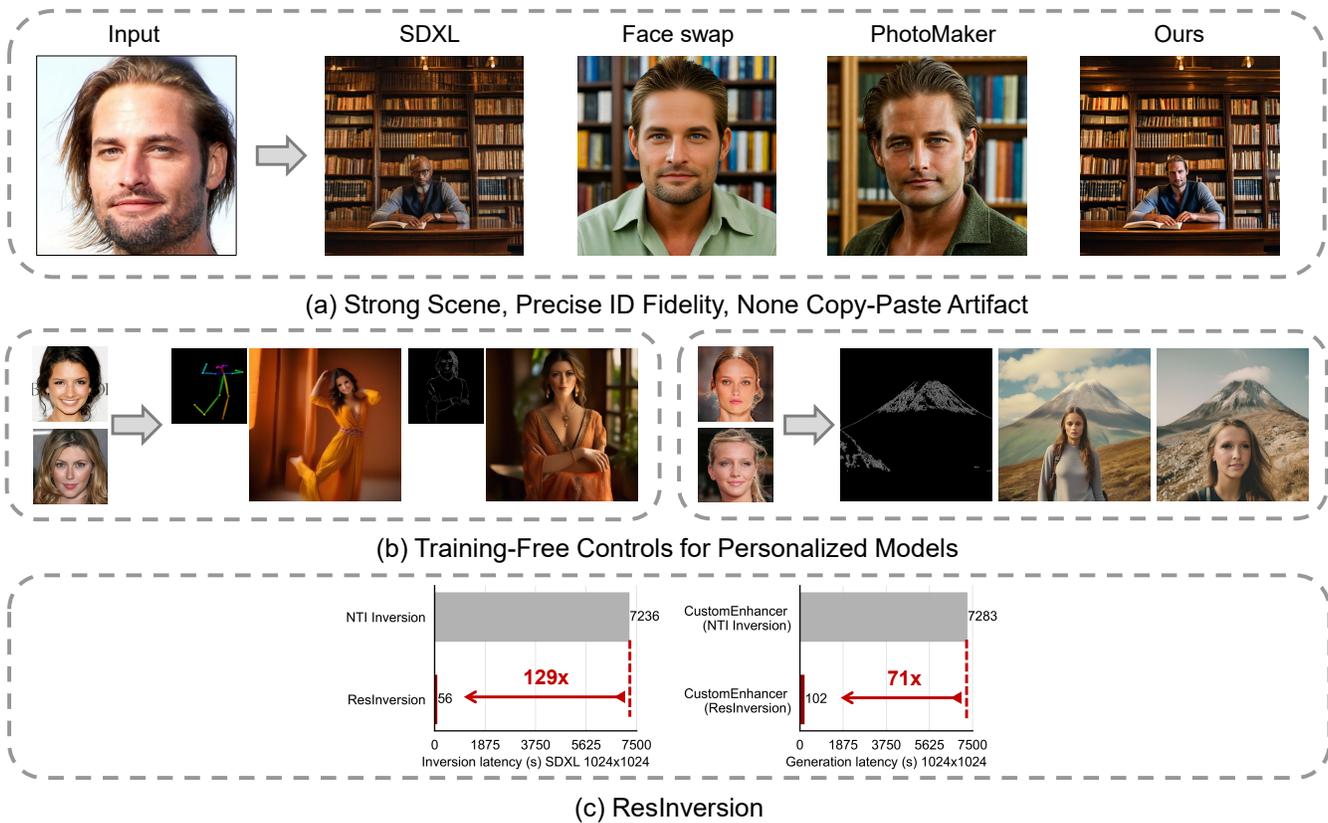


Fig. 1. Given a single image of input ID, our CustomEnhancer (a) enables SOTA identity customized generation with diverse large-scale scene, further ID fidelity, and zero artifacts of copy-paste, and (b) enables comprehensive training-free controls for personalized models, offering controlled personalization on human and both scene and eliminating inefficient per-model controller retraining, and (c) Our ResInversion achieves 129 \times speedup over NTI inversion, and making our full pipeline 71 \times faster than NTI-based implementations.

control over not only human subjects but also non-primary generation targets, the environmental elements, which remains unaddressed in prior work. It offers the controlled photorealistic personalization for these models and eliminates the computationally expensive control modules retraining.

Our proposed CustomEnhancer is a plug-in method, compatible with any diffusion-based model (eg. PhotoMaker, InstantID, etc.). It redistributes the scene and identity task to specialized auxiliary models, effectively solving the copy-paste problem between character and context. The main contributions of our paper are as follows:

- 1) We propose CustomEnhancer pipeline capable of providing diverse scenes, training-free controls, and perceptual identity, offering controlled personalization and eliminating inefficient controller retraining.
- 2) We propose BiMD approach to integrate reconstruction into generation, which was nonexistent in previous works.
- 3) We propose Resinversion approach that enables fast inversion while maintaining reconstruction fidelity.
- 4) We realize NTI in more complex SDXL framework, and implement in both PhotoMaker and InstantID methods. We extend CustomEnhancer to other applications.
- 5) Experiments demonstrate the superiority of CustomEnhancer in scene, control, and identity, without exhibiting copy-paste artifacts.

II. RELATED WORK

A. Personalization in Diffusion Models.

Traditional approaches, such as DreamBooth [5], Textual Inversion [6], Low-Rank Adaptation (LoRA) [7], and IP-Adapter [10] rely on extensive fine-tuning during the test phase to adapt the model to specific identities or concepts. These methods are time-consuming and require significant computational resources. Their identity preservation and image diversity is bad by finetuning on only few input images. Recent research has focused on single forward pass methods that bypass the need for fine-tuning, offering more efficient personalization. However, in methods like PhotoMaker [8] and InstantID [9], the general generation ability has lost by the large-scale finetune, and the perceptual identity is weaker compare to reference image. Our work introduces an novel BiMD method integrating more representations to personalized model's generation process to overcome these limitations.

B. Inversion in Diffusion Models.

Traditional Inversion methods, such as Denoising Diffusion Implicit Models (DDIM) inversion [11], [12], are employed to reverse the diffusion process, enabling modifications to real images while retaining their original attributes. DDIM inversion works by reversing the ODE process in the limit of small steps, effectively running the diffusion process backward. However, in practice, a small error accumulates at

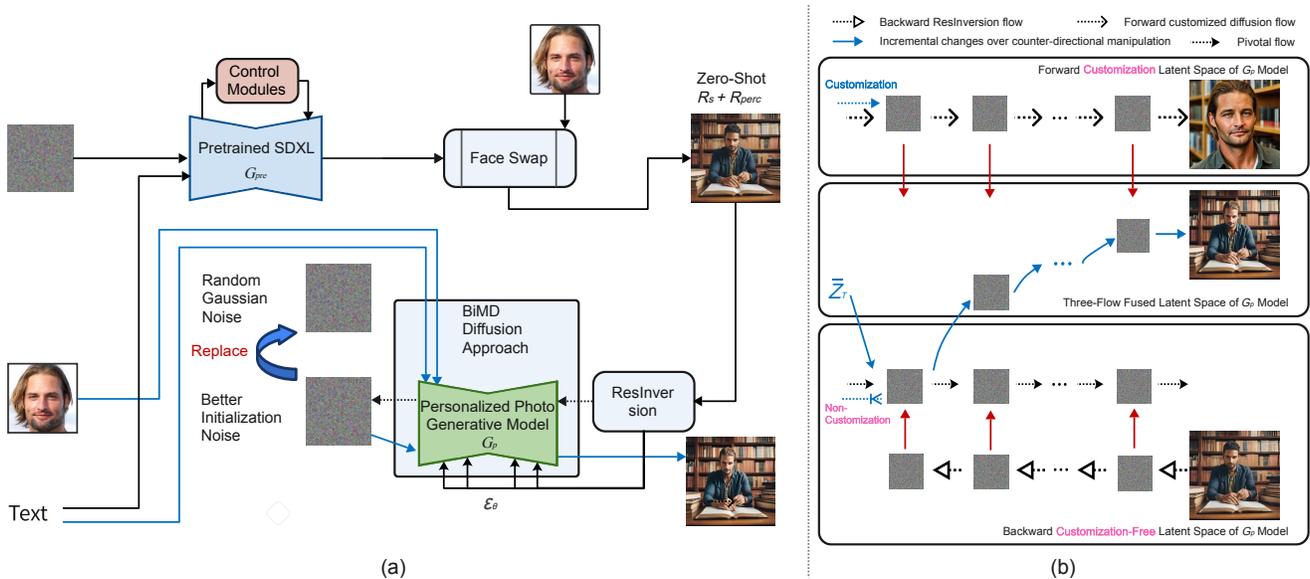


Fig. 2. Overview of the proposed: (a) CustomEnhancer pipeline and (b) BiMD approach within personalized model. We first leverage pretrained SDXL and face swap techniques to provide diverse scene representations and perceptual facial representation in zero-shot manner. Then we use BiMD to integrate the generation of these representation and G_p 's customized facial representation. BiMD employs compatible counter-directional latent spaces: forward customized generation (customization space) and backward ResInversion for reconstruction (customization-free space) latent spaces to intervene at a pivotal space, unifying the generation and reconstruction processes. Through incorporating SDXL's control modules upon SDXL component, training-free controls can be integrated into personalized models' generation process through our pipeline.

each step. Inversion of a given image in the context of diffusion models is an active area of research, and recent advancements, such as Null-text Inversion [13] and ReNoise Inversion [14], have significantly improved upon the limitations of DDIM inversion. Null-text Inversion enhances the inversion process by optimizing the unconditional null-text embedding. This optimization helps to compensate for the inevitable reconstruction errors that occur when applying DDIM inversion directly, while preserving the editability of real images. ReNoise Inversion refines the inversion process, particularly for models with fewer denoising steps, enhancing reconstruction accuracy. It iteratively renoises the latent at each step, improving the predicted points along the forward diffusion path. By leveraging the inversion process, we build a path for information transferred to the personalized model's generation process.

III. METHOD

The goal of our method is to improve the scene diversity, controllability, and identity fidelity for personalized models through purely generative means, without requiring additional environmental or identity images. The above abilities are mainly brought by our proposed zero-shot enhancement pipeline and BiMD approach, which innovatively combine information from both the forward and inverse diffusion processes, integrating high-fidelity reconstruction into generation. The latency improvement is attributed to the proposed ResInversion that facilitates near real-time inversion for large-scale diffusion models. Our CustomEnhancer pipeline is illustrated in Fig. 2. Below, we describe each component in detail.

A. Zero-Shot diverse Scene & Perceptual facial features.

Our approach builds upon the key observation that pretrained SDXL models, from which these personalized models are finetuned, inherently encode rich scene priors through their large-scale training on diverse datasets. Pretrained SDXL model also demonstrates exceptional capability in generating physically plausible human-context compositions. To leverage these capabilities, we propose to extract SDXL's rich scene representations and embed them into personalized models' generation, enabling zero-shot scene encoding through text prompt alone without requiring additional environmental references. Specifically, we employ SDXL to produce detailed scene images containing an identity-agnostic human character, guided by text prompt identical to the personalized models (Scene control is detailed in subsequent). The generated image can be represented as:

$$I_P = R_S + ID_{ag} \quad (1)$$

where I_P denotes the image generated by the pretrained model, R_S represents the scene representation, ID_{ag} denotes the identity-agnostic facial features.

Personalized models' neural network-based facial feature extractor primarily capture high-level features while lacking sufficient concrete perceptual features. We propose to adopt face swapping (FS) technique that additionally supplies concrete perceptual facial representation (eg. precise geometric shapes, accurate landmarks, and fine-scale attributes) for personalized models. Specifically, we employ the FS to inject reference identity into the above identity-agnostic image through anchor-point alignment. Then, the image now can be represented as:

$$I_P = R_S + R_{perc} \quad (2)$$

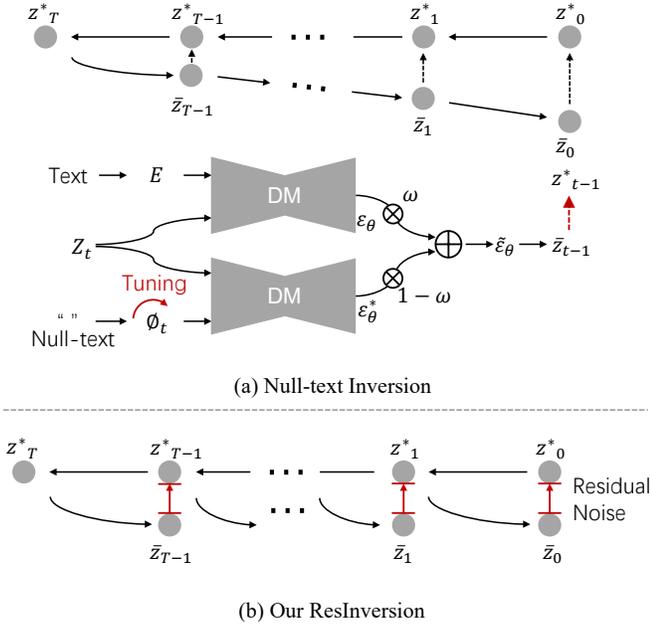


Fig. 3. (a) Null-text inversion. (b) ResInversion.

where R_{perc} denotes concrete perceptual facial representation obtained from FS. The limitations of FS lie in modifying only the facial subjects instead of other attributes like hairstyle and skin color, and introducing misaligned edges and blurring in face regions, which can be effectively resolved by our subsequent step. Next, we encode these representations into the generation process of the personalized model. Notably, FS integration enables our pipeline to handle identity preserving in small localized regions and viewpoint changes, a persistent challenge for generative methods.

B. ResInversion.

We first describe NTI and then our ResInversion. NTI is an inversion method that achieves accurate inversion of real images while preserving the editing ability. As is depicted in Fig. 3 (a), it begins by generating initial noise trajectories, Z_0^*, \dots, Z_T^* , using DDIM inversion serving as an optimization anchor. To address the accumulated error in DDIM inversion, in which each step deviates the noise trajectory from its expected path, NTI utilizes a tuning mechanism named Null-text Optimization. NTI optimizes the unconditional text embedding to adjust the unconditional denoising part for solving the accumulated error and achieving high-fidelity reconstruction. NTI was initially proposed in smaller architectures (SD1.5 model), and we realize it in the more challenging SDXL framework which serves as the backbone of current SOTA personalized models.

However, tuning text-embedding in NTI requires propagating through the full diffusion model every optimization step (Fig. 3 (a)). Although it remains computationally tractable for compact architectures like SD v1.5, the text-embedding optimization becomes prohibitive time complexity in larger models.

We propose ResInversion, a novel inversion approach that directly identifies and compensates for noise deficiency in each

diffusion step to address trajectory deviation due to the accumulated error. Specifically, as illustrated in Fig. 3 (b), 1) We first employ DDIM inversion to obtain initial noise trajectories, Z_0^*, \dots, Z_T^* as the anchor. 2) Then, in our ResInversion, we propose to explicitly records residual noise through a pre-diffusion process. During this preliminary diffusion, we performs stepwise noise correction and simultaneously documents the residual noise $\{\epsilon_{r,0}, \dots, \epsilon_{r,t}, \dots, \epsilon_{r,T}\}$, denoted as

$$\epsilon_{r,t} = \epsilon_{DDIM,t} - \epsilon_{pre-d,t} \quad (3)$$

where $\epsilon_{r,t}$ denotes the documented residual noise component at time step t , $\epsilon_{DDIM,t}$ represents the removed noise derived from DDIM inversion trajectory between timestep t and $t-1$, $\epsilon_{pre-d,t}$ indicate the denoised part by pre-diffusion process of the model with the text prompt. These residuals then rectify noise discrepancies in forward step, aligning trajectories with pivot flow targets Z_0^*, \dots, Z_T^* . ResInversion eliminates the need for iterative optimization, achieving significant speedup inversion while maintaining reconstruction fidelity.

C. BiMD approach.

To integrate the representations from I_P 's image space into personalized model G_p 's generation process and achieve integrated generation, we introduce BiMD approach. As illustrated in Fig. 2 (b), BiMD diffusion method consists of three synergistic flows in G_p 's denoising process: 1) Pivot flow: We utilize DDIM inversion to obtain initial noise trajectories as pivot flow. 2) Backward ResInversion flow: We invert the image I_P into the G_p by ResInversion based on the pivot anchor, projecting the representations in I_P from the image space into the dispersed residual noise space. Different from NTI-like inversion method inverting the image into the fully functional G_p , we propose to invert image into the partial functional space, customization-free space where G_p generates non-specific identity in process. This aims to preserve G_p 's personalized capabilities from been overwritten by backward flow. Notably, the backward ResInversion flow is compatible with the pivot flow due to ResInversion's inherent mechanism, which enables pivot flow to faithfully reconstruct image I_P without information loss. 3) Forward customization flow: We integrate the customized denoising process from G_p into the pivot flow, which incorporates G_p 's identity customization capabilities for the current latent. This customized generation flow remains compatible with the pivot flow as it can customize arbitrary free generation process of G_p from customization-free space, of which the pivot flow is one instance. Through identifying these two compatible spaces and establishing a dual-path latent manipulation from counter-direction for a pivot flow, BiMD achieves integration of the customized identity and the backward representations within a unified generation process, which able to transfer information from both forward G_p 's customization and backward ResInversion's reconstruction. In sampling procedure of diffusion

process, the updating formula of BiMD is:

$$Z_{t-1} = \frac{1}{\sqrt{\alpha_t}} \left\{ Z_t - \frac{1 - \alpha_t}{\sqrt{1 - \alpha_t}} \left\{ \epsilon_\theta(Z_t, t) + \epsilon_{Res}(Z_t, t) - \epsilon_{G_{p,cus}}(Z_t, t) \right\} \right\} \quad (4)$$

where α_t denotes noise scheduling parameters, ϵ_θ represents network predicting noise, ϵ_{Res} indicates the residual noise of backward ResInversion at time step t under customization-free spaces, $\epsilon_{G_{p,cus}}$ represents predicted noise of forward G_p under identity customization space. Through iterative refinement via model’s diffusion process, we generate final images that preserve bidirectional representations, maintaining both reconstruction representation and customized attributes.

The key distinction between our approach and other DDIM inversion-based methods lies in its information supplementation capability for the inverted model. Conventional DDIM inversion fails to retain information during the regeneration process [13], as it predominantly relies on the inverted model’s generative capabilities to recreate whole content, representing a reuse of the model’s existing generative capacity. Our approach supplements the model with additional information and abilities in their diffusion process that the original model lacked. Furthermore, although BiMD has three flows, it employs the diffusion processes under a single model via a forward and inversion paradigm, as opposed to blending of diffusion processes from multiple models, thereby avoiding artifacts arising from domain gaps of various models, such as inconsistent copy-paste effects.

D. Training-free controls.

Proposed pipeline establishes a training-free control paradigm for diffusion-based personalized models, through integrating pretrained SDXL’s control modules into SDXL component in our pipeline, as depicted in Fig. 2 (a) upper branch. Our pipeline seamlessly embeds the control into the generation process of personalized models, enabling comprehensive training-free controllability across personalized systems. The control embedding can be denoted as:

$$I_P = R_S + R_{perc} + C_a \quad (5)$$

where C_a indicates arbitrary control modules trained for SDXL. This has two key advantages: (1) Enabling controlled photorealistic personalization on both primary generation targets, i.e., the human subject, and non-primary generation targets, such as environmental elements. Specifically, precisely controlling non-primary generation elements presents a significant technical challenge, a capability notably absent in prior work due to the inherent difficulty of control non-primary generation elements while maintaining the quality of primary subjects. (2) Eliminating the computationally expensive re-training of control modules typically required for personalized models.

IV. EXPERIMENTS

A. Experimental Setup

a) Evaluation dataset: We used the CelebA-HQ dataset [15] as our base dataset. We select the IDs from CelebA-HQ with more than 20 images to form our dataset. In total, we identified 30 IDs from CelebA-HQ to comprise our dataset, which has a similar ID number as [8]. We prepare 40 prompts for each ID, which has a variety of attributes and backgrounds following [8].

b) Evaluation metrics: Following [8] we use face similarity, DINO [16] and CLIP-I [6] metrics to measure the ID fidelity. For the face similarity, we use is MTCNN [17] as the detection model and the face embedding is extracted by FaceNet [18] following [8]. For each ID, we have 20+ images as mentioned above. In the evaluation, we randomly select one showing the full face and the other images of this ID are used for evaluating the face similarity by averaging. To evaluate the quality of the generation, we use the FID metric [19] and CLIP-IQA [20]. We calculate the FID between generated image and HumanArt dataset [21] containing high-resolution images of faces, scenes, and interactions. We also adopt CLIP-T [22] metric to measure the prompt fidelity and the FID metric to evaluate the quality of the generation. For the scene diversity, we propose a metric, termed Scene Diversity, to measure the diversity of the regions excluding facial region, which detects and crops out the face region and calculates the LPIPS [23] scores of the remaining images.

c) Comparison methods: We select the SOTA personalized photo generation method PhotoMaker [8] and InstanID [9] as the comparison methods, which are also the methods our pipeline plugs into. We also include DreamBooth [5] and IP-Adapter [10] as benchmark methods. The experimental results are systematically compared against these approaches.

d) Implementation details: To generate the scene and ID-agnostic image in our pipeline, we employ SDXL model [24] *stable-diffusion-xl-base-1.0*. We adopt InsightFace Swapper¹ as the face swapping model. The 50-step DDIM sampler is employed for all diffusion models. All the experiments are conducted on 8 NVIDIA RTX A4500 GPUs.

B. Comparison results

a) Scene diversity & ID fidelity: We conduct both quantitative and qualitative comparisons of the generated results of compared methods. For each personalized method our pipeline plugs into, we prioritize using the official codes following their papers. The experiment results for the quantitative comparisons are presented in Tab. I. The highest performance is shown in bold. The results show that our method generates images with diverse scenes (Scene Div., FID) and higher ID fidelity (Face Sim.), while ensuring overall image quality (CLIP-IQA, FID). The qualitative comparisons are illustrated in Fig. 4. The results demonstrate that our method produces images with high-quality scenes (complex background and detailed body feature), physically plausible human-context interaction (hands in the desk with book) without artifact

¹<https://github.com/haofanwang/inswapper>



Fig. 4. Qualitative comparison on identity-preserved recontextualization samples. We compare our method with the SOTA PhotoMaker, InstantID, Dreambooth, and IPAdapter under various identities and prompts. Our method is plugged into PhotoMaker and InstantID, denoted as ours (P.M.) and ours (Ins.ID). We observe that our method significantly enhances the scene diversity, identity fidelity, and produces high-quality images without copy-paste artifacts.

TABLE I
QUANTITATIVE RESULTS ON PHOTOMAKER AND INSTANTID AND OUR METHOD WHEN THEY PLUG IN.

	Scene Div.↑ (%)	Face Sim.↑(%)	CLIP-T↑ (%)	DINO ↑ (%)	CLIP-I↑ (%)	CLIP-IQA↑ (%)	FID↓
CustomEnhancer (P.M.)	60.0	67.3	31.7	85.4	82.4	89.6	416.3
PhotoMaker	52.2	55.7	27.8	84.9	80.8	87.4	473.9
CustomEnhancer (Ins.ID)	58.5	70.5	32.4	85.6	78.2	88.7	423.6
InstantID	52.8	61.1	29.6	84.7	76.3	86.4	496.1
DreamBooth	54.6	45.2	29.2	73.9	68.9	84.7	534.2
IPAdapter	55.4	52.6	26.5	79.2	78.6	86.9	483.8

of copy-paste, and enhanced facial regions with better ID fidelity. The overall image is generated via a unified diffusion process within personalized models, which guarantees the image quality.

b) Large-scale scene by scene-invoking prompts: We incorporate specific keywords into the prompt and conduct experiments to evaluate the performance of CustomEnhancer and personalized methods in large-scale scene generation tasks. We included phrases “wide angle scene”, “human standing in the distance”, and “detailed scene” into the prompts, “A photo of a <class word> in a library”, to generate large-scale scenes. The results are illustrated in Fig. Results show that although these personalized generation models produced more detailed scenes compared to those without additional

prompts (see Fig. 4), they still generated only a small portion of the scenes, which are entirely not satisfactory. In contrast, our method generated expansive and detailed scenes (Fig. 5 third column), while also producing high-quality details of the human character and their plausible interactions with the environment (hand on the table). By incorporating scene-invoking texts in the prompts, our pipeline can further exert the scene generation ability in the pretrained SDXL and produce better scene representations. In contrast, these personalized models have diminished scene generation ability. This demonstrates that, under the same prompts, our method consistently produces superior scenes, character details, and reasonable character-context interactions, with zero copy-paste artifact,

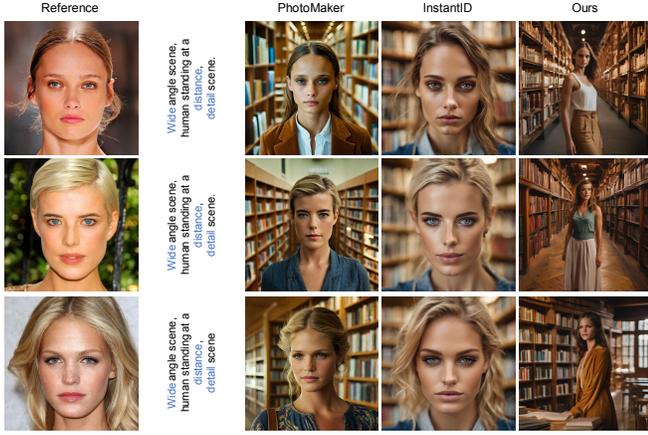


Fig. 5. Comparison under scene-invoing prompts between PhotoMaker, InstantID, and our method. Our method generated expansive and detailed scenes, high-quality details of the human, reasonable character-context interactions, while personalized models fail.

compared to existing personalized models.

According to the limitations discussed in PhotoMaker manuscript [8], PhotoMaker excels at generating half-length portraits, but performs poorly in generating full-length portraits. It is a common challenge for current diffusion-based personalized models. By plugging our method into these personalized models, they can be enhanced with the capabilities of generating full-length human and diverse scenes. More importantly, our method also enhances them with training-free controls and ID fidelity.

c) More dataset results: We conducted expanded experiments on the CFB dataset to evaluate our method’s generalization ability. In CFB dataset, we select a frontal-facing image as input within images that represent the same ID and utilize the remaining images of this ID for face similarity evaluation by averaging. The other metrics are measured in the same way as the main paper. Experimental results are presented in Tab. II. The results consistently demonstrate proposed method’s superior performance, confirming its effectiveness in enhancing personalized models with both scene diversity and ID fidelity. The robust performance across diverse datasets validates the generalization and robustness of our proposed method.

TABLE II

RESULTS OF SCENE DIVERSITY AND FACE SIMILARITY ON CFB DATASET.

Method	Scene Div.↑	Face Sim.↑	CLIP-I↑	FID↓
Our pipeline (P.M.)	60.4	66.2	82.5	417.8
PhotoMaker	52.6	54.4	81.0	477.3
Our pipeline (Ins.ID)	58.9	69.6	78.4	428.6
InstantID	53.0	60.3	76.8	498.5

d) Training-free control: Human subjects and environmental elements controlled personalization: We incorporate OpenPose and Canny controlnets as representative examples in the SDXL component (Fig. 2 upper branch) and conduct the human-controlled experiments in personalized models. For a fair comparison, we apply the same controlnet module and

prompt across all methods. As illustrated in Fig. 6 (a), the results exhibit that our method precisely adheres to control conditions while maintaining high image quality and identity fidelity, with no copy-paste artifacts. In contrast, personalized models like PhotoMaker show incompatibility with these control modules, leading to corrupted image quality, poor identity preservation, and inconsistent outputs. Our method does not interfere with the identity diffusion process of these personalized models, ensuring high image quality and artifact-free synthesis. Results generalize effectively to other SDXL-compatible control modules, providing personalized models with training-free controls and removing the inefficient controller retraining.

We employ an canny-based scene control in pretrained SDXL as example to conduct experiments on scene control. We use the identity prompt ‘!A woman at the foot of this mountain’ to generate the image for all compared methods. As shown in Fig. 6 (b), our method can obtain the marvelous scene (mountain), while retaining the high ID fidelity on the generated images. Environment and human subjects and controlled environment are composed naturally without copy-paste problem. Our method also enables personalized methods with full-body generation capability, as well as detailed face generation on small regions of an image. In contrast, the existing personalized models not only generate poor image quality, but also struggle to condition on the non-primary elements, generating basically no human in the image.

e) ResInversion: We implement the NTI-based CustomEnhancer in PhotoMaker and InstantID frameworks, while realizing NTI for inversion testing in the general SDXL model, followed by comprehensive comparisons with our ResInversion-based implementations. Generation latency is measured with batch size=1 on a single GPU. The quantitative results are detailed in Table III. Our ResInversion makes our full pipeline 71× faster than NTI-based implementations in PhotoMaker and 65× in InstantID, reducing latency from hours to minutes. Although DDIM inversion achieves the fastest processing speed, it fails to accurately reconstruct the input image and merely utilizes the model’s generative capabilities to produce new samples, providing no additional accurate information to enhance the model. In contrast, our ResInversion introduces only a small latency overhead while providing significantly distinguished reconstruction quality than DDIM inversion.

TABLE III

GENERATION LATENCY BY DIFFERENT INVERSION METHODS.


	PhotoMaker (s)	InstantID (s)	SDXL (s)
NTI	7283	9237	7567
ResInversion	102	141	98
DDIM Inversion	54	82	52

C. Ablation study

a) Module ablation: We ablate each component in reverse order, presenting results after final output, FS component, SDXL component of our pipeline, and we also ablate



(a) Human controlled personalization.

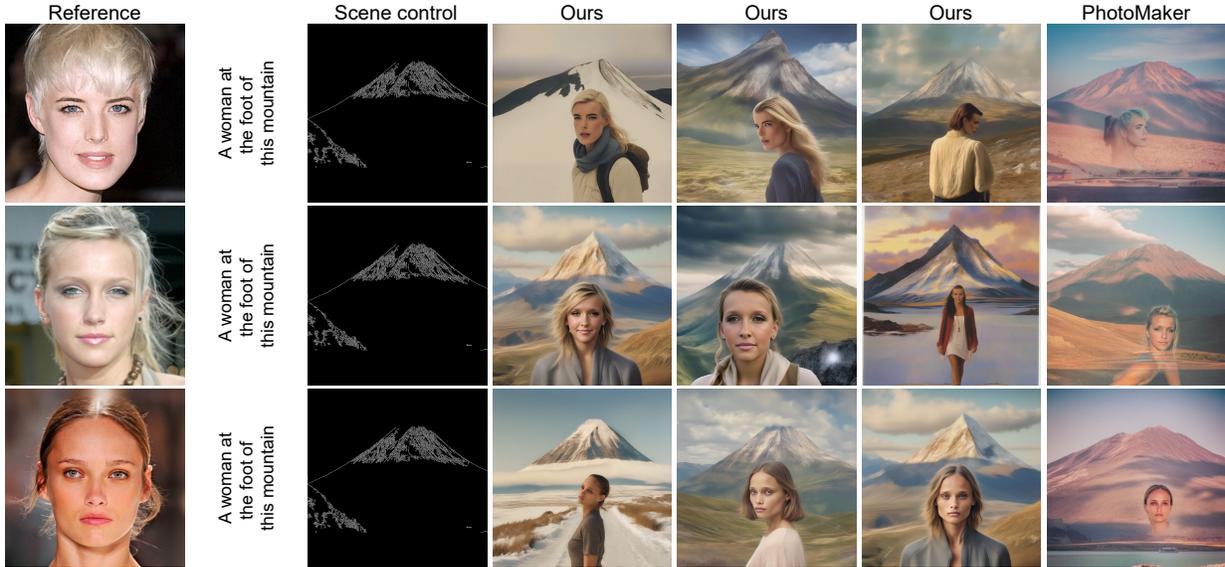

(b) Environmental-elements controlled personalization.

Fig. 6. Training-free control for (a) human controlled personalization, taking the openpose and canny controls as examples, and (b) environmental-elements controlled personalization, where our CustomEnhancer enables controlled personalization on non-primary generation targets. elements.

the forward flow (AB. FWD flow) and backward flow (AB. BKWD flow) in BiMD. The qualitative results are illustrated in Fig. 8, which shows that BiMD further modifies the smectic area of human from the base image, such as the hairstyle, skin color of face and arm, and the face identity, while keeping the background consistent (After Final and After FS). FS effectively injects the perceptual identity into the pretrained image (After FS and After SDXL), and backward flow faithfully reconstructs the inverse image (AB. FWD and After FS) and forward flow is able to customize the face (AB. BKWD).

The quantitative results are summarized in Table. IV. (For the results of CustomEnhancer and personalized models, refer to Table. I). Results show that the face similarity in the output image of CustomEnhancer is better than that of both face swap and personalized models. This demonstrates that the

concrete perceptual identity, additionally injected through face swap, can further complete the identity information for neural network-based extractors in personalized models.

TABLE IV
QUANTITATIVE ABLATION RESULTS ON OUR PIPELINE.

	CustomEnhancer (PhotoMaker)			
	Scene DIV ↑ (%)	Face Sim. ↑ (%)	CLIP-IQA↑ (%)	FID↓
Ab. BKWD	50.6	55.1	84.2	485.9
Ab. FWD flow	58.2	63.5	84.5	428.2
After FS	58.2	63.5	84.8	423.8
After SDXL	58.2	18.7	89.5	419.7
Input image	33.8	77.4	82.3	441.9

b) Manipulation starting step.: We ablate the manipulation starting step (MSS) of the forward and backward flow at the pivot flow within the 50-step DDIM sampler in our BiMD. Since the backward flow cannot tune the starting step (image



Fig. 7. Qualitative results of ResInversion on reconstruction quality.

collapse), we double the manipulation scale of forward flow to simulate ablating half of the backward flow and then we tune the intervention starting steps step of forward flow. Fig. 9 shows examples with different MSS steps. We can observe that personalized models do not have ability to generate large-scale scene (smaller step), often tending to discard the scene and generate only face area. The distribution learned by these personalized models is narrowed down to facial area. Our method integrates these personalized models' generation process with additional scene and facial information (larger step), helping them access more information and expanding their generative capability.

For better illustration, the quantitative results on face similarity and CLIP-IQA at different MSS are shown in Fig. 10. Results show that our method outperforms PhotoMaker and InstantID in all MSS ranges in terms of face similarity (Face Sim.). The increasing face similarity is provided by representation from face swapping, which shows that face swapping can supply additional identity information that neural network-based extractors cannot achieve. The image quality varies among different MSSs, but the variance are not significant.

V. APPLICATION

a) Identity fusion: Our pipeline implements forward ID and backward ID two passes, which enables the interpolation of two ID images. This allows for performing ID fusion across the two IDs. Furthermore, it is able to provide explicit visualization of ID transformation trajectories through these two IDs, which PhotoMaker and InstantID cannot. We employ MSS to control the strength of forward ID, and we keep the manipulation scale of forward and backward flows' consistency. The results are provided in Fig. 11 (a). We can clearly observe how the identity is progressively fused through such an interpolation process.

b) Identity on specific cartoon character: Our pipeline enables generating identities on arbitrary specific cartoon characters, such as 2D and sketches, through our unifying

generation process of BiMD. The results are illustrated in Fig. 11 (b). Results show identity modification focused on semantic area of the head of specific cartoon character, allowing adjustments to the hairstyle, expression, etc. Furthermore, it can provide explicit visualization of transformations for these adjustments, as shown in Fig. 12, enabling novel applications such as the discovery of unseen facial expressions, among others, etc.

VI. CONCLUSION

In this paper, we propose the CustomEnhancer for personalized photo generation models enhancing the scene diversity, training-free controls, and perceptual identity. We propose a zero-shot enhancement pipeline, BiMD approach, ResInversion, and training-free controls, improving scene diversity by 6% ~ 8%, face similarity by 7% ~ 9%, inversion speed $65\times \sim 71\times$, offering controlled personalization without inefficient controller re-training.

REFERENCES

- [1] I. Goodfellow, J. Pouget-Abadie, M. Mirza, B. Xu, D. Warde-Farley, S. Ozair, A. Courville, and Y. Bengio, "Generative adversarial networks," *Communications of the ACM*, vol. 63, no. 11, pp. 139–144, 2020.
- [2] A. Ramesh, P. Dhariwal, A. Nichol, C. Chu, and M. Chen, "Hierarchical text-conditional image generation with clip latents," *arXiv preprint arXiv:2204.06125*, vol. 1, no. 2, p. 3, 2022.
- [3] K. Saharia, W. Chan, S. Saxena, L. Li, J. Whang, E. L. Denton, C. Ghasemipour, R. Gontijo Lopes, B. Karagol Ayan, T. Salimans *et al.*, "Photorealistic text-to-image diffusion models with deep language understanding," *Advances in neural information processing systems*, vol. 35, pp. 36479–36494, 2022.
- [4] R. Rombach, A. Blattmann, D. Lorenz, P. Esser, and B. Ommer, "High-resolution image synthesis with latent diffusion models," in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2022, pp. 10684–10695.
- [5] N. Ruiz, Y. Li, V. Jampani, Y. Pritch, M. Rubinstein, and K. Aberman, "Dreambooth: Fine tuning text-to-image diffusion models for subject-driven generation," in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2023, pp. 22500–22510.
- [6] R. Gal, Y. Alaluf, Y. Atzmon, O. Patashnik, A. H. Bermano, G. Chechik, and D. Cohen-Or, "An image is worth one word: Personalizing text-to-image generation using textual inversion," *arXiv preprint arXiv:2208.01618*, 2022.
- [7] E. J. Hu, Y. Shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen, "Lora: Low-rank adaptation of large language models," *arXiv preprint arXiv:2106.09685*, 2021.
- [8] Z. Li, M. Cao, X. Wang, Z. Qi, M.-M. Cheng, and Y. Shan, "Photomaker: Customizing realistic human photos via stacked id embedding," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024, pp. 8640–8650.
- [9] Q. Wang, X. Bai, H. Wang, Z. Qin, and A. Chen, "Instantid: Zero-shot identity-preserving generation in seconds," *arXiv preprint arXiv:2401.07519*, 2024.
- [10] H. Ye, J. Zhang, S. Liu, X. Han, and W. Yang, "Ip-adapter: Text compatible image prompt adapter for text-to-image diffusion models," *arXiv preprint arXiv:2308.06721*, 2023.
- [11] P. Dhariwal and A. Nichol, "Diffusion models beat gans on image synthesis," *Advances in neural information processing systems*, vol. 34, pp. 8780–8794, 2021.
- [12] J. Song, C. Meng, and S. Ermon, "Denoising diffusion implicit models," *arXiv preprint arXiv:2010.02502*, 2020.
- [13] R. Mokady, A. Hertz, K. Aberman, Y. Pritch, and D. Cohen-Or, "Null-text inversion for editing real images using guided diffusion models," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 6038–6047.
- [14] D. Garibi, O. Patashnik, A. Voynov, H. Averbuch-Elor, and D. Cohen-Or, "Renoise: Real image inversion through iterative noising," *arXiv preprint arXiv:2403.14602*, 2024.



Fig. 8. Ablation on components. Results after final output, face swapping, SDXL components, and after ablating the FWD and BKWD flow in BiMD.

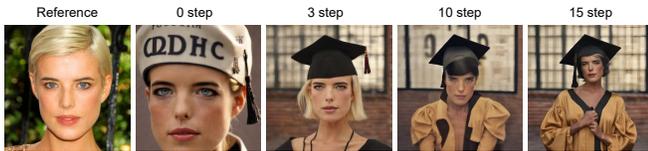


Fig. 9. Ablation through MSS step. Smaller steps tend to generate by PhotoMaker whereas larger steps by our pipeline.

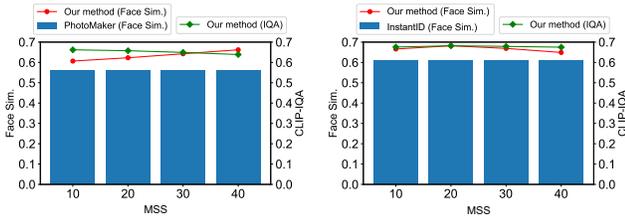


Fig. 10. Face Sim. and CLIP-IQA across MSS for PhotoMaker and InstantID.



(a) Identity Fusion



(b) Generate Identity On Cartoon character

Fig. 11. Two applications of CustomEnhancer: (a) Identity fusion: Interpolate between two identities to do the identity synthesis. (b) Identity on specific cartoon character: Synthesis ID into specific character.

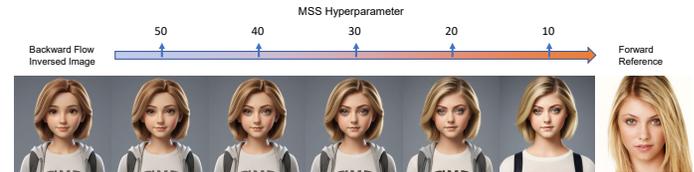


Fig. 12. Interpolation of identity transformation from provided specific cartoon character to the reference image. The first column shows the image inverted to the personalized model through the backward flow, which is an ID-agnostic cartoon character. The last column represents the reference image fed forward into the personalized model.

[15] T. Karras, “Progressive growing of gans for improved quality, stability, and variation,” *arXiv preprint arXiv:1710.10196*, 2017.

[16] M. Caron, H. Touvron, I. Misra, H. Jégou, J. Mairal, P. Bojanowski, and A. Joulin, “Emerging properties in self-supervised vision transformers,” in *Proceedings of the IEEE/CVF international conference on computer vision*, 2021, pp. 9650–9660.

[17] K. Zhang, Z. Zhang, Z. Li, and Y. Qiao, “Joint face detection and alignment using multitask cascaded convolutional networks,” *IEEE signal processing letters*, vol. 23, no. 10, pp. 1499–1503, 2016.

[18] F. Schroff, D. Kalenichenko, D. Philbin, James, and J. Philbin, “Facenet: A unified embedding for face recognition and clustering,” in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2015, pp. 815–823.

[19] M. Heusel, H. Ramsauer, T. Unterthiner, B. Nessler, and S. Hochreiter, “Gans trained by a two time-scale update rule converge to a local nash equilibrium,” *Advances in neural information processing systems*, vol. 30, 2017.

[20] J. Wang, K. C. Chan, K. C. Loy, Chen Change, and C. C. Loy, “Exploring clip for assessing the look and feel of images,” in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 37, no. 2, 2023, pp. 2555–2563.

[21] X. Ju, A. Zeng, J. Wang, Q. Xu, and L. Zhang, “Human-art: A versatile human-centric dataset bridging natural and artificial scenes,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 618–629.

[22] A. Radford, J. W. Kim, C. Hallacy, A. Ramesh, G. Goh, S. Agarwal, G. Sastry, A. Askell, P. Mishkin, J. Clark *et al.*, “Learning transferable visual models from natural language supervision,” in *International*

conference on machine learning. PMLR, 2021, pp. 8748–8763.

[23] R. Zhang, P. Isola, A. A. Efros, E. Shechtman, and O. Wang, “The unreasonable effectiveness of deep features as a perceptual metric,” in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2018, pp. 586–595.

[24] D. Podell, Z. English, K. Lacey, A. Blattmann, T. Dockhorn, J. Müller, J. Penna, and R. Rombach, “Sdxl: Improving latent diffusion models for high-resolution image synthesis,” *arXiv preprint arXiv:2307.01952*, 2023.