

# PREDICTING LLM REASONING PERFORMANCE WITH SMALL PROXY MODEL

Woosung Koh<sup>▽♣</sup>, Juyoung Suk<sup>▽♣</sup>, Sungjun Han<sup>▽\*</sup>, Se-Young Yun<sup>♣\*</sup>, Jamin Shin<sup>▽\*</sup>

<sup>▽</sup>Trillion Labs, <sup>♣</sup>KAIST AI

\*Correspondence to: yunseyoung@kaist.ac.kr, {sungjun.han, jay}@trillionlabs.co

## ABSTRACT

Given the prohibitive cost of pre-training large language models, it is essential to leverage smaller proxy models to optimize datasets before scaling up. However, this approach becomes challenging for reasoning capabilities, which exhibit *emergent* behavior that only appear reliably at larger model sizes, often exceeding 7B parameters. To address this, we introduce RBRIDGE, showing that small proxies ( $\leq 1B$ ) can effectively predict large-model reasoning by aligning more closely with (1) the pre-training objective and (2) the target task. RBRIDGE achieves this by weighting negative log-likelihood with task alignment, using reasoning traces from frontier models as gold labels. In our experiments, RBRIDGE (i) reduces dataset ranking costs by over 100× relative to the best baseline, (ii) achieves the strongest correlation across six reasoning benchmarks at 1B to 32B scale, and (iii) zero-shot transfers predictive relationships across pre-training datasets at 1B to 7B scale. These findings indicate that RBRIDGE offers a practical path for exploring reasoning-oriented pre-training at lower cost.

## 1 INTRODUCTION

Pre-training modern language models at scale requires enormous computational and data resources, making it infeasible to exhaustively explore pre-training design choices directly at large scale (Radford et al., 2018; 2019; Brown et al., 2020; Dong et al., 2019; Hoffmann et al., 2022a; Cottier et al., 2024; Hu et al., 2024; Khandelwal et al., 2024; Han et al., 2025). In response, leveraging smaller models as a proxy for larger model performance has been a key direction through the establishment of empirical scaling laws for prediction (Kaplan et al., 2020; Hoffmann et al., 2022b) or derivation of pre-training dataset rank invariance across scale (Magnusson et al., 2025).

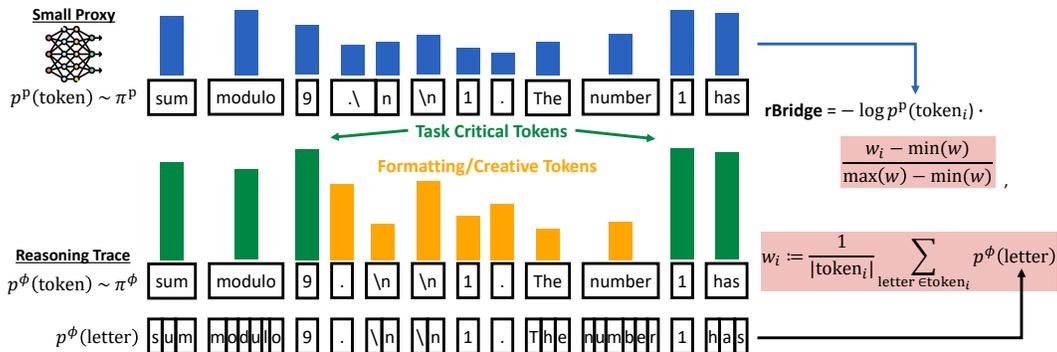


Figure 1: Schematic overview of RBRIDGE, which is used to predict and rank performance at much larger model size. We use a frontier model  $\pi^\phi$ 's reasoning trace (Wei et al., 2022b) as the gold label  $Y^*$  and compute **weighted** NLL for evaluation. Each token  $i$ 's NLL is **weighted** by the frontier model's confidence in that token (MinMax normalized). To handle tokenizer mismatches between proxy and frontier models, we compute weights at the letter level and average within tokens.

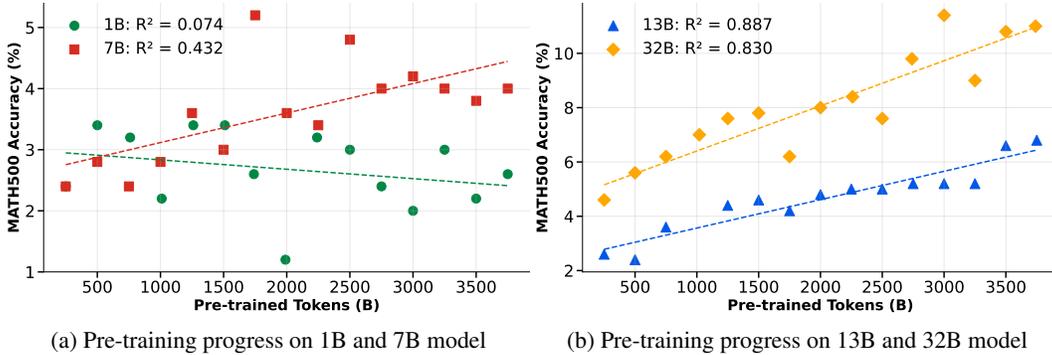


Figure 2: Using MATH500 as an example benchmark, given the same data source OLMo-Mix-1124 (OLMo et al., 2024), smaller models exhibit more noise and get the direction wrong, making it challenging to use smaller models to proxy larger model performance.  $R^2$  values are derived from linear curve fitting. Extended visualization across other reasoning benchmarks are available in Appendix A.

However, the literature on the *emergence* of reasoning performance as we scale model size (Wei et al., 2022a; Almazrouei et al., 2023; Du et al., 2024) suggest that there may be a limit to how small these proxy models can be. They demonstrate that reasoning capabilities only appear when models are sufficiently large in size. Du et al. (2024)’s granular study demonstrates *random* accuracy on small scale models of size 300M - 3B benchmarked on reasoning tasks like MMLU (Hendrycks et al., 2021a) and GSM8K (Cobbe et al., 2021). Contrarily, other non-reasoning benchmarks like TriviaQA (Joshi et al., 2017) and HellaSwag (Zellers et al., 2019) show smooth signs of improvement even at small scale.

We further visualize this challenge of using small models to proxy large model especially for reasoning in Fig. 2. While larger models exhibit stable Accuracy (Acc.) improvement (Fig. 2b), smaller models are highly noisy, and in the case of the smallest 1B model, sloping in the wrong direction (Fig. 2a).

Due to this limitation, practitioners are often constrained to relatively larger proxy models up to 15B to capture reasoning performance, which incurs substantial computational and economic costs (Grattafiori et al., 2024; DeepSeek-AI et al., 2025). For example, a single training run of a 7B model with 500B tokens can reportedly exceed 50K USD in cost (Han et al., 2025).

**Contribution.** To bridge the evaluation scheme at small proxy to large target scale, we first analyze limitations of past approaches (§ 3.1). Our analysis uncovers that existing methods fail to (§ 3.1 (1)) align with the pre-training objective, and (§ 3.1 (2)) align with the target task. (1) Alignment with the pre-training objective is required as small pre-trained models *lack strong generalization capabilities*. (2) Ensuring that the evaluation scheme is aligned with the target task is necessary to fulfil our *ultimate* goal of proxying task performance at large scale. To achieve (1, 2), we use frontier-model generated gold reasoning traces (Wei et al., 2022b) for negative log-likelihood (NLL) (Fig. 1). Then, we further task alignment at the token-level by automatically weighting tokens based on their level of task-alignment (Fig. 1). We empirically validate our method RBRIDGE (§ 4):

1. On a pre-training dataset ranking benchmark with target 1.2B scale, RBRIDGE achieves **80.8%** decision accuracy across **25** pre-training datasets, outperforming **5** baselines, reducing dataset ranking compute cost by at least **100.2×** against the best baseline
2. Best average proxy (1B) to target (13B, 32B) relationship across **6** benchmarks (mathematics, science, engineering, commonsense, and coding tasks), against **6** baselines
3. Best average 1B → 13B relationship after a supervised fine-tuning (SFT) stage at target scale across **4** benchmarks, against **6** baselines
4. Outperform proxy models **7 - 13×** larger using the target metric (e.g. Acc., Pass@K)

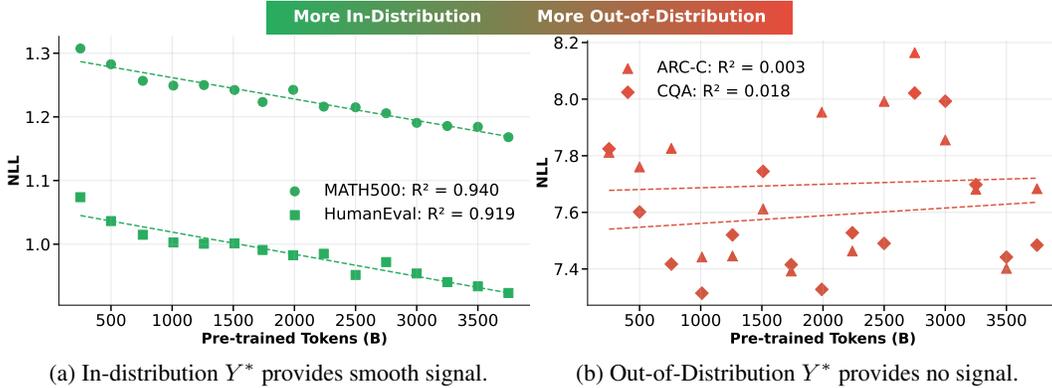


Figure 3: When evaluating a 1B pre-trained model with next token prediction,  $\pi^p(y_\tau|x, y_{<\tau}^*)$ , how in-distribution the target  $Y^*$  is becomes important. All visualized benchmarks demonstrate smooth improvements at larger ( $13\times$ ,  $32\times$ ) scale with target metric  $\text{Acc./p@k}$ . For clarity, we visualize the benchmarks in our empirical study with the two smallest and largest average NLL values.

5. Demonstrate that RBRIDGE-target relationship on one pre-trained dataset can be **zero-shot transferred** to an alternative dataset for low-error performance prediction and ranking using a **fraction** of experimental compute cost

## 2 PROBLEM SETTING

Let  $\pi^p, \pi^t$  denote small proxy and large target model, respectively. The target metric  $\text{metric}^t$  (e.g., Acc., Pass@k) is fixed. Our objective is to design a proxy evaluation metric<sup>p</sup> such that considering  $f : \text{metric}^p \mapsto \text{metric}^t$ , find  $\text{metric}^p := \max_{\text{metric}} \text{corr}(\text{metric}(\pi^p), \text{metric}^t(\pi^t))$ . We discuss the  $\text{corr}(\cdot)$  function we use in future sections. That is, improvements observed at proxy scale should reliably predict improvements at target scale. We denote scaling experiments as  $n \rightarrow m$ , where  $n, m$  is the proxy, target model size, respectively; e.g.,  $1\text{B} \rightarrow 32\text{B}$ . Performance changes can arise from either **(I)** varying the training dataset at fixed data size, or **(II)** varying the training data size given a fixed dataset. This enables two key applications: **(I)** comparing alternative training datasets without training large models on each, and **(II)** predicting whether scaling up training data (e.g.,  $3000\text{B} \rightarrow 3500\text{B}$  tokens) is worthwhile. This is important because it enables us to predict the return on investment for large-scale training before committing resources. A practical proxy evaluation scheme must therefore be reliable at *small scale* and achieve *high correlation*.

## 3 BRIDGING SMALL AND LARGE MODEL SCALE EVALUATION

We find that small models become strong proxies for large models when achieving alignment along two axes: alignment with the pre-training evaluation objective (§ 3.1 (1)), and alignment with the target task (§ 3.1 (2)). In response, we introduce our method, RBRIDGE (§ 3.2).

### 3.1 PRIOR APPROACH LIMITATION

**(1) Evaluation Objective Misalignment.** We find that the first limitation of existing approaches is their lack of evaluation objective alignment with  $\pi^p$ . This is required as small pre-trained models *lack strong generalization capabilities*. Concretely, **(a)** Acc. and Pass@K (p@k) is misaligned with the pre-training objective function, and **(b)** even if we use an objective function aligned evaluation scheme like NLL, we must stay aligned with the pre-trained model’s distribution.

**(1.a) Misaligned Evaluation Metric.** Existing target metrics like Acc./p@k are misaligned with the proxy model’s next token prediction (NTP) NLL learning objective (Brown et al., 1992). Consider Fig. 3a, where NLL shows smooth improvement with correct slope at 1B on MATH500 while Acc. in Fig. 2 is noisy and sloping the wrong direction.

$Y^*$ :	$\mathcal{D}$	ScB = $R^\phi + A^\phi$	$R^\phi$
Min NLL ( $\downarrow$ )	1.168	1.285	0.925
Average NLL ( $\downarrow$ )	1.228	1.351	0.981
Max NLL ( $\downarrow$ )	1.307	1.405	1.060
<b>1B <math>\rightarrow</math> 13B</b>			
Train $R^2$ ( $\uparrow$ )	0.861	0.814	0.886
Test MAE ( $\downarrow$ )	0.593	0.637	0.524
<b>1B <math>\rightarrow</math> 32B</b>			
Train $R^2$ ( $\uparrow$ )	0.823	0.809	0.832
Test MAE ( $\downarrow$ )	0.815	0.933	0.739

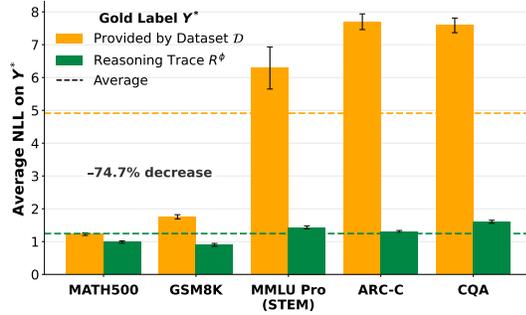


Table 1: We observe a direct relationship between Figure 4: Using reasoning trace  $R^\phi$  over benchmark-degree of in-distribution (as presented as NLL) mark test set’s  $Y^*$  significantly reduces NLL, suggesting that  $R^\phi$  is more in-distribution. Error bars indicate one standard deviation.

**(1.b) Not All NLL are Equal: Distributional Alignment.** Furthermore, we find that the quality of the NLL signal hinges on the gold label  $Y^*$ . We define gold label as the string used for NLL on our proxy model. We observe that it should be closer to the pre-training distribution  $p(y_\tau|x, y_{<\tau}^*) \sim \pi^P$  where  $x$  is the input, and  $\tau$  is the decoded token. Following Arora et al. (2021), Gonen et al. (2023), we measure how in-distribution (ID)  $Y^*$  is via NLL,  $-\log(p(Y^*))$ . The more out-of-distribution (OOD), the more lacking in signal the proxy model becomes (Fig. 3). Benchmarks with an ID  $Y^*$  (lower NLL) show smooth and predictable progress at smaller model scale (1B) (Fig. 3a). Contrarily, benchmarks with OOD  $Y^*$  (higher NLL) is at least as noisy as the target metric Acc. (Fig. 3b).

We also observe this distributional misalignment in ScalingBench (ScB; Xiao et al. (2024); Team (2025)). ScB proposes we set the reasoning trace  $R^\phi$  (Wei et al., 2022b) and the final answer label  $A^\phi$  of a frontier model  $\pi^\phi$  as  $Y^*$ . ScB’s gold labels include formatting artifacts like “\n”, “Final Answer:”, and “I hope it is correct.” that rarely appear in pre-training data, making them OOD, hurting proxy performance (Tab. 1). The proxy evaluation protocol is detailed in § 4.1 (ii).

**(2) Target Task Alignment of Gold Label  $Y^*$  and at the Token Level.** Secondly, we hypothesize that the evaluation scheme should be task aligned. Here, target task refers to, e.g., correctly solving math problems for GSM8K (Cobbe et al., 2021), and MATH500 (Hendrycks et al., 2021b). Ensuring that  $Y^*$  is aligned with the target task is necessary to fulfilling our *ultimate* goal of proxying task performance at large scale. While we could achieve maximal ID by setting the greedy decoded tokens of  $\pi^P(y_\tau|x, y_{<\tau}^*)$  as  $Y^*$ , this would provide no signal, as it would fail to be task aligned.

We further observe that standard NLL on  $Y^*$  does not distinguish between tokens that are important for task alignment, and others that are less task critical. Consider, Fig. 1, where frontier model  $\pi^\phi$  decoding produces both **task critical** and **formatting/creative** tokens. For example, newlines and numbering are not essential, while steps like “sum modulo 9” are crucial. To further achieve task alignment, tokens should not be arbitrarily given equal weight as is in NLL.

### 3.2 RBRIDGE: IMPROVING EVALUATION OBJECTIVE ALIGNMENT AND TASK ALIGNMENT

**Reasoning Trace  $R^\phi$  as  $Y^*$ .** We show that using only the reasoning trace  $R^\phi$  of a frontier model  $\pi^\phi$  as  $Y^*$  satisfies both being (1) ID and (2) task alignment. (1) We hypothesize that  $R^\phi$  is more distributionally aligned (ID) with the pre-training distribution comprised predominantly of a collection of continuous long texts (Penedo et al., 2024; Kydlíček et al., 2025). We verify this empirically in Fig. 4, where we visualize average NLL across 250 to 3750B trained tokens on a 1B model, on the provided  $Y^*$  by the benchmark dataset  $\mathcal{D}$  against the frontier model  $\pi^\phi$  generated  $R^\phi$ . We observe an average NLL decline of 74.7% when using  $R^\phi$  across five reasoning benchmarks, providing supportive evidence that  $R^\phi$  is more ID. (2)  $R^\phi$  is well aligned with the target task as  $R^\phi$  is the reasoning trace that leads to the correct final answer for Acc./p@k. Intuitively, evaluating how well the model  $\pi^P$  reasons towards the final answer is a good ID proxy for achieving the target Acc./p@k. Empirically, using only  $R^\phi$  achieves the best relationship on MATH500 which we are able to replicate as the exact ScB  $Y^*$  gold labels have been released for MATH500 (Tab. 1).

**Weighted NLL on  $R^\phi$ 's Tokens for Further Task Alignment.** RBRIDGE takes a final step for further task alignment by weighting each token by its level of task-alignment. We hypothesize that frontier model token probability  $p^\phi(\text{token}_i) \sim \pi^\phi$  provide automatic task-alignment weights:

$$\text{RBRIDGE NLL}(\text{token}_i) := \underbrace{-\log(p^\phi(\text{token}_i))}_{\text{standard NLL}} \cdot \underbrace{\frac{1}{|\text{token}_i|} \sum_{\text{letter} \in \text{token}_i} p^\phi(\text{letter})}_{\text{Automatic tokenizer-agnostic task-alignment weight}}. \quad (1)$$

Our method weighs each token  $i$ 's NLL by the frontier model's confidence in that token  $p^\phi(\text{token}_i)$ . To handle different tokenizers, we average letter-level probabilities within each token. Finally, we apply MinMax normalization (Witten & Frank, 2002) on the weight factor in Eq. (1) to amplify the effect. Consider Fig. 1 for an intuitive visualization of Eq. (1) with the MinMax normalized form unpacked in full. The pseudocode and prompt is available at Appendix B.

## 4 EMPIRICAL STUDY

Our experiments are organized in three stages: **(i)** first, we show that RBRIDGE can be used to rank datasets from proxy scale of <100M to target scale 1.2B, **(ii)** next, we examine the RBRIDGE-target relationship across different amounts of training data at 1B to 32B scale, and **(iii)** finally, demonstrate that the relationship derived in **(ii)** can be effectively transferred to a different dataset, allowing us to predict *and* rank large-scale datasets' reasoning performance at a fraction of the cost.

### 4.1 EXPERIMENTAL PROTOCOL

All experimental settings are set *a priori*, and all methods are evaluated in the same manner. Detailed experimental details are available in Appendix C.

**(i) Dataset Ranking at <100M  $\rightarrow$  1.2B.** We evaluate whether RBRIDGE scores from proxy models can effectively rank pre-training datasets for target model performance. Following DataDecide's protocol (Magnusson et al., 2025), we rank 25 datasets using proxy models and assess alignment with target model rankings. We measure effectiveness using Decision Accuracy (DAcc.; fraction of correctly ordered dataset pairs; Magnusson et al. (2025)) and Kendall's Tau correlation.

**Setup.** Proxy models range  $n \in [3.7\text{M}, 97.9\text{M}]$ , with a 1.2B target model. As discussed in § 1, noisy benchmarks such as MATH500 and MMLU Pro are excluded at this scale. Instead, we use ARC-C (Clark et al., 2018) and CQA (Talmor et al., 2019), which yield stable cloze-form (CF) accuracy (Gu et al., 2025) when averaged across three pre-training seeds (Magnusson et al., 2025). Reported results are the average over these two benchmarks.

**Baselines.** Alongside RBRIDGE, we compare five *dataset-ranking* metrics commonly used with proxy models: Correct Probability, Normalized Correct Probability, Total Probability, Margin, and CF Accuracy (Xie et al., 2023; Liu et al., 2025; Magnusson et al., 2025).

**(ii) Proxy-target Relationship Across Different Amounts of Training Data at 1B  $\rightarrow$  32B.** We test whether proxy-scale metrics can predict changes in target-scale Acc. and p@k across different training data sizes. Each data point corresponds to a specific data size from the same source (Fig. 5). Following Che et al. (2018), Lee et al. (2020), we evaluate using 5-fold cross validation on the setup visualized in Fig. 5, reporting average train  $R^2$  and test Mean Absolute Error (MAE; Chai & Draxler (2014)). Curve fitting selects the best function based on train  $R^2$  from our hypothesis space: linear, quadratic, exponential, and logarithmic. This hypothesis space was defined *a priori* to avoid overfitting.

**Setup.** We examine model scales of 1B  $\rightarrow$  13B and 1B  $\rightarrow$  32B, pre-trained on 250B to 3750B tokens in 250B token intervals using the OLMo-Mix-1124 dataset (OLMo et al., 2024). Evaluation spans six reasoning benchmarks: GSM8K, MATH500, ARC-C, MMLU Pro (STEM subset; Wang et al. (2024)), CQA, and HumanEval (Chen et al., 2021).

**Baselines.** We cover six alternative metrics that examine the relationship of small and large models given the *same* data source, and metrics that have shown non-emergent continuity at small scale.

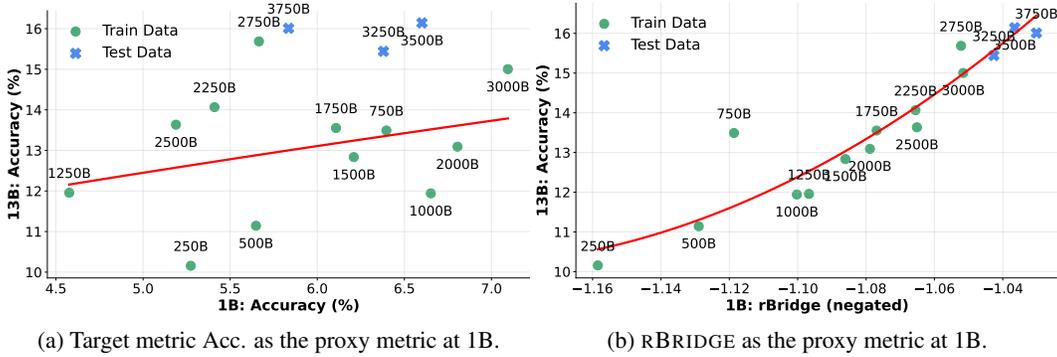


Figure 5: Example visualization from a fold of proxy-target relationship study at 1B  $\rightarrow$  13B on MMLU Pro (STEM). Each data point represents equal trained tokens for the proxy and target model.

First, we include the most naïve approach, the target metric: Accuracy and Pass@1 (Acc./p@1; [Kulal et al. \(2019\)](#)). Second, we include intermediate supervised fine-tuning (iSFT; [Snell et al. \(2024\)](#)) which demonstrate that including a SFT stage throughout the intermediate pre-training checkpoints help target metric (Acc./p@1) be used as signals. Third is Token Edit Distance (TED; [Schaeffer et al. \(2023\)](#)) which argue that emergence occurs due to discontinuous metrics. Fourth is Model Probability of Correct Answer (MPCA) as demonstrated in [Schaeffer et al. \(2023\)](#), [Snell et al. \(2024\)](#) as a continuous metric. Last is ScB which visualize the relationship between ScB and target metric using *numerous* smaller proxy models (similar to the scaling law literature). As mentioned in § 3, we use our proposed improved version of ScB,  $R^\phi$ , as there were insufficient details to replicate ScB on all of our benchmarks.


**(iii) Zero-shot Functional Relationship Transfer Across Dataset at 1B  $\rightarrow$  7B.** Finally, we ask: *if we fit an empirical function on a single pre-training dataset  $\mathcal{D}_{pre}$  as in (ii), can this function transfer directly to a different dataset  $\mathcal{D}'_{pre}$ ?* Concretely, once we fit  $\text{Acc.}/p@k = f(\text{RBRIDGE})$  on  $\mathcal{D}_{pre}$ , can this learned function transfer zero-shot (i.e., with no additional fitting) to  $\mathcal{D}'_{pre}$  where  $\mathcal{D}_{pre} \neq \mathcal{D}'_{pre}$ ? If so, we could predict the performance (Acc./p@k) of  $\mathcal{D}'_{pre}$  at target scale using only the proxy model  $\pi^p$ , reducing compute by a factor of  $m/n$ , recalling that  $m, n$  are the target and proxy sizes, respectively. This allows us to both estimate performance for any number of additional datasets and rank them at a given pre-training size  $D'_{pre} \in \mathbb{N}^+$ , simply by inputting the RBRIDGE score in  $f(\cdot)$  after training on  $D'_{pre}$  tokens from  $\mathcal{D}'_{pre}$ .

**Setup.** We curate an additional pre-training dataset  $\mathcal{D}'_{pre}$  described in Appendix C. Then, we examine how accurate such function as described in (ii), zero-shot transfers from the OLMo-Mix-1124 to our alternative dataset at 1B  $\rightarrow$  7B at 1T tokens. While larger-scale studies across more model sizes and pre-training datasets would be ideal, training an additional 1B and 7B model for 1T tokens required *thousands* of H100 hours, making further comparisons prohibitively expensive.

## 4.2 RESULTS

**(i) Over 100 $\times$  Dataset Ranking Compute Saving at <100M  $\rightarrow$  1.2B.** RBRIDGE significantly improves DAcc. given equivalent compute (Fig. 6a). For example, at the most compute-efficient point (3.7M model trained on 87.3M tokens), RBRIDGE achieves up to 27% higher DAcc. than baseline metrics. This is remarkable as at this proxy compute level, CF Accuracy and Norm Correct Prob displays random decision levels ( $\sim 50\%$ ). To achieve the same level of DAcc., RBRIDGE uses 100.2 $\times$  to 733.4 $\times$  less FLOPs (Fig. 6b). Kendall’s Tau results are reported in Appendix D. As the two evaluation metric are intimately related, the results are highly similar.

**(ii) Consistently Strongest Relationship at 1B $\rightarrow$ 13B, 32B.** In 1B  $\rightarrow$ 13B, RBRIDGE achieves the best  $R^2$  and MAE in 10/12 cases, and ranks near the top in the remaining two (Tab. 2). Similar performance occurs in 1B $\rightarrow$ 13B+SFT where we include a single epoch SFT stage at target scale, and 1B $\rightarrow$ 32B. For 1B $\rightarrow$ 13B+SFT and 1B $\rightarrow$ 32B, granular benchmark-level results appear in Appendix

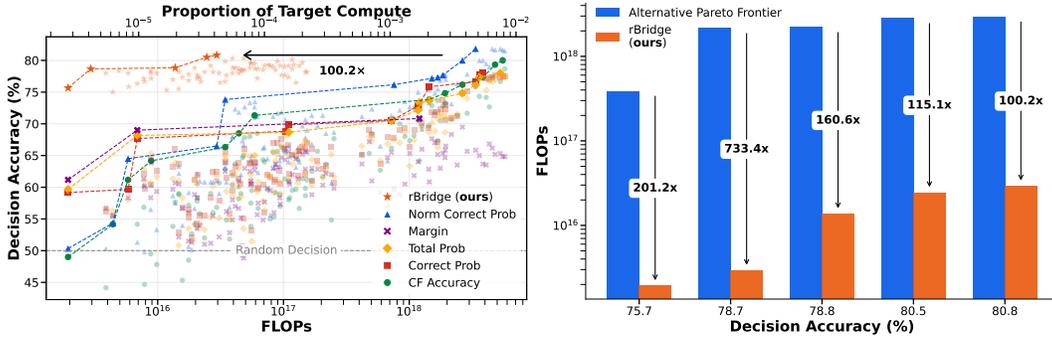

(a) Decision Accuracy results across 3.7 - 97.9M proxy (b) rBRIDGE saves FLOPs by a factor of 100.2x to model size, and across intermediary checkpoints. 733.4x.

Figure 6: rBRIDGE improves the pareto frontier in pre-training dataset ranking for 1.2B target model size. Values are averages aggregated across ARC-C and CQA. For intuitive reference, the two most compute efficient points in rBRIDGE’s pareto frontier is (1) 3.7M model size trained on 87.3M tokens, and (2) 6M model size trained on 81.6M tokens.

Benchmark	Method:	Acc./p@1	iSFT	TED	MPCA	NLL	$R^\phi$	rBRIDGE
<b>1B → 13B (Pre-to-Pre)</b>								
GSM8K	Train $R^2$	0.402	0.385	0.558	0.116	0.853	<b>0.947</b>	<u>0.944</u>
	Test MAE	5.189	4.848	5.961	84.006	3.210	<u>1.837</u>	<b>1.751</b>
MATH500	Train $R^2$	0.127	0.076	0.213	0.025	0.861	<u>0.864</u>	<b>0.890</b>
	Test MAE	1.276	1.008	1.134	3.943	0.593	<u>0.526</u>	<b>0.525</b>
ARC-C	Train $R^2$	0.200	0.166	0.547	0.319	0.166	<u>0.950</u>	<b>0.969</b>
	Test MAE	7.287	8.750	6.197	25.970	7.058	<u>1.546</u>	<b>1.246</b>
MMLU Pro (STEM)	Train $R^2$	0.167	—	0.199	0.200	<u>0.207</u>	<b>0.897</b>	<b>0.897</b>
	Test MAE	1.624	—	1.572	1.495	12.582	<u>0.575</u>	<b>0.574</b>
CQA	Train $R^2$	0.666	0.534	<u>0.677</u>	0.323	0.139	<b>0.890</b>	<b>0.890</b>
	Test MAE	3.989	5.885	3.010	1697.096	5.483	<u>2.203</u>	<b>2.182</b>
HumanEval	Train $R^2$	0.260	—	0.057	0.179	<b>0.685</b>	<u>0.655</u>	0.652
	Test MAE	2.889	—	2.389	3.341	2.111	<u>2.041</u>	<b>2.025</b>
<b>Average Train <math>R^2</math> (↑)</b>		0.304	0.290	0.375	0.194	0.485	<u>0.867</u>	<b>0.874</b>
<b>Average Test MAE (↓)</b>		3.709	5.123	3.377	302.642	5.173	<u>1.455</u>	<b>1.384</b>
<b>1B → 13B + SFT (Pre-to-Post)</b>								
<b>Average Train <math>R^2</math> (↑)</b>		0.329	0.302	0.517	0.257	0.413	<u>0.820</u>	<b>0.846</b>
<b>Average Test MAE (↓)</b>		4.375	5.251	4.236	27.062	3.932	<u>1.549</u>	<b>1.304</b>
<b>1B → 32B (Pre-to-Pre)</b>								
<b>Average Train <math>R^2</math> (↑)</b>		0.312	0.349	0.352	0.205	0.488	<u>0.820</u>	<b>0.826</b>
<b>Average Test MAE (↓)</b>		19.785	5.165	3.546	21.833	3.276	<u>1.540</u>	<b>1.481</b>

Table 2: 1B→13B and 1B→32B performance across mathematics, science, engineering, common-sense, and coding benchmarks. Train fitting and test is done using 5-fold cross validation (§ 4.1). Best value across methods is **bolded**, and second best is underlined.

D. Aligned with the literature on emergence, discontinuous metrics (Acc./p@1, iSFT) demonstrated worst performance. The remaining continuous metrics performed better, with rBRIDGE’s state-of-the-art performance achieving train  $R^2$  of 0.826 - 0.874 and test MAE of 1.304 - 1.481.

Additionally, even as we increase the proxy model size by 7x, 13x, the target metric fails to outperform rBRIDGE (Fig. 7a). Notably, rBRIDGE’s and best alternative box-and-whisker’s box does not overlap, suggesting a meaningful improvement. To understand where these gains originate, we ablate the components of rBRIDGE in Fig. 7b, showing that each part of the rBRIDGE NLL (Eq. 1)

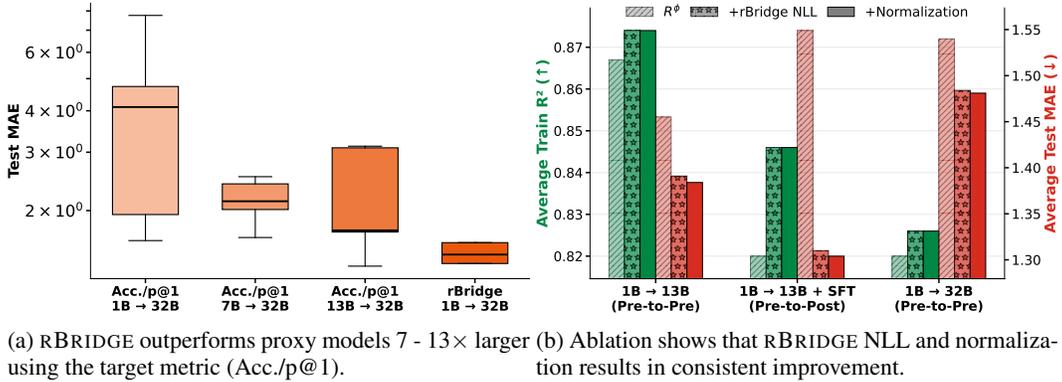


Figure 7: Additional experimental results demonstrate clear advantages of our proposed method.

1B → 7B Zero-shot Functional Relationship Transfer from $\mathcal{D}_{pre}$ to $\mathcal{D}'_{pre}$							
Method	Benchmark:	GSM8K	MATH500	ARC-C	MMLU Pro	CQA	Average
Ground Truth	Acc. (%) of $\mathcal{D}_{pre}$	10.538	2.800	56.911	10.225	60.442	28.183
	Acc. (%) of $\mathcal{D}'_{pre}$	8.264	3.600	51.536	9.578	44.554	23.506
$R^\phi$	Acc. (%) Prediction of $\mathcal{D}'_{pre}$	9.886	3.116	52.558	10.649	57.479	26.738
	Rank( $\mathcal{D}_{pre}, \mathcal{D}'_{pre}$ ) w. Prediction (↑)	✓	✓	✓	✗	✓	4/5
	MAE (↓)	1.622	0.484	1.022	1.071	12.926	3.425
rBridge	Acc. (%) Prediction of $\mathcal{D}'_{pre}$	8.220	3.044	52.254	8.161	54.269	25.190
	Rank( $\mathcal{D}_{pre}, \mathcal{D}'_{pre}$ ) w. Prediction (↑)	✓	✓	✓	✓	✓	5/5
	MAE (↓)	0.043	0.556	0.718	1.417	9.716	2.490

Table 3: rBRIDGE demonstrates strong zero-shot functional relationship transfer across datasets. Ground Truth rows are the Acc. performance and ranking (rank 1, rank 2) that the prediction is aiming to attain. rBRIDGE achieves 0 - 1.5 (%) error-rate excluding one outlier, and perfectly ranks the datasets on all five benchmarks. Average values are aggregated across the row.

plays an important role to its effectiveness across all three experimental settings. Note that we have an ablation study on going from NLL to ScB to  $R^\phi$  in § 3.2, therefore, skip this part here.

(iii) **Successful Zero-shot Functional Relationship Transfer at 1B→7B.** We demonstrate that functions fitted on dataset  $\mathcal{D}_{pre}$  with rBRIDGE (from (ii)) can zero-shot transfer to alternative pre-training dataset  $\mathcal{D}'_{pre}$ , reducing additional experimental compute cost by factor  $\frac{m}{n}$  (Tab. 3). In our experiment setting of 1B→7B, this yields a 7x compute reduction since only a proxy model of  $\frac{1}{7}$  the target size is required. The transferred function achieves low MAE of 0.043 - 1.417 across most benchmarks (one outlier at 9.716), outperforming  $R^\phi$ . For dataset ranking using predicted accuracy, rBRIDGE achieves perfect 5/5 performance versus  $R^\phi$ 's 4/5. This demonstrates that improved function fitting from (ii) translates to superior zero-shot transfer performance across datasets.

## 5 DISCUSSION

**Additional Related Work.** Zhang et al. (2024) uses proxy benchmarks with small proxy models to predict pre-training performance of larger target models. However, their approach suffers from several limitations. First, it is computationally expensive, requiring global search over 42 benchmarks and 34 models. Second, the required size of the search space (number of benchmarks and models) lacks principled justification. Third, using fundamentally different test distributions introduces suboptimal noise, as we empirically demonstrate in Appendix E.

Xie et al. (2023) and Liu et al. (2025) leverage small proxy models (1 to 280M parameters) to optimize pre-training data mixture weights for larger target models (~7B), operating under the assumption that small-scale performance meaningfully correlates with large-scale performance. Both works rely on standard NLL or perplexity metrics, which we demonstrate to be suboptimal in § 3.1. Furthermore, their experiments are predominantly on non-emergent benchmarks (e.g., TriviaQA and

HellaSwag), whereas our work specifically targets reasoning benchmarks that exhibit emergent behavior. Lastly, their approaches are specialized for optimizing pre-training data *mixtures*, whereas our method addresses the more general problem of predicting large model performance with small proxy models, enabling *broader* applications.

**Minimal Compute Overhead.** While RBRIDGE introduces some additional costs, these are minor. First, is generating the gold reasoning trace  $R^\phi$  via the frontier model. However, this represents a small one-time cost of under \$10 per benchmark. To help the research community we plan to open-source our dataset and method, allowing future researchers to skip this cost for benchmarks we examine. Second, the automatic weighting mechanism (Fig. 1) incurs only a few seconds of CPU runtime per benchmark. Both overheads are negligible compared to the computational savings our method provides.

**RBRIDGE is a Better Predictor of Large Scale Pre-training Performance on Reasoning.** While we would expect the *same* metric to yield the greatest relationship and predictive power, our paper demonstrates that this is not the case. As visualized in Fig. 7a even as we scale the proxy model by  $7\times$ ,  $13\times$ , it fails to achieve the performance levels of RBRIDGE. Our work empirically demonstrates that improved alignment with the (1) pre-training evaluation objective, and the (2) task is key to successfully leveraging small models to proxy large model’s reasoning performance. Our ablative studies clearly indicate that each component (1, 2) of RBRIDGE is valuable (Tab. 1, Fig. 7b).

**Significant Compute and Economic Cost Reduction.** We observe definitive computational cost saving gains through RBRIDGE. In our first experiment (i), we demonstrate that through RBRIDGE proxy models that are  $324.3\times$  (proxy models  $\frac{3.7}{1200}$  the size of target) smaller can be strong proxies for dataset ranking. From a computational perspective, RBRIDGE achieve at least  $100.2\times$  compute savings against the best baseline in achieving the same ranking performance. In our second experiment (ii), we demonstrate that  $13\times$  and  $32\times$  smaller proxy models can be effectively used as proxies. We believe that RBRIDGE’s utility extrapolates to much greater proxy-target model scale differences.

**Enabling Zero-shot Functional Relationship Transfer Across Datasets.** To our knowledge, we are the first to show that the proxy-target function fitted on one pre-training dataset (as shown in experiment (ii)) can be successfully transferred to an alternative one, with no additional fitting. We observe that the improved relationship fitting of RBRIDGE in experiment (ii)’s Tab. 2 extends to improved prediction (MAE) and ranking performance in Tab. 3. This saves  $\frac{m}{n}\times$  compute as any additional pre-training dataset’s performance can be reasonably approximated.

**Practical Potential Application: Two-stage Dataset Optimization.** Practitioners optimizing pre-training data navigate a vast candidate space of data sources and mixtures (Xie et al., 2023; Han et al., 2025; Liu et al., 2025). The experiments in § 4 provide a practically applicable framework for such dataset optimization that can be derived as a strong future work. [Stage 1] Given  $N$  candidate datasets, following the setting of experiment (i) offers a cost-effective way to filter out  $N - k$  poor datasets at e.g.  $<100M$  proxy scale, reducing the candidate space to  $k$ . With high decision accuracy of  $\sim 80\%$  (Fig. 6), we can expect bad datasets to have been filtered out correctly. Using relatively easier reasoning benchmarks (e.g., ARC-C) suffices for filtering out *weak* datasets. This approach works because (1) strong candidates must also perform well on these tasks, and (2) their performance still correlates with more difficult ones (Fig. 10), even if they are not strong enough to serve as accurate predictors for ranking the downstream reasoning task. [Stage 2] For the remaining  $k$  datasets, we train larger 1B-scale proxies following (ii) and (iii) to accurately rank them by predicting performance at the target scale (e.g., 32B). Although one training run at the target scale  $m$  is needed, it is rare for practitioners to work without a baseline target model to improve upon.

Denoting the required proxy and target compute as  $C_1^p$  and  $C_2^p$  for proxies and  $C^t$  for target, it can be assumed that these costs  $C$  are directly proportional to model size (Kaplan et al., 2020). The required total compute under this framework is  $NC_1^p + kC_2^p + C^t$  compared to the naïve approach cost  $NC^t$ . Given that the cost reduction factor is  $\frac{NC^t}{NC_1^p + kC_2^p + C^t}$ , and  $C_1^p, C_2^p \ll C^t$ , we can see how cost savings improve as the number of candidate datasets  $N$  enlarge. Considering that the candidate

space  $N$  is very large in the real-world, this framework enables practitioners to optimize pre-training datasets at a fraction of the cost.

**Limitation and Future Direction.** We discuss limitation and more future direction in Appendix [F](#).

## 6 ETHICS STATEMENT

Our work conforms to the ICLR Code of Ethics. We report minor use of LLMs for polishing writing. All LLM-generated content has been reviewed and verified by the authors, who take full responsibility for the accuracy and integrity of the work presented.

## 7 REPRODUCIBILITY STATEMENT

Our method RBRIDGE is fully reproducible using the information provided in this paper. The approach follows a straightforward process: applying a specific prompt to a frontier model, then computing our proposed negative log-likelihood as presented in Eq. (1) and illustrated in Fig. 1. We provide the exact prompt in Appendix B along with pseudocode (Alg. 1) for implementation. To further support reproducibility and benefit the research community, we plan to open-source both our dataset and implementation code, as discussed in § 5.

## 8 ACKNOWLEDGMENT

This research was fully funded by Trillion Labs. Se-Young Yun was partially supported by the Institute of Information & communications Technology Planning & Evaluation (IITP) grant funded by the Korea government (MSIT) (No. 2022-0-00871, Development of AI Autonomy and Knowledge Enhancement for AI Agent Collaboration).

## REFERENCES

- Ebtesam Almazrouei, Hamza Alobeidli, Abdulaziz Alshamsi, Alessandro Cappelli, Ruxandra Cojocaru, M erouane Debbah,  tienne Goffinet, Daniel Hesslow, Julien Launay, Quentin Malartic, et al. The falcon series of open language models. *arXiv preprint arXiv:2311.16867*, 2023.
- Udit Arora, William Huang, and He He. Types of out-of-distribution texts and how to detect them. In Marie-Francine Moens, Xuanjing Huang, Lucia Specia, and Scott Wen-tau Yih (eds.), *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 10687–10701, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.835. URL <https://aclanthology.org/2021.emnlp-main.835/>.
- Peter F. Brown, Vincent J. Della Pietra, Peter V. deSouza, Jenifer C. Lai, and Robert L. Mercer. Class-based  $n$ -gram models of natural language. *Computational Linguistics*, 18(4):467–480, 1992. URL <https://aclanthology.org/J92-4003/>.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in Neural Information Processing Systems*, 33:1877–1901, 2020.
- Tianfeng Chai and Roland R Draxler. Root mean square error (rmse) or mean absolute error (mae)?—arguments against avoiding rmse in the literature. *Geoscientific model development*, 7(3):1247–1250, 2014.
- Zhengping Che, Sanjay Purushotham, Kyunghyun Cho, David Sontag, and Yan Liu. Recurrent neural networks for multivariate time series with missing values. *Scientific reports*, 8(1):6085, 2018.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde De Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*, 2021.
- Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge. *arXiv preprint arXiv:1803.05457*, 2018.

- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, et al. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- Ben Cottier, Robi Rahman, Loredana Fattorini, Nestor Maslej, Tamay Besiroglu, and David Owen. The rising costs of training frontier ai models. *arXiv preprint arXiv:2405.21015*, 2024.
- DeepSeek-AI, Aixin Liu, Bei Feng, Bing Xue, Bingxuan Wang, Bochao Wu, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chenyu Zhang, Chong Ruan, Damai Dai, Daya Guo, Dejian Yang, Deli Chen, Dongjie Ji, Erhang Li, Fangyun Lin, Fucong Dai, Fuli Luo, Guangbo Hao, Guanting Chen, Guowei Li, H. Zhang, Han Bao, Hanwei Xu, Haocheng Wang, Haowei Zhang, Honghui Ding, Huajian Xin, Huazuo Gao, Hui Li, Hui Qu, J. L. Cai, Jian Liang, Jianzhong Guo, Jiaqi Ni, Jiashi Li, Jiawei Wang, Jin Chen, Jingchang Chen, Jingyang Yuan, Junjie Qiu, Junlong Li, Junxiao Song, Kai Dong, Kai Hu, Kaige Gao, Kang Guan, Kexin Huang, Kuai Yu, Lean Wang, Lecong Zhang, Lei Xu, Leyi Xia, Liang Zhao, Litong Wang, Liyue Zhang, Meng Li, Miaojun Wang, Mingchuan Zhang, Minghua Zhang, Minghui Tang, Mingming Li, Ning Tian, Panpan Huang, Peiyi Wang, Peng Zhang, Qiancheng Wang, Qihao Zhu, Qinyu Chen, Qiushi Du, R. J. Chen, R. L. Jin, Ruiqi Ge, Ruisong Zhang, Ruizhe Pan, Runji Wang, Runxin Xu, Ruoyu Zhang, Ruyi Chen, S. S. Li, Shanghao Lu, Shangyan Zhou, Shanhuang Chen, Shaoqing Wu, Shengfeng Ye, Shengfeng Ye, Shirong Ma, Shiyu Wang, Shuang Zhou, Shuiping Yu, Shunfeng Zhou, Shuting Pan, T. Wang, Tao Yun, Tian Pei, Tianyu Sun, W. L. Xiao, Wangding Zeng, Wanbiao Zhao, Wei An, Wen Liu, Wenfeng Liang, Wenjun Gao, Wenqin Yu, Wentao Zhang, X. Q. Li, Xiangyue Jin, Xianzuo Wang, Xiao Bi, Xiaodong Liu, Xiaohan Wang, Xiaojin Shen, Xiaokang Chen, Xiaokang Zhang, Xiaosha Chen, Xiaotao Nie, Xiaowen Sun, Xiaoxiang Wang, Xin Cheng, Xin Liu, Xin Xie, Xingchao Liu, Xingkai Yu, Xinnan Song, Xinxia Shan, Xinyi Zhou, Xinyu Yang, Xinyuan Li, Xuecheng Su, Xuheng Lin, Y. K. Li, Y. Q. Wang, Y. X. Wei, Y. X. Zhu, Yang Zhang, Yanhong Xu, Yanhong Xu, Yanping Huang, Yao Li, Yao Zhao, Yaofeng Sun, Yaohui Li, Yaohui Wang, Yi Yu, Yi Zheng, Yichao Zhang, Yifan Shi, Yiliang Xiong, Ying He, Ying Tang, Yishi Piao, Yisong Wang, Yixuan Tan, Yiyang Ma, Yiyuan Liu, Yongqiang Guo, Yu Wu, Yuan Ou, Yuchen Zhu, Yudian Wang, Yue Gong, Yuheng Zou, Yujia He, Yukun Zha, Yunfan Xiong, Yunxian Ma, Yuting Yan, Yuxiang Luo, Yuxiang You, Yuxuan Liu, Yuyang Zhou, Z. F. Wu, Z. Z. Ren, Zehui Ren, Zhangli Sha, Zhe Fu, Zhean Xu, Zhen Huang, Zhen Zhang, Zhenda Xie, Zhengyan Zhang, Zhewen Hao, Zhibin Gou, Zhicheng Ma, Zhigang Yan, Zhihong Shao, Zhipeng Xu, Zhiyu Wu, Zhongyu Zhang, Zhuoshu Li, Zihui Gu, Zijia Zhu, Zijun Liu, Zilin Li, Ziwei Xie, Ziyang Song, Ziyi Gao, and Zizheng Pan. Deepseek-v3 technical report, 2025. URL <https://arxiv.org/abs/2412.19437>.
- Li Dong, Nan Yang, Wenhui Wang, Furu Wei, Xiaodong Liu, Yu Wang, Jianfeng Gao, Ming Zhou, and Hsiao-Wuen Hon. Unified language model pre-training for natural language understanding and generation. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett (eds.), *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc., 2019. URL [https://proceedings.neurips.cc/paper\\_files/paper/2019/file/c20bb2d9a50d5ac1f713f8b34d9aac5a-Paper.pdf](https://proceedings.neurips.cc/paper_files/paper/2019/file/c20bb2d9a50d5ac1f713f8b34d9aac5a-Paper.pdf).
- Zhengxiao Du, Aohan Zeng, Yuxiao Dong, and Jie Tang. Understanding emergent abilities of language models from the loss perspective. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang (eds.), *Advances in Neural Information Processing Systems*, volume 37, pp. 53138–53167. Curran Associates, Inc., 2024. URL [https://proceedings.neurips.cc/paper\\_files/paper/2024/file/5f1eee2509599faeeb3570a887016a64-Paper-Conference.pdf](https://proceedings.neurips.cc/paper_files/paper/2024/file/5f1eee2509599faeeb3570a887016a64-Paper-Conference.pdf).
- Hila Gonen, Sridhar Iyer, Terra Blevins, Noah A. Smith, and Luke Zettlemoyer. Demystifying prompts in language models via perplexity estimation. In *The 2023 Conference on Empirical Methods in Natural Language Processing*, 2023. URL <https://openreview.net/forum?id=NPJznfA7ZC>.
- Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, Amy Yang, Angela Fan, Anirudh Goyal, Anthony Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark, Arun Rao, Aston Zhang, Aurelien Rodriguez, Austen Gregerson, Ava Spataru, Baptiste Roziere, Bethany Biron, Binh Tang, Bobbie Chern, Charlotte Caucheteux,

Chaya Nayak, Chloe Bi, Chris Marra, Chris McConnell, Christian Keller, Christophe Touret, Chunyang Wu, Corinne Wong, Cristian Canton Ferrer, Cyrus Nikolaidis, Damien Allonsius, Daniel Song, Danielle Pintz, Danny Livshits, Danny Wyatt, David Esiobu, Dhruv Choudhary, Dhruv Mahajan, Diego Garcia-Olano, Diego Perino, Dieuwke Hupkes, Egor Lakomkin, Ehab AlBadawy, Elina Lobanova, Emily Dinan, Eric Michael Smith, Filip Radenovic, Francisco Guzmán, Frank Zhang, Gabriel Synnaeve, Gabrielle Lee, Georgia Lewis Anderson, Govind Thattai, Graeme Nail, Gregoire Mialon, Guan Pang, Imanol Arrieta Ibarra, Isabel Kloumann, Ishan Misra, Ivan Evtimov, Jack Zhang, Jade Copet, Jaewon Lee, Jan Geffert, Jana Vranes, Jason Park, Jay Mahadeokar, Jeet Shah, Jelmer van der Linde, Jennifer Billock, Jenny Hong, Jenya Lee, Jeremy Fu, Jianfeng Chi, Jianyu Huang, Jiawen Liu, Jie Wang, Jiecao Yu, Joanna Bitton, Joe Spisak, Jongsoo Park, Joseph Rocca, Joshua Johnstun, Joshua Saxe, Junteng Jia, Kalyan Vasuden Alwala, Karthik Prasad, Kartikeya Upasani, Kate Plawiak, Ke Li, Kenneth Heafield, Kevin Stone, Khalid El-Arini, Krithika Iyer, Kshitiz Malik, Kuenley Chiu, Kunal Bhalla, Kushal Lakhota, Lauren Rantala-Yearly, Laurens van der Maaten, Lawrence Chen, Liang Tan, Liz Jenkins, Louis Martin, Lovish Madaan, Lubo Malo, Lukas Blecher, Lukas Landzaat, Luke de Oliveira, Madeline Muzzi, Mahesh Pasupuleti, Mannat Singh, Manohar Paluri, Marcin Kardas, Maria Tsimpoukelli, Mathew Oldham, Mathieu Rita, Maya Pavlova, Melanie Kambadur, Mike Lewis, Min Si, Mitesh Kumar Singh, Mona Hassan, Naman Goyal, Narjes Torabi, Nikolay Bashlykov, Nikolay Bogoychev, Niladri Chatterji, Ning Zhang, Olivier Duchenne, Onur Çelebi, Patrick Alrassy, Pengchuan Zhang, Pengwei Li, Petar Vasic, Peter Weng, Prajwal Bhargava, Pratik Dubal, Praveen Krishnan, Punit Singh Koura, Puxin Xu, Qing He, Qingxiao Dong, Ragavan Srinivasan, Raj Ganapathy, Ramon Calderer, Ricardo Silveira Cabral, Robert Stojnic, Roberta Raileanu, Rohan Maheswari, Rohit Girdhar, Rohit Patel, Romain Sauvestre, Ronnie Polidoro, Roshan Sumbaly, Ross Taylor, Ruan Silva, Rui Hou, Rui Wang, Saghar Hosseini, Sahana Chennabasappa, Sanjay Singh, Sean Bell, Seohyun Sonia Kim, Sergey Edunov, Shaoliang Nie, Sharan Narang, Sharath Rapparthi, Sheng Shen, Shengye Wan, Shruti Bhosale, Shun Zhang, Simon Vandenhende, Soumya Batra, Spencer Whitman, Sten Sootla, Stephane Collot, Suchin Gururangan, Sydney Borodinsky, Tamar Herman, Tara Fowler, Tarek Sheasha, Thomas Georgiou, Thomas Scialom, Tobias Speckbacher, Todor Mihaylov, Tong Xiao, Ujjwal Karn, Vedanuj Goswami, Vibhor Gupta, Vignesh Ramanathan, Viktor Kerkez, Vincent Conguet, Virginie Do, Vish Vogeti, Vitor Albiero, Vladan Petrovic, Weiwei Chu, Wenhan Xiong, Wenyin Fu, Whitney Meers, Xavier Martinet, Xiaodong Wang, Xiaofang Wang, Xiaoqing Ellen Tan, Xide Xia, Xinfeng Xie, Xuchao Jia, Xuwei Wang, Yaelle Goldschlag, Yashesh Gaur, Yasmine Babaei, Yi Wen, Yiwen Song, Yuchen Zhang, Yue Li, Yuning Mao, Zacharie Delpierre Coudert, Zheng Yan, Zhengxing Chen, Zoe Papanikos, Aaditya Singh, Aayushi Srivastava, Abha Jain, Adam Kelsey, Adam Shajnfeld, Adithya Gangidi, Adolfo Victoria, Ahuva Goldstand, Ajay Menon, Ajay Sharma, Alex Boesenberg, Alexei Baevski, Allie Feinstein, Amanda Kallet, Amit Sangani, Amos Teo, Anam Yunus, Andrei Lupu, Andres Alvarado, Andrew Caples, Andrew Gu, Andrew Ho, Andrew Poulton, Andrew Ryan, Ankit Ramchandani, Annie Dong, Annie Franco, Anuj Goyal, Aparajita Saraf, Arkabandhu Chowdhury, Ashley Gabriel, Ashwin Bharambe, Assaf Eisenman, Azadeh Yazdan, Beau James, Ben Maurer, Benjamin Leonhardi, Bernie Huang, Beth Loyd, Beto De Paola, Bhargavi Paranjape, Bing Liu, Bo Wu, Boyu Ni, Braden Hancock, Bram Wasti, Brandon Spence, Brani Stojkovic, Brian Gamido, Britt Montalvo, Carl Parker, Carly Burton, Catalina Mejia, Ce Liu, Changhan Wang, Changkyu Kim, Chao Zhou, Chester Hu, Ching-Hsiang Chu, Chris Cai, Chris Tindal, Christoph Feichtenhofer, Cynthia Gao, Damon Civin, Dana Beaty, Daniel Kreymer, Daniel Li, David Adkins, David Xu, Davide Testuggine, Delia David, Devi Parikh, Diana Liskovich, Didem Foss, Dingkan Wang, Duc Le, Dustin Holland, Edward Dowling, Eissa Jamil, Elaine Montgomery, Eleonora Presani, Emily Hahn, Emily Wood, Eric-Tuan Le, Erik Brinkman, Esteban Arcaute, Evan Dunbar, Evan Smothers, Fei Sun, Felix Kreuk, Feng Tian, Filippos Kokkinos, Firat Ozgenel, Francesco Caggioni, Frank Kanayet, Frank Seide, Gabriela Medina Florez, Gabriella Schwarz, Gada Badeer, Georgia Swee, Gil Halpern, Grant Herman, Grigory Sizov, Guangyi, Zhang, Guna Lakshminarayanan, Hakan Inan, Hamid Shojanazeri, Han Zou, Hannah Wang, Hanwen Zha, Haroun Habeeb, Harrison Rudolph, Helen Suk, Henry Aspegren, Hunter Goldman, Hongyuan Zhan, Ibrahim Damlaj, Igor Molybog, Igor Tufanov, Ilias Leontiadis, Irina-Elena Veliche, Itai Gat, Jake Weissman, James Geboski, James Kohli, Janice Lam, Japhet Asher, Jean-Baptiste Gaya, Jeff Marcus, Jeff Tang, Jennifer Chan, Jenny Zhen, Jeremy Reizenstein, Jeremy Teboul, Jessica Zhong, Jian Jin, Jingyi Yang, Joe Cummings, Jon Carvill, Jon Shepard, Jonathan McPhie, Jonathan Torres, Josh Ginsburg, Junjie Wang, Kai Wu, Kam Hou U, Karan Saxena, Kartikay Khandelwal, Katayoun Zand, Kathy

Matosich, Kaushik Veeraraghavan, Kelly Michelena, Keqian Li, Kiran Jagadeesh, Kun Huang, Kunal Chawla, Kyle Huang, Lailin Chen, Lakshya Garg, Lavender A, Leandro Silva, Lee Bell, Lei Zhang, Liangpeng Guo, Licheng Yu, Liron Moshkovich, Luca Wehrstedt, Madian Khabsa, Manav Avalani, Manish Bhatt, Martynas Mankus, Matan Hasson, Matthew Lennie, Matthias Reso, Maxim Groshev, Maxim Naumov, Maya Lathi, Meghan Keneally, Miao Liu, Michael L. Seltzer, Michal Valko, Michelle Restrepo, Mihir Patel, Mik Vyatskov, Mikayel Samvelyan, Mike Clark, Mike Macey, Mike Wang, Miquel Jubert Hermoso, Mo Metanat, Mohammad Rastegari, Munish Bansal, Nandhini Santhanam, Natascha Parks, Natasha White, Navyata Bawa, Nayan Singhal, Nick Egebo, Nicolas Usunier, Nikhil Mehta, Nikolay Pavlovich Laptev, Ning Dong, Norman Cheng, Oleg Chernoguz, Olivia Hart, Omkar Salpekar, Ozlem Kalinli, Parkin Kent, Parth Parekh, Paul Saab, Pavan Balaji, Pedro Rittner, Philip Bontrager, Pierre Roux, Piotr Dollar, Polina Zvyagina, Prashant Ratanchandani, Pritish Yuvraj, Qian Liang, Rachad Alao, Rachel Rodriguez, Rafi Ayub, Raghotham Murthy, Raghu Nayani, Rahul Mitra, Rangaprabhu Parthasarathy, Raymond Li, Rebekkah Hogan, Robin Battey, Rocky Wang, Russ Howes, Ruty Rinott, Sachin Mehta, Sachin Siby, Sai Jayesh Bondu, Samyak Datta, Sara Chugh, Sara Hunt, Sargun Dhillon, Sasha Sidorov, Satadru Pan, Saurabh Mahajan, Saurabh Verma, Seiji Yamamoto, Sharadh Ramaswamy, Shaun Lindsay, Sheng Feng, Shenghao Lin, Shengxin Cindy Zha, Shishir Patil, Shiva Shankar, Shuqiang Zhang, Shuqiang Zhang, Sinong Wang, Sneha Agarwal, Soji Sajuyigbe, Soumith Chintala, Stephanie Max, Stephen Chen, Steve Kehoe, Steve Satterfield, Sudarshan Govindaprasad, Sumit Gupta, Summer Deng, Sungmin Cho, Sunny Virk, Suraj Subramanian, Sy Choudhury, Sydney Goldman, Tal Remez, Tamar Glaser, Tamara Best, Thilo Koehler, Thomas Robinson, Tianhe Li, Tianjun Zhang, Tim Matthews, Timothy Chou, Tzook Shaked, Varun Vontimitta, Victoria Ajayi, Victoria Montanez, Vijai Mohan, Vinay Satish Kumar, Vishal Mangla, Vlad Ionescu, Vlad Poenaru, Vlad Tiberiu Mihailescu, Vladimir Ivanov, Wei Li, Wenchen Wang, Wenwen Jiang, Wes Bouaziz, Will Constable, Xiaocheng Tang, Xiaojian Wu, Xiaolan Wang, Xilun Wu, Xinbo Gao, Yaniv Kleinman, Yanjun Chen, Ye Hu, Ye Jia, Ye Qi, Yenda Li, Yilin Zhang, Ying Zhang, Yossi Adi, Youngjin Nam, Yu, Wang, Yu Zhao, Yuchen Hao, Yundi Qian, Yunlu Li, Yuzi He, Zach Rait, Zachary DeVito, Zef Rosnbrick, Zhaoduo Wen, Zhenyu Yang, Zhiwei Zhao, and Zhiyu Ma. The llama 3 herd of models, 2024. URL <https://arxiv.org/abs/2407.21783>.

Yuling Gu, Oyvind Tafjord, Bailey Kuehl, Dany Haddad, Jesse Dodge, and Hannaneh Hajishirzi. OLMES: A standard for language model evaluations. In Luis Chiruzzo, Alan Ritter, and Lu Wang (eds.), *Findings of the Association for Computational Linguistics: NAACL 2025*, pp. 5005–5033, Albuquerque, New Mexico, April 2025. Association for Computational Linguistics. ISBN 979-8-89176-195-7. doi: 10.18653/v1/2025.findings-naacl.282. URL <https://aclanthology.org/2025.findings-naacl.282/>.

Sungjun Han, Juyoung Suk, Suyeong An, Hyunguk Kim, Kyuseok Kim, Wonsuk Yang, Seungtaek Choi, and Jamin Shin. Trillion 7b technical report. *arXiv preprint arXiv:2504.15431*, 2025.

Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. In *International Conference on Learning Representations*, 2021a. URL <https://openreview.net/forum?id=d7KBjmI3GmQ>.

Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the MATH dataset. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*, 2021b. URL <https://openreview.net/forum?id=7Bywt2mQsCe>.

Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, Tom Hennigan, Eric Noland, Katherine Millican, George van den Driessche, Bogdan Damoc, Aurelia Guy, Simon Osindero, Karen Simonyan, Erich Elsen, Oriol Vinyals, Jack William Rae, and Laurent Sifre. An empirical analysis of compute-optimal large language model training. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho (eds.), *Advances in Neural Information Processing Systems*, 2022a. URL <https://openreview.net/forum?id=iBBcRU1OAPR>.

- Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Jardine Uesato, Jaehoon Bae, Jahnvi Gbp, Sven Gowal, Adrien Gane, Angeliki Lazaridou, Aedan Mckinnon, Tayfun Roman, Oriol Vinyals, Laurent Sifre, Aäron van den Oord, Erich Elsen, Ryan Clark, Tom Ring, and Hroi Hrorbjartsson. Training compute-optimal large language models. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh (eds.), *Advances in Neural Information Processing Systems*, volume 35, pp. 30433–30448, 2022b. URL [https://proceedings.neurips.cc/paper\\_files/paper/2022/file/7a685d49b555239a7c8585e46804d9ce-Paper-Conference.pdf](https://proceedings.neurips.cc/paper_files/paper/2022/file/7a685d49b555239a7c8585e46804d9ce-Paper-Conference.pdf).
- Shengding Hu, Yuge Tu, Xu Han, Ganqu Cui, Chaoqun He, Weilin Zhao, Xiang Long, Zhi Zheng, Yewei Fang, Yuxiang Huang, Xinrong Zhang, Zhen Leng Thai, Chongyi Wang, Yuan Yao, Chenyang Zhao, Jie Zhou, Jie Cai, Zhongwu Zhai, Ning Ding, Chao Jia, Guoyang Zeng, dahai li, Zhiyuan Liu, and Maosong Sun. MiniCPM: Unveiling the potential of small language models with scalable training strategies. In *First Conference on Language Modeling*, 2024. URL <https://openreview.net/forum?id=3X2L2TFr0f>.
- Mandar Joshi, Eunsol Choi, Daniel Weld, and Luke Zettlemoyer. TriviaQA: A large scale distantly supervised challenge dataset for reading comprehension. In Regina Barzilay and Min-Yen Kan (eds.), *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 1601–1611, Vancouver, Canada, July 2017. Association for Computational Linguistics. doi: 10.18653/v1/P17-1147. URL <https://aclanthology.org/P17-1147/>.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*, 2020.
- Apoorv Khandelwal, Tian Yun, Nihal V Nayak, Jack Merullo, Stephen H Bach, Chen Sun, and Ellie Pavlick. 100 k or 100 days: Trade-offs when pre-training with academic resources. *arXiv preprint arXiv:2410.23261*, 2024.
- Sumith Kulal, Panupong Pasupat, Kartik Chandra, Mina Lee, Oded Padon, Alex Aiken, and Percy S Liang. Spoc: Search-based pseudocode to code. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d’Alché-Buc, E. Fox, and R. Garnett (eds.), *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc., 2019. URL [https://proceedings.neurips.cc/paper\\_files/paper/2019/file/7298332f04ac004a0ca44cc69ecf6f6b-Paper.pdf](https://proceedings.neurips.cc/paper_files/paper/2019/file/7298332f04ac004a0ca44cc69ecf6f6b-Paper.pdf).
- Hynek Kydliček, Guilherme Penedo, and Leandro von Werra. Finepdfs. <https://huggingface.co/datasets/HuggingFaceFW/finepdfs>, 2025.
- Jinhyuk Lee, Wonjin Yoon, Sungdong Kim, Donghyeon Kim, Sunkyu Kim, Chan Ho So, and Jaewoo Kang. Biobert: a pre-trained biomedical language representation model for biomedical text mining. *Bioinformatics*, 36(4):1234–1240, 2020.
- Qian Liu, Xiaosen Zheng, Niklas Muennighoff, Guangtao Zeng, Longxu Dou, Tianyu Pang, Jing Jiang, and Min Lin. Regmix: Data mixture as regression for language model pre-training. In *The Thirteenth International Conference on Learning Representations*, 2025. URL <https://openreview.net/forum?id=5BjQOUXq7i>.
- Ian Magnusson, Nguyen Tai, Ben Bogin, David Heineman, Jena D. Hwang, Luca Soldaini, Akshita Bhagia, Jiacheng Liu, Dirk Groeneveld, Oyvind Tafjord, Noah A. Smith, Pang Wei Koh, and Jesse Dodge. Datadecide: How to predict best pretraining data with small experiments. In *Forty-second International Conference on Machine Learning*, 2025. URL <https://openreview.net/forum?id=p9YlQPF8fE>.
- Team OLMo, Pete Walsh, Luca Soldaini, Dirk Groeneveld, Kyle Lo, Shane Arora, Akshita Bhagia, Yuling Gu, Shengyi Huang, Matt Jordan, et al. 2 olmo 2 furious. *arXiv preprint arXiv:2501.00656*, 2024.

- Guilherme Penedo, Hynek Kydlíček, Loubna Ben allal, Anton Lozhkov, Margaret Mitchell, Colin Raffel, Leandro Von Werra, and Thomas Wolf. The fineweb datasets: Decanting the web for the finest text data at scale. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang (eds.), *Advances in Neural Information Processing Systems*, volume 37, pp. 30811–30849. Curran Associates, Inc., 2024. URL [https://proceedings.neurips.cc/paper\\_files/paper/2024/file/370df50ccfdf8bde18f8f9c2d9151bda-Paper-Datasets\\_and\\_Benchmarks\\_Track.pdf](https://proceedings.neurips.cc/paper_files/paper/2024/file/370df50ccfdf8bde18f8f9c2d9151bda-Paper-Datasets_and_Benchmarks_Track.pdf).
- Alec Radford, Karthik Narasimhan, Tim Salimans, and Ilya Sutskever. Improving language understanding by generative pre-training. 2018.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. *OpenAI*, 2019.
- Rylan Schaeffer, Brando Miranda, and Sanmi Koyejo. Are emergent abilities of large language models a mirage? In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine (eds.), *Advances in Neural Information Processing Systems*, volume 36, pp. 55565–55581. Curran Associates, Inc., 2023. URL [https://proceedings.neurips.cc/paper\\_files/paper/2023/file/adc98a266f45005c403b8311ca7e8bd7-Paper-Conference.pdf](https://proceedings.neurips.cc/paper_files/paper/2023/file/adc98a266f45005c403b8311ca7e8bd7-Paper-Conference.pdf).
- Charlie Victor Snell, Eric Wallace, Dan Klein, and Sergey Levine. Predicting emergent capabilities by finetuning. In *First Conference on Language Modeling*, 2024. URL <https://openreview.net/forum?id=vL8BIGuFTF>.
- Alon Talmor, Jonathan Herzig, Nicholas Lourie, and Jonathan Berant. CommonsenseQA: A question answering challenge targeting commonsense knowledge. In Jill Burstein, Christy Doran, and Tamar Solorio (eds.), *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pp. 4149–4158, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/N19-1421. URL <https://aclanthology.org/N19-1421/>.
- MiniCPM Team. Minicpm4: Ultra-efficient llms on end devices. *arXiv preprint arXiv:2506.07900*, 2025.
- Yubo Wang, Xueguang Ma, Ge Zhang, Yuansheng Ni, Abhranil Chandra, Shiguang Guo, Weiming Ren, Aaran Arulraj, Xuan He, Ziyang Jiang, Tianle Li, Max Ku, Kai Wang, Alex Zhuang, Rongqi Fan, Xiang Yue, and Wenhu Chen. MMLU-pro: A more robust and challenging multi-task language understanding benchmark. In *The Thirty-eight Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2024. URL <https://openreview.net/forum?id=y10DM6R2r3>.
- Jason Wei, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama, Maarten Bosma, Denny Zhou, Donald Metzler, Ed H. Chi, Tatsunori Hashimoto, Oriol Vinyals, Percy Liang, Jeff Dean, and William Fedus. Emergent abilities of large language models. *Transactions on Machine Learning Research*, 2022a. ISSN 2835-8856. URL <https://openreview.net/forum?id=yzkSU5zdwD>. Survey Certification.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, brian ichter, Fei Xia, Ed Chi, Quoc V Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh (eds.), *Advances in Neural Information Processing Systems*, volume 35, pp. 24824–24837. Curran Associates, Inc., 2022b. URL [https://proceedings.neurips.cc/paper\\_files/paper/2022/file/9d5609613524ecf4f15af0f7b31abca4-Paper-Conference.pdf](https://proceedings.neurips.cc/paper_files/paper/2022/file/9d5609613524ecf4f15af0f7b31abca4-Paper-Conference.pdf).
- Ian H Witten and Eibe Frank. Data mining: practical machine learning tools and techniques with java implementations. *Acm Sigmod Record*, 31(1):76–77, 2002.
- Chaojun Xiao, Jie Cai, Weilin Zhao, Guoyang Zeng, Biyuan Lin, Jie Zhou, Zhi Zheng, Xu Han, Zhiyuan Liu, and Maosong Sun. Densing law of llms. *arXiv preprint arXiv:2412.04315*, 2024.

Sang Michael Xie, Hieu Pham, Xuanyi Dong, Nan Du, Hanxiao Liu, Yifeng Lu, Percy S Liang, Quoc V Le, Tengyu Ma, and Adams Wei Yu. Doremi: Optimizing data mixtures speeds up language model pretraining. *Advances in Neural Information Processing Systems*, 36:69798–69818, 2023.

Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. HellaSwag: Can a machine really finish your sentence? In Anna Korhonen, David Traum, and Lluís Màrquez (eds.), *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 4791–4800, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1472. URL <https://aclanthology.org/P19-1472/>.

Bo-Wen Zhang, Yan Yan, Boxiang Yang, Yifei Xue, and Guang Liu. Predictable emergent abilities of llms: Proxy tasks are all you need. *arXiv preprint arXiv:2412.07111*, 2024.

## APPENDIX

### A ADDITIONAL RESULTS ON NOISY SMALL SCALE MODELS

Refer to Fig. 8.

### B RBRIDGE PSEUDOCODE

**Pseudocode.** The pseudocode is available in Alg. 1. We recommend viewing with Fig. 1 to build intuition. Recall that  $x$  is an input from the benchmark dataset’s validation or test we want to evaluate. Recall that  $\pi^p, \pi^\phi$  are the proxy, and frontier LMs, respectively.  $i$  denotes index of token  $\tau$ .  $\tau^p$  denotes the token tokenized using  $\pi^p$ ’s tokenizer. Exact prompt and extraction used in Line 1 is available in **prompt**.

---

#### Algorithm 1: RBRIDGE

---

**Input:**  $x, \pi^p, \pi^\phi$   
 /\* Step 1: Extract reasoning trace and token-level confidence  
           from frontier model \*/  
 1  $R^\phi, p(R^\phi), A^\phi \leftarrow \pi^\phi(x)$ ;  
 /\* Step 2: Discard answer label, and compute normalized  
           RBRIDGE NLL \*/  
 2  $w \leftarrow []$ ;  
 3 **for each** token  $\tau_i^p$  **tokenizing**  $R^\phi$  **do**  
 4      $w_i \leftarrow \text{Mean}_{\text{letter} \in \tau_i^p}(p^\phi(\text{letter}) \text{ from } p(R^\phi))$ ;  
 5      $w.append(w_i)$   
 6 RBRIDGE  $\leftarrow []$ ;  
 7 **for each** token  $\tau_i^p$  **tokenizing**  $R^\phi$  **do**  
 8     NLL  $\leftarrow -\log p^p(\tau_i^p) \sim \pi^p$ ;  
 9     RBRIDGE.append(NLL  $\cdot \frac{w[i] - \min(w)}{\max(w) - \min(w)}$ );  
 10 RBRIDGE  $\leftarrow \text{Mean}(\text{RBRIDGE})$ ;  
**Return:** RBRIDGE

---

**Prompt.** Here is the **prompt** we use to generate  $R^\phi$ . We use greedy decoding. Brackets [] indicate dynamic insertions depending on the benchmark and question. We extract the value for key “reasoning” to attain  $R^\phi$ .

Prompt to Frontier Model

System: You are a helpful assistant that solves [task] problems.

User: [question]  
 Respond ONLY with a JSON object in this exact format: { “reasoning”: “your step by step reasoning”, “final\_answer”: “your final answer” }

### C FURTHER EXPERIMENTAL DETAILS

**Common Evaluation Setting.** All evaluations are done using 5-shot CoT (Wei et al., 2022b).

#### C.1 HARDWARE

We use A100 80G, H100 and H200 nodes and numerous terabytes of disk storage for experiments. For pre-training, we use 256 H100 GPUs with HBM3. For other hardware like CPU and RAM we use commonly available ones, as these hardware did not induce any bottlenecks.

## C.2 EXPERIMENT (I) ADDITIONAL DETAILS

All proxy models used is the default seed as provided in [Magnusson et al. \(2025\)](#). We do not use multi-seed averaging for the proxy as this significantly increases compute cost. We exactly follow [Magnusson et al. \(2025\)](#) on every other aspect of experiments, using their open-source assets where available. All intermediary checkpoints are as available from [Magnusson et al. \(2025\)](#).

## C.3 EXPERIMENT (II) ADDITIONAL DETAILS

**Additional Baseline Details.** iSFT results are unavailable for MMLU Pro (STEM) and HumanEval as these benchmarks do not provide an SFT set.

**Frontier Model’s  $R^\phi$ .** Following [Hu et al. \(2024\)](#), we use GPT-4o to generate  $R^\phi$ . We tested Claude 3.5 Sonnet and Gemini 2.5 Pro and found no meaningful performance difference. We have not tested this method on long CoT models.

**Pre-training and Post-training Details.** Unless stated otherwise, for pre-training, we fully follow OLMo 2 ([OLMo et al., 2024](#)), and use their checkpoints where available. For SFT post-training we use the settings in [Tab. 4](#).

Table 4: Hyperparameters for SFT

Hyperparameter	Value
Epoch	1
Learning Rate	$1 \times 10^{-5}$
Warmup Ratio	0.1
Batch Size	64

## C.4 EXPERIMENT (III) ADDITIONAL DETAILS

**Alternative Pre-training Dataset  $\mathcal{D}'$ .** For the alternative pre-training dataset  $\mathcal{D}'$  described in experiment (iii), we closely follow the setup described in [Han et al. \(2025\)](#), but exclusively use publicly-available datasets. The training data follows an 8.5:1:0.5 ratio of English:multilingual:math/code, where the English portion consists of DCLM and FineWeb-Edu in equal proportions, and the multilingual portion comprises Korean, Chinese, and Japanese dumps of FineWeb and DCLM pipeline-processed Common Crawl filtered for Korean.

**Benchmark Choice.** We use the same benchmarks presented in (ii), excluding HumanEval, as our extraction method on the alternative dataset  $\mathcal{D}'$  achieved 0% p@1.

## D ADDITIONAL EXPERIMENTAL RESULTS

Refer to [Tab. 5](#) for all 1B  $\rightarrow$  13B (Pre-to-Post) benchmark results. MMLU Pro (STEM) and HumanEval are not included as they do not have a designated SFT set. Refer to [Tab. 6](#) for all 1B  $\rightarrow$  32B (Pre-to-Pre) benchmark results. Refer to [Fig. 9](#) for Kendall Tau results.

## E PROXY BENCHMARKS ARE UNRELIABLE

Refer to [Fig. 10](#).

## F LIMITATION AND FUTURE DIRECTION

We discuss several limitations of RBRIDGE that present opportunities for future research. First, frontier models do not achieve perfect accuracy on reasoning tasks, potentially resulting in imper-

Benchmark	Method:	Acc./p@1	iSFT	TED	MPCA	NLL	$R^\phi$	rBridge
GSM8K	Train $R^2$	0.363	0.385	0.565	0.129	0.868	<u>0.951</u>	<b>0.956</b>
	Test MAE	5.807	5.536	7.054	79.761	3.302	<u>1.715</u>	<b>1.616</b>
MATH500	Train $R^2$	0.088	0.128	0.199	0.182	<b>0.557</b>	0.544	<u>0.555</u>
	Test MAE	1.178	0.888	0.805	0.849	0.692	<u>0.609</u>	<b>0.605</b>
ARC-C	Train $R^2$	0.187	0.153	0.522	0.331	0.160	<u>0.938</u>	<b>0.964</b>
	Test MAE	6.921	8.317	6.248	22.685	6.679	<u>1.590</u>	<b>1.279</b>
CQA	Train $R^2$	0.677	0.543	0.783	0.385	0.068	<u>0.845</u>	<b>0.910</b>
	Test MAE	3.593	6.264	2.837	4.952	5.055	<u>2.283</u>	<b>1.715</b>
<b>Average Train <math>R^2</math> (<math>\uparrow</math>)</b>		0.329	0.302	0.517	0.257	0.413	<u>0.820</u>	<b>0.846</b>
<b>Average Test MAE (<math>\downarrow</math>)</b>		4.375	5.251	4.236	27.062	3.932	<u>1.549</u>	<b>1.304</b>

Table 5: Detailed results of 1B  $\rightarrow$  13B+SFT (Pre-to-Post). Train fitting and test is done using 5-fold cross validation (§ 4.1). Best value across methods is **bolded**, and second best is underlined.

Benchmark	Method:	Acc./p@1	iSFT	TED	MPCA	NLL	$R^\phi$	rBridge
GSM8K	Train $R^2$	0.281	0.398	0.706	0.076	0.814	<b>0.972</b>	<b>0.972</b>
	Test MAE	7.755	7.299	6.505	107.493	6.935	<u>1.676</u>	<b>1.601</b>
MATH500	Train $R^2$	0.193	0.196	0.166	0.019	0.823	<u>0.832</u>	<b>0.834</b>
	Test MAE	98.093	1.869	1.985	6.907	0.815	<u>0.739</u>	<b>0.718</b>
ARC-C	Train $R^2$	0.206	0.169	0.582	0.346	0.144	<u>0.926</u>	<b>0.949</b>
	Test MAE	4.734	5.976	4.491	7.588	4.985	<u>1.560</u>	<b>1.384</b>
MMLU Pro (STEM)	Train $R^2$	0.057	—	0.031	0.210	<u>0.344</u>	<b>0.756</b>	<b>0.756</b>
	Test MAE	2.075	—	1.930	<u>1.864</u>	2.133	<b>1.326</b>	<b>1.326</b>
CQA	Train $R^2$	0.624	0.634	0.528	0.332	0.046	<u>0.765</u>	<b>0.766</b>
	Test MAE	4.105	5.516	3.630	4.199	3.664	<b>2.382</b>	<u>2.384</u>
HumanEval	Train $R^2$	0.514	—	0.101	0.245	<b>0.759</b>	0.666	<u>0.679</u>
	Test MAE	1.946	—	2.733	2.947	<b>1.424</b>	1.555	<u>1.474</u>
<b>Average Train <math>R^2</math> (<math>\uparrow</math>)</b>		0.312	0.349	0.352	0.205	0.488	<u>0.820</u>	<b>0.826</b>
<b>Average Test MAE (<math>\downarrow</math>)</b>		19.785	5.165	3.546	21.833	3.276	<u>1.540</u>	<b>1.481</b>

Table 6: Detailed results of 1B  $\rightarrow$  32B (Pre-to-Pre). Train fitting and test is done using 5-fold cross validation (§ 4.1). Best value across methods is **bolded**, and second best is underlined.

fect extracted reasoning trace  $R^\phi$ . While we utilize all available  $R^\phi$  without filtering and demonstrate substantial performance and efficiency gains. Our preliminary experiments showed minimal improvements from post-hoc filtering of incorrect generations. Future work could investigate more sophisticated quality assurance mechanisms, such as ensemble methods leveraging multiple frontier models.

Second, frontier models occasionally fail to produce outputs in the required format for reasoning trace  $R^\phi$  extraction. Our current approach provides one additional generation attempt before excluding the sample from training. This represents a limitation that future research could address through more robust prompt engineering, or ensembling multiple frontier models.

Finally, while we present a potential framework for further practical application in § 5, the efficient and effective implementation of this system remains an open challenge. Future work can further explore how to best leverage the methodological contribution of RBRIDGE (§ 3) and experimental robustness (§ 4) on more complex frameworks.

## G ATTRIBUTION

We attribute the neural network icon in Fig. 1 as taken from Freepik (flaticon.com). Their guideline indicates that it can be used with attribution.


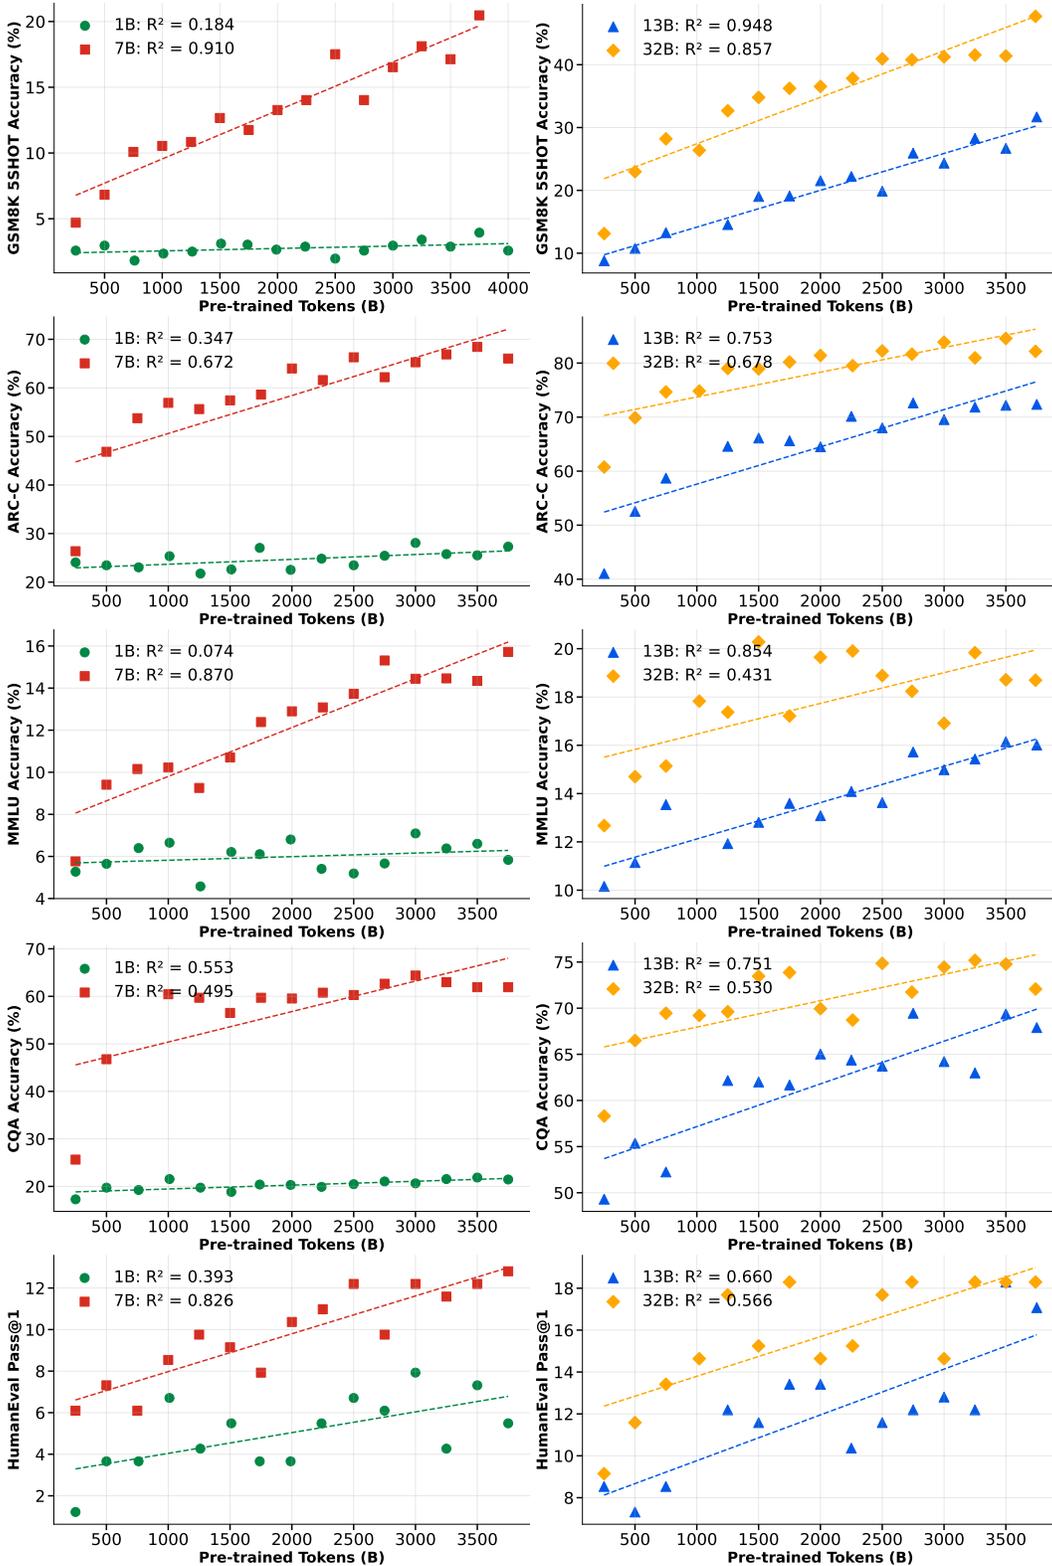


Figure 8: Given the same data source, smaller models exhibit significantly more noise and occasionally provide the wrong direction, making it challenging to use smaller models to proxy larger model performance.  $R^2$  values are derived from linear curve fitting. MMLU corresponds to MMLU Pro (STEM).

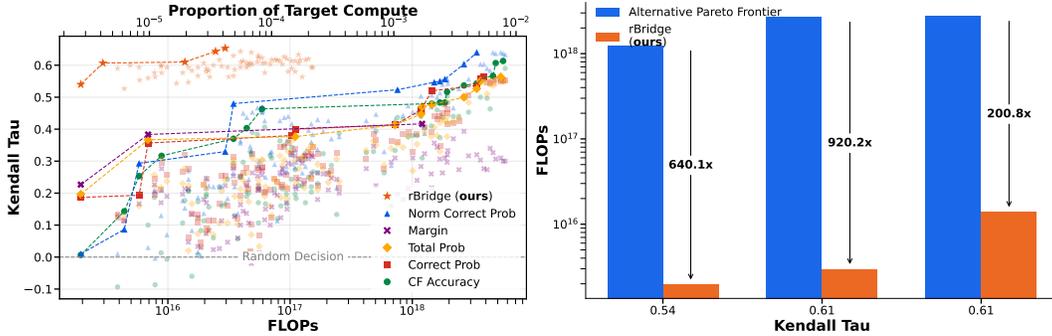

(a) Kendal Tau results across 3.7 - 97.9M proxy model (b) RBRIDGE saves FLOPs by a factor of 200.8x to size, and across intermediary checkpoints. 920.2x.

Figure 9: RBRIDGE improves the pareto frontier in pre-training dataset ranking for 1.2B target model size. Values are averages aggregated across ARC-C and CQA. The two most compute efficient points in RBRIDGE’s pareto frontier is (1) 3.7M model size trained on 87.3M tokens, and (2) 6M model size trained on 81.6M tokens.

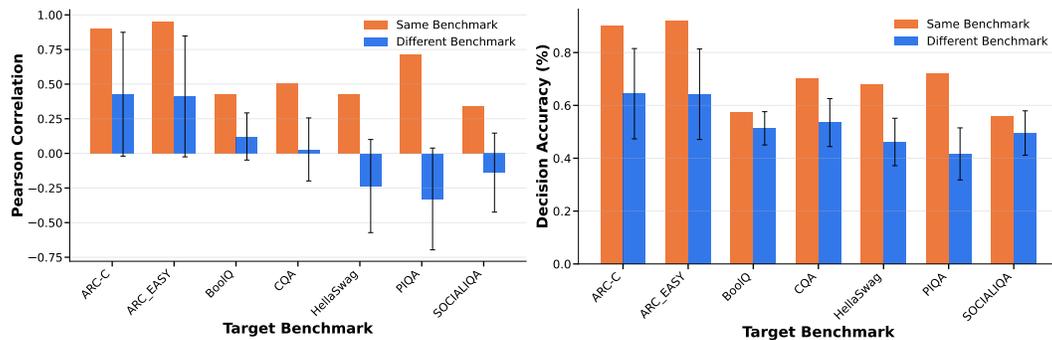


Figure 10: Correlation and decision accuracy performance using the same benchmark vs. different benchmark on 97.9M → 1.2B. Error bars indicate one standard deviation. On average, different benchmarks performs sub-optimally and are noisy.