
EVADING OVERLAPPING COMMUNITY DETECTION VIA PROXY NODE INJECTION

Dario Loi

Department of Computer Science
Sapienza University of Rome
loi.1940849@studenti.uniroma1.it

Matteo Silvestri

Department of Computer Science
Sapienza University of Rome
silvestri.m@di.uniroma1.it

Fabrizio Silvestri

Department of Computer, Control, and Management Engineering
fsilvestri@diag.uniroma1.it

Gabriele Tolomei

Department of Computer Science
Sapienza University of Rome
tolomei@di.uniroma1.it

ABSTRACT

Protecting privacy in social graphs requires preventing sensitive information, such as community affiliations, from being inferred by graph analysis, without substantially altering the graph topology. We address this through the problem of *community membership hiding* (CMH), which seeks edge modifications that cause a target node to exit its original community, regardless of the detection algorithm employed. Prior work has focused on non-overlapping community detection, where trivial strategies often suffice, but real-world graphs are better modeled by overlapping communities, where such strategies fail. To the best of our knowledge, we are the first to formalize and address CMH in this setting. In this work, we propose a deep reinforcement learning (DRL) approach that learns effective modification policies, including the use of proxy nodes, while preserving graph structure. Experiments on real-world datasets show that our method significantly outperforms existing baselines in both effectiveness and efficiency, offering a principled tool for privacy-preserving graph modification with overlapping communities.

1 INTRODUCTION

Graphs often exhibit rich community structure, where nodes organize into densely connected groups that capture meaningful relations (Girvan & Newman, 2002a). Detecting such communities is a fundamental task with broad applicability: in biology, it reveals functional modules in protein-protein interaction networks; in network security, it helps identify clusters of coordinated malicious actors; and in social networks, it identifies tightly knit circles of users. Because of its ability to expose latent organization in complex systems, community detection (Blondel et al., 2008) has become a cornerstone of graph analysis and an essential tool across multiple domains (Javed et al., 2018).

However, the widespread use of community detection also raises privacy concerns. In social graphs, revealing a user’s community membership can expose sensitive attributes, such as political affiliation, health condition, or social group identity, even when the user has not explicitly disclosed this information. For instance, a user who frequently interacts with members of a sensitive community may be algorithmically inferred to share that affiliation, exposing private beliefs and making them vulnerable to profiling or discrimination.

To address this risk, we study the problem of community membership hiding (CMH), where the goal is to alter a graph’s edge structure so that a target node is no longer identified as part of its original community, regardless of the detection algorithm. Prior work (Bernini et al., 2024; Silvestri et al.,

2025) has focused mainly on non-overlapping community detection, where each node belongs to a single community. In this setting, the problem admits trivial solutions – for instance, attaching the target node to a random graph effectively obscures its membership. In contrast, under *overlapping community detection*, such strategies fail: since nodes can legitimately belong to multiple communities, disentangling the target node from its original community becomes a non-trivial challenge.

To the best of our knowledge, we are the first to formally study community membership hiding (CMH) under this more realistic and challenging scenario. We propose a deep reinforcement learning (DRL) approach that introduces a small set of external *proxy nodes*, initially organized as an Erdős-Rényi graph and connected to the target node. A DRL agent then learns an optimal policy for edge modifications, either by rewiring the target’s connections or manipulating links between proxies and the rest of the graph. This strategy achieves effective membership hiding while minimizing disruption to the overall graph topology.

To summarize, our main contributions are:

- (1) We formally define the CMH problem under overlapping community detection and show that trivial strategies succeed in the non-overlapping case, but fail in this more realistic setting, motivating the need for a principled solution;
- (2) We propose a DRL-based framework that learns optimal edge modification policies for both the target node and injected proxy nodes;
- (3) We demonstrate on real-world graph datasets that our method significantly outperforms existing baselines. Source code is available at: https://anonymous.4open.science/r/overlapping_comm_detect-EC02/README.md.

The paper is organized as follows. Section 2 reviews related work, and Section 3 introduces background and notation. In Section 4, we formally define the CMH problem in both non-overlapping and overlapping settings, and analyze the impact of proxy injections in each case. Section 5 presents our proposed approach for the overlapping scenario, followed by experimental results in Section 6. Section 7 discusses limitations and future directions, and Section 8 concludes the paper.

2 RELATED WORK

Community detection has long been a central theme in graph analysis, with algorithms broadly divided into two categories: non-overlapping methods, such as modularity maximization (Blondel et al., 2008), spectral clustering (Ruan et al., 2012), random walk, label propagation, or statistical inference (Airoldi et al., 2008), which partition the graph into disjoint sets; and overlapping methods, such as clique percolation, label propagation-based techniques (Rossetti, 2020; Coscia et al., 2012), matrix factorization (Yang & Leskovec, 2013), Neighborhood-Inflated Seed Expansion (Whang et al., 2015), or techniques based on minimizing the Hamiltonian of the Potts model (Ronhovde & Nussinov, 2009), which allows nodes to belong to multiple communities simultaneously and better reflects the eclectic structure of real-world social graphs.

The problem of community membership hiding (CMH) was first introduced by Bernini et al. (2024), who proposed modifying a node’s local neighborhood to obscure its community affiliation. They formulate the task as a counterfactual graph optimization problem, using a graph neural network (GNN) to model the structural dependencies and a deep reinforcement learning (DRL) agent within a Markov decision process framework to rewire edges under a strict budget, ensuring efficiency and realistic perturbations. More recently, (Silvestri et al., 2025) reformulated CMH as a differentiable optimization problem, inspired by adversarial attacks on GNNs. Their method perturbs the target’s adjacency vector via a learnable perturbation and relies on gradient-based optimization guided by “promising actions”, a privileged set of candidate modifications based on structural properties. Crucially, both works restrict attention to non-overlapping communities, where trivial solutions (e.g., attaching the target to an external graph) often suffice (see Section 4.2). By contrast, we address the more realistic and challenging overlapping setting, where community boundaries are less rigid and hiding membership requires more nuanced strategies.

Our approach draws inspiration from recent node-injection strategies, which show that introducing proxy nodes can effectively mislead GNN-based node classifiers on specific targets while requiring only minimal perturbations to the graph (Wang et al., 2021; 2018).

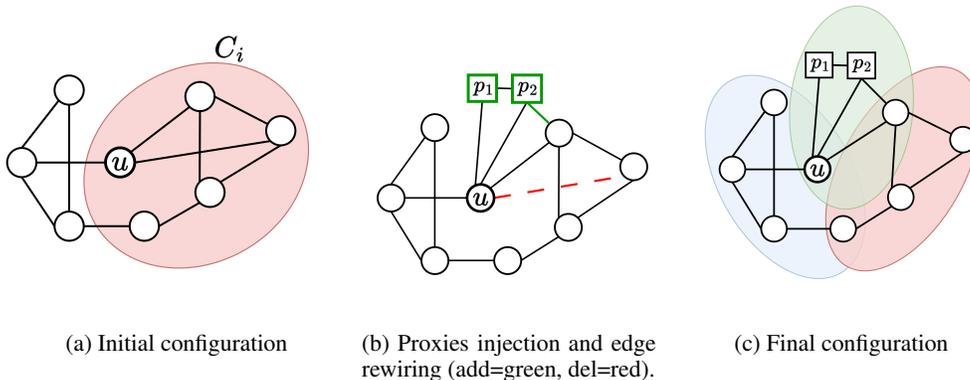


Figure 1: Example of the proxy-based CMH problem in the overlapping community detection setting for budget of modifications $\beta = 2$, and number of proxies $k = 2$.

Beyond CMH, our work connects to the broader literature on adversarial attacks in graph learning, which exposes vulnerabilities in tasks such as link prediction (Chen et al., 2020), node and graph classification (Dai et al., 2018), and graph clustering (Chen et al., 2017). Within clustering, the most related direction is community deception (Fionda & Pirro, 2017; Waniek et al., 2018b; Chen et al., 2019), where the objective is to perturb the graph to obscure an entire community. Our focus differs in both granularity and motivation: instead of hiding a whole group, we tackle the fine-grained challenge of concealing the community membership of a single target node, a problem that is both more subtle and directly tied to user privacy.

3 BACKGROUND AND NOTATION

Let $G = (V, E)$ be an undirected¹ graph, where V is the set of nodes with $|V| = n$, and $E \subseteq V \times V$ is the set of edges with $|E| = m$. Throughout, we use $\text{sim}(\cdot, \cdot)$ to denote a similarity function between sets, and $\tau \in (0, 1)$ to denote a similarity threshold.

Community detection aims to partition the nodes of a graph into clusters, or communities, with denser internal connectivity than external links. In this work, we focus on structure-based methods, leaving those that exploit node attributes for future work.

Formally, a community detection algorithm can be described as a function $f(\cdot)$ that maps a graph G to a set of non-empty communities $f(G) = \{C_1, C_2, \dots, C_k\}$, where k is not fixed a priori. For a node $u \in V$, $f(u, G)$ denotes the set of communities containing u . In the non-overlapping setting, $|f(u, G)| = 1$ for all $u \in V$, whereas in the overlapping setting, there exists at least one u with $|f(u, G)| \neq 1$. Notably, the input to f may range from the adjacency matrix \mathbf{A} to richer representations such as $Z = \Phi_\eta(\mathbf{A}, \mathbf{X})$, where \mathbf{X} is the node feature matrix and Φ_η is a GNN encoder. For simplicity, we denote the generic input representation as G .

4 COMMUNITY MEMBERSHIP HIDING

At a high level, the community membership hiding (CMH) problem involves perturbing the edge structure of a graph to conceal the association of a target node with a specific community C_i , while preserving the global topology as much as possible. Formally, following Bernini et al. (2024), the goal is to learn an optimal policy h_θ that transforms the original graph G into a modified graph $G' = (V, E')$ such that, when the detection algorithm $f(\cdot)$ is applied to G' , the target node is no longer assigned to C_i . We model $f(\cdot)$ as a black box, relying solely on its input-output mapping.

The notion of a node being “hidden” from a community is inherently task-dependent. One may, for instance, require the target to share no memberships with a given set of nodes, or simply to reduce its similarity to its original community. Following prior work, we adopt the latter view, using a similarity function between sets $\text{sim}(\cdot, \cdot)$ and a threshold $\tau \in [0, 1)$.

¹The reasoning naturally extends to directed graphs as well.

We analyze the problem under two settings: the *non-overlapping* case, where communities are disjoint and can be addressed by trivial strategies, and the more general *overlapping* case, where nodes may belong to multiple communities and the problem remains non-trivial.

4.1 NON-OVERLAPPING SCENARIO

In the non-overlapping setting, communities form a partition of the node set V . Following previous work (Bernini et al., 2024; Silvestri et al., 2025), the hiding objective is defined via a threshold-based similarity criterion. Let $C_i = f(u, G)$ denote the target node u 's community in the original graph, and let $\{C'_1, \dots, C'_{k'}\}$ be the communities detected in the perturbed graph G' , with u assigned to the community C'_i . The hiding task is successful if the similarity between the original and updated community (excluding u) falls below the threshold τ , i.e. $\text{sim}(C_i \setminus \{u\}, C'_i \setminus \{u\}) \leq \tau$.

Given the complexity of the problem, prior work restricts the search to solutions within a modification budget β . Effectiveness is then evaluated using the F1 score, defined as the harmonic mean of *success rate* (SR), i.e., the proportion of trials in which the hiding condition is satisfied, and *normalized mutual information* (NMI) (Strehl & Ghosh, 2002): SR measures the ability to hide the target node, while NMI quantifies how well the original community structure is preserved. Their combination offers a balanced view of both hiding effectiveness and minimal disruption.

4.2 PROXY INJECTIONS

A recurring insight in adversarial graph learning is that injecting new nodes can substantially alter model behavior while leaving the overall structure largely intact (Wang et al., 2021; 2018). Motivated by this, we extend the CMH problem to allow the target node to introduce a small set of controllable *proxy* nodes. This assumption is realistic in social graphs, where members can create new nodes independent of the original topology and strategically connect them to pursue their goal.

Formally, given a proxy set $P = \{p_1, \dots, p_k\}$ with $k \ll |V|$, we generate an Erdős–Rényi graph $G_{\text{proxy}} \sim G(k, p)$, where p is the edge probability, and connect all proxies to the target node u .

Therefore, we assess how this strategy, denoted as *naïve connection*, performs on previous benchmarks. Figure 2 shows the resulting F1 scores across standard datasets and non-overlapping detection algorithms (see Section 6). To ensure comparability with prior work, we set the number of proxies to match the modification budget β , defining $\mu = |E|/|V|$ and varying k over 0.5μ , μ , and 2μ . Notably, even without explicit edge rewiring from the target node, the results remain consistently close to, and in several cases even surpass, the DRL approach of Bernini et al. (2024) (red reference lines). The sole exception is the `pow` dataset, where the grid-like structure limits the effectiveness of naïve connections. Overall, these findings underscore the utility of proxy nodes for concealing community membership and motivate their use as a powerful mechanism for CMH.

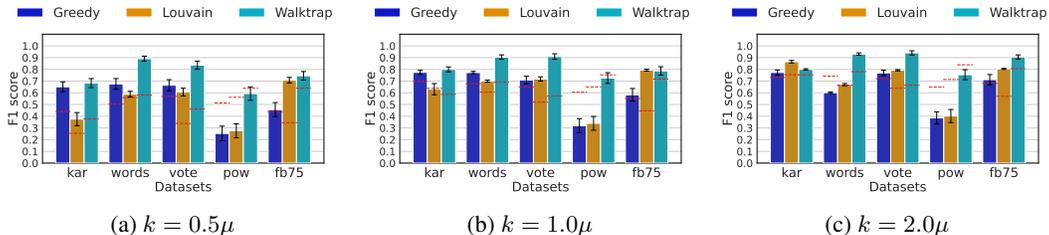


Figure 2: F1 scores of SR and NMI for the naïve connection baseline under non-overlapping detection algorithms, evaluated across varying proxy budgets k (with $\tau = 0.5$, $p = 0.5$). Red dashed lines indicate the DRL-Agent performance for each setting, as reported by Bernini et al. (2024)

4.3 OVERLAPPING SCENARIO

In many real-world graphs, most notably social graphs, nodes often participate in multiple groups. Overlapping community detection methods capture this by allowing nodes to belong to several communities simultaneously, posing a more nuanced and practically relevant challenge for CMH.

To extend the formulation, let $C_i \in f(u, G)$ be the target community of node u in the original graph. The hiding condition is satisfied if, for *every* community C'_i assigned to u in the perturbed graph G' , the similarity with C_i falls below the threshold τ :

$$\text{sim}(C_i \setminus \{u\}, C'_i \setminus \{u\}) \leq \tau, \quad \forall C'_i \in f(u, G'). \quad (1)$$

If u is not assigned to any community in G' (i.e., $f(u, G') = \emptyset$), the condition holds vacuously, representing a successful hiding attempt since the detector cannot place u in any group. To avoid bias, we exclude from our experiments nodes that are not initially assigned to any community.

To highlight the complexity of the overlapping scenario, Figure 3 shows that the naïve connection baseline, while effective in the non-overlapping case, fails under overlapping detection, evidenced by a sharp drop in its (overlapping) F1 score. This performance gap motivates our development of a more refined strategy that explicitly exploits proxy nodes to manipulate community structure.

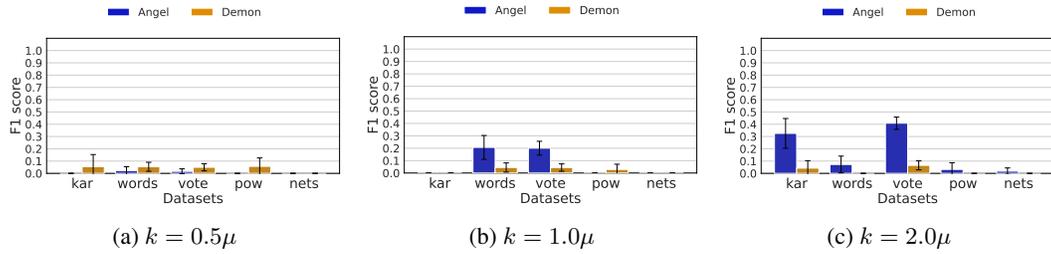


Figure 3: F1 scores of SR and ONMI for the naïve connection baseline under overlapping community detection algorithms, evaluated across varying proxy budgets k (with $\tau = 0.5$, $p = 0.5$).

5 PROPOSED METHOD

Building on the formulation of Bernini et al. (2024), we model the community membership hiding (CMH) problem as a discounted Markov decision process (MDP) $\mathcal{M} = (S, \mathcal{A}, \mathcal{P}, r, \gamma)$. In this setting, the state s_t corresponds to the current graph G_t , and the transition function $\mathcal{P} : S \times \mathcal{A} \times S \rightarrow [0, 1]$ is deterministic: $P(s_{t+1}|s_t, a_t) = 1$ if s_{t+1} is the graph obtained by applying action a_t to s_t , and 0 otherwise. The single-step action space for the controlled node u consists of (i) deletions of any existing edge incident to u , and (ii) additions of edges between u and any non-neighboring node $v \in V$:

$$\mathcal{A}_u = \{\text{del}(u, v) \mid (u, v) \in E\} \cup \{\text{add}(u, v) \mid (u, v) \notin E\} \quad (2)$$

Therefore, the complete set of single-step candidate actions is given by $\mathcal{A} = \bigcup_{v \in u \cup P} \mathcal{A}_u$, i.e., the union of all the single-step action spaces for each controlled node. This formulation contrasts with Bernini et al. (2024), who restrict modifications based on the original community of the target node. By removing this constraint, our approach enhances the agent’s expressiveness, allowing for the exploration of a broader range of intermediate graph configurations.

The reward associated with taking action a_t in state s_t , leading to the next state s_{t+1} , is defined as

$$r(s_t, a_t) = \begin{cases} 1 + \lambda \delta_{sim}^t, & \text{if Eq. (1) is satisfied,} \\ \lambda \delta_{sim}^t, & \text{otherwise,} \end{cases} \quad (3)$$

where $\delta_{sim}^t = \frac{\text{sim}_{prev} - \text{sim}_{curr}}{\text{sim}_{prev}}$ measures the relative decrease in the maximum similarity between the original target community and the community assignment at time t , normalized by the previous similarity score. In our experiments, we set $\lambda = 0.1$.

Factored Policy A naive policy π_θ that scores all ordered node pairs (i, j) would require the computation of $O(|V|^2)$ logits per episode step, which is prohibitive even for graphs of intermediate size. Instead, inspired by similar methods on off-policy algorithms (Tavakoli et al., 2018), we designed a factored action space that is aligned with the problem structure by (i) select which acting node $u_j \in \{u\} \cup P$ will perform the edit and (ii) conditionally select an edit for u_j by jointly selecting the target node and whether to perform an addition or removal. Formally, we have:

$$\pi_\theta(a_t|s_t) = \pi_\theta^{node}(j|s_t)\pi_\theta^{actor}(a|s_t, j) \quad (4)$$

For each actor branch of the policy, we perform action masking such that $\pi_\theta^{actor}(a|s_t, j) = 0$ if $a \notin A_{u_j}$, reducing variance during learning and preventing invalid operations. With this formulation, each actor branch only has to score $2(|V| - 1)$ logits, for a total computation of $O(|\{u\} \cup P||V|)$ logits. Knowing that $|\{u\} \cup P| \ll |V|$, the space complexity of our policy becomes $O(|V|)$.

Training We learn the optimal policy π_θ using Proximal Policy Optimization (PPO) (Schulman et al., 2017). The complete training objective combines the standard PPO clipped surrogate \mathcal{L}_{clip} loss with a value-function loss \mathcal{L}_{value} and an entropy bonus to encourage exploration:

$$\mathcal{L}(\theta) = c_v \mathcal{L}_{value} + c_{clip} \mathcal{L}_{clip} - c_{ent} \mathbb{E}_t [\mathcal{H}(\pi(\cdot|s_t))], \quad (5)$$

where c_v, c_{clip} , and c_{ent} are weighting coefficients.

A key aspect of our approach is adapting this objective for our factored action space. Since the policy is divided into selecting an acting node and then an edge modification, we compute the policy probability ratios for each factor independently. For a sampled action $a = (i, a_{actor})$, these are:

$$r_t^{node} = \frac{\pi_\theta^{node}(i|s_t)}{\pi_{\theta_{old}}^{node}(i|s_t)}, \quad r_t^{actor} = \frac{\pi_\theta^{actor}(a_{actor}|s_t, i)}{\pi_{\theta_{old}}^{actor}(a_{actor}|s_t, i)}, \quad (6)$$

The PPO clipping is applied to each ratio, and the final surrogate objective is the average of the two resulting losses: $\mathcal{L}_{clip}(\theta) = \frac{1}{2}(\mathcal{L}_{node}(\theta) + \mathcal{L}_{actor}(\theta))$. Ultimately, the training objective can be summarized as:

$$\theta^* = \arg \min_{\theta} \left\{ \mathcal{L}(\theta; u, f, G_{proxy}, G) \right\} \quad (7)$$

subject to: $|\mathcal{B}_u| \leq \beta$,

where $\mathcal{B}_u \subset \mathcal{A}_u$ denotes the set of edge modifications performed by the actors, i.e., $\{u\} \cup P$.

Actor and Critic Networks Our agent’s architecture uses a shared graph encoder to generate rich, d_h -dimensional node embeddings. This encoder is a 4-layer GCN (Kipf & Welling, 2016) with jumping knowledge connections (Xu et al., 2018) to capture multi-scale structural patterns. From these embeddings, we aggregate representations for the target node, the proxy nodes, and the entire graph. This aggregated context is then processed by a GRU (Cho et al., 2014) to produce a temporal state representation, h_{shared} , which serves as the input for our actor and critic heads.

The actor employs a factored policy that first selects an acting node from the $|P| + 1$ candidates (the target and its proxies), and then conditionally selects an edge modification from the $2(|V| - 1)$ available actions for that node. In parallel, a simple two-layer MLP critic estimates the state value directly from h_{shared} . More details are available in Section A

6 EXPERIMENTS

6.1 EXPERIMENTAL SETUP

Datasets We ground our study in real-world graphs from social, linguistic, and collaboration domains. For non-overlapping experiments (Section 4.2), we use five benchmarks: kar², Zachary’s karate club; words², capturing semantic associations between common English words; vote³,

²<http://konect.cc/>

³<https://networkrepository.com>

which records Wikipedia administrator elections and the votes cast between users; `fb-75`², a Facebook ego network; and `pow`², representing the American power grid. For overlapping experiments, we retain the same set, except that `fb-75` is replaced with `nets`⁴, a coauthorship graph in network science, since the available implementation of overlapping community detection algorithms scales poorly to large graphs. Indeed, even the preliminary experiments of Section 4.3 on `fb-75` could not be completed within a reasonable timeframe. Detailed dataset statistics are reported in Table 1.

Community Detection Algorithms In the non-overlapping setting, used only in the motivating experiments of Section 4.2, we follow the experimental protocol of Bernini et al. (2024) and evaluate against three algorithms: Greedy Modularity (`greedy`) (Brandes et al., 2008), Louvain (`louvain`) (Blondel et al., 2008), and Walktrap (`walktrap`) (Pons & Latapy, 2005). In the overlapping case, which is the primary focus of our study, we consider two prominent algorithms: `angel` (Rossetti, 2020) and `demon` (Coscia et al., 2012), both with merging threshold $\phi = 0.8$. Table 1 reports the number of communities detected by each algorithm.

Table 1: Dataset properties and number of communities as detected by each of our community detection algorithms).

Dataset	Graph Properties		Non-overlapping $f(\cdot)$			Overlapping $f(\cdot)$	
	$ V $	$ E $	<code>greedy</code>	<code>louvain</code>	<code>walktrap</code>	<code>demon</code>	<code>angel</code>
<code>kar</code>	34	78	3	4	5	5	2
<code>words</code>	112	425	7	7	25	16	4
<code>vote</code>	889	2,900	12	10	42	188	161
<code>pow</code>	4,941	6,594	40	41	364	99	30
<code>nets</code>	1,589	2,742	403	405	416	112	120
<code>fb-75</code>	6,386	217,662	29	19	357	5,551	48

Similarity and Evaluation Metrics Following prior work (Bernini et al., 2024; Silvestri et al., 2025), we adopt the Sørensen–Dice coefficient (Dice, 1945) as the similarity function $\text{sim}(\cdot, \cdot)$. We assess concealment performance by considering both the *Success Rate* (SR), i.e., the fraction of trials where the hiding condition in Eq. (1) is met, and the *Overlapping Normalized Mutual Information* (ONMI) (McDaid et al., 2011), which quantifies the similarity between community assignments before and after perturbations. Since SR and ONMI are contrasting metrics, we also compute their harmonic mean (F1 score), computed as $\frac{2 \times \text{SR} \times \text{ONMI}}{\text{SR} + \text{ONMI}}$.

Experimental Design We follow the evaluation protocol of Silvestri et al. (2025), sampling 100 nodes from communities whose sizes are 0.3, 0.5, 0.8 times that of the largest community and restricting inter-community similarity so that $\text{sim}(C_i, C_j) \leq 0.8$. To ensure statistical reliability, we sample three communities for each size. The ODRL agent is trained only against the `angel` detector. We then test its performance in two settings: a symmetric setting, testing against `angel`, and a more realistic asymmetric one, testing against `demon`, an unseen detector. Strong performance in the asymmetric setting highlights our model’s *transferability* and robustness.

Baselines We evaluate our proposed ODRL method against four baseline strategies. All baselines operate on the same graph structure with injected proxy nodes, but employ different edge modification policies. The *Random-based* baseline selects one actor (target or proxy) and one endpoint node uniformly at random at each step and toggles the edge between them. The *Degree-based* heuristic modifies the connection between the actor and endpoint nodes that possess the highest degree. Similarly, the *Centrality-based* approach selects the actor and endpoint for the edge modification based on the highest betweenness centrality (Freeman, 1977). Finally, our *Roam-based* baseline adapts the ROAM heuristic (Waniek et al., 2018a); it first removes the edge between the target node and its highest-degree neighbor, and then reconnects that neighbor to different neighbors of the target node.

Training Details We train the ODRL agent for 5000 episodes using the RMSProp optimizer (Hinton, 2012) with a learning rate of $\eta = 5 \times 10^{-4}$. Our PPO implementation uses a clipping parameter

⁴<http://www-personal.umich.edu/~mejn/netdata>

$\epsilon = 0.1$ and Generalized Advantage Estimation (GAE) (Schulman et al., 2016) with $\lambda = 0.95$ and $\gamma = 0.99$, performing four updates per episode. For the loss function in Eq. (5), the coefficients are set to $c_v = 1.0$ and $c_{clip} = 0.1$, while the entropy coefficient c_{ent} is linearly annealed from 10^{-2} to 10^{-4} to balance exploration and exploitation. The hidden dimension for all actor and critic networks is $d_h = 32$. To promote training diversity, we resample the target node every 5 episodes and the target community every 50 episodes.

6.2 RESULTS AND DISCUSSION

Our evaluation framework is designed to assess performance across two primary axes: the rewiring budget β and the proxy node budget k . For both, we use a range relative to the average node degree, i.e., $\mu = |E|/|V|$ and $\beta, k \in \{\frac{1}{2}\mu, \mu, 2\mu\}$ ⁵. We comprehensively evaluate our ODRL Agent across all combinations of these budgets. The baseline methods, however, are evaluated with a fixed proxy budget $k = \mu$ across the varying rewiring budgets to provide a concise point of comparison. All table entries include 95% confidence intervals (CIs). For SR we compute CIs using the normal approximation to the binomial variance, for F1 scores we compute 95% CIs via a non-parametric bootstrap with 1000 resamples over the sampled node set, reporting the percentile-based interval.

In the symmetric setting, our evaluation shows that the ODRL agent consistently outperforms all baselines across datasets, as reported in Table 2. The performance gap is particularly pronounced on large-scale graphs (see Figure 4a), where our method achieves substantially higher F1 scores. This trend highlights a key advantage of our approach: while baseline methods degrade as graph size increases, the ODRL agent maintains high effectiveness, demonstrating scalability and robustness.

To assess the *transferability* of our approach, we further evaluate it in the asymmetric setting, where the agent is trained against `angel` and tested against the unseen detector `demon`. As reported in Table 3, the ODRL agent generalizes effectively, outperforming the baselines across most datasets. The only exception is `words` (see Figure 4b), yet even there the performance remains competitive. Notably, the advantage of our method becomes even more evident on large-scale graphs, where the gap over baselines widens significantly. These findings underscore the practical applicability of our approach in scenarios where the adversary has no access to the target detector during training.

Lastly, we observe that the performance of the ODRL agent remains stable across different numbers of proxy nodes in both symmetric and asymmetric settings. This robustness indicates that the learned policy effectively leverages available proxies without over-relying on their quantity, further validating the efficiency and adaptability of our approach.

Further results, including the success rate across all settings, are provided in Section B.

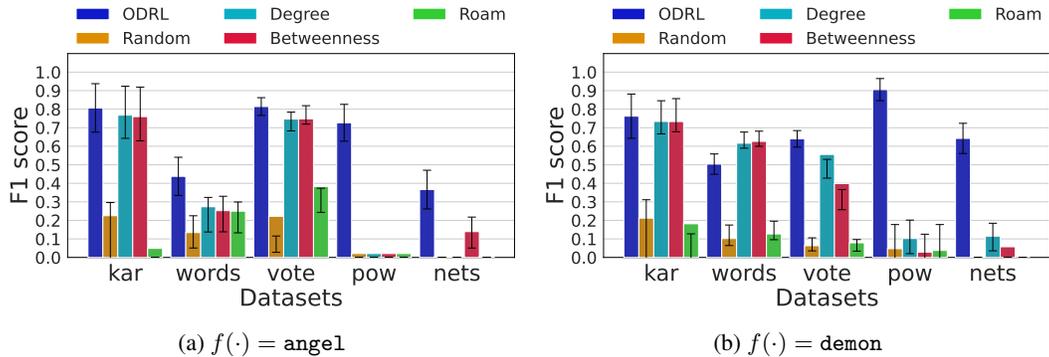


Figure 4: F1 scores of SR and ONMI for the *ODRL Agent* and baselines in the symmetric (Figure 4a) and asymmetric (Figure 4b) scenarios, with parameters $k = \mu$, $p = 0.5$, $\beta = \mu$.

⁵For the `kar` dataset, we set $\mu = |E|/|V| + 1$ to ensure a non-zero budget.

Table 2: F1 Score (F1, %) \pm error of SR and ONMI in the symmetric setting (angel), $\tau = 0.5$. Best results are in bold, second best are underlined

Symmetric setting — training: angel; testing: angel								
Dataset	β	ODRL(0.5 μ)	ODRL(1.0 μ)	ODRL(2.0 μ)	Random	Degree	Betweenness	Roam
kar	$\frac{1}{2}\mu$	61.2 \pm 16.9	71.6 \pm 14.8	56.6 \pm 17.2	53.0 \pm 17.7	66.0 \pm 15.9	64.0 \pm 15.9	23.8 \pm 16.2
	1μ	77.7 \pm 14.4	80.7 \pm 13.1	74.0 \pm 16.4	53.0 \pm 17.7	73.7 \pm 16.4	73.1 \pm 16.6	7.3 \pm 8.5
	2μ	90.8 \pm 11.3	<u>90.2 \pm 11.8</u>	85.4 \pm 16.0	62.1 \pm 16.2	81.1 \pm 19.1	78.4 \pm 16.8	7.3 \pm 8.5
words	$\frac{1}{2}\mu$	29.3 \pm 10.6	34.4 \pm 11.2	<u>32.9 \pm 10.2</u>	16.6 \pm 9.0	26.1 \pm 9.1	28.3 \pm 9.0	26.9 \pm 8.9
	1μ	39.0 \pm 10.5	43.8 \pm 10.3	<u>41.4 \pm 9.8</u>	18.2 \pm 9.2	30.3 \pm 8.8	30.4 \pm 8.8	30.1 \pm 8.7
	2μ	44.6 \pm 8.6	61.2 \pm 8.8	<u>48.3 \pm 9.0</u>	18.2 \pm 9.2	34.0 \pm 8.5	34.6 \pm 8.3	34.9 \pm 7.9
vote	$\frac{1}{2}\mu$	<u>81.4 \pm 4.4</u>	79.6 \pm 4.7	86.4 \pm 4.7	20.5 \pm 5.4	61.8 \pm 4.7	62.3 \pm 4.6	29.4 \pm 5.7
	1μ	<u>83.4 \pm 4.4</u>	81.4 \pm 4.8	86.8 \pm 4.7	22.8 \pm 5.5	77.2 \pm 4.4	70.7 \pm 4.4	29.4 \pm 5.7
	2μ	<u>84.4 \pm 4.5</u>	81.7 \pm 4.8	86.9 \pm 4.7	23.2 \pm 5.5	82.5 \pm 4.5	79.2 \pm 4.4	33.4 \pm 5.7
pow	$\frac{1}{2}\mu$	68.8 \pm 10.6	<u>70.1 \pm 10.4</u>	83.2 \pm 9.3	6.2 \pm 6.7	6.2 \pm 6.7	6.2 \pm 6.7	6.2 \pm 6.7
	1μ	68.8 \pm 10.6	<u>72.7 \pm 9.9</u>	84.2 \pm 9.2	6.2 \pm 6.7	6.2 \pm 6.7	6.2 \pm 6.7	6.2 \pm 6.7
	2μ	78.6 \pm 9.0	<u>75.1 \pm 9.5</u>	84.1 \pm 9.2	6.2 \pm 6.7	6.2 \pm 6.7	17.5 \pm 12.0	6.2 \pm 6.7
nets	$\frac{1}{2}\mu$	36.6 \pm 10.5	36.6 \pm 10.5	58.1 \pm 8.8	1.8 \pm 2.2	1.8 \pm 2.2	1.8 \pm 2.2	1.8 \pm 2.2
	1μ	36.6 \pm 10.5	36.6 \pm 10.4	58.9 \pm 8.7	1.8 \pm 2.2	1.8 \pm 2.2	15.0 \pm 8.7	1.8 \pm 2.2
	2μ	<u>40.3 \pm 10.4</u>	36.6 \pm 10.4	58.1 \pm 8.8	1.8 \pm 2.2	5.3 \pm 5.3	22.3 \pm 9.7	1.8 \pm 2.2

Table 3: F1 Score (F1, %) \pm error of SR and ONMI in the asymmetric setting (training: angel, testing: demon), $\tau = 0.5$. Best results are in bold, second best are underlined

Asymmetric setting — training: angel; testing: demon								
Dataset	β	ODRL(0.5 μ)	ODRL(1.0 μ)	ODRL(2.0 μ)	Random	Degree	Betweenness	Roam
kar	$\frac{1}{2}\mu$	57.4 \pm 14.5	73.0 \pm 12.3	69.2 \pm 11.3	25.8 \pm 13.6	65.0 \pm 9.2	61.9 \pm 10.0	19.6 \pm 14.0
	1μ	76.5 \pm 12.3	76.2 \pm 11.9	78.8 \pm 12.4	28.8 \pm 14.9	69.1 \pm 7.9	68.8 \pm 7.8	29.3 \pm 15.4
	2μ	<u>87.5 \pm 11.4</u>	88.0 \pm 11.0	81.7 \pm 11.2	31.2 \pm 14.4	76.5 \pm 5.8	73.6 \pm 6.1	30.4 \pm 13.4
words	$\frac{1}{2}\mu$	27.5 \pm 6.5	45.7 \pm 5.8	31.0 \pm 6.7	2.7 \pm 2.8	<u>49.1 \pm 5.5</u>	50.9 \pm 5.1	9.2 \pm 4.6
	1μ	32.7 \pm 6.6	50.4 \pm 5.5	35.4 \pm 6.6	6.1 \pm 4.4	<u>60.5 \pm 4.3</u>	61.9 \pm 4.1	9.1 \pm 4.6
	2μ	44.6 \pm 6.0	54.3 \pm 5.5	43.5 \pm 6.2	9.3 \pm 4.3	<u>65.6 \pm 3.5</u>	69.0 \pm 3.2	14.6 \pm 5.4
vote	$\frac{1}{2}\mu$	50.7 \pm 4.9	54.2 \pm 4.9	51.8 \pm 4.5	8.1 \pm 3.8	16.8 \pm 4.8	16.4 \pm 4.9	7.0 \pm 3.6
	1μ	51.4 \pm 4.8	64.0 \pm 4.5	<u>52.6 \pm 4.5</u>	8.1 \pm 3.8	<u>60.5 \pm 4.6</u>	51.1 \pm 4.8	9.6 \pm 3.8
	2μ	57.5 \pm 4.6	61.9 \pm 4.6	56.1 \pm 4.4	8.1 \pm 3.8	78.7 \pm 2.7	<u>70.5 \pm 3.8</u>	12.5 \pm 4.6
pow	$\frac{1}{2}\mu$	92.6 \pm 5.6	89.3 \pm 6.2	89.6 \pm 6.2	0.0 \pm 0.0	8.4 \pm 8.1	0.0 \pm 0.0	0.0 \pm 0.0
	1μ	92.0 \pm 5.7	90.6 \pm 6.0	90.3 \pm 6.1	0.0 \pm 0.0	8.4 \pm 8.1	0.0 \pm 0.0	0.0 \pm 0.0
	2μ	91.9 \pm 5.8	92.0 \pm 5.7	90.2 \pm 6.1	0.0 \pm 0.0	8.4 \pm 8.1	2.9 \pm 4.2	0.0 \pm 0.0
nets	$\frac{1}{2}\mu$	52.9 \pm 9.2	64.2 \pm 8.2	52.9 \pm 9.1	0.0 \pm 0.0	4.8 \pm 5.5	0.0 \pm 0.0	0.0 \pm 0.0
	1μ	<u>54.7 \pm 9.0</u>	64.2 \pm 8.2	52.9 \pm 9.2	1.6 \pm 2.4	10.9 \pm 6.6	12.4 \pm 7.9	0.0 \pm 0.0
	2μ	<u>54.7 \pm 9.0</u>	64.2 \pm 8.2	<u>54.7 \pm 9.0</u>	1.6 \pm 2.4	18.0 \pm 8.8	13.8 \pm 7.8	0.0 \pm 0.0

7 LIMITATIONS AND FUTURE WORK

While our proposed DRL-based framework effectively addresses the CMH problem for overlapping communities, we acknowledge several limitations that pave the way for future research.

A first bottleneck lies in scalability: although our method is inherently parallelizable, training requires repeated calls to the community detection oracle, which is computationally expensive and often lacks efficient GPU implementations. This makes training on massive graphs with billions of nodes prohibitively slow. Future work could explore the use of surrogate models to approximate the community detection function, providing faster, even though less precise, feedback to the agent.

Second, our current formulation assumes static graphs, whereas real-world networks are dynamic. Policies trained on a single snapshot may quickly become obsolete. Extending the framework to dynamic or temporal graphs, possibly through continual learning, would improve applicability.

Third, our work considers a single target node. In practice, multiple users may wish to hide their memberships simultaneously, which calls for multi-agent formulations that can model cooperation or competition among agents.

Beyond these assumptions, future research should also explore alternative definitions of the hiding objective, extend evaluations to larger graphs and different community detection algorithms, consider broader hyperparameter settings, and assess unintended side effects of edge modifications, such as their impact on the community assignments of non-target nodes.

8 CONCLUSION

In this paper, we tackled the problem of community membership hiding (CMH) under the realistic and challenging setting of overlapping communities. We further showed that a simple injection strategy suffices to solve the non-overlapping case, highlighting the added complexity of the overlapping scenario. To the best of our knowledge, this is the first formalization of CMH in the overlapping setting and the first principled solution to it. We proposed a deep reinforcement learning framework that strategically injects proxy nodes and performs edge modifications to effectively obscure a target node’s affiliation from its original community. Our empirical results across multiple real-world datasets show that the method consistently outperforms strong baselines in both effectiveness and efficiency. Overall, our work establishes a foundation for privacy-preserving graph analysis, with promising directions in scaling to dynamic and large-scale networks.

REPRODUCIBILITY

We have made every effort to ensure the reproducibility of our work. The source code for our ODRL agent, the experimental setup, and all baseline implementations is available as supplementary material at https://anonymous.4open.science/r/overlapping_comm_detect-EC02/README.md. The datasets used in our experiments are standard, publicly available benchmarks. Section 6 and Table 1 provide detailed descriptions and references to their sources. The specifics of our proposed methodology, including the Markov decision process (MDP) formulation, network architectures, and training procedure, are detailed in Sections 5 and 6. Further implementation details and key hyperparameters are provided in Section A to facilitate the full replication of our results.

ETHICAL CONSIDERATIONS

This work contributes to the field of privacy-preserving machine learning, but we recognize its dual-use nature.

On the one hand, the developed method serves as a powerful tool for safeguarding user privacy. It can empower individuals, such as journalists, activists, or members of vulnerable groups, to protect themselves from algorithmic profiling and unwanted exposure by controlling their visibility in online social networks. This aligns with the principles of data autonomy and the “right to be forgotten”.

On the other hand, like any privacy-enhancing technology, this method could be misused by malicious actors. For instance, it could be employed to conceal criminal or coordinated inauthentic behavior, thereby evading detection by graph-based security and content moderation systems. Furthermore, modifications made to hide one user may have unintended side effects on the community assignments of their neighbors.

We believe the potential benefits for individual privacy are significant. We advocate for the responsible deployment of such technologies. If implemented by platform providers, this capability should be accompanied by robust safeguards, such as access controls, monitoring for anomalous activity, and transparent policies to mitigate the risk of misuse.

REFERENCES

Sabrina Ben Abdrabbah, Raouia Ayachi, and Nahla Ben Amor. Collaborative filtering based on dynamic community detection. In *Proceedings of the 2nd International Conference on Dynamic Networks and Knowledge Discovery - Volume 1229*, DYNAP’14, pp. 85–106, Aachen, DEU, 2014. CEUR-WS.org.

-
- Edo M Airolidi, David Blei, Stephen Fienberg, and Eric Xing. Mixed membership stochastic blockmodels. In D. Koller, D. Schuurmans, Y. Bengio, and L. Bottou (eds.), *Advances in Neural Information Processing Systems*, volume 21. Curran Associates, Inc., 2008. URL https://proceedings.neurips.cc/paper_files/paper/2008/file/8613985ec49eb8f757ae6439e879bb2a-Paper.pdf.
- Sergio Antonio Alcalá-Corona, Santiago Sandoval-Motta, Jesus Espinal-Enriquez, and Enrique Hernandez-Lemus. Modularity in biological networks. *Frontiers in Genetics*, 12:701331, 2021.
- Andrea Bernini, Fabrizio Silvestri, and Gabriele Tolomei. Evading community detection via counterfactual neighborhood search. In *Proceedings of the 30th ACM SIGKDD Conference on Knowledge Discovery and Data Mining, KDD '24*, pp. 131–140, New York, NY, USA, 2024. Association for Computing Machinery. ISBN 9798400704901. doi: 10.1145/3637528.3671896. URL <https://doi.org/10.1145/3637528.3671896>.
- Vincent D. Blondel, Jean-Loup Guillaume, Renaud Lambiotte, and Etienne Lefebvre. Fast Unfolding of Communities in Large Networks. *Journal of Statistical Mechanics: Theory and Experiment*, 2008(10):P10008, Oct 2008. doi: 10.1088/1742-5468/2008/10/P10008. URL <https://dx.doi.org/10.1088/1742-5468/2008/10/P10008>.
- Ulrik Brandes, Daniel Delling, Marco Gaertler, Robert Görke, Martin Hoefer, Zoran Nikoloski, and Dorothea Wagner. On modularity clustering. *IEEE Transactions on Knowledge and Data Engineering*, 20:172–188, 2008. URL <https://api.semanticscholar.org/CorpusID:150684>.
- Genís Calderer and Marieke L Kuijjer. Community detection in large-scale bipartite biological networks. *Frontiers in Genetics*, 12:649440, 2021.
- Alina Campan, Yasmeen Alufaisan, and Traian Marius Truta. Preserving communities in anonymized social networks. *Transactions on Data Privacy*, 8(1):55–87, Dec 2015. ISSN 1888-5063.
- Jinyin Chen, Lihong Chen, Yixian Chen, Minghao Zhao, Shanqing Yu, Qi Xuan, and Xiaoniu Yang. Ga-based q-attack on community detection. *IEEE Transactions on Computational Social Systems*, 6(3):491–503, 2019.
- Jinyin Chen, Xiang Lin, Ziqiang Shi, and Yi Liu. Link prediction adversarial attack via iterative gradient attack. *IEEE Transactions on Computational Social Systems*, 7(4):1081–1094, 2020.
- Yizheng Chen, Yacin Nadji, Athanasios Kountouras, Fabian Monrose, Roberto Perdisci, Manos Antonakakis, and Nikolaos Vasiloglou. Practical attacks against graph-based clustering. In *Proceedings of the 2017 ACM SIGSAC conference on computer and communications security*, pp. 1125–1142, 2017.
- Kyunghyun Cho, Bart van Merriënboer, Dzmitry Bahdanau, and Yoshua Bengio. On the properties of neural machine translation: Encoder–decoder approaches. In *SSST@EMNLP*, 2014. URL <https://api.semanticscholar.org/CorpusID:11336213>.
- Djork-Arné Clevert, Thomas Unterthiner, and Sepp Hochreiter. Fast and accurate deep network learning by exponential linear units (elus). *arXiv: Learning*, 2015. URL <https://api.semanticscholar.org/CorpusID:5273326>.
- Carlos Garcia Cordero, Emmanouil Vasilomanolakis, Max Mühlhäuser, and Mathias Fischer. Community-based collaborative intrusion detection. In Bhavani Thuraisingham, XiaoFeng Wang, and Vinod Yegneswaran (eds.), *Security and Privacy in Communication Networks*, pp. 665–681, Cham, 2015. Springer International Publishing. ISBN 978-3-319-28865-9.
- Michele Coscia, Giulio Rossetti, Fosca Giannotti, and Dino Pedreschi. Demon: a local-first discovery method for overlapping communities. 08 2012. doi: 10.1145/2339530.2339630.
- Hanjun Dai, Hui Li, Tian Tian, Xin Huang, Lin Wang, Jun Zhu, and Le Song. Adversarial attack on graph structured data. In *International conference on machine learning*, pp. 1115–1124. PMLR, 2018.

-
- Lee R. Dice. Measures of the amount of ecologic association between species. *Ecology*, 26(3):297–302, 1945. doi: <https://doi.org/10.2307/1932409>. URL <https://esajournals.onlinelibrary.wiley.com/doi/abs/10.2307/1932409>.
- Valeria Fionda and Giuseppe Pirro. Community deception or: How to stop fearing community detection algorithms. *IEEE Transactions on Knowledge and Data Engineering*, 30(4):660–673, 2017.
- Linton C Freeman. A set of measures of centrality based on betweenness. *Sociometry*, pp. 35–41, 1977.
- M. Girvan and M. E. J. Newman. Community structure in social and biological networks. *Proceedings of the National Academy of Sciences*, 99(12):7821–7826, June 2002a. ISSN 1091-6490. doi: 10.1073/pnas.122653799. URL <http://dx.doi.org/10.1073/pnas.122653799>.
- M. Girvan and M. E. J. Newman. Community Structure in Social and Biological Networks. *Proceedings of the National Academy of Sciences*, 99(12):7821–7826, 2002b. doi: 10.1073/pnas.122653799. URL <https://www.pnas.org/doi/abs/10.1073/pnas.122653799>.
- Aditya Grover and Jure Leskovec. node2vec: Scalable feature learning for networks. *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 2016. URL <https://api.semanticscholar.org/CorpusID:207238980>.
- Geoffrey Hinton. Lecture 6.5-rmsprop: Divide the gradient by a running average of its recent magnitude. *COURSERA: Neural networks for machine learning*, 4(2):26, 2012.
- Paul Jaccard. The distribution of the flora in the alpine zone. *New Phytologist*, 11(2):37–50, 1912. doi: <https://doi.org/10.1111/j.1469-8137.1912.tb05611.x>. URL <https://nph.onlinelibrary.wiley.com/doi/abs/10.1111/j.1469-8137.1912.tb05611.x>.
- Muhammad Aqib Javed, Muhammad Shahzad Younis, Siddique Latif, Junaid Qadir, and Adeel Baig. Community detection in networks: A multidisciplinary review. *J. Netw. Comput. Appl.*, 108(C):87–111, April 2018. ISSN 1084-8045. doi: 10.1016/j.jnca.2018.02.011. URL <https://doi.org/10.1016/j.jnca.2018.02.011>.
- Arzum Karataş and Serap Şahin. Application areas of community detection: A review. In *2018 International congress on big data, deep learning and fighting cyber terrorism (IBIGDELFT)*, pp. 65–70. IEEE, 2018.
- Thomas N. Kipf and Max Welling. Semi-supervised classification with graph convolutional networks. *CoRR*, abs/1609.02907, 2016. URL <http://arxiv.org/abs/1609.02907>.
- Wanyu Lin, Shengxiang Ji, and Baochun Li. Adversarial attacks on link prediction algorithms based on graph neural networks. In *Proceedings of the 15th ACM asia conference on computer and communications security*, pp. 370–380, 2020.
- Aaron F. McDavid, Derek Greene, and Neil J. Hurley. Normalized mutual information to evaluate overlapping community finding algorithms. *ArXiv*, abs/1110.2515, 2011. URL <https://api.semanticscholar.org/CorpusID:15046858>.
- Vijaymeena M.K and Kavitha K. A survey on similarity measures in text mining. 2016. URL <https://api.semanticscholar.org/CorpusID:62118842>.
- Volodymyr Mnih, Adria Puigdomenech Badia, Mehdi Mirza, Alex Graves, Timothy Lillicrap, Tim Harley, David Silver, and Koray Kavukcuoglu. Asynchronous methods for deep reinforcement learning. In Maria Florina Balcan and Kilian Q. Weinberger (eds.), *Proceedings of The 33rd International Conference on Machine Learning*, volume 48 of *Proceedings of Machine Learning Research*, pp. 1928–1937, New York, New York, USA, 20–22 Jun 2016. PMLR. URL <https://proceedings.mlr.press/v48/mnih16.html>.
- Mohammad Javad Mosadegh and Mehdi Behboudi. Using Social Network Paradigm for Developing a Conceptual Framework in CRM. *Australian Journal of Business and Management Research*, 1(4):63, 2011.

-
- M. E. J. Newman and M. Girvan. Finding and Evaluating Community Structure in Networks. *Physical Review E*, 69(2), 2004. doi: 10.1103/physreve.69.026113. URL <https://doi.org/10.1103%2Fphysreve.69.026113>.
- Mark E. J. Newman. Finding Community Structure in Networks Using the Eigenvectors of Matrices. *Physical Review E*, 74:036104, 2006. doi: 10.1103/PhysRevE.74.036104. URL <https://link.aps.org/doi/10.1103/PhysRevE.74.036104>.
- Pascal Pons and Matthieu Latapy. Computing communities in large networks using random walks. pp. 284–293, 2005.
- Usha Nandini Raghavan, Réka Albert, and Soundar Kumara. Near Linear Time Algorithm to Detect Community Structures in Large-Scale Networks. *Physical Review E*, 76:036106, Sep 2007. doi: 10.1103/PhysRevE.76.036106. URL <https://link.aps.org/doi/10.1103/PhysRevE.76.036106>.
- Jörg Reichardt and Stefan Bornholdt. Statistical Mechanics of Community Detection. *Physical Review E*, 74:016110, 2006. doi: 10.1103/PhysRevE.74.016110. URL <https://link.aps.org/doi/10.1103/PhysRevE.74.016110>.
- Peter Ronhovde and Zohar Nussinov. Multiresolution Community Detection for Megascale Networks by Information-Based Replica Correlations. *Physical Review E*, 80(1), Jul 2009. doi: 10.1103/physreve.80.016109. URL <https://doi.org/10.1103%2Fphysreve.80.016109>.
- Giulio Rossetti. Angel: efficient, and effective, node-centric community discovery in static and dynamic networks. *Applied Network Science*, 5, 06 2020. doi: 10.1007/s41109-020-00270-6.
- XingMao Ruan, YueHeng Sun, Bo Wang, and Shuo Zhang. The community detection of complex networks based on markov matrix spectrum optimization. In *2012 International Conference on Control Engineering and Communication Technology*, pp. 608–611, 2012. doi: 10.1109/ICCECT.2012.192.
- John Schulman, Philipp Moritz, Sergey Levine, Michael I. Jordan, and Pieter Abbeel. High-dimensional continuous control using generalized advantage estimation. In Yoshua Bengio and Yann LeCun (eds.), *4th International Conference on Learning Representations, ICLR 2016, San Juan, Puerto Rico, May 2-4, 2016, Conference Track Proceedings*, 2016. URL <http://arxiv.org/abs/1506.02438>.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *CoRR*, abs/1707.06347, 2017. URL <http://arxiv.org/abs/1707.06347>.
- Matteo Silvestri, Edoardo Gabrielli, Fabrizio Silvestri, and Gabriele Tolomei. The right to hide: Masking community affiliation via minimal graph rewiring, 2025. URL <https://arxiv.org/abs/2502.00432>.
- Alexander Strehl and Joydeep Ghosh. Cluster ensembles—a knowledge reuse framework for combining multiple partitions. *Journal of machine learning research*, 3(Dec):583–617, 2002.
- Jianhai Su and Timothy C. Havens. Quadratic program-based modularity maximization for fuzzy community detection in social networks. *IEEE Transactions on Fuzzy Systems*, 23(5):1356–1371, 2015. doi: 10.1109/TFUZZ.2014.2360723.
- Yiwei Sun, Suhang Wang, Xianfeng Tang, Tsung-Yu Hsieh, and Vasant G. Honavar. Adversarial attacks on graph neural networks via node injections: A hierarchical reinforcement learning approach. In Yennun Huang, Irwin King, Tie-Yan Liu, and Maarten van Steen (eds.), *WWW '20: The Web Conference 2020, Taipei, Taiwan, April 20-24, 2020*, pp. 673–683. ACM / IW3C2, 2020. doi: 10.1145/3366423.3380149. URL <https://doi.org/10.1145/3366423.3380149>.
- Arash Tavakoli, Fabio Pardo, and Petar Kormushev. Action branching architectures for deep reinforcement learning. In *Proceedings of the Thirty-Second AAAI Conference on Artificial Intelligence and Thirtieth Innovative Applications of Artificial Intelligence Conference and Eighth AAAI Symposium on Educational Advances in Artificial Intelligence, AAAI'18/IAAI'18/EAAI'18*. AAAI Press, 2018. ISBN 978-1-57735-800-8.

-
- Giovanni Trappolini, Valentino Maiorca, Silvio Severino, Emanuele Rodola, Fabrizio Silvestri, and Gabriele Tolomei. Sparse vicious attacks on graph neural networks. *IEEE Transactions on Artificial Intelligence*, 5(5):2293–2303, 2023.
- Xiaoyun Wang, Joe Eaton, Cho-Jui Hsieh, and Shyhtsun Felix Wu. Attack graph convolutional networks by adding fake nodes. *ArXiv*, abs/1810.10751, 2018. URL <https://api.semanticscholar.org/CorpusID:53027350>.
- Zhengyi Wang, Zhongkai Hao, Ziqiao Wang, Hang Su, and Jun Zhu. Cluster attack: Query-based adversarial attacks on graph with graph-dependent priors. In *International Joint Conference on Artificial Intelligence*, 2021. URL <https://api.semanticscholar.org/CorpusID:250048351>.
- Marcin Waniek, Tomasz Michalak, Talal Rahwan, and Michael Wooldridge. Hiding individuals and communities in a social network. *Nature Human Behaviour*, 2, 02 2018a. doi: 10.1038/s41562-017-0290-3.
- Marcin Waniek, Tomasz P Michalak, Michael J Wooldridge, and Talal Rahwan. Hiding individuals and communities in a social network. *Nature Human Behaviour*, 2(2):139–147, 2018b.
- Joyce Jiyoun Whang, David F. Gleich, and Inderjit S. Dhillon. Overlapping community detection using neighborhood-inflated seed expansion, 2015.
- Keyulu Xu, Chengtao Li, Yonglong Tian, Tomohiro Sonobe, Ken ichi Kawarabayashi, and Stefanie Jegelka. Representation learning on graphs with jumping knowledge networks. *ArXiv*, abs/1806.03536, 2018. URL <https://api.semanticscholar.org/CorpusID:47018956>.
- Jaewon Yang and Jure Leskovec. Overlapping community detection at scale: a nonnegative matrix factorization approach. In *Proceedings of the Sixth ACM International Conference on Web Search and Data Mining, WSDM ’13*, pp. 587–596, New York, NY, USA, 2013. Association for Computing Machinery. ISBN 9781450318693. doi: 10.1145/2433396.2433471. URL <https://doi.org/10.1145/2433396.2433471>.
- Lingxiao Zhao and Leman Akoglu. Pairnorm: Tackling oversmoothing in gnns. *ArXiv*, abs/1909.12223, 2019. URL <https://api.semanticscholar.org/CorpusID:202888772>.
- Daniel Zügner, Amir Akbarnejad, and Stephan Günnemann. Adversarial attacks on neural networks for graph data. In *Proceedings of the 24th ACM SIGKDD international conference on knowledge discovery & data mining*, pp. 2847–2856, 2018.

GENAI DISCLOSURE STATEMENT

We used GPT-5 to identify and correct grammatical errors, typos, and to improve the overall writing quality. No AI tools were used at any other stage of this work to ensure full academic integrity.

A IMPLEMENTATION DETAILS

Network Architecture The agent’s policy and value functions are parameterized by a neural network composed of three main components: a shared graph encoder, an actor head, and a critic head, all built upon a shared state representation.

Shared Graph Encoder. The encoder maps input node features $x \in \mathbb{R}^{|V| \times d_{in}}$ to rich node embeddings $h \in \mathbb{R}^{|V| \times d_h}$. It consists of four GCN layers (Kipf & Welling, 2016), each employing PairNorm normalization (Zhao & Akoglu, 2019) and ELU nonlinearities (Clevert et al., 2015). To create multi-scale representations and mitigate oversmoothing, the outputs of each layer (each with dimensionality $d_h/4$) are concatenated, in a style similar to jumping knowledge networks (Xu et al., 2018).

State Representation. From the node embeddings produced by the encoder, we construct an aggregated state context. Specifically, we compute representations for the target node, the set of proxy nodes, and the entire graph:

$$h_{\text{target}} = h_{i_u}, \quad h_{\text{proxy}} = \frac{1}{|P|} \sum_{p \in P} h_{i_p}, \quad h_{\text{global}} = \frac{1}{|V|} \sum_{v \in V} h_{i_v} \quad (8)$$

These vectors are concatenated and passed through a linear projection with LayerNorm and an ELU activation. To capture temporal dependencies within an episode, this resulting vector is processed by a single-layer GRU (Cho et al., 2014). The GRU’s hidden state serves as the final shared representation, h_{shared} , for the current step.

Actor and Critic Heads. From this shared backbone, the network branches into the actor and critic. The **actor** implements the factored policy. First, a linear projection maps h_{shared} to logits over the $|P| + 1$ candidate nodes (the target and its proxies). Then, for each candidate, an independent linear head takes the concatenation of its node embedding and the shared state, $[h_{\text{shared}}; h_{\text{actor}}]$, and produces logits over the $2(|V| - 1)$ available actions. The **critic** is a two-layer MLP with ELU nonlinearities that maps the shared representation h_{shared} directly to a scalar state-value estimate, $V_{\theta}(\cdot)$.

B ADDITIONAL RESULTS

In this section, we provide additional experimental results to supplement the analysis presented in the main paper. While the main text focuses on the F1 score to provide a balanced view of performance, here we present the disaggregated Success Rate (SR) metric. Specifically, Table 4 details the SR for the symmetric setting, while Table 5 shows the SR for the asymmetric setting. These tables offer a more granular perspective on the effectiveness of our method in achieving the primary hiding objective across various datasets and budgets. Figures 5 and 6 show the F1 score performance with budgets $\beta \in \{\frac{1}{2}\mu, 2\mu\}$.

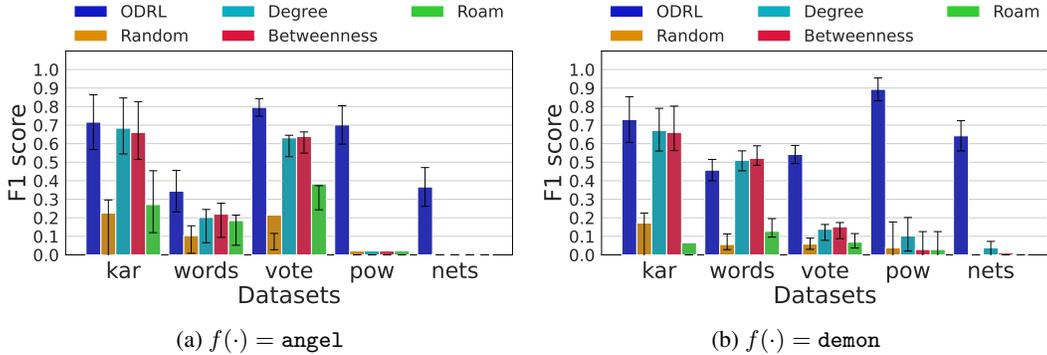


Figure 5: F1 scores of SR and ONMI for the *ODRL Agent* and baselines in the symmetric (Figure 5a) and asymmetric (Figure 5b) scenarios, with parameters $k = \mu$, $p = 0.5$, $\beta = \frac{1}{2}\mu$.

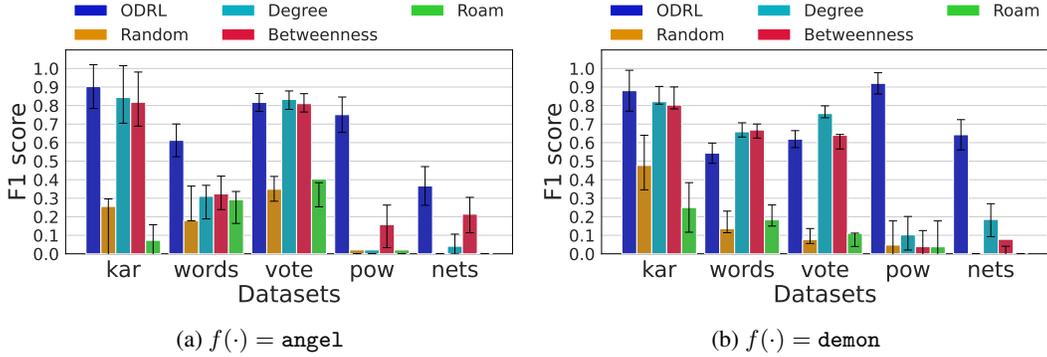


Figure 6: F1 scores of SR and ONMI for the *ODRL Agent* and baselines in the symmetric (Figure 6a) and asymmetric (Figure 6b) scenarios, with parameters $k = \mu$, $p = 0.5$, $\beta = 2\mu$.

Table 4: Success Rate (SR, %) \pm error of SR in the symmetric setting (*angel*), $\tau = 0.5$.

Symmetric setting — training: <i>angel</i> ; testing: <i>angel</i>								
Dataset	β	ODRL(0.5μ)	ODRL(1.0μ)	ODRL(2.0μ)	Random	Degree	Betweenness	Roam
kar	$\frac{1}{2}\mu$	48.0 \pm 19.6	64.0 \pm 18.8	44.0 \pm 19.5	40.0 \pm 19.2	60.0 \pm 19.2	56.0 \pm 19.5	16.0 \pm 14.4
	1μ	76.0 \pm 16.7	76.0 \pm 16.7	76.0 \pm 16.7	40.0 \pm 19.2	76.0 \pm 16.7	76.0 \pm 16.7	4.0 \pm 5.8
	2μ	100.0 \pm 0.0	100.0 \pm 0.0	100.0 \pm 0.0	52.0 \pm 19.6	100.0 \pm 0.0	88.0 \pm 12.4	4.0 \pm 5.8
words	$\frac{1}{2}\mu$	18.0 \pm 8.0	21.1 \pm 8.4	21.3 \pm 8.5	9.5 \pm 5.9	16.8 \pm 7.5	18.9 \pm 7.9	17.9 \pm 7.7
	1μ	25.8 \pm 9.1	30.0 \pm 9.5	29.2 \pm 9.4	10.5 \pm 6.2	21.1 \pm 8.2	21.1 \pm 8.2	21.1 \pm 8.2
	2μ	37.1 \pm 10.0	62.2 \pm 10.0	38.2 \pm 10.1	10.5 \pm 6.2	25.3 \pm 8.7	26.3 \pm 8.9	29.5 \pm 9.2
vote	$\frac{1}{2}\mu$	84.8 \pm 3.8	79.6 \pm 4.8	94.5 \pm 2.5	11.7 \pm 3.5	50.5 \pm 5.4	51.1 \pm 5.4	17.8 \pm 4.2
	1μ	89.3 \pm 3.3	83.6 \pm 4.4	95.5 \pm 2.3	13.2 \pm 3.7	75.7 \pm 4.7	63.7 \pm 5.2	17.8 \pm 4.2
	2μ	92.6 \pm 2.8	84.7 \pm 4.3	95.8 \pm 2.2	13.5 \pm 3.7	87.1 \pm 3.6	79.7 \pm 4.4	20.9 \pm 4.4
pow	$\frac{1}{2}\mu$	54.1 \pm 12.5	55.7 \pm 12.5	80.4 \pm 10.4	3.2 \pm 3.8	3.2 \pm 3.8	3.2 \pm 3.8	3.2 \pm 3.8
	1μ	54.1 \pm 12.5	59.0 \pm 12.3	82.1 \pm 10.0	3.2 \pm 3.8	3.2 \pm 3.8	3.2 \pm 3.8	3.2 \pm 3.8
	2μ	67.2 \pm 11.8	62.3 \pm 12.2	82.1 \pm 10.0	3.2 \pm 3.8	3.2 \pm 3.8	9.7 \pm 7.4	3.2 \pm 3.8
nets	$\frac{1}{2}\mu$	22.6 \pm 8.0	22.6 \pm 8.0	41.5 \pm 8.9	0.9 \pm 1.3	0.9 \pm 1.3	0.9 \pm 1.3	0.9 \pm 1.3
	1μ	22.6 \pm 8.0	22.6 \pm 8.0	42.4 \pm 8.9	0.9 \pm 1.3	0.9 \pm 1.3	8.1 \pm 5.1	0.9 \pm 1.3
	2μ	25.5 \pm 8.3	22.6 \pm 8.0	41.5 \pm 8.9	0.9 \pm 1.3	2.7 \pm 2.9	12.6 \pm 6.2	0.9 \pm 1.3

Table 5: Success Rate (SR, %) \pm error of SR in the symmetric setting (training: *angel*, testing: *demon*), $\tau = 0.5$.

Asymmetric setting — training: <i>angel</i> ; testing: <i>demon</i>								
Dataset	β	ODRL(0.5μ)	ODRL(1.0μ)	ODRL(2.0μ)	Random	Degree	Betweenness	Roam
kar	$\frac{1}{2}\mu$	44.4 \pm 16.2	63.9 \pm 15.7	63.3 \pm 13.5	15.6 \pm 10.6	57.8 \pm 14.4	53.3 \pm 14.6	11.1 \pm 9.2
	1μ	72.2 \pm 14.6	69.4 \pm 15.0	87.8 \pm 9.2	17.8 \pm 11.2	66.7 \pm 13.8	66.7 \pm 13.8	17.8 \pm 11.2
	2μ	94.4 \pm 6.5	94.4 \pm 6.5	95.9 \pm 4.8	20.0 \pm 11.7	82.2 \pm 11.2	77.8 \pm 12.1	20.0 \pm 11.7
words	$\frac{1}{2}\mu$	17.1 \pm 5.0	34.2 \pm 6.1	19.6 \pm 5.3	1.4 \pm 1.4	36.9 \pm 6.3	38.7 \pm 6.4	5.0 \pm 2.9
	1μ	21.2 \pm 5.4	40.6 \pm 6.3	23.4 \pm 5.7	3.2 \pm 2.3	52.7 \pm 6.6	55.4 \pm 6.5	5.0 \pm 2.9
	2μ	33.2 \pm 6.3	44.4 \pm 6.4	31.3 \pm 6.2	5.0 \pm 2.9	63.1 \pm 6.3	67.6 \pm 6.2	8.1 \pm 3.6
vote	$\frac{1}{2}\mu$	36.3 \pm 4.8	39.7 \pm 5.0	37.5 \pm 4.6	4.2 \pm 2.1	9.3 \pm 3.0	9.0 \pm 3.0	3.7 \pm 2.0
	1μ	37.1 \pm 4.9	51.5 \pm 5.1	38.4 \pm 4.6	4.2 \pm 2.1	46.2 \pm 5.2	36.1 \pm 5.0	5.1 \pm 2.3
	2μ	43.7 \pm 5.0	48.5 \pm 5.1	41.9 \pm 4.7	4.2 \pm 2.1	71.8 \pm 4.7	60.0 \pm 5.1	6.8 \pm 2.6
pow	$\frac{1}{2}\mu$	88.8 \pm 6.9	82.5 \pm 8.3	83.8 \pm 8.1	0.0 \pm 0.0	4.4 \pm 4.6	0.0 \pm 0.0	0.0 \pm 0.0
	1μ	87.5 \pm 7.2	85.0 \pm 7.8	85.0 \pm 7.8	0.0 \pm 0.0	4.4 \pm 4.6	0.0 \pm 0.0	0.0 \pm 0.0
	2μ	87.5 \pm 7.2	87.5 \pm 7.2	85.0 \pm 7.8	0.0 \pm 0.0	4.4 \pm 4.6	1.5 \pm 2.2	0.0 \pm 0.0
nets	$\frac{1}{2}\mu$	36.4 \pm 8.6	47.9 \pm 8.9	36.4 \pm 8.6	0.0 \pm 0.0	2.5 \pm 2.6	0.0 \pm 0.0	0.0 \pm 0.0
	1μ	38.0 \pm 8.6	47.9 \pm 8.9	36.4 \pm 8.6	0.8 \pm 1.2	5.8 \pm 4.2	6.6 \pm 4.4	0.0 \pm 0.0
	2μ	38.0 \pm 8.6	47.9 \pm 8.9	38.0 \pm 8.6	0.8 \pm 1.2	9.9 \pm 5.3	7.4 \pm 4.7	0.0 \pm 0.0