

Beyond Embeddings: Interpretable Feature Extraction for Binary Code Similarity

Charles E. Gagnon

*Defence Research and Development Canada
McGill University*

Steven H. H. Ding

McGill University

Philippe Charland

Defence Research and Development Canada

Benjamin C. M. Fung

McGill University

Abstract

Binary code similarity detection is a core task in reverse engineering. It supports malware analysis and vulnerability discovery by identifying semantically similar code in different contexts. Modern methods have progressed from manually engineered features to vector representations. Hand-crafted statistics (e.g., operation ratios) are interpretable, but shallow and fail to generalize. Embedding-based methods overcome this by learning robust cross-setting representations, but these representations are opaque vectors that prevent rapid verification. They also face a scalability–accuracy trade-off, since high-dimensional nearest-neighbor search requires approximations that reduce precision. Current approaches thus force a compromise between interpretability, generalizability, and scalability.

We bridge these gaps using a language model-based agent to conduct structured reasoning analysis of assembly code and generate features such as input/output types, side effects, notable constants, and algorithmic intent. Unlike hand-crafted features, they are richer and adaptive. Unlike embeddings, they are human-readable, maintainable, and directly searchable with inverted or relational indexes. Without any matching training, our method respectively achieves 42% and 62% for recall@1 in cross-architecture and cross-optimization tasks, comparable to embedding methods with training (39% and 34%). Combined with embeddings, it significantly outperforms the state-of-the-art, demonstrating that accuracy, scalability, and interpretability can coexist.

1 Introduction

Modern software development heavily relies on external libraries. For security researchers, detecting whether an executable invokes vulnerable library functions is critical for assessing and mitigating exposure [34, 41]. For reverse engineers, identifying redundant assembly functions accelerates analysis and enables them to focus on the unique logic of a binary. Binary Code Similarity Detection (BCSD) provides a

means to address these requirements by identifying whether two compiled code fragments exhibit similar behavior. Its importance is amplified by the growing size, modularity, and production rate of modern software, which make manual inspection infeasible. Beyond vulnerability assessment, BCSD also plays an important role in malware analysis, software supply-chain auditing, and firmware security, where statically linked libraries are common and reused components can be difficult to identify [5, 6]. For instance, when a vulnerability is discovered in a library, BCSD enables efficient identification of affected binaries or firmware, supporting both defensive security and large-scale reverse engineering.

Early approaches to BCSD used human-defined heuristics to extract a “feature vector” from a binary code fragment [2, 16, 42]. These heuristics could be derived statically by examining a function and its control-flow graph (CFG)—for example, by measuring the number of basic blocks, the ratio of arithmetic to control-flow instructions, or the sequence of opcodes—or dynamically by executing the function in an emulator to capture instruction counts, memory access patterns, or system call traces [15]. Such methods were deterministic and had the advantage of producing human-understandable feature vectors, but they suffered key limitations. Purely statistical descriptors were often too simplistic to capture deep semantic similarity [42], while more sophisticated CFG-based comparisons sometimes required computationally intractable algorithms such as subgraph isomorphism or graph-edit distance [16], which limited their scalability.

More recently, machine learning (ML)-based approaches have demonstrated superior performance in binary code similarity detection [14, 31, 36, 52, 56]. Inspired by natural language processing, these methods map each code fragment into a high-dimensional floating-point embedding that captures its structural and semantic patterns. Similarity is then computed with vector distance metrics such as cosine similarity, and large-scale retrieval relies on approximate nearest-neighbor search. These models have shown strong generalization across compilers, optimizations, and architectures. However, embedding-based approaches suffer from three lim-

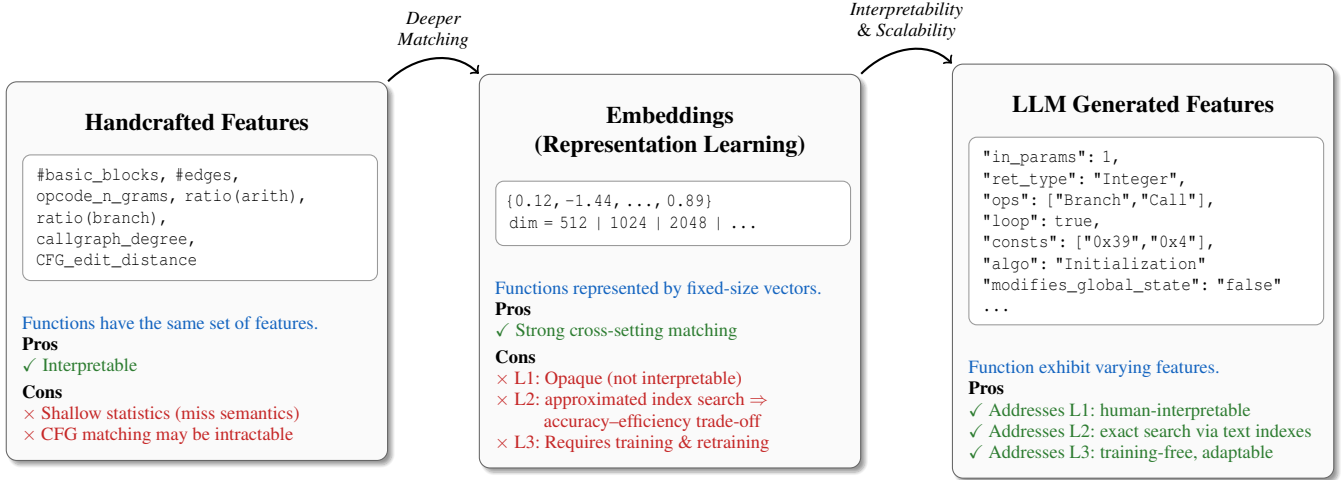


Figure 1: Evolution of features in BCSD. **Left:** Handcrafted statistics are interpretable, but shallow and sometimes intractable (CFG). **Middle:** Deep embeddings improve matching, but suffer from L1–L3 (interpretability, scalability–accuracy, training dependency). **Right:** Our LLM-generated structured features are interpretable, searchable via inverted/relational indexes, and training-free, addressing L1–L3, while improving practicality.

itations:

- **(L1) Lack of interpretability and maintainability.** The embeddings are opaque vectors with no intuitive meaning. Analysts cannot easily understand why two fragments match, making clone verification difficult and limiting their usefulness in reverse engineering workflows.
- **(L2) Scalability–accuracy trade-off.** Embeddings are high-dimensional vectors and searching at scale requires approximate nearest-neighbor indexing. While this improves efficiency, it sacrifices precision, whereas exact search is prohibitively slow—forcing a compromise between scalability and accuracy.
- **(L3) Dependency on training data.** These models must be trained on large datasets of code fragments and their effectiveness is constrained by the coverage of the training data (e.g., architectures, compilers, optimization levels). As a result, they often fail to generalize to unseen settings or proprietary instruction sets without costly retraining.

Our work presents a method to detect code fragment clones across binaries using pre-trained large language models (LLMs), without any training or fine-tuning. Instead of opaque embeddings, our approach generates *structured, human-interpretable feature vectors* (e.g., input/output types, loop structures, high-level behaviors, inferred algorithms), directly addressing **L1 (lack of interpretability)** by allowing analysts to understand why two fragments match. Because these features are represented as text, they can be indexed and queried using inverted or relational databases, avoiding high-dimensional nearest-neighbor search and thereby overcoming **L2 (scalability–accuracy trade-off)**. Moreover, by relying on the general reasoning ability of modern LLMs rather than curated training datasets, our method naturally generalizes to **unseen compilers, optimizations, and architectures**, ad-

ressing **L3 (dependency on training data)**. In this way, our method combines the transparency of early heuristic approaches with the robustness of modern ML, while also surpassing state-of-the-art results (see Figure 1). Our contributions are:

- A training-free BCSD method using LLMs that produces *human-interpretable features* and works across optimizations and architectures.
- A demonstration that performance scales with LLM size, outperforming state-of-the-art models in both accuracy and versatility.
- A hybrid framework that combines our features with embedding-based models, achieving superior results.
- A discussion of efficiency improvements and deployment considerations for large-scale use.

The paper is organized as follows: Section 2 presents our LLM-based feature extraction pipeline; Section 3 details the experimental setup and results; Section 4 reviews related work; and Section 5 summarizes our contributions and limitations.

2 From Embedding-Based BCSD to LLM-Based Feature Extraction

Security researchers and reverse engineers are routinely tasked with the analysis of unknown or proprietary executables. Reverse engineers try to analyze the binary to understand its underlying algorithms, while security researchers want to assess the risk associated with potential vulnerabilities found within the executable. This process is usually conducted using a software reverse engineering tool such as Ghidra [1] or IDA Pro [23]. The main functions of these tools are to disassemble and decompile the provided machine code so that its content

can be analyzed by humans. Disassembly is the process of retrieving the assembly instructions (human-readable machine code) from the binary executable, whereas decompilation is the process of generating higher-level pseudo-code from the instructions based on common patterns and heuristics.

Binary analysis is a difficult task because once a program is compiled, most of the information contained in its source code is lost [41]. Variables, data structures, functions, and comments are removed, because the compiler’s task is to make the program as efficient as possible—which often means removing as much as possible. The optimizers within the compiler only have a single rule: They must not make changes to the observable behavior of the program (often referred to as the “as-if rule” [26]). As a result, compilers can remove, reorder, and inline significant parts of the code, making it difficult to understand the code’s behavior. Even worse, adversarial programs such as malware or digital rights management software make use of obfuscation techniques to resist having their code reverse engineered.

BCSD is the task of determining whether two fragments of binary code perform similar actions. These fragments are usually first disassembled and are then compared for similarity. In practice, similarity detection is performed with one known fragment (either because it was analyzed before or because its source code is known), and one unknown fragment. Known code fragments are typically collected in a database which is queried against for clone search. If the unknown piece of code is deemed highly similar to the known one, the analysis task becomes significantly simpler and duplicate work is minimized. For example, if a vulnerability in a widely used open-source component is found, BCSD can be used to quickly assess if a binary contains the vulnerable code fragment. It can also be used for plagiarism detection, which could take the form of license or patent infringement, for software and malware classification [42], or for security patch analysis [55].

2.1 General BCSD Pipeline

BCSD is typically organized as a multi-stage pipeline:

1. **Disassembly.** The binary executable is first disassembled into assembly code, using tools such as IDA Pro or Ghidra. In some cases, this step is extended with decompilation to recover higher-level pseudo-code.
2. **Preprocessing.** Many approaches transform the raw disassembly into an intermediate representation (IR), CFG, or apply normalization steps (e.g., operand abstraction or instruction reordering). These transformations aim to reduce syntactic variance caused by compilers or obfuscators.
3. **Vectorization.** Each assembly function is mapped to a feature vector $\Phi(f)$ that captures its semantics. Different approaches instantiate Φ in different ways: earlier

```

; x86-64 00
push rbp
mov rbp, rsp
sub rsp, 8
mov [rbp+var_8], rdi
mov rax, [rbp+var_8]
mov rdi, rax
call sub_42b49a
mov rax, [rbp+var_8]
mov dword ptr [rax+50h], 0
mov rax, [rbp+var_8]
mov dword ptr [rax+58h], 0
mov rax, [rbp+var_8]
mov edx, [rax+58h]
mov rax, [rbp+var_8]
mov [rax+54h], edx

; x86-64 03
movdqa xmm0, cs:xmmword_448750
mov dword ptr [rdi+50h], 0
mov dword ptr [rdi+58h], 0
movups xmmword ptr [rdi], xmm0
mov dword ptr [rdi+54h], 0

; MIPS 00
addiu $sp, -0x20
sw $ra, 0x18+var_s4($sp)
sw $fp, 0x18+var_s0($sp)
move $fp, $sp
sw $a0, 0x18+arg_0($fp)
lw $v0, 0x18+arg_0($fp)
move $a0, $v0
jal sub_43D930
nop
lw $v0, 0x18+arg_0($fp)
sw $zero, 0x50($v0)
lw $v0, 0x18+arg_0($fp)
sw $zero, 0x58($v0)
lw $v0, 0x18+arg_0($fp)
lw $v1, 0x58($v0)
lw $v0, 0x18+arg_0($fp)
sw $v1, 0x54($v0)
nop
move $sp, $fp
lw $ra, 0x18+var_s4($sp)
lw $fp, 0x18+var_s0($sp)
addiu $sp, 0x20
jr $ra

```

Figure 2: Exemple MD5Init function compiled under different architectures and optimization levels. BCSD methods aim at identifying them as clones.

systems relied on manually engineered features, whereas recent work uses deep neural embeddings.

4. **Indexing and Search.** Known functions are stored in a database of feature vectors. Given a query function f_q , its vector $\Phi(f_q)$ is compared against the database (e.g., via cosine similarity or nearest-neighbor search) to identify similar code fragments.

This structured pipeline provides a practical way to organize large-scale clone search. However, challenges in binary analysis are amplified in BCSD, since two code fragments that look very different syntactically can still share the same observable behavior.

2.2 The Vectorization Problem

The central challenge in BCSD lies in the *vectorization step*. Given a function f represented as a sequence of assembly instructions, the goal is to define a mapping

$$\Phi : f \mapsto \mathbf{v} \in \mathbb{R}^d$$

that produces a vector $\mathbf{v}$ which preserves the semantics of f . In other words, two functions f_1 and f_2 that are semantically equivalent (e.g., compiled with different compilers, optimization levels, or instruction sets) should be mapped to vectors that are closer in the embedding space than unrelated functions:

$$f_1 \equiv f_2 \Rightarrow \begin{aligned} &\text{sim}(\Phi(f_1), \Phi(f_2)) > \text{sim}(\Phi(f_1), \Phi(f_3)), \\ &\forall f_3 \not\equiv f_1 \end{aligned}$$

Here, $\text{sim}(\cdot, \cdot)$ denotes a similarity measure such as cosine similarity. In practice, BCSD systems rarely evaluate based on absolute thresholds, but rather by the ranking quality of known matches (e.g., top- k accuracy or mean average precision). This requirement makes vectorization the key bottleneck in BCSD:

- **Feature design.** Early approaches used manually engineered heuristics (e.g., opcode histograms or CFG metrics), which were interpretable but too simplistic to robustly capture semantics.
- **Learning-based embeddings.** Here, an *embedding* refers to a fixed-length vector representation of a function, typically produced by a neural network, that places semantically similar functions close together in the vector space. Recent work uses neural networks to learn Φ , producing high-dimensional embeddings that yield better accuracy. However, these embeddings are opaque, tightly coupled to the training data, and computationally expensive to use at scale.

Thus, the vectorization problem is not only about finding a function-to-vector mapping, but also about balancing interpretability, generalization, and efficiency.

2.3 Limitations of Embedding Vectorization

In the introduction, we highlighted three central limitations (L1–L3) of embedding-based approaches. We now elaborate on these challenges, as they frame the design space for our method.

L1: Lack of Interpretability. The feature vectors produced by deep learning models are high-dimensional and opaque. When two fragments are judged to be similar, the embedding offers no explanation of what instructions, structures, or semantic properties led to that conclusion. This makes it difficult for analysts to validate results or to trust the system in high-stakes settings such as vulnerability detection. In contrast, traditional heuristic-based BCSD methods generated explicit features such as opcode sequences or control-flow structures, which—while less powerful—at least provided human-understandable reasoning. The black-box nature of embeddings therefore limits their usefulness in workflows where analyst oversight is essential.

L2: Scalability of Nearest-Neighbor Search. In production-scale environments, BCSD databases may contain millions of disassembled functions. Each query requires finding the most similar embeddings among these millions of candidates. A naïve search compares the query vector to every database vector, resulting in linear time complexity that becomes prohibitively expensive at scale. To address this, approximate nearest-neighbor (ANN) algorithms are commonly used, which index vectors in specialized data structures (e.g., graphs, trees, or hashing schemes) to accelerate search. However, ANN introduces approximation errors: the true nearest neighbor may be missed, or spurious neighbors may be returned, leading to degraded accuracy. Thus, practitioners face a fundamental trade-off between search efficiency and similarity accuracy.

L3: Limited Generalization. Existing embedding-based BCSD models are trained on specific corpora of binaries,

	Feature explanations
1 { "in_param_cnt": 1,	
2 "in_param_types": ["Ptr"],	"in_param_types" — function expects a pointer input parameter.
3 - "ret_type": "None",	
4 + "ret_type": "Integer",	"loop" — whether explicit looping constructs are present (here: none).
5 "dominant_operation_categories": [	"subcall_targets" — number of distinct callees invoked (here: 2).
6 "ConditionalBranching",	
7 "SubroutineCall"	
8],	
9 "loop": false,	
10 "subcall_targets": 2,	
11 "indexed_addr": false,	"indexed_addr" — use of indexed/array-style addressing (false = absent).
12 "int_consts": [	
13 - "0x39"	
14 + "0x39", "0x4"	
15],	
16 "float_consts": [],	"imm_values_cnt" — number of unique immediate constants in code.
17 "imm_values_cnt": 3,	
18 "mutates_inputs": false,	"mutates_globals" — whether the function writes to global state (false).
19 "mutates_globals": false,	
20 "mem_alloc": false,	
21 "io_ops": false,	
22 "block_mem_ops": false,	
23 "interrupts_syscalls": 0,	
24 - "inferred_algo": "Undetermined",	"inferred_algo" — high-level role inferred; here = initialization.
25 + "inferred_algo": "Initialization",	
26 ...}	

Figure 3: Comparison of the simplified example sha384_init assembly function for ARM (red) and x86-64 (green); identical values in black. Right-hand panel explains several less obvious features. The specific set of features shown is function-dependent and generated by the language model.

often covering only a narrow range of architectures, compilers, and optimization settings. In practice however, reverse engineers must analyze binaries compiled under diverse conditions, often with toolchains and optimization heuristics unseen during training. As a result, these models exhibit poor cross-domain generalization. By contrast, human reverse engineers are able to recognize equivalence between functions across compilers or platforms because they rely on general knowledge of instruction semantics and common code generation patterns. Embedding-based methods lack this higher-level reasoning, and thus fail to transfer their knowledge effectively when faced with out-of-distribution inputs.

Taken together, these limitations motivate a different design point: a method that leverages broad reverse engineering knowledge (mitigating L3), produces human-interpretable features (addressing L1), and avoids reliance on approximate vector search (reducing L2). Our approach, based on LLM feature extraction, is explicitly constructed around these principles.

2.4 LLM-Based Feature Extraction

Our design is guided directly by the limitations of embedding-based BCSD identified in the previous section. We aim to replace opaque, training-dependent vector embeddings with structured, human-interpretable features that can be generated from arbitrary assembly code. This choice is motivated by three design principles:

- **Interpretability (addresses L1).** Our method extracts explicit features—such as input/output types, control structures, side effects, and notable constants—that analysts can

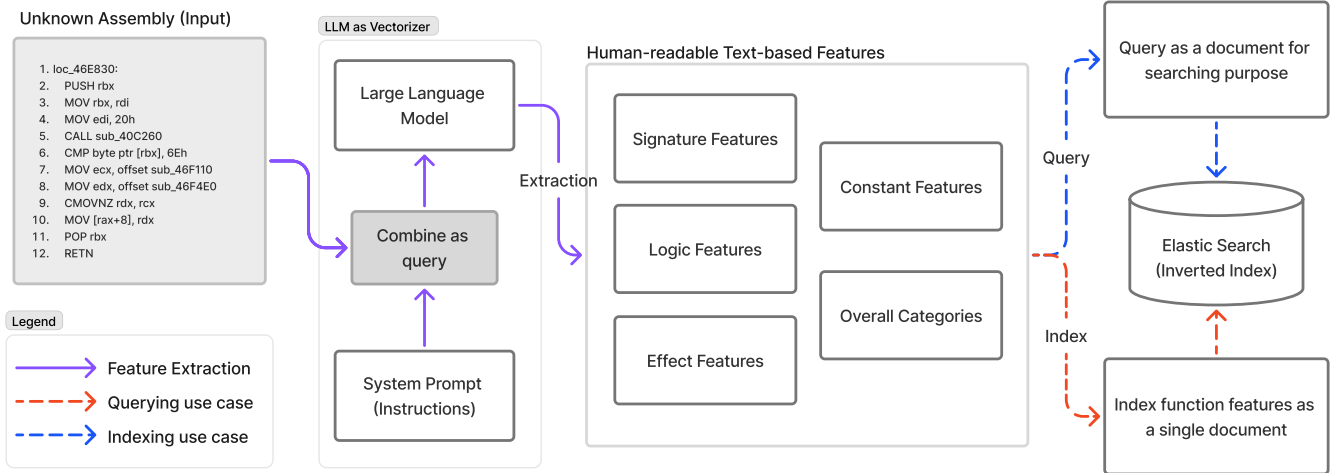


Figure 4: Workflow of our method in both the indexing and searching use cases.

directly inspect. When a similarity match is reported, the underlying reasoning can be understood and verified by a human, something impossible with black-box embeddings. See the simplified example in Figure 3, which illustrates how interpretable features can be directly compared.

- **Scalability (addresses L2).** Because features are textual and structured, they can be stored and queried using inverted indexes or relational databases. This eliminates the need for approximate nearest-neighbor search in high-dimensional spaces, removing the trade-off between efficiency and accuracy.
- **Generalization (addresses L3).** Instead of training models on narrow corpora of binaries, we leverage large language models that are pretrained on broad, diverse data. These models encode general knowledge of program structure and algorithmic behavior, which transfers across architectures, compilers, and optimization settings.

These designs define a different point in the BCSD design space: instead of embedding functions into opaque vectors, we treat the LLM as a semantic feature extractor, producing generalizable, interpretable, and scalable representation.

Figure 4 illustrates our workflow. Given the raw assembly code of a function, the LLM produces a JSON object containing human-readable attributes such as type signatures, control-flow indicators, constants, side effects, and overall functional categories. Each function is thus represented as a lightweight document rather than a dense vector. These documents are stored in a database that can be indexed using inverted indexes or relational queries, enabling efficient and exact similarity search at scale.

At query time, the process is identical: the unknown function is analyzed by the LLM, its features are generated in the same format, and similarity is computed over the textual database. This workflow eliminates approximate nearest-neighbor search and allows analysts to directly inspect the reasons behind a reported match using simple diffing on fea-

tures.

2.5 Feature Extraction via Prompting

The core of our approach is a structured prompt that instructs the LLM to act as a reverse engineering assistant and to output its analysis as a JSON object. Unlike prior methods, our pipeline does not require preprocessing: raw assembly code is fed directly into the model, which produces a structured set of semantic features. The full prompt is available as part of the published artifacts [3].

Framing and Conditioning: We use a system prompt that defines the task, the expected format, and the role of the LLM. This preamble ensures consistency and constrains the model output. An excerpt is shown below:

You are an expert assembly code analyst, specializing in high-level semantic description and feature extraction for comparative analysis. Your goal is to analyze an assembly function from an unspecified architecture and compiler and provide its extracted high-level features, formatted as a JSON object. For the provided assembly routine, extract the following features and infer the algorithm. Your output **MUST** be a JSON object conforming to the structure defined by these features.

Type Signature: The type signature is the foundation of understanding a function’s interface: how many conceptual inputs it takes, whether they are raw integers or pointers to memory regions, and what kind of return value is produced. This mirrors what reverse engineers attempt manually when labeling functions in tools such as IDA or Ghidra.

Because compiler transformations and source-level variants may alter the calling convention (e.g., passing values

through registers, folding constants, or introducing hidden parameters), we define these as *effective parameters*: the distinct conceptual inputs that the function’s logic depends on, rather than the literal register or stack arguments. This abstraction helps align variants of the same routine that may differ syntactically but share the same semantics. The LLM is instructed to output the following fields:

- *Input Parameter Count (Integer)*: The number of effective conceptual inputs used by the function. This can be inferred by observing how values are consumed (e.g., registers initialized at entry, stack offsets consistently read from, or constants passed into subroutines). The goal is not ABI-level accuracy but a stable abstraction across compiler and optimization variants.
- *Input Parameter Types (Array of Strings)*: Each inferred input is labeled as either *Integer* (used in arithmetic, comparisons, or scalar logic) or *Pointer* (dereferenced or used as an address). Ambiguous cases (e.g., integers occasionally cast to addresses) are resolved by majority usage within the function body. We observed that inferring more information than these two primitive types has shown to be too complicated for current LLMs.
- *Return Value Type (String)*: The abstract type of the returned value, if any. This is usually inferred from the value placed in the conventional return register (e.g., *EAX/RAX*) or stack slot before a *RET*. If no consistent return is found, the type is set to *None*.

Logic and Operations: While the type signature describes the function’s interface, its internal logic reveals how it behaves algorithmically. For reverse engineers, identifying loops, dispatch tables, or the prevalence of arithmetic versus memory operations is often the fastest way to infer purpose. Because compiler optimizations alter instruction order, we capture these features at the level of semantic patterns rather than raw mnemonics. The LLM is instructed to output the following fields:

- *Loop Indicators (Boolean)*: True if the function contains backward branches (conditional jumps targeting earlier instructions) or explicit loop constructs, which imply iterative structure. False otherwise.
- *Jump Table Indicators (Boolean)*: True if the function implements control transfer via jump tables, inferred from indirect jumps based on computed indices or long sequences of compare-and-jump instructions.
- *Use of Indexed Addressing Modes (Boolean)*: True if the function accesses memory via complex addressing forms such as $[\text{base} + \text{index} * \text{scale} + \text{offset}]$. This usually indicates array traversals, buffer processing, or structured data access.
- *Presence of SIMD Instructions (Boolean)*: True if the function employs Single Instruction, Multiple Data (SIMD) instructions or wide registers. This often signals numerical routines, multimedia processing, or cryptographic kernels.

- *Number of Distinct Subroutine Call Targets (Integer)*: The number of unique functions invoked. A high value suggests orchestration routines, whereas a value of zero marks leaf utility functions. Inline calls eliminated by the compiler are not counted.
- *Dominant Operation Categories (Array of Strings)*: A coarse-grained classification of the function’s logic, chosen from: arithmetic, bitwise, data movement, conditional branching, subroutine call, or memory access. This mirrors how reverse engineers mentally classify functions — for example, a hashing routine may combine bitwise and arithmetic, while a dispatcher may emphasize control flow.

Notable Constants: Constants embedded in a function often serve as signatures of higher-level algorithms. Cryptographic routines can be identified by well-known primes, irreducible polynomials, or fixed S-box values; file format parsers by magic numbers at fixed offsets; and network code by protocol constants or port numbers. For reverse engineers, spotting such values is often the quickest way to narrow down a function’s purpose.

Earlier approaches typically relied on regular expressions or literal extraction to gather constants from assembly. This produced large sets dominated by trivial values (loop counters, stack offsets, small increments), requiring manual filtering to isolate the meaningful ones. By contrast, a language model can act more like an experienced analyst: it not only identifies constants but also distinguishes trivial from informative values, and normalizes them into a consistent representation. This enables database-level comparison without ad hoc filtering. The language model is instructed to extract:

- *Presence of Notable Integer Constants (Array of Hexadecimal Strings)*: A list of up to 15 unique integer literals represented in hexadecimal form. Trivial values such as 0, 1, -1, or common stack adjustments excluded, while unusual or patterned constants (e.g., 0x04C11DB7, 0xDEADBEEF) are preserved.
- *Count of Distinct Immediate Values (Integer)*: The total number of unique literal values used in the function. This provides a quantitative measure of how “constant-heavy” the routine is, helping to separate lightweight utilities from structured parsers or cryptographic kernels.
- *String Literal Presence (Boolean)*: True if identifiable string literals are referenced or manipulated within the function, such as error messages, protocol headers, or format strings. False otherwise. This feature often highlights I/O or interface code.

Side Effects: Beyond inputs and outputs, many functions affect the surrounding program state. These effects are especially important for reverse engineers, since they help distinguish pure computational routines from those that interact with memory, I/O, or the operating system. Traditional static

analysis often struggles here: heuristics based on raw instruction matching (e.g., scanning for `INT` or `SYSCALL`) can detect obvious system calls, but fail to capture subtler patterns such as input-pointer modification or implicit error handling. An LLM, by contrast, can integrate contextual cues to decide whether a write operation is best interpreted as modifying a parameter, updating global state, or performing memory allocation. The language model is instructed to extract:

- *Modifies Input Parameters (Boolean)*: True if writes target memory derived from input arguments, such as dereferenced pointers passed into the function. False if inputs are only read or used in calculations.
- *Modifies Global State (Boolean)*: True if writes occur to fixed or absolute memory addresses, or via pointers likely originating from global data segments. False otherwise. This captures stateful routines that affect program-wide variables.
- *Memory Allocation or Deallocation (Boolean)*: True if the function follows patterns of dynamic memory management, such as calls returning usable pointers or frees. Heuristics include detecting arguments consistent with sizes, followed by pointer-based writes.
- *I/O Operations (Boolean)*: True if the function appears to perform input/output, such as passing string literals or buffers to read/write calls. False otherwise. This feature often distinguishes utility code from user-facing or system-interfacing routines.
- *Block Memory Operations (Boolean)*: True if patterns of copying or setting large memory blocks are observed, either through loops with indexed accesses or calls to known block operations such as `memcpy`. False otherwise.
- *Error Handling (Boolean)*: True if extensive conditional checks occur after subroutine calls, especially comparisons against error codes, followed by logging or cleanup routines. False otherwise.
- *Number of System Calls or Software Interrupts (Integer)*: The total number of instructions that directly invoke kernel-mode transitions (e.g., `INT`, `SYSCALL`, `SVC`). This provides a direct measure of OS interaction.

Categorization: While individual features describe specific aspects of a function, reverse engineers also seek a concise, high-level label that captures the routine’s overall purpose. Such categorization helps analysts prioritize what to study, and it provides an immediate explanation for why two functions might be considered similar. Earlier BCSD approaches rarely attempted categorization, since heuristics were too brittle and embeddings too opaque. With an LLM, however, it is feasible to synthesize a judgment based on the combination of signature, operations, constants, and side effects, much like a human analyst would. The language model is instructed to extract:

- *Inferred Category (String)*: A high-level label summarizing the function’s purpose, chosen from categories such as: sys-

tem/OS interaction, memory management, data processing or transformation, control-flow or dispatch, initialization, error handling, utility/helper, cryptographic or hashing, interfacing/wrapper, or undetermined. The LLM bases this decision on the complete set of extracted features, prioritizing consistency and interpretability.

2.6 Generation Robustness

We adopt several techniques to ensure that the output generated by the LLM is valid JSON and maximally relevant. Because LLMs are stochastic generators rather than deterministic parsers, robustness is critical for reliable use at scale.

Model performance and scaling. It is well known that model size is a dominant factor in language model quality [28]. In our early experiments, smaller local models (e.g., 0.5B parameters) sometimes produced nonsensical output, such as repeating the same line until the context was exhausted, or emitting malformed JSON. Larger models rarely exhibited such issues, but we designed our pipeline to be robust even under weaker conditions.

Retry on failure. To handle invalid JSON, we implement a retry loop: if parsing fails, the same query is repeated with a slightly higher sampling temperature. This discourages deterministic repetition of invalid output. In practice, a maximum of three retries was sufficient, and over 95% of responses from the smallest evaluated model were valid on the first attempt.

Few-shot prompting. We stabilize the model’s behavior using few-shot prompting [7], where several assembly functions with handcrafted feature analyses are included in the prompt. In our evaluations, three examples shown to be sufficient: adding more yielded no substantial improvement, while using only one still produced reasonable results. The examples are deliberately diverse in size, architecture, and logic to reflect the range of our test data. They can be found in our code repository [3].

Schema independence. Commercial LLMs increasingly support schema-enforced decoding (e.g., JSON mode). For fairness, we did not use these vendor-specific features, ensuring that results are directly comparable to open-source local models that lack such capabilities. Our robustness instead derives purely from prompt design and the retry mechanism.

2.7 Similarity Computation and Extensibility

Unlike embeddings, which require vector distances and approximate nearest-neighbor search, our structured representation enables direct set-based comparison. Each JSON output is flattened into field-value pairs, and similarity is computed using Jaccard overlap. This can be implemented efficiently with inverted-index search engines such as Elasticsearch or Lucene, allowing clone retrieval to scale without custom ANN infrastructure. The schema-based design also provides extensibility: new features can be added incrementally (with

Library	Function count	Median function length	Description
BusyBox	66,706	32	A fairly complete Unix utility set for any small or embedded system.
GNU coreutils	42,545	31	The basic utilities of the GNU operating system.
curl	27,198	14	Command line tool to transfer data with URLs.
ImageMagick	69,873	55	Software suite used for editing and manipulating digital images.
OpenSSL	134,359	29	Toolkit for general-purpose cryptography and secure communication.
PuTTY	12,655	26	An implementation of SSH and Telnet for Windows and Unix platforms.
SQLite	30,322	40	A small SQL database engine.

Table 1: Detailed statistics of the dataset: function counts, median function lengths, and descriptions of the selected software libraries.

defaults or derived values) without retraining models or re-generating the database. This makes the system both scalable and maintainable over time.

3 Experiments

The evaluation is structured to progressively validate different aspects of our approach. We begin by benchmarking a range of candidate LLMs to identify which are most suitable for feature extraction in BCSD. Next, we compare our method directly against state-of-the-art machine learning approaches, measuring cross-optimization and cross-architecture performance on our dataset. To better understand where our method’s strengths come from, we then conduct ablation studies, examining the role of model size, the number of few-shot examples, and the contribution of different prompt sections. Finally, we test composability: showing that our interpretable features can be combined with generic embedding models, and that this hybrid design yields results that significantly surpass existing methods. All experiments are run on a server equipped with 8 Intel Xeon Gold 5218 CPU cores, 100 GB of RAM, and four NVIDIA Quadro RTX 6000 GPUs with 24 GB of RAM each.

Dataset: The dataset is made of a varied set of executables, so as to be representative of the diversity found in real world software. It is composed of seven open source binaries: BusyBox [51], GNU coreutils [13], curl [44], ImageMagick [10], OpenSSL [9], PuTTY [46], and SQLite [24]. All have permissive licenses that allow their use in our evaluations. All executables were compiled with `gcc` for the following architectures: `x86-64` (also known as `AMD64`), `ARM`, `MIPS`, and `PowerPC`. For each architecture, binaries were generated for all optimization levels (00 to 03) and stripped of debug symbols. The compiled binaries were disassembled using IDA Pro [23] and separated into individual functions, yielding a total of 383,658 assembly functions. Functions consisting of less than three instructions were not included as part of the dataset, because of their insignificance.

Pairs of equivalent functions compiled for the same platform but with different optimization levels were made for cross optimization evaluation. Pairs compiled with the same optimization level but for different platforms were also gener-

ated for cross platform evaluation. For example, in Figure 2, the variants of `MD5Init` compiled with `-O0` (top-left) and `-O3` (bottom-left) for `x86-64` form a pair for cross optimization retrieval, whereas the variants compiled with `-O0` for `x86-64` (top-left) and `MIPS` (right) form a pair for cross platform retrieval.

Evaluation method: The mean reciprocal rank (MRR) and first position recall (Recall@1) metrics are used for evaluation and for comparison to other methods [14, 22, 36, 52, 53], following the setup in prior work. Specifically, a pool of assembly function pairs is used, where both assembly fragments in a pair come from the same source function. For each pair, we compare the generated features for the first element against all second elements of the pairs contained in the pool.

For example, consider a pool of ten pairs (a_i, b_i) for $i \in [1, 10]$, where a_i is compiled for the `ARM` architecture with optimization level 3, and b_i is compiled for the `MIPS` architecture with the same optimization level. The feature set generated for function a_1 is compared for similarity with the features of each b_i for $i \in [1, 10]$. A ranking is generated by ordering these comparisons from most to least similar. For a given pair (a_1, b_1) , Recall@1 is successful if b_1 is the most similar function to a_1 . The reciprocal rank is defined as $1/\text{rank}(b_1)$, and the MRR metric is obtained by averaging this value across all pairs. Recall@1 is computed as the fraction of successful recalls over the total number of pairs.

3.1 Pilot Testing for LLM Selection

Before evaluating our method against the baselines with full dataset, we compare different LLMs available in small scale to select our backbones for the remaining experiments, given the potentially high computational cost. For the local model, three options are considered: Qwen2.5 Coder [25] with sizes 0.5B, 1.5B, 3B, and 7B; Gemma 3 [48] with sizes 1B and 4B; and Qwen3 4B [49]. We preselected these models because they are open source, small enough to fit in most modern GPUs when quantized, and small enough to fit within our GPU with 24 GB of VRAM unquantized. We did not consider mixture-of-experts models, because they are much larger and the specificity of our workload is likely to result in only a subset of experts being heavily used. We selected a small set of tasks that are representative of the extensive experiments

Model	00-03	02-03	ARM-x86-64
Qwen2.5 Coder 7B	0.558	0.725	0.498
Qwen3 4B	0.550	0.850	0.564
Gemma 3 4B	0.571	0.839	0.594

Table 2: MRR results of the selected evaluations for local model selection, using a pool size of 100.

conducted against the baselines. There are two cross optimization evaluations and one cross architecture evaluation.

In all experiments on local models, the input context size is limited to 4,096 tokens and the maximum output tokens to generate is set to 512. Very large assembly functions that do not fit within the input tokens are truncated. The more recent Qwen3 and Gemma 3 models perform better for their size than Qwen2.5 Coder. They match or surpass it in most metrics while being around 40% smaller. The three models perform inference in a similar time frame. On one of our GPUs, Qwen2.5 7B takes 10 seconds on average to generate an analysis for one assembly function. For smaller models such as Qwen2.5 0.5B and 1.5B, inference is faster since multiple queries can be batched on the same GPU (because of lower memory consumption). We selected Qwen2.5 Coder for the remaining experiments because it provides many smaller size configurations for our ablation study, and is more stable than the newer Gemma 3 and Qwen3 models.

For the commercial model, we preselected GPT 4.1 Mini [38] and Gemini 2.5 Flash [47]. These were chosen mainly because of their low cost and availability. The same subset of evaluations as for local models is performed to determine the model to use for the remaining evaluations.

To provide a similar environment to local models, functions are truncated to a maximum length of 128 instructions. We selected Gemini 2.5 Flash because it performs best and offers a better infrastructure. Compared to GPT 4.1 Mini’s 10 seconds latency per request, Gemini is almost able to handle a request every second, making it easier to iterate on our evaluations.

3.2 Cross-Optimization Evaluation

This experiment benchmarks the capability of the baselines and our method for the detection of similar code fragments across different optimization levels. There are five baselines, presented in the same order as in Table 4.

- *Order Matters* [56] combines BERT [12] with control flow graph embeddings, producing function-level representations via a multi-layer perceptron. It supports cross-optimization and cross-architecture retrieval, though training was limited to x86-64 and ARM.
- *SAFE* [36] encodes instructions with word2vec [37] and aggregates them using a self-attentive network [32]. Like other pre-trained models, it supports cross-architecture similarity but was only trained on x86-64 and ARM.

Model	00-03	02-03	ARM-x86-64
Gemini 2.5 Flash	0.674	0.865	0.766
GPT 4.1 Mini	0.662	0.811	0.755

Table 3: MRR results of the selected evaluations for commercial model selection, using a pool size of 100.

- *Asm2Vec* [14], an early NLP-based approach, samples instruction sequences from CFG traversals and applies PVD [29] to embed functions. It inspired later models such as SAFE.
- *PalmTree* [31], a BERT-based model, tokenizes instructions and is trained on masked language modeling, context prediction, and def-use prediction. It supports cross-optimization and cross-architecture tasks, though the reference implementation targets compiler-level similarity.
- *CLAP* [52] builds on RoBERTa [33], directly embedding functions and supporting text-assembly alignment for classification. It was trained on x86-64/gcc, but generalizes to other settings.

Results. We present the results of the baselines and our method evaluated on both the largest local model, Qwen2.5-Coder 7B, and the commercially deployed model, Gemini 2.5 Flash. As evident in Table 5, the hardest retrieval task is between optimization levels 0 and 3, highlighting the substantial difference between unoptimized and maximally optimized code (see also Figure 2). At optimization level 0, functions perform a lot of unnecessary actions, such as extensively moving data between registers and performing conditional evaluation of expressions that return a constant value. The generated code is mostly left untouched by the optimizer. At optimization level 3, the compiler will inline simple functions into the body of the caller, meaning that jumps and calls to other places in the binary are replaced by the destination’s instructions. Some loops are unrolled, so that each iteration of the loop is laid out sequentially instead of performing a conditional check and a jump to the loop’s initial instruction. Also, instructions can be heavily reordered to achieve best performance for the targeted hardware, while keeping the observable behavior of the program untouched.

For the most part, the baselines perform worse than expected on the evaluations. As our own dataset is used rather than the one each baseline is pre-trained on, we believe overfitting to be the cause of this poor performance, as also observed by Marcelli et al. [35]. Compared to the baselines, one of our method’s advantage is that it requires no specific training other than the general pre-training process performed by the model developers. As such, our method is less likely to overfit the dataset. This is seen through our its stability in Table 5: our method consistently performs well, compared to some of the baselines that perform excellently on some tasks, but poorly on others.

Model	MRR				Recall @ 1			
	ARM-x86-64	PowerPC-x86-64	MIPS-x86-64	average	ARM-x86-64	PowerPC-x86-64	MIPS-x86-64	average
Order Matters	0.007	0.007	0.007	0.007	0.002	0.000	0.001	0.001
SAFE	0.239	0.187	0.196	0.207	0.081	0.059	0.064	0.068
PalmTree	0.037	0.036	0.018	0.030	0.031	0.013	0.007	0.017
Asm2Vec	0.242	0.293	0.417	0.317	0.085	0.113	0.231	0.143
CLAP	0.416	0.523	0.494	0.478	0.334	0.443	0.415	0.397
Qwen 2.5 7B	0.263	0.201	0.202	0.222	0.165	0.108	0.110	0.128
Gemini 2.5 Flash	0.548	0.520	0.525	0.531	0.436	0.414	0.417	0.422

Table 4: Evaluation of the baselines and our method on cross architecture retrieval with a pool size of 1,000. All functions are compiled with optimization level 2 using `gcc` for the architectures specified in each column. Three examples are provided with our prompt.

3.3 Cross-Architecture Evaluation

Different CPU architectures have varying assembly code languages. It is hard for BCSD methods that analyze assembly code to support multiple architectures. These methods need to accurately represent two functions with completely different syntaxes but with identical semantics as being very similar in terms of their feature set or embedding. Hence, methods that use CFG analysis have a better chance at supporting many architectures, since the structure of the CFG itself is architecture agnostic. However, the basic blocks that constitute this graph are still in assembly code, which does not fully resolve the issue. Furthermore, there exists many different variants of each instruction set, because each new version of an architecture brings new instructions to understand and support. With deep learning methods, this requires training or fine-tuning the model to understand a new language variant every time. Afterwards, all embeddings in a BCSD database need to be regenerated. Our method does not directly address this issue, but brings a significant improvement. It indirectly benefits from the vast amount of data used to train foundational LLMs. Since a LLM has extensively seen all of the mainstream CPU architectures and their dialects in its training data, it is able to grasp their meaning and extract features from them. Also, if the model in use seems to poorly comprehend a specific architecture, it can be replaced with one that better performs the specific platform without invalidating the BCSD database. As seen in Table 4, our method slightly surpasses the baselines, but there is still room for improvement.

3.4 Ablation Testing on LLM Size

In this experiment, we vary the language model size to determine the correlation between the number of parameters in the LLM and the performance of our method on BCSD retrieval. Our results generally follow the scaling laws for neural language models [28], in that increasing the model size does significantly improve the results generated.

From our observations, LLMs with less than 3B parameters

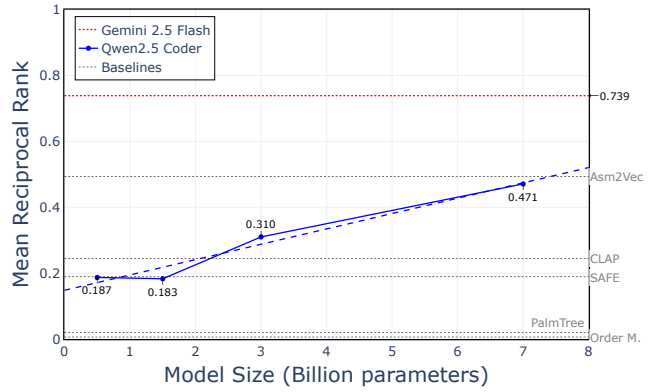


Figure 5: MRR for cross-optimization retrieval versus LLM parameters. All functions are compiled for ARM, with retrieval between O0–O1 using a pool of 1,000 functions. Prompts include three few-shot examples.

do not seem to comprehend the analysis task when they are not provided with any examples. When provided with examples, these small models will mimic the examples provided without basing the output on the assembly function in the query. In Figure 5, we observe a form of sub-linear increase in performance with respect to model size. The Gemini 2.5 Flash model architecture is not disclosed at the time of writing, but we can expect the model to have at least an order of magnitude more parameters than Qwen2.5 Code 7B, and may use a mixture-of-experts architecture, based on previous Gemini model architectures.

3.5 Ablation Testing on Few-Shot Examples

By providing hand crafted examples to the large language model, we are able to increase the performance of assembly function analysis. This follows the general observations behind few shot prompting [7]. Providing a single example significantly increases the retrieval scores, but providing more than one provides very limited increase in scores. Interestingly, a smaller model such as Qwen2.5 Coder 7B still sees

Model	MRR						Recall @ 1					
	00-01	00-02	00-03	01-03	02-03	average	00-01	00-02	00-03	01-03	02-03	average
Order Matters	0.006	0.008	0.006	0.006	0.006	0.006	0.001	0.002	0.001	0.000	0.001	0.001
SAFE	0.189	0.200	0.189	0.218	0.171	0.193	0.059	0.063	0.057	0.068	0.051	0.060
PalmTree	0.020	0.019	0.230	0.314	0.878	0.292	0.006	0.007	0.080	0.184	0.676	0.191
Asm2Vec	0.494	0.460	0.444	0.535	0.563	0.499	0.290	0.252	0.234	0.343	0.376	0.299
CLAP	0.244	0.221	0.214	0.550	0.781	0.402	0.187	0.176	0.168	0.455	0.707	0.339
Qwen 2.5 7B	0.471	0.412	0.343	0.456	0.608	0.458	0.342	0.301	0.234	0.345	0.488	0.342
Gemini 2.5 Flash	0.739	0.672	0.568	0.700	0.816	0.699	0.646	0.579	0.485	0.618	0.758	0.617

Table 5: Evaluation of the baselines and our method on cross optimization retrieval with a pool size of 1,000. All functions are compiled for the ARM architecture using gcc with the optimization levels specified for each column. Three examples are provided with our prompt.

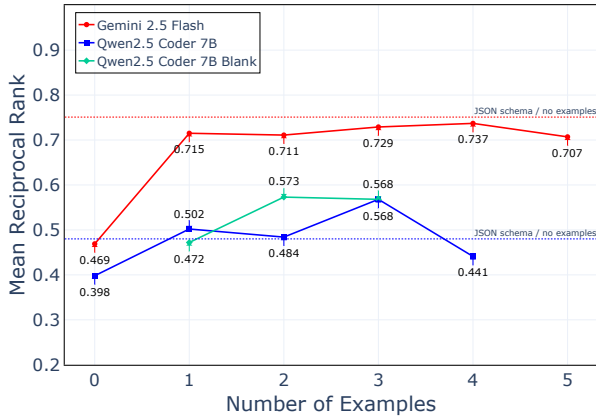


Figure 6: MRR for cross-optimization retrieval versus prompt examples. Functions are compiled for x86-64, using a pool of 100 functions. Retrieval is between 00-03 for Gemini 2.5 Flash and 00-01 for Qwen2.5 Coder 7B.

marginal increase in MRR scores as the number of examples increases up to three. Another observation is the number of invalid JSON outputs generated by the local model. When no examples are provided, approximately 3% of queries generate an invalid output. With at least one example, or with a JSON schema, no invalid outputs are generated.

Another interesting result is the fact that when providing enough examples, the system prompt has very little impact on the retrieval scores. This is depicted by the green data points in Figure 6, where only examples are provided with an empty string as the system prompt. This suggests that the examples themselves contain enough information for the model to perform the analysis, without being explained exactly how.

With our experimental configuration, providing four examples to Qwen2.5 Coder 7B significantly decreases its MRR scores. That is because the examples almost completely use the context window that we provide to the language model. As such, most assembly functions are too large to fit in the remaining tokens and are thus truncated, which loses infor-

mation about our query.

The red dotted line in Figure 6 represents the MRR score obtained by providing no examples to Gemini 2.5 Flash, but providing a reference JSON schema for the model to follow using the built-in capabilities of the API. The scores being very similar shows that Gemini does not base itself on the provided examples, but only uses them to understand the JSON schema required. In all our other evaluations, we provide examples instead of a JSON schema because local models do not have the capability of generating output based on a schema built-in. The blue dotted line in Figure 6 simulates this behavior for Qwen2.5 Coder 7B by providing the schema within the system prompt. This does not match the results achieved with JSON-enforced token decoding, but almost matches the results obtained when a single example is provided.

3.6 Ablation on Prompt Features

To verify that each section of our prompt brings meaningful insight into the assembly function analysis task, we perform an ablation study by removing one section of the prompt while keeping others intact. We notice that all individual sections bring a positive outcome to the overall results, but some sections of the prompt have a larger impact than others. In particular, the categorization and notable constants sections have the most impact on cross optimization retrieval. The categorization section causes an increase of almost 0.30 on the MRR metric, when evaluated on the the hardest cross optimization task. The notable constants sections brings an increase of almost 0.20 on the MRR for the same task. This result is justified by the comparatively large range of accepted values for both features. For example, the list of notable constants has many more possible values and thus has more variability in the output compared to a set of booleans, such as those in the side effects prompt section.

The story is slightly different when this ablation study is performed for cross architecture retrieval. As seen on Figure 7, there is a smaller difference between the least and most

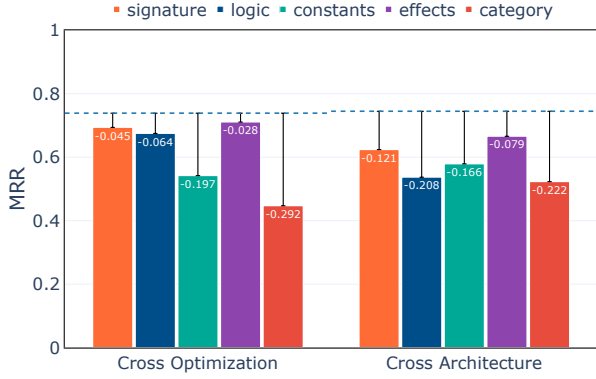


Figure 7: MRR with one prompt section removed using Gemini 2.5 Flash. Cross-optimization retrieval is between O0–O3 on x86–64, and cross-architecture retrieval is between ARM and x86–64 (at O2). Both use a pool of 100 functions. Dotted lines indicate MRR without section removal; smaller bars imply greater impact.

influential prompt sections. The categorization and notable constants sections are significantly less impactful than they were for the cross optimization study, while the other three sections have a larger impact. For instance, the categorization section went from having an impact of 0.30 on the MRR to having an impact 0.22, while the logic section is more influential, going from 0.06 to 0.20 in MRR impact.

3.7 Combined Method

Our method has shown strong performance in the BCSD retrieval tasks. Nevertheless, models trained for assembly function embedding remain beneficial in specific subdomains, such as supporting niche architectures or understanding similarity through specific obfuscation methods. State-of-the-art embedding models are much smaller than our method in terms of parameter count. For instance, the CLAP [52] model baseline is only 110M parameters, compared to the billions required to perform our method. The cost of training such models is still very expensive, but once trained, they are more lightweight and efficient than language models.

To achieve the best of both worlds, we experiment with combining the similarity scores from an embedding model and our prompting method. Our evaluation consists of generating both an embedding and a LLM analysis for each function. The embedding similarity s_e is calculated using cosine similarity, and the analysis similarity s_a is calculated using jaccard similarity. Both similarity scores are then combined with equal weight.

$$S = \frac{s_e + s_a}{2}$$

In a real life scenario, combining both methods could be performed by using our textual representation as a pre-filter,

	Gemini 2.5 Flash	Qwen Embedding	Combined (Both)
O0–O1	0.646	0.640	0.910
O0–O2	0.579	0.554	0.843
O0–O3	0.485	0.518	0.759
O1–O3	0.618	0.640	0.855
O2–O3	0.758	0.783	0.921
ARM–AMD64	0.436	0.334	0.736
PowerPC–AMD64	0.414	0.443	0.746
MIPS–AMD64	0.417	0.415	0.729

Table 6: Comparison between Qwen3-Embedding 4B, Gemini 2.5 Flash, and the combination of both. The retrieval task is performed on both cross optimization and cross architecture settings. For cross optimization, the binaries are compiled for the ARM architecture, for cross architecture, the binaries are compiled with optimization level 2. A pool of 1,000 assembly functions is used throughout. Only Recall@1 scores are presented.

and then calculating the embedding representation. As such, the scalability and maintainability of the underlying BCSD database is maintained, while allowing a flexible choice of embedding-based BCSD model. That is, an inverted index database is maintained for the pre-filter query. Once this query is completed, the top- k results can be refined using an embedding model, by calculating the embeddings only for those k candidates. With this approach, the decision to use an embedding model, and which one to use, can be made dynamically.

To provide a method that keeps all of the advantages of our presented work, we use Qwen3-Embedding 4B [49] as the embedding model for this experiment. As such, the combination still does not require any training nor fine-tuning. As shown in Table 6, off-the-shelf embedding models based on a LLM perform very well. Furthermore, using a generic embedding model means that it can inexpensively be replaced by a new generation, since the training phase is performed by the open source model developers.

The combined method significantly surpasses both the embedding and analysis methods individually, as well as the baseline methods. Seen differently, the embedding and analysis supplement each other, meaning that our analysis extracts features from the assembly function that are not properly represented in the embedding model.

4 Related Work

Dynamic analysis. This method family consists of analyzing the features of a binary or code fragment by monitoring its runtime behavior. This method is compute intensive and requires a cross-platform emulator, but completely sidesteps the syntactic aspects of binary code and solely analyzes its semantics. [34] As such, this method is highly resilient to

obfuscations, but requires a sandboxed environment and is hard to generalize across architectures and application binary interfaces [15, 17].

Code Representations. Our research focuses on methods of binary similarity that use the assembly code (and possibly the control flow graph) retrieved from the binary to perform similarity detection. However, other approaches exist that use an alternate representation language, so that binaries compiled for all architectures are extracted into the same representation language. Some methods turn to the well known LLVM-IR [19, 20, 57] as representation language, and others prefer the VEX intermediate representation [43, 50].

Full Program Similarity. An alternate approach to binary matching is to compare whole binaries, instead of their individual functions. This type of method constructs a fingerprint for the whole binary as compared to having one embedding per function. This approach is primarily used for malware identification [27, 39, 40, 54], but also for identifying known vulnerabilities [11, 30].

LLM-based software analysis. Researchers have found many related applications of language models to binary and software analysis. We give a sparse overview of the progress that has been made in this area of research. For vulnerability detection, FuncVul [21] is a language-model-based method to detect whether a provided source function is vulnerable. LLM4Decompile [45] tries to utilize LLMs for decompilation. An open source LLM is fine-tuned to learn the source code representation of an assembly function, and the model is then evaluated on its decompilation capabilities. Fang et al. [18] measure the competency of LLMs for source code analysis, with a focus on obfuscated source code. Their results match our findings, that LLMs are efficient at code analysis, but they also demonstrate that language models still struggle when faced with cases of advanced obfuscation techniques. LLM-based fuzzing is another area that has recently gained interest. For instance, Asmita et al. [4] use a LLM to generate the initial seed of a fuzzing pipeline on the BusyBox [51] executable.

5 Conclusion

Our method for BCSD is a shift in perspective compared to previous state-of-the-art BCSD embedding models. However, this new approach maintains some of the known limitations and also brings new limitations. Most importantly, this method makes use of massive models compared to previous methods. A powerful set of GPUs is required when generating feature sets for a large pool or database. This favors centralised databases with large amounts of assembly fragments over locally maintained databases with hundreds or thousands of functions. Otherwise, a commercially deployed LLM can be used at a cost, but concerns surrounding data privacy can legitimately be raised. Another potential limitation is the size

of the feature set extracted during assembly analysis. As shown, our prompt performs very well with pool sizes of 1,000 assembly functions, however, this may not be the case when comparing millions of feature sets, as is the case in production databases.

We remain confident that our method brings significant improvements to the current landscape of BCSD, by resolving many of the previously acknowledged limitations. Our method does not require any form of training, and can be performed with any LLM available. It also offers a distinct advantage over the current state-of-the-art, because the feature vectors generated are human interpretable. This makes the method easily tunable by human experts. The similarity scores are much more easily verifiable, and cases of incorrect similarity detection can be explained using the generated feature set. Furthermore, this method can be scaled to databases containing millions of assembly functions compared to embedding models, since inverted index search has a lower time complexity than nearest neighbor search, and remains accurate compared to approximated nearest neighbor search methods.

5.1 Future research

Our results open avenues for further investigation in LLM-based BCSD, and more broadly in LLM assisted reverse engineering. A few of these opportunities are outlined here.

Fine Tuning. As stated, our method does not require fine-tuning, and was not evaluated on fine-tuned performance. Developing a fine-tuning step for assembly code understanding and analysis may prove to be efficient and bring significant improvements to our method. An example of such technique would be distillation [8]. With distillation, a large model is used to fine-tune a much smaller model, by using the large model’s output as ground truth to train the smaller model. For example in our experiments, Gemini 2.5 Flash could have been used to fine tune the small Qwen2.5 Coder models. Gemini 2.5 Flash performs remarkably better than a small model such as Qwen2.5 7B at assembly understanding. We believe the distillation process could reduce this gap.

Output Format. Our method uses the JSON format so that the output generated is easily comparable, and similarity metrics can be deduced. It was also chosen because it is ubiquitous: its syntax is straightforward to produce for LLMs and easily understandable for humans. However, finding the best trade-off between output interpretability, compute requirements, and similarity detection capabilities remains an open problem. One possibility is to loosen the restrictions on the output format and use a sentence similarity method to determine the similarity between function analyses. On the contrary, another possibility is to use the analysis capabilities at a smaller scale, for example analyzing single basic blocks and combining these analyses into a more comprehensive structure for a whole assembly function.

Ethical Considerations

An analysis of our research is performed under the four ethical principles suggested.

Respect for persons. Our research is not conducted on human subjects, but we recognize that our research may be used by attackers to ease their reverse engineering efforts and detect vulnerabilities that could be exploited on human subjects. However, it is widely understood that developing software as closed-source is not a valid security measure. Software providers must not rely on the complexity of reverse engineering to secure their software. The security model of software providers is out of our control, and thus respect for persons is not a concern.

Beneficence. The objective of our work is to ease reverse engineering to enhance and ensure the security of software. We use open source components wherever possible, such as our dataset and the local language models. This approach enables us to publicly release all artifacts used in our research, which allows for reproducibility and new research to directly build on our results.

Justice. To the best of our knowledge, our research did not involve the unfair treatment of entities, groups, or individuals and thus justice is not a concern.

Respect for Law and Public Interest. All research steps performed are legal. All licenses of the software used in our research were respected. We believe it is in the public's best interest to freely have access to our research, as it may increase the productivity of security researchers.

Open Science

Consistent with the USENIX Security open science policy, the repository used for experimentation of our method is publicly available [3]. This constitutes the full implementation of our methods that can be reproduced on any open source model, and the implementation for commercial LLM providers. The dataset used throughout this research is also available at that same repository [3].

References

- [1] National Security Agency. Ghidra software reverse engineering framework, 2025-07-31. URL: <https://github.com/NationalSecurityAgency/ghidra>.
- [2] Farouq Al-Omari, Iman Keivanloo, Chanchal K. Roy, and Juergen Rilling. Detecting clones across microsoft .net programming languages. In *2012 19th Working Conference on Reverse Engineering*, pages 405–414, 2012. doi:10.1109/WCRE.2012.50.
- [3] Anonymous. Beyond embeddings: Interpretable feature extraction for binary code similarity – artifact, 2025-08-26. URL: <https://anonymous.4open.science/r/asm-feature-extraction-894E/README.md>.
- [4] Asmita, Yaroslav Oliinyk, Michael Scott, Ryan Tsang, Chongzhou Fang, and Houman Homayoun. Fuzzing BusyBox: Leveraging LLM and crash reuse for embedded bug unearthing. In *33rd USENIX Security Symposium (USENIX Security 24)*, pages 883–900, Philadelphia, PA, August 2024. USENIX Association. URL: <https://www.usenix.org/conference/usenixsecurity24/presentation/asmita>.
- [5] Max Beninger, Philippe Charland, Steven H. H. Ding, and Benjamin C. M. Fung. ERS0: enhancing military cybersecurity with ai-driven SBOM for firmware vulnerability detection and asset management. In Claire Kwan, Lauri Lindström, Davide Giovannelli, Karlis Podins, and Damjan Strucl, editors, *16th International Conference on Cyber Conflict: Over the Horizon, CyCon 2024, Tallinn, Estonia, May 28-31, 2024*, pages 141–160. IEEE, 2024. URL: <https://doi.org/10.23919/CyCon62501.2024.10685598>, doi:10.23919/CYCON62501.2024.10685598.
- [6] Tingting Bi, Boming Xia, Zhenchang Xing, Qinghua Lu, and Liming Zhu. On the way to sboms: Investigating design issues and solutions in practice. *ACM Trans. Softw. Eng. Methodol.*, 33(6), June 2024. doi:10.1145/3654442.
- [7] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners, 2020. URL: <https://arxiv.org/abs/2005.14165>, arXiv:2005.14165.
- [8] Cristian Buciluundefined, Rich Caruana, and Alexandru Niculescu-Mizil. Model compression. In *Proceedings of the 12th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD '06*, page 535–541, New York, NY, USA, 2006. Association for Computing Machinery. doi:10.1145/1150402.1150464.
- [9] Mark Cox, Ralf Engelschall, Stephen Henson, Ben Laurie, and Paul Sutton. Openssl, 2025-08-05. URL: <https://www.openssl.org/>.
- [10] John Cristy. Mastering digital image alchemy, 2025-07-13. URL: <https://imagemagick.org/>.

- [11] Yaniv David, Nimrod Partush, and Eran Yahav. Firmup: Precise static detection of common vulnerabilities in firmware. *SIGPLAN Not.*, 53(2):392–404, March 2018. doi:10.1145/3296957.3177157.
- [12] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding, 2019. URL: <https://arxiv.org/abs/1810.04805>, arXiv:1810.04805.
- [13] Alex Deymo, Jim Meyering, Paul Eggert, Pdraig Brady, Bernhard Voelker, and Collin Funk. Coreutils - gnu core utilities, 2025-04-09. URL: <https://www.gnu.org/software/coreutils/>.
- [14] Steven H. H. Ding, Benjamin C. M. Fung, and Philippe Charland. Asm2vec: Boosting static representation robustness for binary clone search against code obfuscation and compiler optimization. In *2019 IEEE Symposium on Security and Privacy (SP)*, pages 472–489, 2019. doi:10.1109/SP.2019.00003.
- [15] Steven H.H. Ding, Benjamin C.M. Fung, and Philippe Charland. Kamln0: Mapreduce-based assembly clone search for reverse engineering. In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD '16*, page 461–470, New York, NY, USA, 2016. Association for Computing Machinery. doi:10.1145/2939672.2939719.
- [16] Thomas Dullien. Graph-based comparison of executable objects. 2005. URL: <https://api.semanticscholar.org/CorpusID:2001486>.
- [17] Manuel Egele, Maverick Woo, Peter Chapman, and David Brumley. Blanket execution: Dynamic similarity testing for program binaries and components. In *23rd USENIX Security Symposium (USENIX Security 14)*, pages 303–317, San Diego, CA, August 2014. USENIX Association. URL: <https://www.usenix.org/conference/usenixsecurity14/technical-sessions/presentation/egele>.
- [18] Chongzhou Fang, Ning Miao, Shaurya Srivastav, Jialin Liu, Ruoyu Zhang, Ruijie Fang, Asmita, Ryan Tsang, Najmeh Nazari, Han Wang, and Houman Homaoun. Large language models for code analysis: Do LLMs really do their job? In *33rd USENIX Security Symposium (USENIX Security 24)*, pages 829–846, Philadelphia, PA, August 2024. USENIX Association. URL: <https://www.usenix.org/conference/usenixsecurity24/presentation/fang>.
- [19] Qian Feng, Minghua Wang, Mu Zhang, Rundong Zhou, Andrew Henderson, and Heng Yin. Extracting conditional formulas for cross-platform bug search. In *Proceedings of the 2017 ACM on Asia Conference on Computer and Communications Security, ASIA CCS '17*, page 346–359, New York, NY, USA, 2017. Association for Computing Machinery. doi:10.1145/3052973.3052995.
- [20] Yi Gui, Yao Wan, Hongyu Zhang, Huifang Huang, Yulei Sui, Guandong Xu, Zhiyuan Shao, and Hai Jin. Cross-language binary-source code matching with intermediate representations, 2022. URL: <https://arxiv.org/abs/2201.07420>, arXiv:2201.07420.
- [21] Sajal Halder, Muhammad Ejaz Ahmed, and Seyit Camtepe. Funcvul: An effective function level vulnerability detection model using llm and code chunk, 2025. URL: <https://arxiv.org/abs/2506.19453>, arXiv:2506.19453.
- [22] Haojie He, Xingwei Lin, Ziang Weng, Ruijie Zhao, Shuitao Gan, Libo Chen, Yuede Ji, Jiashui Wang, and Zhi Xue. Code is not natural language: Unlock the power of Semantics-Oriented graph representation for binary code similarity detection. In *33rd USENIX Security Symposium (USENIX Security 24)*, pages 1759–1776, Philadelphia, PA, August 2024. USENIX Association. URL: <https://www.usenix.org/conference/usenixsecurity24/presentation/he-haojie>.
- [23] hex rays. Ida pro, 2025-02-28. URL: <https://hex-rays.com/ida-pro>.
- [24] D. Richard Hipp. Sqlite, 2025-07-30. URL: <https://sqlite.org/>.
- [25] Binyuan Hui, Jian Yang, Zeyu Cui, Jiaxi Yang, Dayiheng Liu, Lei Zhang, Tianyu Liu, Jiajun Zhang, Bowen Yu, Keming Lu, Kai Dang, Yang Fan, Yichang Zhang, An Yang, Rui Men, Fei Huang, Bo Zheng, Yibo Miao, Shanghaoran Quan, Yunlong Feng, Xingzhang Ren, Xuancheng Ren, Jingren Zhou, and Junyang Lin. Qwen2.5-coder technical report, 2024. URL: <https://arxiv.org/abs/2409.12186>, arXiv:2409.12186.
- [26] ISO. *ISO/IEC 14882:2011 Information technology — Programming languages — C++*. International Organization for Standardization, Geneva, Switzerland, February 2012. URL: http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=50372.
- [27] Steven Jilcott. Scalable malware forensics using phylogenetic analysis. In *2015 IEEE International Symposium on Technologies for Homeland Security (HST)*, pages 1–6, 2015. doi:10.1109/THS.2015.7225311.

- [28] Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models, 2020. URL: <https://arxiv.org/abs/2001.08361>, arXiv:2001.08361.
- [29] Quoc V. Le and Tomas Mikolov. Distributed representations of sentences and documents, 2014. URL: <https://arxiv.org/abs/1405.4053>, arXiv:1405.4053.
- [30] Qiang Li, Dawei Tan, Xin Ge, Haining Wang, Zhi Li, and Jiqiang Liu. Understanding security risks of embedded devices through fine-grained firmware fingerprinting. *IEEE Transactions on Dependable and Secure Computing*, 19(6):4099–4112, 2022. doi:10.1109/TDSC.2021.3119970.
- [31] Xuezixiang Li, Yu Qu, and Heng Yin. Palmtree: Learning an assembly language model for instruction embedding. In *Proceedings of the 2021 ACM SIGSAC Conference on Computer and Communications Security, CCS '21*, page 3236–3251, New York, NY, USA, 2021. Association for Computing Machinery. doi:10.1145/3460120.3484587.
- [32] Zhouhan Lin, Minwei Feng, Cicero Nogueira dos Santos, Mo Yu, Bing Xiang, Bowen Zhou, and Yoshua Bengio. A structured self-attentive sentence embedding, 2017. URL: <https://arxiv.org/abs/1703.03130>, arXiv:1703.03130.
- [33] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. Roberta: A robustly optimized bert pretraining approach, 2019. URL: <https://arxiv.org/abs/1907.11692>, arXiv:1907.11692.
- [34] Zian Liu. Binary code similarity detection. In *2021 36th IEEE/ACM International Conference on Automated Software Engineering (ASE)*, pages 1056–1060, 2021. doi:10.1109/ASE51524.2021.9678518.
- [35] Andrea Marcelli, Mariano Graziano, Xabier Ugarte-Pedrero, Yanick Fratantonio, Mohamad Mansouri, and Davide Balzarotti. How machine learning is solving the binary function similarity problem. In *31st USENIX Security Symposium (USENIX Security 22)*, pages 2099–2116, Boston, MA, August 2022. USENIX Association. URL: <https://www.usenix.org/conference/usenixsecurity22/presentation/marcelli>.
- [36] Luca Massarelli, Giuseppe Antonio Di Luna, Fabio Petroni, Leonardo Querzoni, and Roberto Baldoni. Safe: Self-attentive function embeddings for binary similarity, 2019. URL: <https://arxiv.org/abs/1811.05296>, arXiv:1811.05296.
- [37] Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg Corrado, and Jeffrey Dean. Distributed representations of words and phrases and their compositionality, 2013. URL: <https://arxiv.org/abs/1310.4546>, arXiv:1310.4546.
- [38] OpenAI. Gpt-4 technical report, 2024. URL: <https://arxiv.org/abs/2303.08774>, arXiv:2303.08774.
- [39] Panpan Qi, Zhaoqi Zhang, Wei Wang, and Chang Yao. Malware detection by exploiting deep learning over binary programs. In *2020 25th International Conference on Pattern Recognition (ICPR)*, pages 9068–9075, 2021. doi:10.1109/ICPR48806.2021.9412227.
- [40] Edward Raff, Jon Barker, Jared Sylvester, Robert Brandon, Bryan Catanzaro, and Charles K. Nicholas. Malware detection by eating a whole EXE. In *The Workshops of the The Thirty-Second AAAI Conference on Artificial Intelligence, New Orleans, Louisiana, USA, February 2-7, 2018*, volume WS-18 of *AAAI Technical Report*, pages 268–276. AAAI Press, 2018. URL: <https://aaai.org/ocs/index.php/WS/AAAIW18/paper/view/16422>.
- [41] Liting Ruan, Qizhen Xu, Shunzhi Zhu, Xujing Huang, and Xinyang Lin. A survey of binary code similarity detection techniques. *Electronics*, 13(9), 2024. URL: <https://www.mdpi.com/2079-9292/13/9/1715>, doi:10.3390/electronics13091715.
- [42] Igor Santos, Felix Brezo, Javier Nieves, Yoseba K. Peña, Borja Sanz, Carlos Laorden, and Pablo G. Bringas. Idea: opcode-sequence-based malware detection. In *Proceedings of the Second International Conference on Engineering Secure Software and Systems, ES-SoS'10*, page 35–43, Berlin, Heidelberg, 2010. Springer-Verlag. doi:10.1007/978-3-642-11747-3_3.
- [43] Noam Shalev and Nimrod Partush. Binary similarity detection using machine learning. In *Proceedings of the 13th Workshop on Programming Languages and Analysis for Security, PLAS '18*, page 42–47, New York, NY, USA, 2018. Association for Computing Machinery. doi:10.1145/3264820.3264821.
- [44] Daniel Stenberg. curl - command line tool and library for transferring data with urls, 2025-07-16. URL: <https://curl.se/>.
- [45] Hanzhuo Tan, Qi Luo, Jing Li, and Yuqun Zhang. LLM4Decompile: Decompiling binary code with large language models. In Yaser Al-Onaizan, Mohit Bansal, and Yun-Nung Chen, editors, *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pages 3473–3487,

- Miami, Florida, USA, November 2024. Association for Computational Linguistics. URL: <https://aclanthology.org/2024.emnlp-main.203/>, doi:10.18653/v1/2024.emnlp-main.203.
- [46] Simon Tatham. Putty, 2025-02-08. URL: <https://www.chiark.greenend.org.uk/~sgtatham/putty/>.
- [47] Google Team. Gemini 2.5: Pushing the frontier with advanced reasoning, multimodality, long context, and next generation agentic capabilities, 2025. URL: <https://arxiv.org/abs/2507.06261>, arXiv:2507.06261.
- [48] Google Team. Gemma 3 technical report, 2025. URL: <https://arxiv.org/abs/2503.19786>, arXiv:2503.19786.
- [49] Qwen Team. Qwen3 technical report, 2025. URL: <https://arxiv.org/abs/2505.09388>, arXiv:2505.09388.
- [50] S. VenkataKeerthy, Soumya Banerjee, Sayan Dey, Yashas Andaluri, Raghul PS, Subrahmanyam Kalyanasundaram, Fernando Magno Quintão Pereira, and Ramakrishna Upadrasta. Vexir2vec: An architecture-neutral embedding framework for binary similarity. *ACM Trans. Softw. Eng. Methodol.*, March 2025. Just Accepted. doi:10.1145/3721481.
- [51] Denys Vlasenko, Bernhard Reutner-Fischer, and Rob Landley. Busybox, 2024-09-27. URL: <https://busybox.net/>.
- [52] Hao Wang, Zeyu Gao, Chao Zhang, Zihan Sha, Mingyang Sun, Yuchen Zhou, Wenyu Zhu, Wenju Sun, Han Qiu, and Xi Xiao. Clap: Learning transferable binary code representations with natural language supervision. In *Proceedings of the 33rd ACM SIGSOFT International Symposium on Software Testing and Analysis, ISSTA 2024*, page 503–515, New York, NY, USA, 2024. Association for Computing Machinery. doi:10.1145/3650212.3652145.
- [53] Jialai Wang, Chao Zhang, Longfei Chen, Yi Rong, Yuxiao Wu, Hao Wang, Wende Tan, Qi Li, and Zongpeng Li. Improving ML-based binary function similarity detection by assessing and deprioritizing control flow graph features. In *33rd USENIX Security Symposium (USENIX Security 24)*, pages 4265–4282, Philadelphia, PA, August 2024. USENIX Association. URL: <https://www.usenix.org/conference/usenixsecurity24/presentation/wang-jialai>.
- [54] Cangshuai Wu, Jiangyong Shi, Yuexiang Yang, and Wenhua Li. Enhancing machine learning based malware detection model by reinforcement learning. In *Proceedings of the 8th International Conference on Communication and Network Security, ICCNS '18*, page 74–78, New York, NY, USA, 2018. Association for Computing Machinery. doi:10.1145/3290480.3290494.
- [55] Zhengzi Xu, Bihuan Chen, Mahinthan Chandramohan, Yang Liu, and Fu Song. Spain: Security patch analysis for binaries towards understanding the pain and pills. In *2017 IEEE/ACM 39th International Conference on Software Engineering (ICSE)*, pages 462–472, 2017. doi:10.1109/ICSE.2017.49.
- [56] Zeping Yu, Rui Cao, Qiyi Tang, Sen Nie, Junzhou Huang, and Shi Wu. Order matters: Semantic-aware neural networks for binary code similarity detection. *Proceedings of the AAAI Conference on Artificial Intelligence*, 34(01):1145–1152, Apr. 2020. URL: <https://ojs.aaai.org/index.php/AAAI/article/view/5466>, doi:10.1609/aaai.v34i01.5466.
- [57] Zhongtang Zhang, Shengli Liu, Qichao Yang, and Shichen Guo. Semantic understanding of source and binary code based on natural language processing. In *2021 IEEE 4th Advanced Information Management, Communicates, Electronic and Automation Control Conference (IMCEC)*, volume 4, pages 2010–2016, 2021. doi:10.1109/IMCEC51613.2021.9482032.