

LIFELONG LEARNING WITH BEHAVIOR CONSOLIDATION FOR VEHICLE ROUTING

Jiyuan Pei¹ Yi Mei¹ Jialin Liu² Mengjie Zhang¹ Xin Yao²

¹Data Science and Artificial Intelligence & School of Engineering and Computer Science,
Victoria University of Wellington,
Wellington, New Zealand

²School of Data Science,
Lingnan University,
Hong Kong SAR, China

jiyuan.pei@vuw.ac.nz

{yi.mei, mengjie.zhang}@ecs.vuw.ac.nz

{jialin.liu, xin.yap}@ln.edu.hk

ABSTRACT

Recent neural solvers have demonstrated promising performance in learning to solve routing problems. However, existing studies are primarily based on one-off training on one or a set of predefined problem distributions and scales, i.e., tasks. When a new task arises, they typically rely on either zero-shot generalization, which may be poor due to the discrepancies between the new task and the training task(s), or fine-tuning the pretrained solver on the new task, which possibly leads to catastrophic forgetting of knowledge acquired from previous tasks. This paper explores a novel lifelong learning paradigm for neural VRP solvers, where multiple tasks with diverse distributions and scales arise sequentially over time. Solvers are required to effectively and efficiently learn to solve new tasks while maintaining their performance on previously learned tasks. Consequently, a novel framework called **L**ifelong **L**earning **R**outer with **B**ehavior **C**onsolidation (LLR-BC) is proposed. LLR-BC consolidates prior knowledge effectively by aligning behaviors of the solver trained on a new task with the buffered ones in a decision-seeking way. To encourage more focus on crucial experiences, LLR-BC assigns greater consolidated weights to decisions with lower confidence. Extensive experiments on capacitated vehicle routing problems and traveling salesman problems demonstrate LLR-BC’s effectiveness in training high-performance neural solvers in a lifelong learning setting, addressing the catastrophic forgetting issue, maintaining their plasticity, and improving zero-shot generalization ability.

1 INTRODUCTION

Neural solvers have gained significant attention for their remarkable performance on vehicle routing problems (VRPs) (Vinyals et al., 2015; Bello et al., 2017; Bengio et al., 2021; Bogrybayeva et al., 2024). By training on one or multiple specific problem distributions and scales, i.e., tasks, simultaneously, neural solvers can learn to construct high-quality solutions or improve existing solutions efficiently for problems drawn from the same distribution and of the same scale as the training tasks (Kool et al., 2019; Kwon et al., 2020; Lu et al., 2020; Tang & Yao, 2024). However, in real-world scenarios, unpredictable problems with new distributions or scales often arise

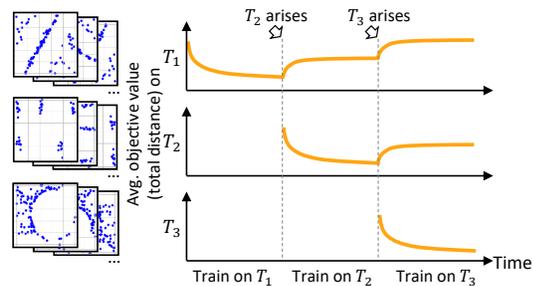


Figure 1: Catastrophic forgetting while fine-tuning a solver on sequential, new tasks with different distributions and scales.

over time. For example, a daily delivery service provider receives different numbers of orders with new patterns of delivery locations and demands due to unpredictable consumer behavior, business expansion, and new shopping trends. In such scenarios, it is challenging to develop a universal solver that can perform effectively across all possible problem distributions and scales after one-off training (Liu et al., 2023). Some recent studies (Jiang et al., 2022; Bi et al., 2022; Gao et al., 2024; Wang et al., 2024b; Xiao et al., 2025) address unpredictable new problems by enhancing the generalization ability of trained solvers. However, the generalization would have a boundary, and on new problems that differ substantially from the training ones, these methods still require additional learning to enhance problem-solving performance (Zhou et al., 2023). A common approach is to fine-tune the trained solver on a new task (Bengio et al., 2021; Zhou et al., 2023); nonetheless, it leads to catastrophic forgetting of knowledge acquired from previous tasks (Khetarpal et al., 2022). Solver’s performance on problems following the previous tasks will decrease significantly (c.f., Figure 1), as the model parameters will be overwritten during training on a new task (Wang et al., 2024c). These issues highlight the need for neural solvers capable of lifelong learning, enabling them to continuously acquire knowledge from unforeseen tasks while retaining generic knowledge and their performance on previous tasks.

To our best knowledge, only Li et al. (2024) and Feng et al. (2025) study lifelong learning for neural VRP solvers. However, the scenarios studied in both works are significantly different from ours: they neglect the possibility of distributional shifts across tasks and primarily focus on a fixed task order (e.g., the order that problem scale constantly increases). Though effective in their focused scenarios, their proposed methods rely on actively generating and training on new problem instances from previous tasks, making them inapplicable when the generation of new instances is uncontrollable, as is the case studied in this work. In contrast, this work focuses on a realistic and general setting, jointly addressing both scale and distribution changes between tasks without requiring any prior knowledge or assumptions about task order. We propose a novel method for lifelong learning of neural VRP solvers, called **L**ifelong **L**earning **R**outer with **B**ehavior **C**onsolidation (LLR-BC). LLR-BC focuses on addressing the catastrophic forgetting issue that arises during training across new tasks arising sequentially, which is commonly overlooked in prior neural VRP solver research. It buffers and revisits experiences from previous tasks to retain acquired knowledge. To efficiently utilize the limited experience memory, LLR-BC weights experiences based on decision confidence, emphasizing more crucial ones. Given that small changes in action probability distribution, especially under low confidence, can alter decisions and drastically affect the constructed route, LLR-BC minimizes reverse Kullback–Leibler divergence to consolidate behavior in a decision-seeking way. Extensive experiments on capacitated vehicle routing problems (CVRPs) and traveling salesman problems (TSPs) under various task sequences and base neural solvers show that LLR-BC effectively mitigates forgetting, maintains plasticity, and improves zero-shot generalization by accumulating transferable knowledge over time.

Our major contributions include: i) we introduce LLR-BC, a general lifelong learning framework enabling neural VRP solvers to learn from different tasks sequentially and address catastrophic forgetting effectively; ii) we propose Confidence-aware Experience Weighting (CaEW) to prioritize crucial experiences, as a module of LLR-BC for enhancing the effectiveness of experiences utilizing; iii) we propose Decision-seeking Behavior Consolidation (DsBC), which works in LLR-BC to preserve past behaviors by minimizing the discrepancy between buffered and current solver behaviors on stored states, with an emphasis on replicating past decisions; iv) the effectiveness of LLR-BC in is validated through extensive experiments, supported by detailed analysis and discussion.

2 RELATED WORK

2.1 NEURAL VRP SOLVERS

Machine learning, particularly deep reinforcement learning (DRL), enables neural solvers to learn VRP-solving strategies directly from problem-solving experience, eliminating the need for hand-crafted heuristics (Bengio et al., 2021). Existing methods are categorized as neural construction or neural improvement approaches (Bi et al., 2022; Kong et al., 2024). Neural construction methods build solutions from scratch by sequentially selecting the next node in an autoregressive fashion. Notable examples such as POMO (Kwon et al., 2020) and DualOpt (Zhou et al., 2025) generate high-quality solutions within seconds, rivaling strong heuristics like LKH3 (Helsgaun, 2017). In

contrast, neural improvement methods learn to enhance existing solutions, either by configuring (Wu et al., 2022; Ma et al., 2023) or selecting (Lu et al., 2020; Pei et al., 2025b; Chen et al., 2025; Guo et al., 2025) among predefined improvement heuristics. Although improvement methods have the potential to further improve solution quality by increasing the number of iterations, this also leads to higher computational cost. This paper focuses on lifelong learning for neural construction methods, due to their favorable balance between effectiveness and efficiency.

2.2 CROSS-DISTRIBUTION CROSS-SCALE GENERALIZATION

Early studies of neural VRP solvers typically focus on solving a single task, i.e., problems with fixed scale and one given distribution (e.g., uniform) (Kool et al., 2019; Kwon et al., 2020), resulting in poor generalization across distributions and scales (Bi et al., 2022; Xiao et al., 2025), which is often encountered in real-world applications. To address this issue, recent studies focus on improving cross-distribution or cross-scale performance. DROP (Jiang et al., 2022) improves cross-distribution performance by training across multiple distributions and optimizing for worst-case task performance. AMDKD (Bi et al., 2022) distills knowledge from multiple task-specific teacher models into a student model, achieving improvement in zero-shot generalization. ELG (Gao et al., 2024) separates local and global policies and, despite training only on uniform problems of scale 100, generalizes well across other tasks. Xiao et al. (2025) propose two network modules to handle different scales and distributions, respectively, improving zero- and few-shot generalization. INViT (Fang et al., 2024) involves multiple encoders and decoders with multiple views to improve zero-shot generalization. Omni (Zhou et al., 2023) applies meta-learning to learn a solver that can quickly adapt to a new task.

However, these works mainly focus on one-off training on a pre-defined task set. New tasks are addressed with zero-shot generalization or fine-tuning the trained solver on each of them independently. The potential of sequential knowledge accumulation from multiple new tasks is overlooked, together with the impact of catastrophic forgetting. As a result, their performance in learning to solve sequentially arising tasks is still limited. In practice, tasks arrive continuously, and past tasks can inform future learning. This motivates the need for lifelong neural VRP solvers that can incrementally learn from a sequence of diverse tasks.

2.3 LIFELONG LEARNING

Lifelong learning, also referred to as continual learning (Wang et al., 2024c), involves training a model to sequentially learn multiple tasks, progressively improving its capabilities in a manner analogous to human learning throughout life (Thrun, 1998; Khetarpal et al., 2022). Each task is characterized by a distinct data distribution (Wang et al., 2024c). A key challenge lies in balancing *plasticity*, i.e., the ability to acquire knowledge of new tasks, with *stability*, i.e., the capacity of retaining knowledge from past tasks (Parisi et al., 2019). Insufficient stability leads to *catastrophic forgetting*, where the performance on earlier tasks degrades after training on new tasks.

Several strategies have been proposed to mitigate catastrophic forgetting. Training task-specific model components is an example (Wu et al., 2021; Ebrahimi et al., 2020), but this increases storage costs and poses challenges in selecting the correct model when the task of the test data is unknown. Regularization on parameter updating to preserve prior knowledge is also widely used (Kirkpatrick et al., 2017; Zenke et al., 2017). However, this can hinder learning on new tasks. A further widely adopted method is experience replay, where past experiences on previously learned tasks are stored and revisited during training on a new task (Isele & Cosgun, 2018; Buzzega et al., 2020). Nonetheless, identifying and retaining the most crucial experiences to improve memory efficiency and minimize interference with learning new tasks often requires problem-specific designs.

3 LIFELONG LEARNING ROUTER WITH BEHAVIOR CONSOLIDATION

We consider the scenarios where only new problem instances of the current task are generated for training (i.e.,), while future tasks and their order are unknown, reflecting practical cases. We assume that all the tasks are equally important, and each has a fixed and known training budget. The main aim is to train a solver capable of generating high-quality solutions across all the learned tasks arising over time. So, a trained solver is evaluated on all the tasks learned so far.

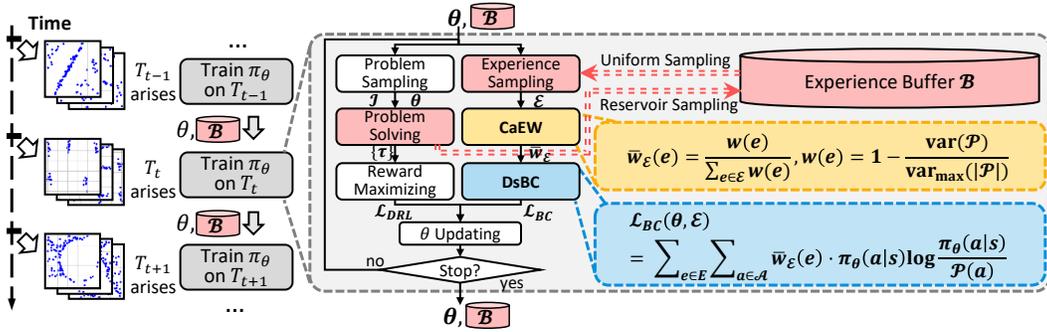


Figure 2: LLR-BC in the lifelong learning scenario where new tasks with different distributions and scales sequentially arise over time.

We propose LLR-BC, inspired by the experience replay paradigm (Isele & Cosgun, 2018; Buzzega et al., 2020). It consolidates knowledge learned from previous tasks by revisiting the old experiences obtained from these tasks. To increase the effectiveness of utilizing limited old experiences, we introduce two ingredients in LLR-BC: CaEW and DsBC. Figure 2 illustrates LLR-BC’s full workflow. LLR-BC maintains a fixed-size experience memory and trains the solver learned from the previous tasks on each newly arrived task. Following standard practice in neural VRP solvers, LLR-BC trains on each task in epochs. In each epoch, LLR-BC iteratively samples and solves a batch of problem instances \mathcal{I} from the current task to obtain a set of experience trajectories $\{\tau\}$. A DRL algorithm that maximizes the reward gain based on $\{\tau\}$ is applied to update the solver model. Simultaneously, a subset of experiences \mathcal{E} is sampled from the memory for consolidation of previously learned tasks. CaEW assigns higher weights to more crucial sampled experiences, then DsBC guides model updates by minimizing weighted behavioral divergence between the current model and the behavior buffer of the sampled experiences. This joint process mitigates catastrophic forgetting while preserving adaptability. Notably, LLR-BC is a general and readily integrable framework, independent of specific model architectures or RL algorithms, and applicable to many existing neural solvers, such as POMO (Kwon et al., 2020) and INViT (Fang et al., 2024). Core ingredients of LLR-BC are described below. More details about LLR-BC can be found in Appendix A.

3.1 EXPERIENCE REPLAY FOR ROUTING

We follow the commonly studied Markov decision process (MDP) formulation of constructive neural VRP solver (Kwon et al., 2020; Zhou et al., 2023; Bogrybayeva et al., 2024), where each state corresponds to a partial solution composed of visited nodes, and an action is to select one node to visit next. Each experience $e = \langle s, \mathcal{P} \rangle$ consists of a state s and the solver’s behavior \mathcal{P} on the state s . A state s represents the current partial solution for solving a problem. The behavior \mathcal{P} is the probability distribution of selecting each node in a problem as the next visit. The detailed solver design, including the handling of infeasible actions and the encoding of problems and solutions, follows any underlying base neural solver used. We use the probability distribution over all nodes rather than the single selected node to represent the solver’s behavior, as it captures richer information about the learned routing strategy (Rusu et al., 2016; Buzzega et al., 2020).

To consolidate high-quality behaviors, LLR-BC buffers experiences only during the final epoch of each task. It employs reservoir sampling (Vitter, 1985) to maintain a balanced and fixed-size buffer \mathcal{B} . New experiences are added directly if the memory is not full; otherwise, each incoming experience replaces a randomly selected experience entry with probability $\frac{|\mathcal{B}|}{N}$, where $|\mathcal{B}|$ is the buffer size and N denotes the sum of the number of experiences obtained from the final epoch of training on each previously learned task, i.e., the total number of experiences considered for buffering across all encountered tasks so far. Reservoir sampling ensures that all experiences are equally likely to be buffered while the total number of obtained experiences is increasing. At each model update step, a random set of experiences \mathcal{E} is sampled from buffer \mathcal{B} for behavior consolidation. A detailed discussion of the additional memory usage from the buffer can be found in Appendix A.4.

3.2 CONFIDENCE-AWARE EXPERIENCE WEIGHTING (CAEW)

While experiences are sampled uniformly from the buffer to ensure broad coverage of seen states, their importance for addressing forgetting can vary significantly. Constructive VRP solvers select nodes in a sequential manner, hence each decision influences future decisions while some crucial ones have a cumulative and amplified impact on the solution quality (Sun et al., 2024). Therefore, identifying and prioritizing crucial states and behaviors, i.e., crucial experience, is essential for effective learning and consolidation.

Decisions made with low confidence could be more susceptible to change during model updates (Farahmand, 2011; Ahmed et al., 2019). Therefore, LLR-BC assigns higher consolidation weights to such experiences, encouraging the solver to preserve behaviors in crucial decision points. Confidence is estimated by the variance of the action probability distribution, where lower variance indicates lower confidence and leads to greater emphasis during consolidation. The normalized confidence-based weight of an experience $e = \langle s, \mathcal{P} \rangle$ is computed as $w(e) = 1 - \frac{\text{var}(\mathcal{P})}{\text{var}_{\max}(|\mathcal{P}|)}$, where $\text{var}(\mathcal{P})$ is the variance of \mathcal{P} and $|\mathcal{P}|$ is the size of \mathcal{P} , i.e., the number of actions. $\text{var}_{\max}(|\mathcal{P}|) = \frac{|\mathcal{P}|-1}{|\mathcal{P}|^2}$ denotes the maximum possible variance for a distribution with the same number of candidates as \mathcal{P} . Then, given a set of sampled experiences \mathcal{E} , we rescale weights such that the sum of weight equals to 1, i.e., $\bar{w}_{\mathcal{E}}(e) = \frac{w(e)}{\sum_{e' \in \mathcal{E}} w(e')}, \forall e \in \mathcal{E}$.

3.3 DECISION-SEEKING BEHAVIOR CONSOLIDATION (DSBC)

By minimizing the weighted sum of the difference between the current model’s behaviors and the buffered behavior at previously encountered states, LLR-BC encourages the consolidation of prior behavior patterns, thereby preserving knowledge and mitigating catastrophic forgetting.

The Kullback–Leibler divergence (KLD) is widely adopted for knowledge distillation of neural VRP solvers (Bi et al., 2022; Zheng et al., 2025). However, recent studies (Kaplanis et al., 2019; Wang et al., 2024a; Qi et al., 2025) have shown that using reverse KLD (RKLD) could lead to better learning performance. Minimizing KLD pushes the learner distribution to spread probability mass across all modes of the given teacher distribution, i.e., mode-covering (Wang et al., 2024a; Qi et al., 2025). In contrast, minimizing RKLD leads to mode-seeking, where the learner tends to concentrate on the teacher’s highest-probability actions, while still maintaining relatively good alignment with the overall distribution (Wang et al., 2024a; Qi et al., 2025). During problem-solving of constructive neural VRP solvers, the action (selected node) with the highest probability is typically chosen to extend the route. To prevent catastrophic forgetting, that could manifest in significantly longer routes on previously seen tasks, it is crucial to preserve these highest-probability decisions. Therefore, instead of KLD, LLR-BC employs the RKLD to measure the behavioral difference in a decision-seeking way. To consolidate sampled behaviors, LLR-BC minimizes the following behavior consolidation loss term, considering the RKLD (Wang et al., 2024a; Qi et al., 2025):

$$\mathcal{L}_{BC}(\theta, \mathcal{E}) = \sum_{e \in \mathcal{E}} \bar{w}_{\mathcal{E}}(e) \sum_{a \in \mathcal{A}} \mathcal{P}_{\theta}(a) \log \frac{\mathcal{P}_{\theta}(a)}{\mathcal{P}(a)}, \quad (1)$$

where $\mathcal{E} = \{e = \langle s, \mathcal{P} \rangle\}$ is the set of sampled experiences, \mathcal{A} is the action space (i.e., available node set), $\mathcal{P}(a)$ is the probability corresponding to action a in the buffered behavior \mathcal{P} and $\mathcal{P}_{\theta}(a) = \pi_{\theta}(a|s)$ is the probability output by the current model π_{θ} on buffered state s .

Finally, during each model updating in training on a new task, LLR-BC jointly maximizes the expected reward on the new task and minimizes the RKLD between the current policy’s behavior on the buffered states and the corresponding buffered behavior. The overall loss function is as follows:

$$\mathcal{L}(\theta, \{\tau\}, \mathcal{E}) = \mathcal{L}_{DRL}(\theta, \{\tau\}) + \alpha \cdot \mathcal{L}_{BC}(\theta, \mathcal{E}), \quad (2)$$

where $\{\tau\}$ is the set of newly obtained experience trajectories from the new task, $\mathcal{L}_{DRL}(\theta, \{\tau\})$ is the loss calculated by the adopted DRL algorithm based on $\{\tau\}$ to maximize the reward gain, and α is a hyperparameter to balance between consolidation of previous experiences and learning of the new task. Notably, LLR-BC is a generic framework and can be applied to different neural solver methods with different DRL algorithms, in which \mathcal{L}_{DRL} in Eq. equation 2 can be implemented in different ways. A detailed discussion about computational cost of DsBC can be found in Appendix A.4.

4 EXPERIMENTS

We conduct a series of experiments to answer the following research questions:

- **Effectiveness on all learned tasks:** Can LLR-BC effectively solve learned tasks after training on them sequentially in the lifelong learning setting?
- **Stability and plasticity:** Detail in lifelong learning process, how does LLR-BC perform in terms of stability and plasticity?
- **Zero-shot generalization ability:** Can LLR-BC effectively acquire transferable knowledge across sequentially arising tasks to enhance zero-shot performance on an unseen task?
- **Hyperparameter sensitivity:** How sensitive is LLR-BC to key hyperparameters, including the buffer size $|\mathcal{B}|$, number of sampled experiences $|\mathcal{E}|$, and the weight α of the behavior consolidation term in the loss function?
- **Applicability:** Can LLR-BC work effectively on different base neural solvers?

To answer the questions, we simulate multiple lifelong learning scenarios on CVRP and TSP, and compare LLR-BC against widely used and representative lifelong learning baselines across diverse metrics¹. Most experiments are conducted based on POMO (Kwon et al., 2020), given its concise design and broad applicability. To verify the applicability of LLR-BC, we further evaluate LLR-BC on two representative and state-of-the-art constructive neural solvers designed for good cross-distribution cross-scale performance, i.e., Omni (Zhou et al., 2023) and INViT (Fang et al., 2024).

Dataset. Six distributions for simpling node coordinates are used: four proposed by Bossek et al. (2019) and widely used in neural VRP solver stuides (Jiang et al., 2022; Zhou et al., 2023), i.e., Uniform (U), Gaussian Mixture (GM), Explosion (E), Compression (C), and two additionally designed ones for greater diversity: Grid (G) and Ring (R). For CVRP, node demand is also required to be sampled. While prior studies used uniformly random demand for all distributions (Kwon et al., 2020; Jiang et al., 2022; Zhou et al., 2023; Fang et al., 2024), we build six distinct demand distributions and assign them to the above six distributions to better reflect the diversity of real-world problems (Liu et al., 2021). Following common practice (Kwon et al., 2020; Jiang et al., 2022), we consider three problem scales: 20, 50, and 100. Specifically, tasks U and R correspond to scale 20, tasks G and E to scale 50, and tasks C and GM to scale 100, arbitrarily. We construct five task orders by randomly permuting the tasks. In addition, two classic and widely used benchmark datasets, TSPLIB (Reinelt, 1991) and CVRPLIB (Uchoa et al., 2017), are involved for generalization ability evaluation. Appendix B provides the full definition of tasks and orders.

Training and Test Settings. Following Kwon et al. (2020), we train the solver on each task over 200 epochs, solve a batch of sampled problems in parallel to leverage GPU parallelism during training. Therefore, both experience buffering and sampling operate at the batch level rather than the single experience level. Hyperparameters of LLR-BC are set as follows: $|\mathcal{B}| = 1000$, $|\mathcal{E}| = 16$, and $\alpha = 100$, where $|\mathcal{B}|$ and $|\mathcal{E}|$ are defined in units of experience batches. The buffer constitutes only about 0.01% of the total training experiences obtained across all tasks. For evaluation, each task has a test set of 1,000 problem instances, which are different from the training ones. For each trial, all methods are evaluated on the same test sets. Additional details are provided in Appendix C.

Compared Methods. The goal of this work is not to design a totally new solver that outperforms the state-of-the-art solver on each individual task or a fixed set of tasks that can be learned simultaneously, but to improve the solver’s ability to learn multiple unpredictable tasks continuously. To this end, we consider several representative strategies, including two commonly adopted strategies in neural solver studies (Kwon et al., 2020; Zhou et al., 2023): (i) *Restart*, reinitialize the solver and train from scratch on each task; (ii) *Fine-tuning*, simply sequential training on each task. Additionally, we evaluate (iii) EWC (Kirkpatrick et al., 2017), a widely used method in lifelong learning, especially in recent studies of optimization tasks (Manchanda & Ranu, 2023; Pei et al., 2025a). We adapt and compare with (iv) LiBOG (Pei et al., 2025a), a recent method originally proposed for black-box optimization, within the VRP tasks. Appendix C.1 provides more details.

¹Code will be released upon acceptance of this paper.

Table 1: The mean (std.) of metrics over the five task orders.

Method	CVRP					TSP				
	AP	AF	AMF	API	AG	AP	AF	AMF	API	AG
Restart	60.5 (29.3)	41.3 (26.3)	52.0 (25.5)	9.1 (-)	49.5 (4.7)	31.7 (7.6)	50.5 (40.0)	65.6 (32.8)	7.1 (-)	72.4 (9.2)
Fine-tuning	23.5 (9.2)	19.9 (3.6)	28.1 (5.0)	3.8 (0.8)	42.1 (6.7)	14.8 (2.3)	28.9 (10.9)	36.6 (7.4)	3.5 (1.3)	57.4 (17.7)
EWC	28.3 (9.2)	19.5 (5.4)	25.5 (4.3)	6.9 (1.1)	39.8 (4.2)	18.3 (2.8)	18.6 (4.4)	24.6 (5.5)	5.5 (1.7)	52.1 (18.3)
LiBOG	31.3 (11.9)	19.7 (5.8)	25.1 (5.8)	7.2 (1.0)	40.8 (3.9)	19.2 (1.6)	17.2 (4.5)	22.8 (5.5)	5.8 (1.7)	51.7 (14.8)
LLR-BC	4.2 (1.0)	0.7 (0.5)	0.8 (0.4)	3.5 (0.8)	26.7 (4.5)	3.4 (1.3)	0.8 (0.3)	1.1 (0.4)	2.8 (1.6)	41.1 (21.0)

Evaluation Metrics. Based on a standard practice in lifelong learning research (Chaudhry et al., 2018; Wang et al., 2024c), we build the following evaluation metrics. Let $\bar{d}_{i,j}$ denote the test performance, i.e., average objective value (tour length) over all the test instances, of the solver on task T_j after training on the first i tasks sequentially (including task T_i). As different tasks have different scales for the objective value, the objective values are normalized by $\bar{d}_{i,j} = \frac{d_{i,j} - d_j^*}{d_j^*}$, where d_j^* is smallest (best) test performance achieved on task T_j by all the solvers obtained by all the methods in all lifelong learning scenarios. Based on this notation, after learning k tasks, we calculate:

- **Average Performance (AP):** the current average performance on tasks learnt so far, i.e., $AP = \frac{1}{k} \sum_{i=1}^k \bar{d}_{k,i}$.
- **Average Forgetting (AF):** the average performance decrease on previously learned tasks after learning all of them sequentially, i.e., $AF = \frac{1}{k-1} \sum_{i=1}^{k-1} \max(0, \bar{d}_{k,i} - \bar{d}_{i,i})$.
- **Average Max Forgetting (AMF),** the average of maximal forgetting of each task during the lifelong learning, i.e., $AMF = \frac{1}{k-1} \sum_{i=1}^{k-1} \max_{j=i+1}^k \max(0, \bar{d}_{j,i} - \bar{d}_{i,i})$.
- **Average Plasticity (API):** the average performance a solver achieves on each new task after training on it, i.e., $APl = \frac{1}{k} \sum_{i=1}^k \bar{d}_{i,i}$.
- **Average zero-shot Generalization (AG):** the average performance on each newly arising task before training on it, i.e., $AG = \frac{1}{k-1} \sum_{i=1}^{k-1} \bar{d}_{i,i+1}$.

Smaller values of above metrics indicate better performance. Unless otherwise specified, all reported metric values in tables are scaled by 10^{-3} .

4.1 PERFORMANCE IN SOLVING SEEN TASKS

The experimental results for CVRP and TSP are summarized in Table 1, with $k = 6$ for all metrics. More results can be found in Appendices D.1, D.2. Across all task orders, LLR-BC achieves average AP values of 0.0042 (CVRP) and 0.0034 (TSP), whereas all other methods exceed 0.023 (CVRP) and 0.014 (TSP), respectively, indicating that LLR-BC obtains solutions of problems from learned tasks with substantially better quality. Moreover, LLR-BC exhibits greater robustness to task order variation. Compared methods show large fluctuations (larger Std.) in AP across orders, while LLR-BC consistently maintains low AP values with lower standard deviations. These results demonstrate that LLR-BC effectively learns from sequentially arising tasks and retains the ability to solve all encountered tasks with high effectiveness.

4.2 STABILITY AND PLASTICITY

We analyze the stability by comparing the AF and AMF values over all five task orders, as shown in Table 1. LLR-BC achieves substantially lower AF and AMF values compared to all other methods, demonstrating its strong stability for effectively mitigating catastrophic forgetting. Figure 3 shows the average solution distance on seen tasks during lifelong learning of task order 1. At the start of each task, all baselines exhibit a sharp performance drop on previously learned tasks. In contrast, LLR-BC mitigates forgetting and maintains consistently lower distances with greater stability.

LLR-BC also achieves the best API values among all methods, indicating its best plasticity. Notably, *Restart* produces a single API value with no std., as it is independent of task order and is executed only once, rather than once per order. Figure 4 presents the solver’s test performance on the current task throughout lifelong learning. As the number of encountered tasks increases, EWC, as well as LiBOG, gradually loses plasticity due to the cumulative regularization on model parameters. In

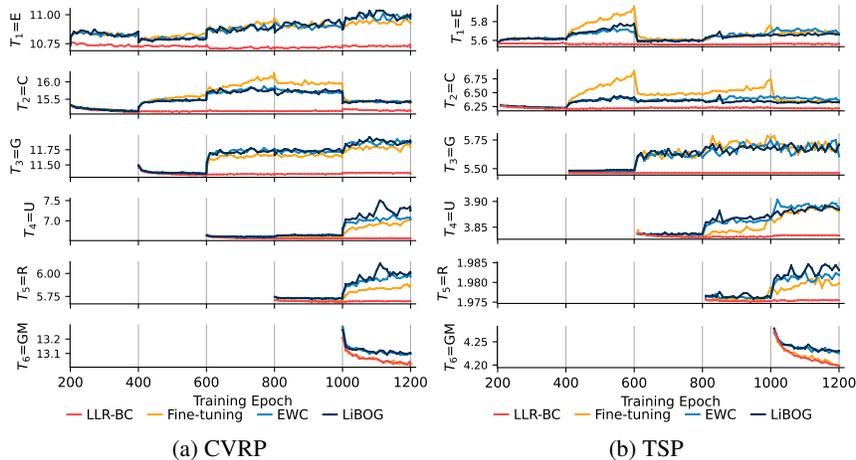


Figure 3: Forgetting curve of task order 1, measured by average solution distance (vertical axis). Epochs 0–200 (first task) are omitted as no forgetting occurs. *Restart* is excluded due to significantly higher forgetting than other methods.

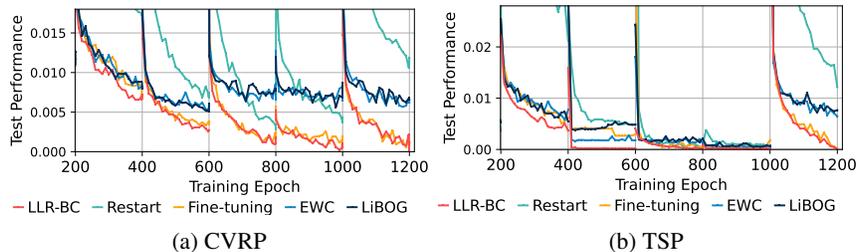


Figure 4: Test performance on the current task during lifelong learning on task order 1.

contrast, LLR-BC operates at the behavioral level, enabling the model to explore the parameter space more freely while preserving learned behaviors. Model can discover new parameter values that yield good decisions on both new and past tasks. With the guidance from previous experiences, LLR-BC demonstrates even better performance on the new task than *fine-tuning*.

Additionally, the rankings of methods differ on the two forgetting metrics, i.e., AF and AMF. For example, *fine-tuning* achieves a lower (better) AF than EWC but yields a higher (worse) AMF. This discrepancy arises because AF also accounts for backward transfer, i.e., training on a new task can sometimes improve performance on earlier, similar tasks. Backward transfer is also evident in Figure 3. This further underscores the importance of LLR-BC’s ability to maintain strong plasticity.

Similar patterns are observed across other task orders, as shown in Appendix D. In summary, LLR-BC consistently outperforms all baselines in both stability and plasticity.

4.3 ZERO-SHOT GENERALIZATION

Beyond performance on learned tasks, we also expect neural solvers to acquire general knowledge from randomly ordered tasks, thereby improving their performance on unseen tasks. AG values for all methods are reported in Table 1. LLR-BC outperforms all baselines in terms of AG, demonstrating its strong ability to zero-shot generalize to a new task. We further test the solver after learning from task order 1 on TSPLIB and CVRPLIB, with the maximum scale as 1001. As the results presented in Table 2, LLR-BC performs the best on both benchmarks. Appendix D.3 presents the detailed values. Despite the uncontrollable and unpredictable nature of task order, LLR-BC demonstrates a strong generalization ability by capturing general knowledge across tasks.

Table 2: Mean (Std.) test performance on benchmark instances. All values are scaled by 10^{-3} .

Benchmark	Restart	Fine-tuning	EWC	LiBOG	LLR-BC
CVRPLIB	43.68 (27.37)	8.54 (10.71)	11.86 (11.59)	18.05 (10.86)	7.88 (8.75)
TSPLIB	99.76 (61.06)	38.16 (93.36)	27.80 (59.58)	27.96 (32.29)	18.08 (16.98)

4.4 ABLATION STUDY

We conduct ablation studies on task order 1 to evaluate the contribution of the CaEW and DsBC. As shown in Table 3, removing either component leads to performance degradation across multiple metrics on both CVRP and TSP, confirming the effectiveness and contribution of both modules.

4.5 HYPERPARAMETER SENSITIVITY ANALYSIS

We varied the values of key hyperparameters, i.e., $|\mathcal{E}|$, $|\mathcal{B}|$ and α , and evaluated the performance of LLR-BC across all metrics under each setting, as shown in Table 3. *-nEW* and *-KLD* denote the version without CaEW (using equal weights) and the version using KLD, respectively. *-n(v)* denotes the version with n set to v . Detailed discussion can be found in Appendix D.4. In summary, varying the hyperparameters leads to only minor performance fluctuations across evaluation metrics, compared with the performance gap between LLR-BC and baselines. This suggests that LLR-BC is robust and not overly sensitive to its hyperparameter settings.

Table 3: Metric values of LLR-BC in different settings, on task order 1 with $k = 6$.

Method	CVRP					TSP					Method	CVRP					TSP				
	AP	AF	AMF	API	AG	AP	AF	AMF	API	AG		AP	AF	AMF	API	AG	AP	AF	AMF	API	AG
$-\mathcal{E} (4)$	5.7	0.8	0.8	4.8	22.7	2.6	1.2	1.2	1.7	21.6	$-\alpha(10)$	13.2	5.1	5.5	4.2	34.7	1.3	0.4	0.6	1.2	20.5
$-\mathcal{E} (8)$	5.8	1.0	1.1	4.2	22.8	2.0	0.9	1.1	1.5	21.6	$-\alpha(50)$	6.6	1.4	1.6	4.2	24.7	2.0	0.7	0.9	1.2	22.2
$-\mathcal{B} (250)$	6.4	1.9	1.9	4.3	25.3	1.6	0.7	1.1	1.1	20.5	$-\alpha(500)$	5.1	0.2	0.3	4.9	22.5	3.5	1.3	1.3	3.2	21.2
$-\mathcal{B} (500)$	5.8	1.3	1.3	4.2	29.8	2.2	0.6	0.9	1.7	22.2	$-\alpha(1000)$	5.9	0.3	0.4	5.8	23.6	4.9	1.4	1.4	4.6	22.3
<i>-nEW</i>	5.2	0.8	0.8	4.2	24.5	1.8	0.9	0.8	1.5	22.3	<i>-KLD</i>	5.5	0.7	0.7	4.3	23.1	1.9	0.9	0.9	1.5	22.3
Default	4.9	0.6	0.7	4.3	23.5	1.7	0.8	0.9	1.3	21.6											

4.6 APPLICABILITY

We further implement LLR-BC on Omni Zhou et al. (2023) and INViT Fang et al. (2024), and compare it with *fine-tuning* on task order 1. As Table 4 shows, LLR-BC outperforms *fine-tuning* generally, with a similar pattern found in on POMO. More details of experiment settings, results and discussions are presented in Appendix D.5. In summary, LLR-BC is effective on the focused lifelong learning scenario, without relying on specific characteristics of the base neural solver.

Table 4: Metric values with Omni or INViT as the base neural solver, $k = 6$.

Method	CVRP					TSP				
	AP	AF	AMF	API	AG	AP	AF	AMF	API	AG
Fine-tuning (Omni)	34.7	19	22.1	16.9	64	52.9	13.6	18.8	14.4	56.7
LLR-BC (Omni)	16.5	2.9	4.6	19.9	55.2	12.9	0.9	1.4	11.6	34.7
Fine-tuning (INViT)	28.6	9.7	9.7	21.6	35.2	14.5	0.6	0.6	17.1	11.1
LLR-BC (INViT)	23.8	5.8	5.8	19.6	28.8	14.5	4.5	6.3	11.1	10.7

5 CONCLUSIONS

We propose LLR-BC, a lifelong learning framework for neural VRP solvers, considering tasks with varying problem scales and distributions that arrive sequentially and require to be learned. We introduce two core components: CaEW, which emphasizes low-confidence behaviors, and DsBC, which preserves learned behavior effectively in a decision-seeking way. Experiments across diverse orders of tasks with varying distributions and scales demonstrate that LLR-BC consistently outperforms baselines in terms of performance in solving learned tasks, resistance to catastrophic forgetting,

learning efficiency on new tasks, and zero-shot generalization. Ablation and sensitivity studies confirm the effectiveness of CaEW and DsBC and the framework’s robustness to hyperparameter settings. LLR-BC is both model- and RL algorithm-agnostic, and can be integrated with various neural VRP solvers. Experiments on different base neural solvers verify LLR-BC’s applicability.

Although studied on cross-distribution and cross-scale settings, LLR-BC can also be applied to other lifelong learning scenarios of neural VRP solvers, such as tasks that differ in their distance matrices or correspond to different problem variants. LLR-BC can further remove the reliance on task identity and adapt to scenarios with continuously changing tasks by applying reservoir sampling during training on each instance instead of only the final epoch of each task. Despite its strong performance, LLR-BC has limitations in some specific cases. A fixed $|\mathcal{E}|$ could be difficult to tune when task scales differ greatly, and reservoir sampling in the last epoch favors tasks with more experiences generated in one epoch, leading to potential buffer imbalance. Future work on addressing these issues could expand its applicability.

REFERENCES

- Zafarali Ahmed, Nicolas Le Roux, Mohammad Norouzi, and Dale Schuurmans. Understanding the impact of entropy on policy optimization. In Kamalika Chaudhuri and Ruslan Salakhutdinov (eds.), *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pp. 151–160. PMLR, 2019.
- Irwan Bello, Hieu Pham, Quoc V. Le, Mohammad Norouzi, and Samy Bengio. Neural combinatorial optimization with reinforcement learning, 2017.
- Yoshua Bengio, Andrea Lodi, and Antoine Prouvost. Machine learning for combinatorial optimization: A methodological tour d’horizon. *European Journal of Operational Research*, 290(2): 405–421, 2021. ISSN 0377-2217.
- Jieyi Bi, Yining Ma, Jiahai Wang, Zhiguang Cao, Jinbiao Chen, Yuan Sun, and Yeow Meng Chee. Learning generalizable models for vehicle routing problems via knowledge distillation. In *Advances in Neural Information Processing Systems*, volume 35, pp. 31226–31238. Curran Associates, Inc., 2022.
- Aigerim Bogrybayeva, Meraryslan Meraliyev, Taukekhan Mustakhov, and Bissenbay Dauletbayev. Machine learning to solve vehicle routing problems: A survey. *IEEE Transactions on Intelligent Transportation Systems*, 25(6):4754–4772, 2024. doi: 10.1109/TITS.2023.3334976.
- Jakob Bossek, Pascal Kerschke, Aneta Neumann, Markus Wagner, Frank Neumann, and Heike Trautmann. Evolving diverse tsp instances by means of novel and creative mutation operators. In *Proceedings of the 15th ACM/SIGEVO Conference on Foundations of Genetic Algorithms*, FOGA ’19, pp. 58–71, New York, NY, USA, 2019. Association for Computing Machinery. ISBN 9781450362542.
- Pietro Buzzega, Matteo Boschini, Angelo Porrello, Davide Abati, and Simone Calderara. Dark experience for general continual learning: A strong, simple baseline. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin (eds.), *Advances in Neural Information Processing Systems*, volume 33, pp. 15920–15930. Curran Associates, Inc., 2020.
- Arslan Chaudhry, Puneet K. Dokania, Thalaiyasingam Ajanthan, and Philip H. S. Torr. Riemannian walk for incremental learning: Understanding forgetting and intransigence. In *Proceedings of the European Conference on Computer Vision (ECCV)*, September 2018.
- Xiang-Ling Chen, Yi Mei, and Mengjie Zhang. Learning adaptive neighborhood search with dual operator selection for capacitated vehicle routing problem. In *Proceedings of the Genetic and Evolutionary Computation Conference*, GECCO ’25, pp. 1108–1116, New York, NY, USA, 2025. Association for Computing Machinery. ISBN 9798400714658.
- Sayna Ebrahimi, Franziska Meier, Roberto Calandra, Trevor Darrell, and Marcus Rohrbach. Adversarial continual learning. In *Computer Vision – ECCV 2020*, pp. 386–402, Cham, 2020. Springer International Publishing. ISBN 978-3-030-58621-8.
- Han Fang, Zhihao Song, Paul Weng, and Yutong Ban. INViT: A generalizable routing problem solver with invariant nested view transformer. In *Proceedings of the 41st International Conference on Machine Learning*, ICML’24. JMLR.org, 2024.
- Amir-massoud Farahmand. Action-gap phenomenon in reinforcement learning. In J. Shawe-Taylor, R. Zemel, P. Bartlett, F. Pereira, and K.Q. Weinberger (eds.), *Advances in Neural Information Processing Systems*, volume 24. Curran Associates, Inc., 2011.
- Shaodi Feng, Zhuoyi Lin, Jianan Zhou, Cong Zhang, Jingwen Li, Kuan-Wen Chen, Senthilnath Jayavelu, and Yew-Soon Ong. Lifelong learner: Discovering versatile neural solvers for vehicle routing problems, 2025. URL <https://arxiv.org/abs/2508.11679>.
- Chengrui Gao, Haopu Shang, Ke Xue, Dong Li, and Chao Qian. Towards generalizable neural solvers for vehicle routing problems via ensemble with transferrable local policy. In *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence*, IJCAI ’24, 2024. ISBN 978-1-956792-04-1.

-
- Tong Guo, Yi Mei, Mengjie Zhang, Haoran Zhao, Kaiquan Cai, and Wenbo Du. Learning-aided neighborhood search for vehicle routing problems. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 47(7):5930–5944, 2025.
- Keld Helsgaun. *An Extension of the Lin-Kernighan-Helsgaun TSP Solver for Constrained Traveling Salesman and Vehicle Routing Problems: Technical report*. Roskilde Universitet, December 2017.
- David Isele and Akansel Cosgun. Selective experience replay for lifelong learning. *Proceedings of the AAAI Conference on Artificial Intelligence*, 32(1), 2018.
- Yuan Jiang, Yaoxin Wu, Zhiguang Cao, and Jie Zhang. Learning to solve routing problems via distributionally robust optimization. *Proceedings of the AAAI Conference on Artificial Intelligence*, 36(9):9786–9794, Jun. 2022.
- Christos Kaplanis, Murray Shanahan, and Claudia Clopath. Policy consolidation for continual reinforcement learning. In Kamalika Chaudhuri and Ruslan Salakhutdinov (eds.), *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pp. 3242–3251. PMLR, 09–15 Jun 2019.
- Khimya Khetarpal, Matthew Riemer, Irina Rish, and Doina Precup. Towards continual reinforcement learning: A review and perspectives. *Journal of Artificial Intelligence Research*, 75: 1401–1476, 2022. ISSN 1076-9757.
- James Kirkpatrick, Razvan Pascanu, Neil Rabinowitz, Joel Veness, Guillaume Desjardins, Andrei A. Rusu, Kieran Milan, John Quan, Tiago Ramalho, Agnieszka Grabska-Barwinska, Demis Hassabis, Claudia Clopath, Dharshan Kumaran, and Raia Hadsell. Overcoming catastrophic forgetting in neural networks. *Proceedings of the National Academy of Sciences*, 114(13):3521–3526, 2017.
- Detian Kong, Yining Ma, Zhiguang Cao, Tianshu Yu, and Jianhua Xiao. Efficient neural collaborative search for pickup and delivery problems. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 46(12):11019–11034, 2024.
- Wouter Kool, Herke van Hoof, and Max Welling. Attention, learn to solve routing problems! In *International Conference on Learning Representations*, 2019.
- Yeong-Dae Kwon, Jinho Choo, Byoungjip Kim, Iljoo Yoon, Youngjune Gwon, and Seungjai Min. Pomo: Policy optimization with multiple optima for reinforcement learning. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin (eds.), *Advances in Neural Information Processing Systems*, volume 33, pp. 21188–21198. Curran Associates, Inc., 2020.
- Jingwen Li, Zhiguang Cao, Yaoxin Wu, and Tang Liu. Enhancing the cross-size generalization for solving vehicle routing problems via continual learning, 2024. URL <https://openreview.net/forum?id=WdvT2UgsTK>.
- Jialin Liu, Ke Tang, and Xin Yao. Robust optimization in uncertain capacitated arc routing problems: Progresses and perspectives [review article]. *IEEE Computational Intelligence Magazine*, 16(1): 63–82, 2021.
- Shengcai Liu, Yu Zhang, Ke Tang, and Xin Yao. How good is neural combinatorial optimization? A systematic evaluation on the traveling salesman problem. *IEEE Computational Intelligence Magazine*, 18(3):14–28, 2023. doi: 10.1109/MCI.2023.3277768.
- Hao Lu, Xingwen Zhang, and Shuang Yang. A learning-based iterative method for solving vehicle routing problems. In *International Conference on Learning Representations*, 2020.
- Yining Ma, Zhiguang Cao, and Yeow Meng Chee. Learning to search feasible and infeasible regions of routing problems with flexible neural k-opt. In *Advances in Neural Information Processing Systems*, volume 36, pp. 49555–49578. Curran Associates, Inc., 2023.
- Sahil Manchanda and Sayan Ranu. Limip: Lifelong learning to solve mixed integer programs. *Proceedings of the AAAI Conference on Artificial Intelligence*, 37(7):9047–9054, 2023.

-
- German I. Parisi, Ronald Kemker, Jose L. Part, Christopher Kanan, and Stefan Wermter. Continual lifelong learning with neural networks: A review. *Neural Networks*, 113:54–71, 2019. ISSN 0893-6080.
- Jiyuan Pei, Yi Mei, Jialin Liu, and Mengjie Zhang. Libog: Lifelong learning for black-box optimizer generation, 2025a. URL <https://arxiv.org/abs/2505.13025>.
- Jiyuan Pei, Yi Mei, Jialin Liu, Mengjie Zhang, and Xin Yao. Adaptive operator selection for meta-heuristics: A survey. *IEEE Transactions on Artificial Intelligence*, pp. 1–21, 2025b.
- Yafei Qi, Chen Wang, Zhaoning Zhang, Yaping Liu, and Yongmin Zhang. Balance divergence for knowledge distillation. In *arXiv 2501.07804*, 2025.
- Gerhard Reinelt. TspLib—a traveling salesman problem library. *ORSA Journal on Computing*, 3(4):376–384, November 1991. ISSN 2326-3245. doi: 10.1287/ijoc.3.4.376. URL <http://dx.doi.org/10.1287/ijoc.3.4.376>.
- Andrei A. Rusu, Sergio Gomez Colmenarejo, Caglar Gulcehre, Guillaume Desjardins, James Kirkpatrick, Razvan Pascanu, Volodymyr Mnih, Koray Kavukcuoglu, and Raia Hadsell. Policy distillation, 2016. URL <https://arxiv.org/abs/1511.06295>.
- Rui Sun, Zhi Zheng, and Zhenkun Wang. Learning encodings for constructive neural combinatorial optimization needs to regret. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(18):20803–20811, 2024.
- Ke Tang and Xin Yao. Learn to optimize – A brief overview. *National Science Review*, 11(8):nwae132, 04 2024. ISSN 2095-5138. doi: 10.1093/nsr/nwae132.
- Sebastian Thrun. *Lifelong Learning Algorithms*, pp. 181–209. Springer US, Boston, MA, 1998. doi: 10.1007/978-1-4615-5529-2_8. URL https://doi.org/10.1007/978-1-4615-5529-2_8.
- Eduardo Uchoa, Diego Pecin, Artur Pessoa, Marcus Poggi, Thibaut Vidal, and Anand Subramanian. New benchmark instances for the capacitated vehicle routing problem. *European Journal of Operational Research*, 257(3):845–858, 2017. ISSN 0377-2217. doi: <https://doi.org/10.1016/j.ejor.2016.08.012>. URL <https://www.sciencedirect.com/science/article/pii/S0377221716306270>.
- Oriol Vinyals, Meire Fortunato, and Navdeep Jaitly. Pointer networks. In *Advances in Neural Information Processing Systems*, volume 28. Curran Associates, Inc., 2015.
- Jeffrey S. Vitter. Random sampling with a reservoir. *ACM Trans. Math. Softw.*, 11(1):37–57, 1985. ISSN 0098-3500.
- Bichen Wang, Yuzhe Zi, Yixin Sun, Yanyan Zhao, and Bing Qin. RKLD: Reverse KL-Divergence-based knowledge distillation for unlearning personal information in large language models. *arXiv 2406.01983*, 2024a.
- Chenguang Wang, Zhouliang Yu, Stephen McAleer, Tianshu Yu, and Yaodong Yang. Asp: Learn a universal neural solver! *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 46(6):4102–4114, 2024b.
- Liyuan Wang, Xingxing Zhang, Hang Su, and Jun Zhu. A comprehensive survey of continual learning: Theory, method and application. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 46(8):5362–5383, 2024c. doi: 10.1109/TPAMI.2024.3367329.
- Yaoxin Wu, Wen Song, Zhiguang Cao, Jie Zhang, and Andrew Lim. Learning improvement heuristics for solving routing problems. *IEEE Transactions on Neural Networks and Learning Systems*, 33(9):5057–5069, 2022. doi: 10.1109/TNNLS.2021.3068828.
- Ziyang Wu, Christina Baek, Chong You, and Yi Ma. Incremental learning via rate reduction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 1125–1133, June 2021.

-
- Yubin Xiao, Di Wang, Xuan Wu, Yuesong Wu, Boyang Li, Wei Du, Liupu Wang, and You Zhou. Improving generalization of neural vehicle routing problem solvers through the lens of model architecture, 2025.
- Friedemann Zenke, Ben Poole, and Surya Ganguli. Continual learning through synaptic intelligence. In Doina Precup and Yee Whye Teh (eds.), *Proceedings of the 34th International Conference on Machine Learning*, volume 70 of *Proceedings of Machine Learning Research*, pp. 3987–3995. PMLR, 2017.
- Yuepeng Zheng, Fu Luo, Zhenkun Wang, Yaoxin Wu, and Yu Zhou. Mtl-kd: Multi-task learning via knowledge distillation for generalizable neural vehicle routing solver, 2025. URL <https://arxiv.org/abs/2506.02935>.
- Jianan Zhou, Yaoxin Wu, Wen Song, Zhiguang Cao, and Jie Zhang. Towards omni-generalizable neural methods for vehicle routing problems. In Andreas Krause, Emma Brunskill, Kyunghyun Cho, Barbara Engelhardt, Sivan Sabato, and Jonathan Scarlett (eds.), *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 42769–42789. PMLR, 23–29 Jul 2023.
- Shipei Zhou, Yuandong Ding, Chi Zhang, Zhiguang Cao, and Yan Jin. Dualopt: A dual divide-and-optimize algorithm for the large-scale traveling salesman problem. *Proceedings of the AAAI Conference on Artificial Intelligence*, 39(25):27178–27186, 2025.

A FURTHER DETAILS OF LLR-BC

A.1 OVERALL PROCESS OF LLR-BC

For a sequence of tasks, LLR-BC conducts lifelong learning with Algorithm 1. For each new task in the lifelong learning process, LLR-BC trains the solver model π_θ and updates the experience buffer \mathcal{B} as Algorithm 2 demonstrates. Only the model parameter θ and the buffer \mathcal{B} are transferred between tasks. LLB-RC can sequentially train on any number of tasks, as it does not rely on any knowledge about the number or order of tasks.

Algorithm 1 LLR-BC Lifelong Learning

```
1: Input:  $\{T_i\}_{i=1}^K, \theta_0$   
2: Parameters:  $A, C, \mathcal{L}_{DRL}$   
3: Output:  $\theta$   
4: for  $i \in \{1, \dots, K\}$  do  
5:    $\theta, \mathcal{B} \leftarrow$  LLR-BC One Task Learning  $(\theta, \mathcal{B}, T, A, C, \mathcal{L}_{DRL})$   
6: end for  
7: return  $\theta$ 
```

Algorithm 2 LLR-BC One Task Learning

```
1: Input:  $\theta, \mathcal{B}, T, A, C, \mathcal{L}_{DRL}$   
2: Parameters:  $\alpha, |\mathcal{E}|$   
3: Output:  $\theta, \mathcal{B}$   
4: for  $i \in \{1, \dots, A\}$  do  
5:    $\mathcal{I} \leftarrow$  generate a batch of  $C$  problems from  $T$   
6:    $\{\tau\} \leftarrow$  Solve  $\mathcal{I}$  with  $\pi_\theta$   
7:    $loss \leftarrow \mathcal{L}_{DRL}(\theta, \{\tau\})$   
8:   if  $\mathcal{B}$  is not empty then  
9:      $\mathcal{E} \leftarrow$  uniformly sample  
10:     $\{w_{\mathcal{E}}(e)\}_{e \in \mathcal{E}} \leftarrow \{1 - \frac{\text{var}(\mathcal{P})}{\text{var}_{\max}(\mathcal{P})}\}_{e=\langle s, \mathcal{P} \rangle \in \mathcal{E}}$   
11:     $\{\bar{w}_{\mathcal{E}}(e)\}_{e \in \mathcal{E}} \leftarrow \{\frac{w_{\mathcal{E}}(e)}{\sum_{e' \in \mathcal{E}} w_{\mathcal{E}}(e')}\}_{e \in \mathcal{E}}$   
12:     $loss \leftarrow loss + \alpha \cdot \mathcal{L}_{BC}(\theta, \mathcal{E})$   
13:   end if  
14:    $\theta \leftarrow \text{Optimize}(\theta, loss)$   
15:   if  $i = A$  then  
16:      $\mathcal{B} \leftarrow$  reservoir sampling  $(\{\tau\}, \mathcal{B})$   
17:   end if  
18: end for  
19: return  $\theta, \mathcal{B}$ 
```

A.2 CONFIDENCE IN CONSTRUCTIVE SOLVERS

Figure 5 demonstrates a CVRP example where the low-confidence decision changes when training the solver on a new task. For the solver trained on U, tested on a problem of task U, it generates a solution with some low-confidence decisions, e.g., the 5th action. Then, after fine-tuning it on task E for 10 epochs, we test it again on the same problem of task U, getting a new solution (the total distance is larger). On the node corresponding to the previous 5th decision, the new solution differs from the previous one. The 11th actions are also changed, where the new solver has low confidence. Many decisions after are also different, but it could be due to the previous differences. It illustrates that low-confidence decisions could be more likely to drift during training on a new task.

A.3 REVERSE KLD

The Kullback–Leibler divergence (KLD) measures the difference from one learner probability distribution Q to a target/teacher distribution P and is widely adopted for knowledge distillation of

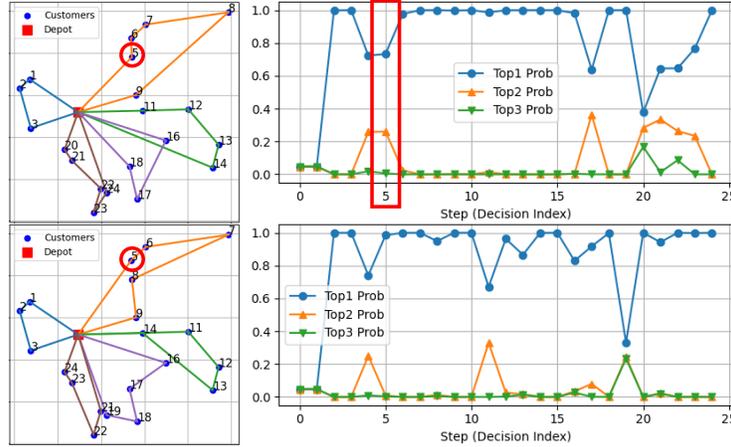


Figure 5: Example of decision drift in a node with low confidence. The number on a node indicates its order in the solution. Left: the generated solution on a problem of task U by a given solver. Right: the top three values of action probability from the solver corresponding to the generated solution. Upper: a solver trained on U task. Lower: fine-tuning the solver on task E for 10 epochs after training it on task U.

neural VRP solvers (Bi et al., 2022; Zheng et al., 2025), computed as:

$$D_{KL}(P||Q) = \sum_i P(i) \log \frac{P(i)}{Q(i)}, \quad (3)$$

where $P(i)$ and $Q(i)$ are the probability of candidate i of the target distribution P and of another distribution Q . KLD is asymmetric, i.e., $D_{KL}(P||Q) \neq D_{KL}(Q||P)$, although both attain their minimum when $P = Q$. By switch Q and P KLD convert to RKLD, i.e.,

$$D_{RKL}(P||Q) = D_{KL}(Q||P) = \sum_i Q(i) \log \frac{Q(i)}{P(i)}. \quad (4)$$

When the teacher’s action probability $P(i)$ is close to zero, the KLD for action i becomes very small. As a result, using KLD as a loss term places little emphasis on the mismatch between $P(i)$ and the learner’s probability $Q(i)$ in such cases. This leads to overly mild penalties when the learner assigns high probability to actions that the teacher has effectively ruled out, i.e., learned incorrect actions. Consequently, the learner tends to spread probability mass across all actions to cover possible modes, i.e., *mode-covering*.

In contrast, RKLD places greater emphasis on penalizing mismatches when the learner’s probability $Q(i)$ is high. This makes RKLD more effective at discouraging the learner from assigning high probability to those learned incorrect actions, thereby encouraging focus on the most probable teacher actions. As a result, RKLD promotes *mode-seeking* or *decision-seeking* behavior.

In LLR-BC, the teacher P is the buffered behavior, and the learner Q is the behavior of the current learning solver on the corresponding buffered state. By minimizing $D_{RKL}(P||Q)$, LLR-BC better preserves the learned good decisions of previously learned tasks.

A.4 COMPUTATIONAL COST

Importantly, compared with fine-tuning the base neural solver, LLR-BC only increases computational cost during training and does not incur extra overhead during inference.

Memory Compared with fine-tuning, the additional space complexity introduced by LLR-BC primarily arises from the experience buffer storing old experiences, with space complexity as $O(|\mathcal{B}| * s_e)$, with s_e denotes the space for one unit of experience. s_e could vary depending on the formulation of the solving process of the base neural solver. Under our implementation, with

$|\mathcal{B}| = 1000$, the experience buffer occupies only about 400 MB of memory when solving CVRP with POMO as the base neural solver. It is acceptable considering the superior performance of LLR-BC.

Run Time Typically, in a training batch of problems with scale N , fine-tuning constraints at least N steps of model forward propagation to generate complete solutions. Compared with fine-tuning the base neural solver, LLR-BC introduces additional time cost from computing the new behaviors of the current model on $|\mathcal{E}|$ sampled old states, storing and sampling experiences from the buffer, and calculating the RKLD between new and old behaviors as the LBC. The first part requires $|\mathcal{E}|$ additional forward propagations, while the latter two involve only lightweight arithmetic operations, whose run cost is negligible. Therefore, the extra time cost introduced by LLR-BC per problem batch is $O(|\mathcal{E}| * t_m)$, $|\mathcal{E}| * t_m$, with t_m denotes the complexity of forward propagation. With $|\mathcal{E}| = 4$ (already outperforming the compared methods) and $N = 20, 50, 100$, ideally, LLR-BC incurs only an additional computational overhead of less than 20%, 8%, and 2%, respectively, compared with fine-tuning. Under our implementation, for all experiments, LLR-BC introduces no more than 8 additional hours based on *fine-tuning* of training for the whole lifelong learning process. Given its superior performance, this additional training complexity is a reasonable and acceptable trade-off.

A.5 NOVELTY

LLR-BC aims to mitigate the catastrophic forgetting issue when learning from multiple tasks sequentially, by consolidating the solver’s good behaviors on previous critical states. LLR-BC is novel and has significant differences from existing methods.

LLR-BC differs from existing methods for improving cross-distribution cross-scale zero-shot generalization ability (i.e., Fang et al. (2024); Jiang et al. (2022); Gao et al. (2024)) in that LLR-BC works at a higher level, involving a lifelong learning process on a sequence of tasks. These existing methods can serve as the base neural solver in LLR-BC.

LLR-BC differs from the method proposed by Li et al. (2024); Feng et al. (2025) in that: their methods conduct experience replay at the problem instance level, retrain solvers on new instances actively generated from previous tasks and equally learns from each step of solving one instance. In contrast, LLR-BC relies on only buffering problem-solving steps (state-behavior pairs) generated in the past instead of generating new problem instances of previous tasks. LLR-BC consolidates knowledge in units of a single step (one state-behavior pair) instead of a whole trajectory of solving an instance, and emphasizes more important steps, making it lower complexity and potentially more efficient.

In addition, this work also differs from Li et al. (2024); Feng et al. (2025) in terms of the breadth of experimentation and performance evaluation. These two works consider only a single task order and make strong assumptions about the order. Although their methods have general applicability, their experiments are conducted solely with POMO as the base neural solver, and performance evaluation is limited to testing the final model—after learning all tasks—on a subset of previously seen tasks. In contrast, our work does not rely on assumptions about task order; we validate performance across multiple randomized task orders, test several widely studied solvers, and introduce a comprehensive set of metrics to enable broad and systematic performance evaluation.

B TASK AND ORDER DETAILS

B.1 TASK SETTINGS

Four of the six tasks use the node coordinate distribution defined in Bossek et al. (2019), which is widely used in neural VRP solver studies (Zhou et al., 2023; Bi et al., 2022). And we built two more distributions, i.e., Ring and Grid. We also assign different demand distributions to different tasks. The details of node coordinate distribution and demand distribution of each task are as follows. Vehicle capacity is set to 30, 40, 50 for the tasks with scale 20, scale 50, and scale 100, following the setting in Kwon et al. (2020). Notably, for CVRP, the coordinate of the depot is randomly sampled from $[0, 1]^2$, independent of the sampling of customers (nodes).

Task Uniform (U): Each customer/city node i has coordinates $(x_i, y_i) \sim \mathcal{U}(0, 1)$. Demand $d_i \sim \mathcal{U}(1, 10)$, drawn uniformly for CVRP. Figure 6 demonstrates problem examples of task U on CVRP and TSP.

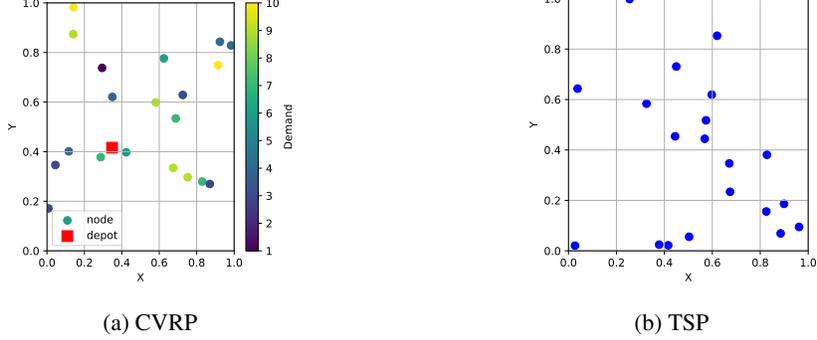


Figure 6: Problem instance sample of task U.

Task Gaussian Mixture (GM): 5 cluster centers $\{c_z\}_{z=1}^5$ are first uniformly sampled from $[0, 50]^2$. For each c_z center, 19 customer/city nodes are sampled. Each is drawn as $(x_i, y_i) \sim \mathcal{N}(c_z, 1)$. Then all node coordinates are linearly mapped into $[0, 1]^2$ with minmax normalization. Demand of each center is drawn uniformly, $d_{c_z} \sim \mathcal{U}(1, 10)$. The distance $dist_i$ of each node i to its center is calculated and minmax normalized to $[0, 1]$. The demand of a node i is set as $10 \cdot dist_i$, then we round the demand. Figure 7 demonstrates problem examples of task GM on CVRP and TSP.

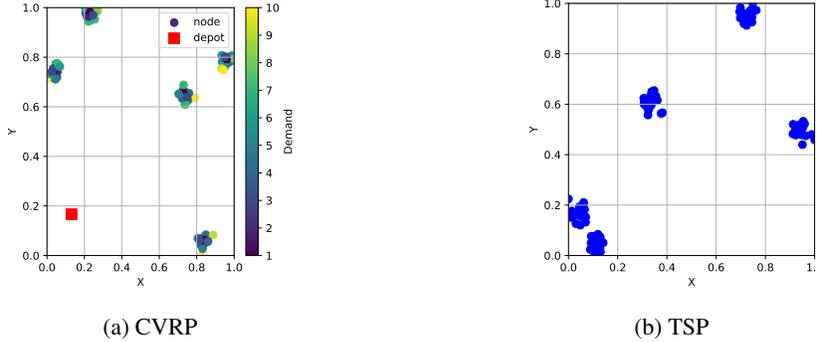


Figure 7: Problem instance sample of task GM.

Task Explosion (E): First nodes are sampled with a uniform coordinate distribution. Then, a point p (not a node) is uniformly sampled from $[0, 1]^2$. For each node with distance to p smaller than 0.3, we move the customer away from p with moving length $0.3 + s$, $s \sim \text{Exp}(40)$. All nodes' coordinates are clamped into $[0, 1]^2$, finally. The demand of each node is sampled from $\mathcal{N}(5, 1)$ and then rounded and clamped to $[0, 10]$. Figure 8 demonstrates problem examples of task E on CVRP and TSP.

Task Compression (C): First nodes are sampled with a uniform coordinate distribution. Then 2 points p_1 and p_2 are sampled uniformly from $[0, 1]^2$, forming a line l . For each node with distance to the l smaller than 0.3, a new distance is sampled from $\mathcal{N}(0, 0.1^2)$. The node will be along the direction vertical to the line, so that its distance to l equals the new distance. All nodes' coordinates are clamped into $[0, 1]^2$, finally. The demand of each node is sampled as $10 - x$, $x \sim \mathcal{N}(5, 1)$, and then rounded and clamped to $[0, 10]$. Figure 9 demonstrates problem examples of task C on CVRP and TSP.

Task Grid (G): A ratio p is uniformly sampled from $[0.2, 0.8]$. Sample a random number r uniformly from $[0, 1]$. If $r \leq 0.5$, $w = 1$, $h = p$, otherwise, $w = p$, $h = 1$. Sample a center rectangle c (not node) $x \sim \mathcal{U}(\frac{w}{2}, 1 - \frac{w}{2})$, $y \sim \mathcal{U}(\frac{h}{2}, 1 - \frac{h}{2})$. Make a square grid in the rectangle with center

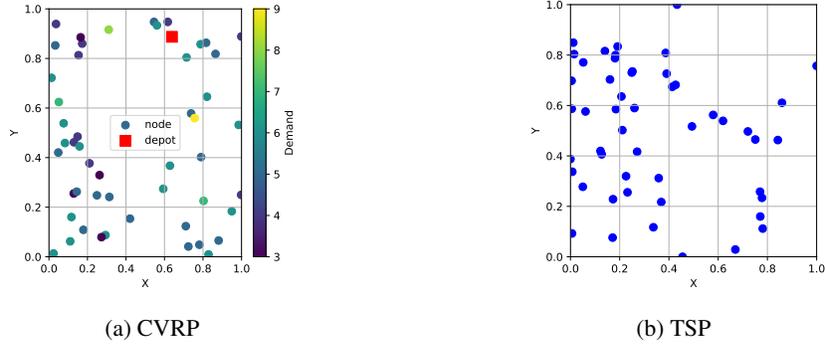


Figure 8: Problem instance sample of task E.

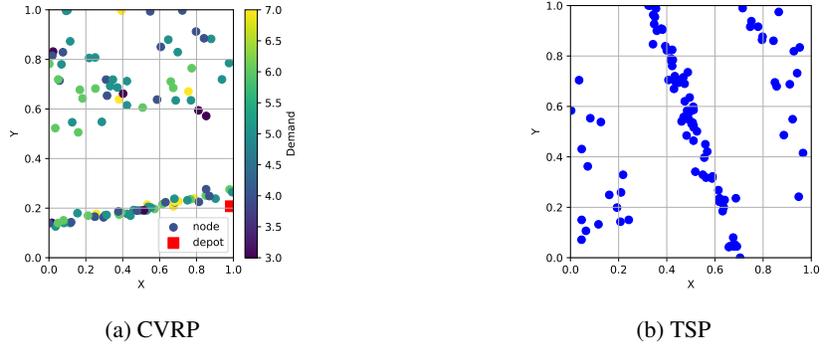


Figure 9: Problem instance sample of task C.

as c , width as w and height as h , $a = \lceil \sqrt{50 * \frac{w}{h}} \rceil$ grids in x axis direction, $b = \lceil \sqrt{\frac{50}{a}} \rceil$ grids in y axis direction. Put one node in each grid until the number of customers meets 50 (If it cannot be evenly divided, leave the grids with the largest x -values in the row with the largest y -value empty). For each customer, we calculate its distance to the depot, and add a noisy $\sim \mathcal{U}(0, 1)$ to the distance. Then we map the distance to $[1, 10]$, round it, and assign it as the demand of the customer. Figure 10 demonstrates problem examples of task G on CVRP and TSP.

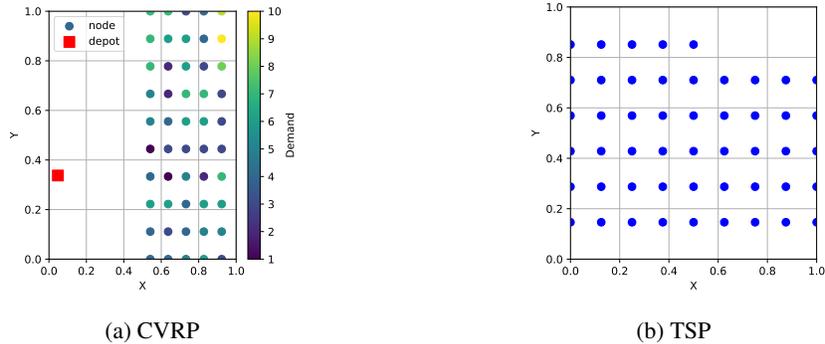


Figure 10: Problem instance sample of task G.

Task Ring (R): A ratio p is uniformly sampled from $[0.2, 0.8]$. For each node, we sample an angle $an \mathcal{U}(0, 2\pi)$ and a radius $ra = ra_1 + ra_2, ra_1 \sim \mathcal{U}(0.3, 0.4), ra_2 \sim \mathcal{N}(0, 0.05^2)$. The coordinate of the node is set as $(0.5 + ra * \cos(an), 0.5 + ra * \sin(an))$. If $p \leq 0.5, p \sim \mathcal{U}(0, 1), x \leftarrow x * p$, otherwise $y \leftarrow y * p$. For each customer, we calculate its distance to the depot, and add a noisy

$\sim \mathcal{U}(0, 2)$ to the distance. Then we map the distance to $[1, 10]$, round it, and assign it as the demand of the customer. Figure 11 demonstrates problem examples of task R on CVRP and TSP.

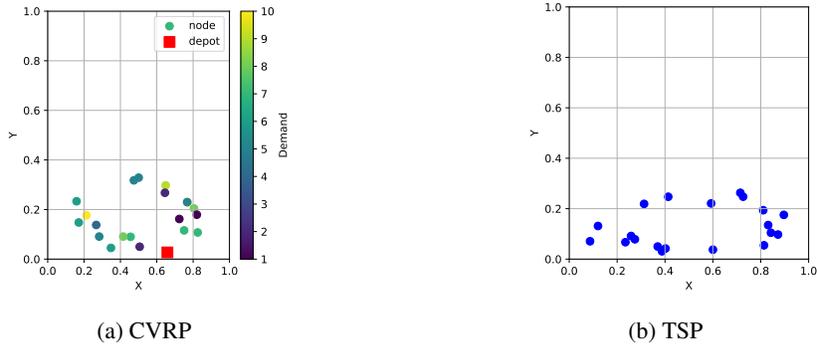


Figure 11: Problem instance sample of task R.

B.2 TASK ORDERS

We randomly shuffle the six tasks five times, getting 5 different task orders.

- Order 1: $E \rightarrow C \rightarrow G \rightarrow U \rightarrow R \rightarrow GM$.
- Order 2: $U \rightarrow GM \rightarrow E \rightarrow R \rightarrow G \rightarrow C$.
- Order 3: $E \rightarrow G \rightarrow R \rightarrow C \rightarrow U \rightarrow GM$.
- Order 4: $G \rightarrow GM \rightarrow E \rightarrow U \rightarrow R \rightarrow C$.
- Order 5: $G \rightarrow C \rightarrow R \rightarrow U \rightarrow GM \rightarrow E$.

C EXPERIMENT SETTING DETAILS

C.1 BASELINES

To adapt LiBOG in VRP tasks, we directly embed its two key modules, i.e., the intra-task and inter-task consolidation terms, into POMO for lifelong learning. After a brief parameter search, the configuration that achieved the best AP performance was selected: the weight of the consolidation term is 10 for EWC and LiBOG, and the weight of the intra-task consolidation term is $1e-4$ for LiBOG. For all runs, the solver learns the first task from an identical randomly generated model. As *Restart* learns each task independently under any task order without being affected by the order, we run *Restart* once on each task and calculate metrics under different task orders. Therefore, *Restart*'s API owns not std. value. As in most cases, POMO can complete the learning on each single task for 200 epochs (Kwon et al., 2020), we let each method train for 200 epochs on each task. To ensure comparable training time across tasks of different problem scales, we vary the number of training problems sampled per epoch: 10,000 for tasks of scale 20, 4,000 for scale 50, and 2,000 for scale 100, with batch sizes of 64, 32, and 16, respectively. Following Kwon et al. (2020), during training, we sample a batch of problem instances and run N parallel solving processes per instance, each corresponding to a different starting node, where N is the problem scale. This results in N^2 parallel trajectories per batch, yielding N^2 independent states and behaviors per experience batch. The size of the experience batch varies across tasks with different problem scales. We consider this reasonable, as larger-scale tasks are typically more complex and thus require larger experience batches to effectively retain learned knowledge. We experimented with buffering and sampling at the level of individual experiences rather than experience batches. However, when using GPU-based parallelization, operating at the batch level significantly reduces computation time without yielding significant performance differences.

C.2 EVALUATION METRICS

In designing our evaluation metrics, we follow common practices in lifelong learning (Chaudhry et al., 2018; Wang et al., 2024c). However, when measuring forgetting, we use the test performance obtained immediately after training on a task as the reference, rather than the best performance before training on the k th task. The latter may include effects of backward transfer, which is not the focus of our study. Notably, we report each metric at a given k value rather than averaging across all k , as averaging would overemphasize early tasks in forgetting metrics and later tasks in AG, contradicting our assumption that all tasks are equally important.

C.3 OTHER DETAILS

Our experiments are conducted on a GPU cluster utilizing a single Nvidia A100 GPU per run. Each lifelong learning method implemented based on POMO² (Kwon et al., 2020) and Omni³ (Zhou et al., 2023) builds upon the official codes released by the original authors.

Based on POMO, each compared method conducts lifelong learning on a single task order once for performance evaluation, requiring approximately one and a half days. For fairness, for each base neural solver, all methods and task orders begin lifelong learning from the same initial model with randomly initialized parameters. Training problem instances are generated on-the-fly at the start of each batch during training.

With 200 training epochs, one task contains $200 * 10000$, $200 * 4000$, $200 * 2000$ problem instances, $\frac{200*10000}{64}$, $\frac{200*4000}{32}$, $\frac{200*2000}{16}$ batches, and at least $\frac{200*10000}{64} * 20 = 625000$, $\frac{200*4000}{32} * 50 = 1250000$, $\frac{200*2000}{16} * 100 = 2500000$ experience batches for scale 20, 50, 100 tasks, respectively. Therefore, the total number of generated experiences after learning the six tasks is 8750000. As $|\mathcal{B}| = 1000$, the buffer contains only $\frac{1000}{8750000} \approx 0.01\%$ of total generated experiences.

D DETAILED EXPERIMENT RESULTS

D.1 MAIN EXPERIMENTS ON CVRP

The detailed metric values in each task order are given in Table 5. Figures 12 and 13 demonstrate the forgetting curve and then learning curve on each current task of each method on task orders 2, 3, 4, and 5. Across all orders, LLR-BC demonstrates the best performance. It aligns with the conclusion in the main text. Additionally, across orders, we found a specific pattern. For *fine-tuning*, learning on GM or C (both scale 100) will lead to significant forgetting of U or R (both scale 20) if they were learned previously, vice versa. It may suggest that the scale difference greatly affects lifelong learning.

D.2 MAIN EXPERIMENTS ON TSP

The detailed metric values in each task order are given in Table 6. Figures 14 and 15 demonstrate the forgetting curve and then learning curve on each current task of each method on task orders 2, 3, 4, and 5. Across all orders, LLR-BC demonstrates the best performance. It aligns with the conclusion in the main text.

D.3 RESULT ON BENCHMARK INSTANCES

We use the identical representative instance set as selected and used by Zhou et al. (2023) Table 7 and 8 present the detailed test performance on CVRPLIB (Set-X) and TSPLIB instances, respectively. Following the same protocol of the main experiments, the reported values are normalized based on the base solution found in our experiments instead of the best-known/optimal solutions reported in existing studies.

²<https://github.com/yd-kwon/POMO>

³<https://github.com/RoyalSkye/Omni-VRP>

Table 5: Metric values on each order on CVRP.

Order	Method	k=3					k=6				
		AP	AF	AMF	API	AG	AP	AF	AMF	API	AG
1	Restart	72.0	8.2	8.2	11.8	36.3	95.7	27.1	27.7	9.1	40.2
	Fine-tuning	32.8	3.2	3.2	7.5	32.8	34.5	19.9	23.1	4.6	31.3
	EWC	35.9	3.1	3.1	8.6	32.6	39.6	19.7	21.5	7.5	33.5
	LiBOG	38.3	2.7	2.7	8.9	33.4	47.7	18.0	18.6	8.3	34.7
	LLR-BC	8.0	0.0	0.0	7.0	27.1	4.7	0.6	0.7	4.1	23.3
2	Restart	44.9	92.5	92.5	8.7	60.7	42.1	37.2	64.4	9.1	52.6
	Fine-tuning	21.8	29.9	29.9	3.7	50.0	18.8	14.3	23.3	2.5	38.4
	EWC	19.5	33.1	33.1	4.4	48.6	19.7	12.4	23.3	4.9	37.9
	LiBOG	22.4	29.1	29.1	4.9	51.1	22.2	12.1	21.2	5.4	39.2
	LLR-BC	2.8	0.0	0.0	3.3	37.1	2.2	0.3	0.3	1.8	22.6
3	Restart	106.8	10.7	10.7	7.8	30.9	95.7	22.8	35.7	9.1	51.9
	Fine-tuning	35.6	4.9	4.9	6.1	24.1	33.4	21	27.4	3.9	44.4
	EWC	40.3	4.1	4.1	6.7	22.3	38.0	18.0	25.4	6.8	40.5
	LiBOG	42.6	4.3	4.3	6.8	25.0	43.0	18.4	25.9	6.7	41.7
	LLR-BC	6.4	0.0	0.0	5.9	23.0	5.0	0.9	1.0	3.7	23.1
4	Restart	35.7	44.5	44.5	10.3	77.3	42.1	26.5	35.5	9.1	52.1
	Fine-tuning	14.6	32.6	32.6	7.0	70.0	20.2	18.9	29.9	4.5	45.8
	EWC	19.2	28.4	28.4	8.4	69.6	27.1	18.5	23.6	7.9	46.4
	LiBOG	19.4	29.1	29.1	8.7	69.0	26.5	20.0	24.3	7.9	46.7
	LLR-BC	7.0	0.3	0.3	6.4	58.2	4.7	0.3	0.6	4.0	32.6
5	Restart	27.2	19.3	19.3	9.5	58.6	26.7	93.1	96.5	9.1	50.5
	Fine-tuning	11.8	11.8	11.8	7.0	50.2	10.5	25.5	36.7	3.7	50.6
	EWC	17.8	14.5	14.5	8.2	49.1	17.0	29.0	33.7	7.5	40.9
	LiBOG	18.3	13.5	13.5	8.6	49.0	17.3	29.9	35.7	7.7	41.7
	LLR-BC	6.5	0.4	0.4	6.7	45.3	4.2	1.6	1.6	3.7	31.8

D.4 HYPERPARAMETER SENSITIVITY ANALYSIS DETAILS

As Table 3 demonstrated, on CVRP, increasing α reduces AF and AMF while increasing API as expected, as it leads to greater emphasis on stability over plasticity, which aligns with expectations since a higher weight in the consolidation loss term will lead to more focus on stability rather than plasticity. In contrast, on the TSP, increasing α results in worse performance across evaluation metrics. A potential reason is that TSP tasks are more similar to each other than those in CVRP, as TSP does not involve differences in demand distribution. This higher similarity increases the likelihood of beneficial backward transfer when learning a new task. In such cases, using a lower consolidation weight could be more advantageous. Nevertheless, LLR-BC consistently outperforms all baseline methods under each tested setting (c.f., Table 1). No significant pattern in performance changing is found by varying $|\mathcal{E}|$ or $|\mathcal{B}|$. But the impact of changing them is substantially small, verifying the robustness of LLR-BC.

D.5 DETAILS OF APPLICABILITY EXPERIMENTS

We evaluate LLR-BC on Omni (Zhou et al., 2023) and INViT Fang et al. (2024) to verify its applicability (cf. Section 4.6). Omni is designed to produce a strong initial model that can quickly adapt to new tasks, through meta-learning. Accordingly, we adopt the meta-learned initial model provided by Zhou et al. (2023) as the starting model for the first task, and run lifelong learning with 10 epochs for each task, following their protocol. INViT aims at learning from one task to achieve strong zero-shot generalization to other tasks. For INViT, we sequentially train on tasks for 100 epochs each. As the default setting (Fang et al., 2024), data augmentation with size 8 is used

Table 6: Metric values on each order on TSP.

Order	Method	k=3					k=6				
		AP	AF	AMF	API	AG	AP	AF	AMF	API	AG
1	Restart	67.0	11.3	11.3	10.0	24.6	39.9	40.8	68	7.1	57.4
	Fine-tuning	31.2	5.3	5.3	4.2	25.9	18.2	36.5	47.9	2.5	35.6
	EWC	26.2	4.5	4.5	5.1	27.4	17.3	22.4	22.6	4.0	29.2
	LiBOG	30.2	3.7	3.7	5.2	28.3	19.4	15.2	22.1	4.3	38.2
	LLR-BC	2.9	0.3	0.3	2.5	19.1	1.7	0.8	0.9	1.3	21.6
2	Restart	39.3	10.0	10.0	5.4	68.7	29.7	128.4	128.4	7.1	76.0
	Fine-tuning	16.6	7.9	7.9	2.4	61.3	13.8	42.5	42.5	2.7	59.3
	EWC	15.4	8.5	8.5	4.2	66.1	14.5	18.9	19.2	4.7	48.1
	LiBOG	18.3	8.0	8.0	4.0	63.0	18.7	16.8	16.8	4.7	45.1
	LLR-BC	4.5	0.1	0.1	2.8	50.6	2.5	0.5	0.6	1.6	27.6
3	Restart	49.9	56.8	56.8	3.1	70.5	39.9	14.6	42.8	7.1	72.9
	Fine-tuning	19.9	29.2	29.2	1.8	17.6	15.4	15.4	30.5	2.2	41.5
	EWC	19.8	19.9	19.9	2.6	16.7	17.0	10.8	19.0	3.8	37.4
	LiBOG	20.6	15.6	15.6	2.1	16.7	17.4	11.8	20.2	4.3	37.2
	LLR-BC	2.2	0.0	0.0	1.9	10.0	3.0	0.6	0.9	1.8	22.9
4	Restart	40.9	46.0	46.0	7.0	156.2	29.7	37.6	47.5	7.1	85.7
	Fine-tuning	25.1	32.2	32.2	7.4	164.3	15.5	33.2	33.2	4.4	85.2
	EWC	34.1	34.1	34.1	8.6	160.8	22.8	23.2	31.2	7.0	77.6
	LiBOG	32.4	34.4	34.4	8.7	154.5	22.2	25.5	33.1	7.5	74.5
	LLR-BC	8.9	1.1	1.1	7.7	154.6	5.0	1.4	1.4	4.2	68.9
5	Restart	14.0	11.1	11.1	8.8	99.5	19.5	30.9	41.5	7.1	69.9
	Fine-tuning	11.5	9.1	9.1	9.4	99.1	11.3	16.7	28.9	5.7	65.4
	EWC	21.5	12.0	12.0	8.9	102.5	20.0	17.7	31.0	8.1	68.3
	LiBOG	18.7	9.4	9.4	8.6	92.1	18.2	16.9	22.0	8.2	63.5
	LLR-BC	7.5	0.8	0.8	9.1	106.3	4.8	0.5	1.7	5.3	64.5

Table 7: Test performance on CVRPLIB instances.

Instance	Restart	Fine-tuning	EWC	LiBOG	LLR-BC
X-n101-k25	8.16	17.92	0	10.56	8.93
X-n153-k22	38.03	0	21.71	43.18	23.72
X-n200-k36	19.54	8.13	7.02	13.22	0
X-n251-k28	14.26	0	14.25	9.23	1.47
X-n303-k21	66.62	10.03	38.12	27.47	0
X-n351-k40	118.54	5.53	6.5	18.25	0
X-n401-k29	23.33	1.48	16.77	21.85	0
X-n459-k26	76.71	0	9.8	8.78	20.85
X-n502-k39	9.86	0	4.42	21.88	20.08
X-n548-k50	35.99	0	9.31	6.18	4.33
X-n599-k92	27.25	17.92	7.76	25.96	0
X-n655-k131	31.02	26.97	0	11.66	0.77
X-n701-k44	58.96	0	30.82	9.88	13.01
X-n749-k98	43.41	20.44	0	13.76	7.94
X-n801-k40	29.82	0	2.3	1.55	14.34
X-n856-k95	50.49	29.5	13.87	35.03	0
X-n895-k37	71.45	0	33.18	26.84	21
X-n957-k87	58.04	24.37	9.06	27.86	0
X-n1001-k43	48.51	0	0.5	9.78	13.28
Mean (Std.)	43.68 (27.37)	8.54 (10.71)	11.86 (11.59)	18.05 (10.86)	7.88 (8.75)

Table 8: Test performance on TSPLIB instances.

Instance	Restart	Fine-tuning	EWC	LiBOG	LLR-BC
kroA100	86.88	40.56	42.67	75.6	0
kroA150	29.43	28.06	0	7.58	12.15
kroA200	101.65	0	16.93	44.99	48.77
kroB200	105.78	10.86	34.53	12.47	0
ts225	152.45	60.52	70.33	24.24	0
tsp225	97.43	9.61	0	15	2.47
pr226	17.84	0	5.95	16.59	16.12
pr264	47.94	36.59	0	34.88	46.66
a280	72.55	8.98	0	28.86	19.19
pr299	79.27	0	5.09	6.53	16.29
lin318	97.15	0	16	46.94	32.34
rd400	81.68	18.25	0	25.14	20.14
fl417	40.69	3.67	30.88	0	21.12
pr439	126.81	29.1	3.8	0	0.14
pcb442	108.27	0	1.17	17.31	11.12
d493	253.56	443.1	280.94	123.82	0
u574	92.14	19.11	3.25	10.8	0
rat575	122.04	0	24.43	20.29	52.95
p654	45.81	0	11.12	5.04	26.84
d657	267.62	136.78	81.08	101.14	0
u724	66.06	30.1	0	2.83	25.28
rat783	135.86	0	10.48	23.03	34.46
pr1002	65.53	2.33	0.67	0	29.88
Mean (Std.)	99.76(61.06)	38.16(93.36)	27.80(59.58)	27.96(32.29)	18.08(16.98)

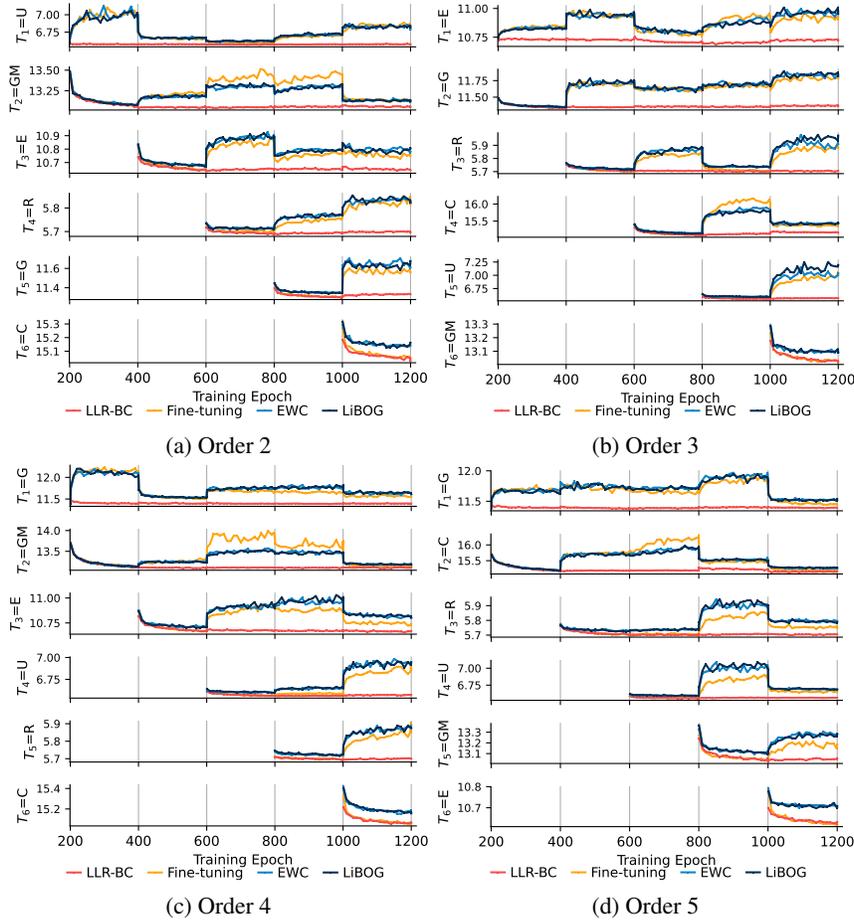


Figure 12: Forgetting curve on CVRP task orders 2-5, measured by average solution distance (vertical axis). Epochs 0–200 (first task) are omitted as no forgetting occurs. *Restart* is excluded due to significantly higher forgetting than other methods.

in INViT. Hyperparameters of LLR-BC are set as follows: $|\mathcal{B}| = 1000$, $|\mathcal{E}| = 16$, and $\alpha = 100$, identical to the one used on POMO. Hyperparameters of base neural solvers are set identically to the original papers. All other settings are consistent with those used with POMO, as above. Since our goal is not to compare performance differences across base neural solvers, we apply independent normalization for each base neural solver, i.e., for different base neural solvers the value of d_j^* is different. This allows us to demonstrate the applicability of LLR-BC across different base solvers more clearly, without the distraction from performance differences in base neural solvers.

For Omni, only on API of CVRP, LLR-BC is slightly higher than *fine-tuning*. It is considered reasonable as Omni is designed to quickly adapt and owns outstanding plasticity, which overwrites the benefit from the potential forward transferring of LLR-BC. For INViT, LLR-BC outperforms *fine-tuning* on most metrics, except for the forgetting measures on CVRP. A potential reason for this weaker performance is that TSP tasks are highly similar to one another (relative to the greater diversity among CVRP tasks), and INViT is known to exhibit strong ability to learn general knowledge of relatively similar tasks from one task (Fang et al., 2024). In such cases, incorporating prior experience that is not directly relevant to the current learning task may introduce distracting signals, which can outweigh the benefits in mitigating forgetting.

Notably, the performance of LLR-BC can be further improved by tuning its hyperparameters for each individual base neural solver. Overall, LLR-BC outperforms *fine-tuning* across most evaluation metrics, regardless of the used base neural solver, thereby confirming its broad applicability.

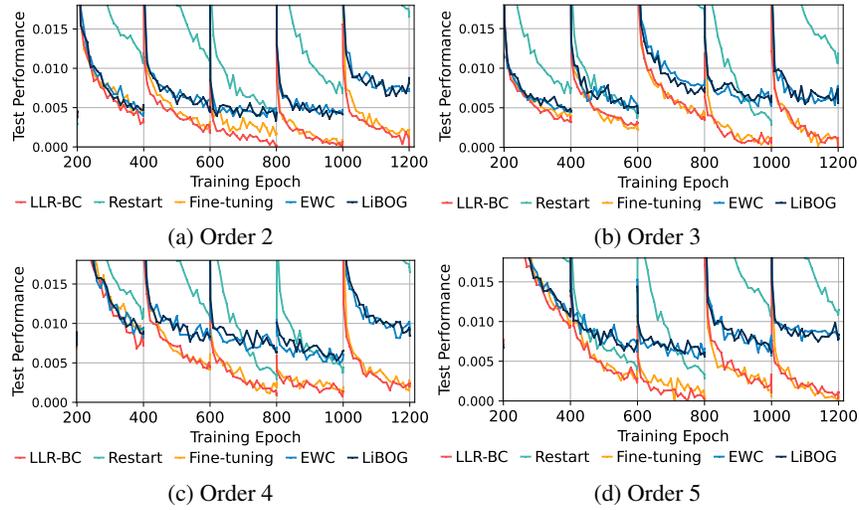


Figure 13: Test performance on the current task during lifelong learning on CVRP task orders 2-5.

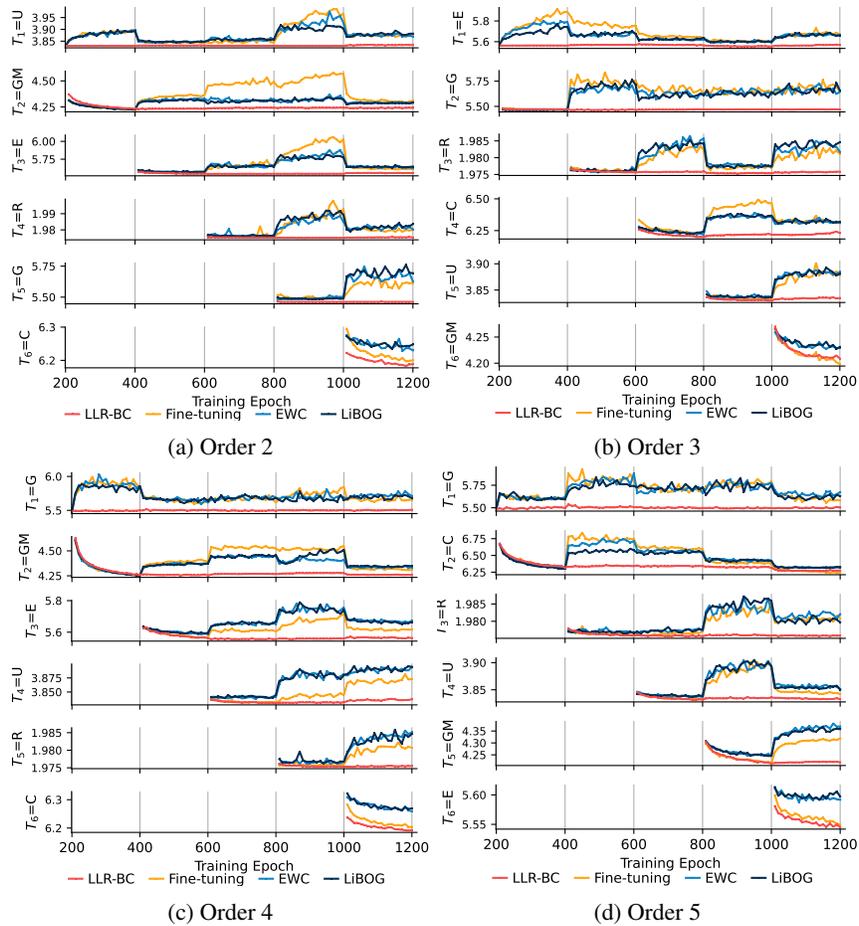


Figure 14: Forgetting curve on TSP task orders 2-5, measured by average solution distance (vertical axis). Epochs 0–200 (first task) are omitted as no forgetting occurs. *Restart* is excluded due to significantly higher forgetting than other methods.

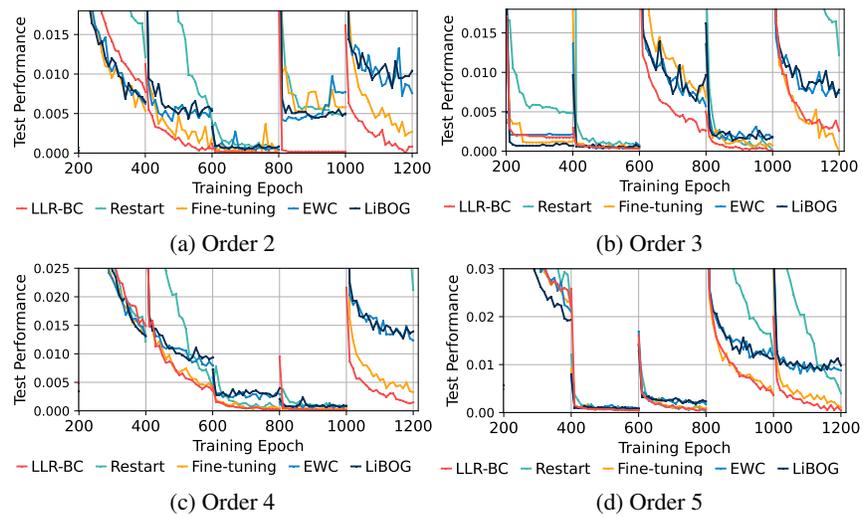


Figure 15: Test performance on the current task during lifelong learning on TSP task orders 2-5.