

Question-Driven Analysis and Synthesis: Building Interpretable Thematic Trees with LLMs for Text Clustering and Controllable Generation

Tiago F. Tavares^{1*}

¹Inspere Institute of Teaching and Research
R. Quatá, 300
São Paulo, SP, 04546-042, Brazil
tiagoft1@insper.edu.br

Abstract

Unsupervised analysis of text corpora is challenging, especially in data-scarce domains where traditional topic models struggle. While these models offer a solution, they typically describe clusters with lists of keywords that require significant manual effort to interpret and often lack semantic coherence. To address this critical interpretability gap, we introduce Recursive Thematic Partitioning (RTP), a novel framework that leverages Large Language Models (LLMs) to interactively build a binary tree. Each node in the tree is a natural language question that semantically partitions the data, resulting in a fully interpretable taxonomy where the logic of each cluster is explicit. Our experiments demonstrate that RTP’s question-driven hierarchy is more interpretable than the keyword-based topics from a strong baseline like BERTopic. Furthermore, we establish the quantitative utility of these clusters by showing they serve as powerful features in downstream classification tasks, particularly when the data’s underlying themes correlate with the task labels. RTP introduces a new paradigm for data exploration, shifting the focus from statistical pattern discovery to knowledge-driven thematic analysis. Furthermore, we demonstrate that the thematic paths from the RTP tree can serve as structured, controllable prompts for generative models. This transforms our analytical framework into a powerful tool for synthesis, enabling the consistent imitation of specific characteristics discovered in the source corpus.

Introduction

Unsupervised analysis of text corpora is a fundamental challenge in artificial intelligence, yet state-of-the-art methods face a critical trade-off between performance and interpretability. While modern topic models like BERTopic (Grootendorst 2022) can cluster documents semantically, they describe these clusters with lists of keywords that require significant post-hoc human effort to interpret and often lack coherence, especially in data-scarce domains. This interpretability gap motivates the central question of our work: can the structured reasoning capabilities of modern Large Language Models (LLMs) be employed to move beyond keyword-based topics and generate an intrinsically interpretable thematic model of a corpus? Furthermore, can such a model not only analyze content but also

provide a structured foundation for controllably synthesizing new text?

To address these questions, we introduce Recursive Thematic Partitioning (RTP), a novel framework that reframes text analysis as an interactive dialogue with an LLM. RTP recursively builds a binary tree by prompting the model to generate a single, divisive natural language question at each node, such as “Is this review primarily about food quality or customer service?”. This process yields a fully interpretable hierarchy where each partition is explained by an explicit, semantic rule. Unlike existing methods, RTP produces a model that is transparent by design and whose thematic logic can be directly understood and validated by a human user.

We demonstrate through a comprehensive set of experiments that RTP provides a powerful new tool for both analysis and synthesis, as follows:

1. By comparing our method with a BERTopic baseline, we show that the thematic hierarchies generated by RTP are easier to interpret and more often linked to actionable information within the dataset.
2. We establish the quantitative utility of the generated clusters by showing they serve as effective features in downstream classification tasks.
3. We introduce and validate a novel application: using the paths of the tree as a structured “thematic signature” for Controllable Thematic Generation (CTG). Our results reveal that this technique provides unparalleled control over the semantic content of generated text, effectively solving a key challenge in controllable synthesis.

This work presents a unified framework that bridges the gap between understanding and creating, shifting from statistical pattern discovery to interactive, knowledge-driven text modeling.

Related Work

The Interpretability Challenge in Topic Modeling

Analysis of large textual corpora often relies on topic modeling to cluster documents by content (Vayansky and Kumar 2020). A canonical approach, Latent Dirichlet Allocation (LDA) (Blei, Ng, and Jordan 2003), models documents as bags-of-words and identifies topics based on word

*Under review at AAAI 2026

co-occurrence. While widely used, LDA’s performance degrades in data-scarce regimes, such as with small datasets or short texts.

To address these limitations, modern methods like BERTopic (Grootendorst 2022) use powerful pre-trained embeddings from models like BERT (Devlin et al. 2019). After clustering document embeddings, BERTopic uses TF-IDF on the resulting clusters to extract representative keywords.

Despite their different mechanisms, both classic and modern topic models share a critical limitation: their outputs require a post-hoc human interpretation of keyword lists. This process can be challenging because the generated keywords can be incoherent or meaningless for a specific application (Chang et al. 2009), and their interpretation can be inconsistent due to analysts’ expertise (Arnold et al. 2016) or hyperparameter choices (Gillings and Hardie 2022). Even when LLMs are used as external interpreters for these topics, their utility can be limited by a lack of domain-specific knowledge (Rijcken et al. 2023). While LLMs can also be prompted to extract topics directly (Pham et al. 2023; Mu et al. 2025), this often requires ad-hoc human intervention. This persistent interpretability gap motivates the central question of our work: can the structured reasoning capabilities of modern LLMs be applied to produce a thematically coherent and inherently interpretable representation of a corpus?

LLMs for Structured Reasoning and Analysis

While the extent to which LLMs possess emergent world models or true reasoning capabilities is debated (Mirzadeh et al. 2025; Shojaee et al. 2025; Abbe et al. 2024), their practical utility in structured tasks is well-established. Providing factual knowledge as part of the prompt, for example, can improve control and reduce hallucinations (Brown et al. 2020; Lewis et al. 2020). Also, explicitly inducing thought processes has shown to improve output quality and interpretability, as is the case of Chain-of-Thought (Wei et al. 2022) and Step-Back (Zheng et al. 2023) prompting.

A key capability that emerges from this grounded reasoning is the ability to answer specific questions about a text (Zhu et al. 2024) and organize these answers into structured formats. Prior work has established that this can be used to create interpretable classifiers from text (Balek et al. 2024). More relevant to our work, the ability of LLMs to generate structured outputs has been successfully applied to create binary decision trees from tabular data (Knauer et al. 2024; Xiong et al. 2024). This line of research is particularly promising, as tree-based models are not only highly interpretable but also consistently outperform other architectures on tabular data classification problems (Grinsztajn, Oyallon, and Varoquaux 2022).

Controllable Thematic Generation

A significant challenge in text generation is achieving fine-grained, reproducible control over content attributes. While LLMs can be prompted with adjectives like “formal” or “assertive”, these descriptions are often ambiguous and lead to inconsistent outputs (Schulhoff et al. 2024). Consequently,

achieving high-fidelity imitation typically requires extensive prompt engineering or fine-tuning on large, specialized corpora (Liang et al. 2024).

The RTP Framework

Our work introduces Recursive Thematic Partitioning, a framework to build an interpretable binary tree from a corpus of unstructured text. The process, depicted in Figure 1, uses a greedy recursion similar to that of the well-known C4.5 decision tree (Quinlan 1993). It starts by associating all documents in the corpus to an initial, root node. Then, it recursively partitions a set of documents by generating a single, thematic question at each node and splitting the documents based on their answers. The implementation used in this work uses OpenAI’s `gpt-4o-mini` model, accessed via the Azure API.

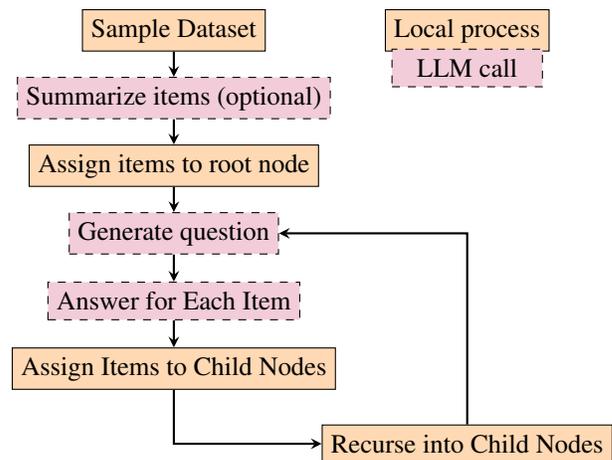


Figure 1: Overview of tree generation for RTP. A random sample of the dataset is taken. Then, the sample is used within a prompt to generate a yes/no question capable of partitioning the sample. Using LLM calls, the question is answered for each item in the sample. The items are assigned to the “yes” leaf and the “no” leaf, and the question generation process is recursively performed in each leaf until stop conditions are met.

Data Reduction

A primary practical challenge is that operating on a full corpus at each recursive step is bounded to the LLM’s context window size and to token costs. To create a tractable version of the dataset for the entire tree-building process, we employ a two-stage data reduction pipeline, which is executed before recursion begins:

1. **Global Corpus Sampling.** First, we draw a single, global random sample from the entire corpus. This smaller, sampled dataset is then used as the input for the complete recursive partitioning process. The sample size is a key hyperparameter governing the trade-off between representativeness and computational cost.

2. **Document Summarization.** Second, if the documents within our global sample are themselves very long, we can perform a one-time summarization step. Each document in the sample is summarized using an LLM call. We treat the use of summarization as a boolean hyperparameter.

This upfront data reduction strategy enables RTP to build a complete thematic hierarchy from a static, representative subset of the original large corpus.

Recursive Question Generation

At each node of the tree, starting with the root node containing the entire sampled dataset, we prompt an LLM to generate a single, divisive thematic question. The prompt contains a representative subset of documents from the current partition and instructs the LLM to create a yes/no question that best splits these documents into two coherent, roughly equal-sized groups.

Robust Data Partitioning

Once a question is generated, we prompt the LLM to generate the answer to the question for each document within the partition. To mitigate stochastic LLM errors, we employ a majority voting mechanism:

1. For each document, we query the LLM N times with a non-zero temperature, asking it to answer the generated question based on the document’s content.
2. The final answer (“yes” or “no”) for the document is determined by a simple majority vote over the N responses.

The number of votes, N , is a hyperparameter allowing a trade-off between robustness and token count. Documents are then split into a “yes” child node and a “no” child node based on their final assigned answer.

Recursion and Stopping Criteria

The process of question generation and partitioning is then recursively applied to both child nodes. The recursion for any given branch terminates when one of the following standard stopping criteria is met:

1. The tree reaches a predefined maximum depth, D .
2. The number of documents in a node falls below a minimum leaf size, K .

Both D and K are hyperparameters of the framework.

Classification

The generated tree can be used for classification. For such, the tree is used as a decision path. For a given document, we traverse the tree from the root, using an LLM to answer the question at each node to determine the path. The final prediction is the majority class of the training samples that landed in the corresponding leaf node.

Controllable Thematic Generation

Controllable Thematic Generation (CTG) leverages the explicit structure of the RTP tree to generate texts that adhere to specific, user-defined themes. The process begins by selecting a target leaf node that represents the desired thematic content. We then extract the “thematic signature” of this node, defined as the unique sequence of questions and answers along the path from the root. This sequence is then translated into a set of structured constraints that are incorporated into a prompt to guide a generative LLM.

Experiments and Results

Our experiments are designed to answer three central research questions regarding RTP:

1. **Interpretability:** Does RTP produce thematic hierarchies that are demonstrably more interpretable to humans than those from state-of-the-art topic models?
2. **Quantitative Utility:** Do the clusters generated by RTP serve as useful features in downstream supervised tasks?
3. **Controllable Thematic Synthesis:** Can the thematic paths of an RTP tree be used as structured prompts to controllably generate text within a specific, data-driven theme?

In the following sections, we describe the methods used to address each of these questions, followed by a detailed analysis of our findings.

Datasets

We evaluate our framework, RTP, on three widely-used public benchmarks: IMDB Movie Reviews¹ (Maas et al. 2011), Yelp Reviews² (Zhang, Zhao, and LeCun 2015), and AG News³ (Zhang, Zhao, and LeCun 2015). These datasets were strategically chosen for their well-understood semantic content, which allows for a straightforward assessment of the interpretability and alignment of the generated themes. Moreover, the clear nature of sentiment in a movie review or the category of a news article enables a critical assessment of the results without requiring specialized domain knowledge.

Importantly, some items in each dataset triggered the LLM’s safety protections due to violent or sexual content. These items were discarded from the sample.

Qualitative Analysis of Thematic Trees

We generated thematic trees for each dataset to perform a qualitative analysis of RTP’s behavior⁴. They are shown in figures 2 (IMDB), 3 (Yelp Reviews), and 4 (AG-News). We immediately note that the questions seem to be related to the dataset content.

A qualitative examination of the trees generated by RTP reveals several key characteristics of our method, highlighting both its strengths in thematic discovery and its interesting emergent behaviors.

¹<https://huggingface.co/datasets/stanfordnlp/imdb>

²https://huggingface.co/datasets/Yelp/yelp_review_full

³https://huggingface.co/datasets/fancyzhx/ag_news

⁴Parameters: sample size 100, $N = 4$, $D = 5$, $K = 3$, no summarization

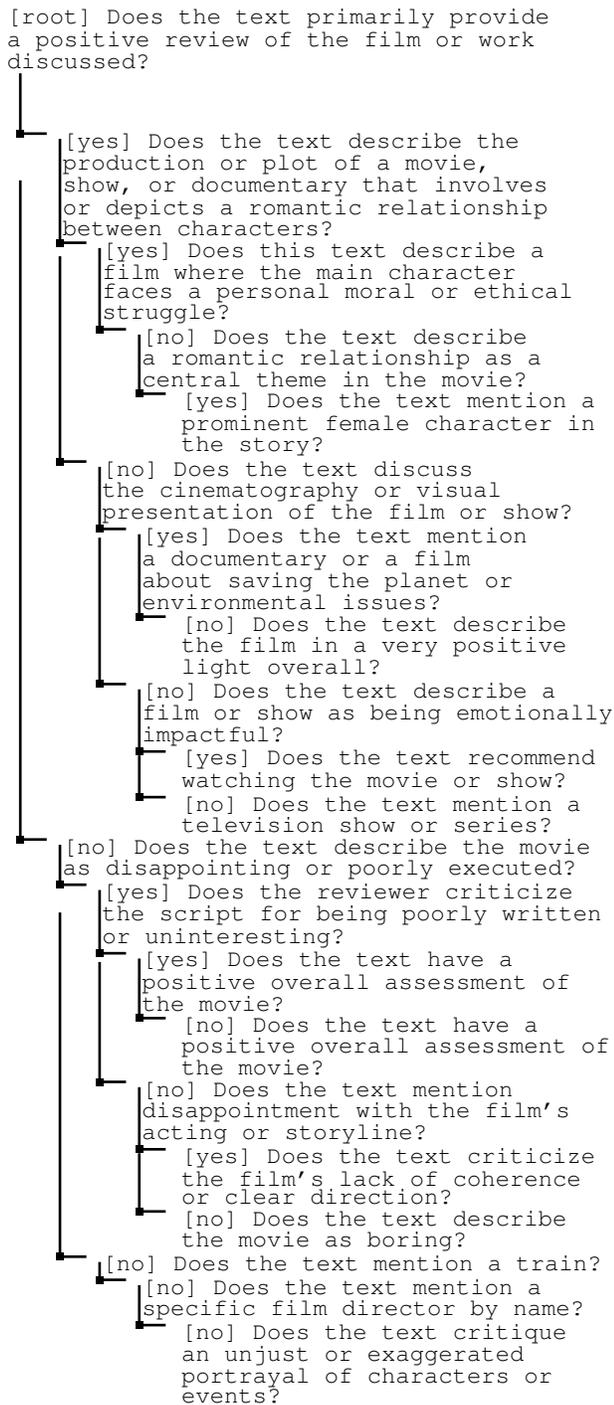


Figure 2: Thematic tree generated for the IMDB dataset.

Hierarchical Theme Discovery For the sentiment-focused IMDB and Yelp Reviews datasets, RTP consistently identifies the primary axis of variation. The root node in both trees is a question directly related to positive versus negative sentiment, confirming that RTP correctly captures the most dominant theme. Subsequent nodes in the hierarchy then explore more nuanced, fine-grained aspects within each sentiment class. For example, as shown in Figure 2, positive reviews in the IMDB dataset are further partitioned by ques-

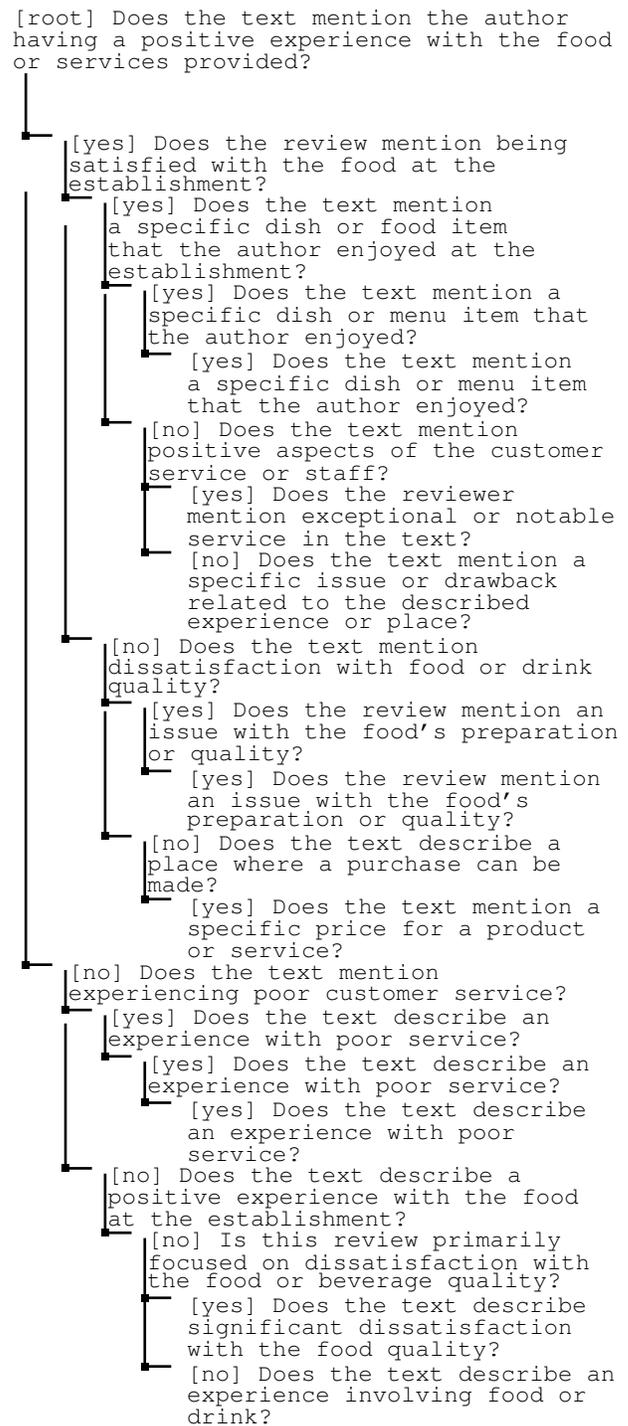


Figure 3: Thematic tree generated for the Yelp Reviews dataset.

tions about the movie's emotional impact, while negative reviews are split by criticisms of technical aspects like cinematography or acting. Similarly, the Yelp tree reveals that negative customer experiences are often thematically clustered around poor customer service, which is a highly specific and actionable insight for a business owner.

In contrast, the root node of the AG News tree asks a ques-

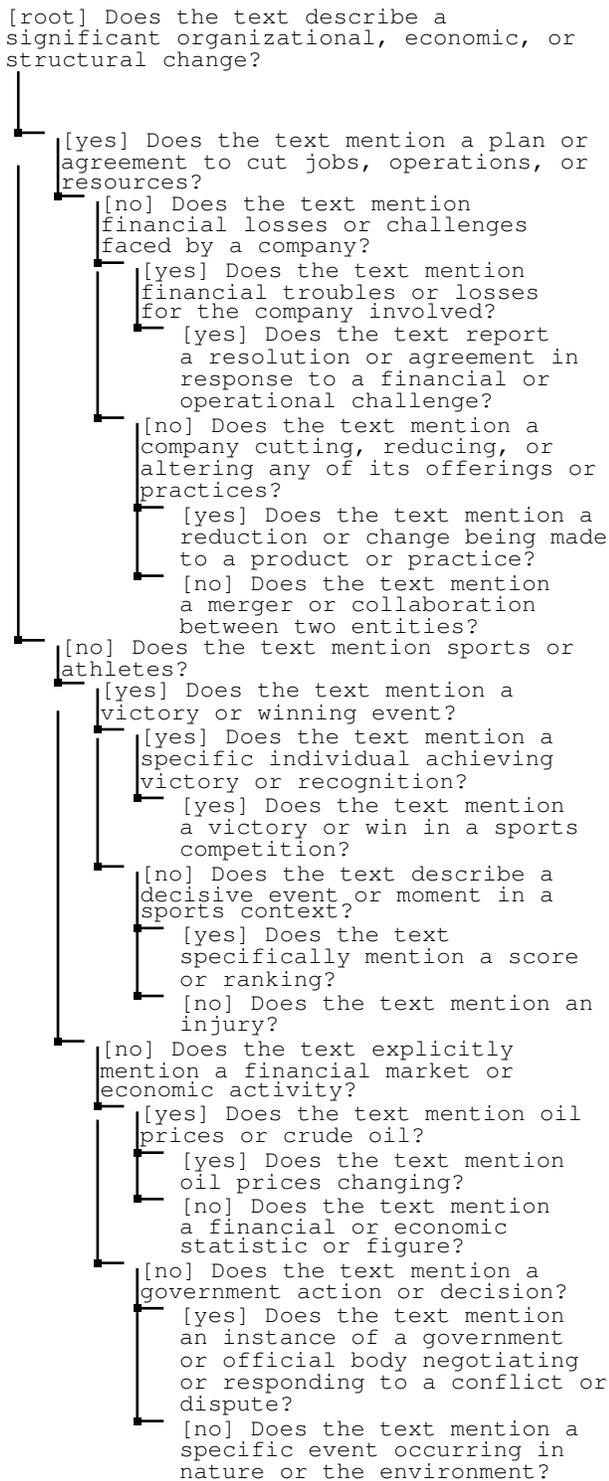


Figure 4: Thematic tree generated for the AG-News dataset.

tion that separates articles related to geopolitics and finance from those concerning sports and technology. This demonstrates that RTP identifies semantic themes that may not perfectly align with the predefined ground-truth labels but still represent a valid and logical partition of the content. The resulting hierarchy thus provides a more fine-grained thematic

view than the four broad categories alone.

Emergent Behaviors and Limitations Our analysis also highlights several emergent behaviors that characterize the current RTP framework.

Unbalanced Partitions. While we prompt the LLM to generate questions that create roughly equal splits, we observed several nodes, particularly in the IMDB and Yelp trees, that result in highly unbalanced branches. This occurs when the LLM generates a very specific question that isolates a small but coherent thematic minority (e.g., reviews focused on a niche technical flaw). This indicates a failure to strictly adhere to the “half-and-half” constraint, but it successfully identifies a distinct, interesting subgroup. This suggests a trade-off between creating balanced trees for exploration and isolating small, highly specific themes.

Thematic Redundancy. We also noted instances of similar or repeated questions appearing in the tree, either in parent-child relationships or between sibling nodes. This is a natural consequence of the algorithm’s design, where question generation for each node is an independent process that only considers the local document partition. The model has no memory of the questions asked previously in the hierarchy. While this can lead to redundancy, it also demonstrates the robustness of the LLM in identifying the most salient thematic split at different levels of granularity.

Summary of Analysis Overall, our qualitative analysis confirms that RTP successfully builds a meaningful and interpretable thematic hierarchy. It correctly identifies the dominant themes at the root and uncovers nuanced, actionable sub-themes in deeper nodes. Its emergent behaviors, such as unbalanced splits and thematic redundancy, do not detract from its utility but rather provide valuable insights into the method’s decision-making process and highlight clear avenues for future work, such as incorporating tree-level context into the question generation prompt.

Interpretability: RTP vs. BERTopic

Setup and results To provide a fair comparison with a standard topic model, we executed BERTopic in the same dataset sample used in the experiments with RTP. The results are shown in Tables 1, 2, and 3. Following BERTopic convention, topics are numbered from 0 to the number of topics found, and topic -1 represents outliers.

Analysis We note that the keywords seem to be related to the dataset ideas. However, they do not convey as much information as the themes generated by RTP. For example, theme 0 in the IMDB dataset is related to both “good” and “bad”, whereas we can find topics that cite specific actors or actresses. Similarly, in the Yelp Reviews dataset there are mentions of specific dishes, and the topics for AG-News mention specific companies, cities, and sports teams. This showcases that RTP yields more general themes, while this generalization must be performed manually when using BERTopic.

However, it is important to note that BERTopic topics represent the result of an objective analysis of an embedding-based clustering of the collection, whereas the themes for

Topic	Representation
-1	br movie like just really film best actors time joseph
0	br film movie like just bad good really movies thing
1	film br movie police hes mukhsin tolstoy way good love
2	film musical best brando singing dancing george burns astaire fontaine
3	br action point dont sasha film does believe like money
4	ethel movie dead story advancement backwoods bodies battalion halfway film
5	color life natali films think movie important based white kind

Table 1: Topics generated by BERTopic in IMDB

Topic	Representation
-1	food like really just good place groupon ordered lunch told
0	bar got airport way people air like line view terminal
1	great good delicious ordered place places crepes breakfast lunch phoenix
2	food thai good great pho place menu hair love felt
3	room told hotel desk card security stay roland didnt safe
4	table horrible minutes busy servers sat right server service del
5	pizzas pizza papa called crust toppings johns driver looked time
6	wash sushi mat creme includes vacuum price machine priced tea
7	salmon hype fruit place garlic dont flavors instead fries time
8	salad cardboard hickory food salads piece know dressing husband came
9	buffet wait quality seated relleno chile youre enchiladas beans food
10	sandwiches night cute owner nni coffee lots quite huge big

Table 2: Topics generated by BERTopic in Yelp Reviews

RTP rely on a strong pre-training of a stochastic generative question-answering system. This means that each word in the topics created by BERTopic can be explained in terms of their role, whereas the themes created by RTP are more strongly linked to the datasets used to train the LLM itself. Consequently, although RTP-generated themes are easier to interpret, they can be misleading due to biases that cannot be controlled by the user.

Text Classification

Setup To evaluate the quantitative utility of the thematic hierarchies generated by RTP, we use them as classifiers for the ground-truth labels of each dataset. Also, we further analyze the effects of summarization by turning it on and off both in the training and testing stages. The process is repeated five times in different samples of the training set and

Topic	Representation
-1	ap monday bush biggest said solaris group british hp 39s
0	39s reuters oil corp prices cut stocks said new york election iran nuclear said afp north lbtgtlbtgt syria sudan region
1	election iran nuclear said afp north lbtgtlbtgt syria sudan region
2	lions 39t inter williams win sunday season standings dallas revolution
3	yankees sox look jeter games johnson peskys rays aftermath charleys
4	39s england world bowler open number test coach champions harmison
5	bison bears falls taj river salmon mahal mconeil spectacular sun
6	alitalia alter emissions end split practices canada unions deal sales

Table 3: Topics generated by BERTopic in AG-News

mean and the two-sigma confidence interval are reported.

To obtain a baseline result, we fine-tune a pre-trained DistilBERT model (Sanh et al. 2019) on the exact same small data sample used to generate the RTP tree. This ensures a fair comparison, isolating the benefit of RTP’s structure against the fine-tuning of a powerful neural network on the same limited data. For context, we also report the state-of-the-art (SoTA) performance from models on huggingface.com⁵, which are typically trained on the full dataset.

Results Our primary finding is that RTP significantly outperforms the fine-tuned DistilBERT baseline in IMDB, and surpasses the performance of a model trained on the full dataset ($p < 0.05$, one-sample t-test). The performances of RTP and the baseline are similar in Yelp Reviews. However, on the topic-based AG News dataset, the fine-tuned DistilBERT baseline is superior. This brings forward a key characteristic of our method.

Model	IMDB	Yelp Reviews	AG-News
SoTA (reference)	.94	.65	.94
DistilBERT (baseline)	.81(.03)	.39(.07)	0.87(.01)
RTP (ours)	96(.02)	.40(.12)	.64(.04)
RTP-T (ours)	96(.02)	.39(.04)	.52(.10)
RTP-E (ours)	.91(.03)	.37(.08)	.61(.06)
RTP-TE (ours)	.89(.04)	.41(.05)*	.51(.07)

Table 4: Accuracies for each model. SoTA is the highest accuracy reported in models found in huggingface.com. The RTP classifiers are identified on whether they use summarization on training (T) or on evaluation (E). The highest mean accuracy (excluding SoTA) is marked in bold. Values are $\mu(2\sigma)$. Asterisks denote non-significant differences ($p > .05$) compared to baseline.

⁵IMDB: <https://huggingface.co/DeepAxion/distilbert-imdb-sentiment>; Yelp Reviews: <https://huggingface.co/BexRedpill/distilbert-on-yelp-reviews-full-epoch-2>; AG-News: <https://huggingface.co/JiaqiLee/bert-agnews>

Analysis The performance increase in IMDB can be attributed to the alignment between the question in the root node (“Does the text primarily provide a positive review of the film or work discussed?”) and the classification problem itself. Thus, the high classification accuracy is a consequence of the LLM’s ability to answer that question correctly. With an adequate set of questions, the classification process exploits the zero-shot learning ability of LLMs and can reach close to SoTA accuracies.

The root question in the Yelp Reviews tree (“Does the text mention the author having a positive experience with the food or services provided?”) is ambiguous with regards to the classification problem: a review can be primarily positive without explicitly mentioning the author’s experience. In AG-News, the questions throughout the tree are only indirectly aligned to the classification problem. Henceforth, the high classification accuracy is a consequence of the dataset partitions identified by RTP being correlated to the ground truth labels.

Our ablation study on summarization revealed that it has a different effect in each dataset. The use of summarization was harmful in IMDB and AG-News, whereas it had no statistically significant effect in Yelp Reviews. Also, summarization in training had a smaller impact in IMDB, while summarization on evaluation had a smaller impact on AG-News. Henceforth, the effects of summarization depend on the datasets themselves, and should be treated as a dataset-dependent hyperparameter.

Controllable Thematic Generation

Setup The proposed Controllable Thematic Generation (CTG) was evaluated using the trees generated for IMDB, Yelp Reviews, and AG-News. We used two baselines. The first, a generic prompt that uses no information from the dataset, which we called “uncontrolled”. Second, we used a strategy based on few-shot prompting in which all texts in the target node were used as examples (instead of the explicit questions and answers that compose the theme signature). The generation process was executed for an arbitrary leaf node in each dataset, and evaluated using two strategies.

Results The first evaluation strategy was to use Sentence Bert (Reimers and Gurevych 2019) to calculate the embedding for each document in the original leaf and in the generated samples⁶. Then, the cosine similarity between the centroids of each generated sample and the original sample was calculated. The results, shown in Table 5, indicate a general coherence of writing style and phrasal similarity. Clearly, in this aspect, few-shot prompting is a far superior technique.

The second evaluation strategy was to use the classification algorithm to associate each document with a leaf node. A document associated with the same node used to start the generation was considered correct. This allows calculating an accuracy, as shown in Table 6, which shows that CTG outperforms other techniques.

⁶We used the all-MiniLM-L6-v2 model. It operated in the initial tokens of each text and discarded those that did not fit the context window, under the assumption that style and tone are constant throughout each text

Strategy	IMDB	Yelp Reviews	AG-News
Uncontrolled	.37	.51	-.01
Few-shot (baseline)	.45	.55	.86
CTG (ours)	.41	.52	.34

Table 5: Sentence Bert embedding similarity evaluation of each generation strategy.

Strategy	IMDB	Yelp Reviews	AG-News
Uncontrolled	.07	.00	.00
Few-shot (baseline)	.04	.03	.08
CTG (ours)	.60	.39	.31

Table 6: Node accuracy evaluation of each generation strategy.

Analysis These contrasting results reveal an important finding. The choice of generation strategy depends on the user’s goal. Few-shot prompting is a powerful technique for imitating surface-level features like phrasing and tone. However, our CTG method provides control over thematic content, making it the superior tool when the goal is to generate text that adheres to specific, rule-based semantic constraints. This is because in few-shot prompting the LLM has the burden of extracting patterns from the dataset, whereas the CTG method specifically informs what are these patterns. This distinction between mimicking style and controlling substance is a key contribution of our work.

Conclusion

In this paper, we introduced Recursive Thematic Partitioning (RTP), a novel framework that uses Large Language Models to build interpretable thematic hierarchies from text corpora. By recursively partitioning data with natural language questions, RTP moves beyond the keyword-based outputs of traditional topic models, creating a transparent taxonomy where each decision point is explained. We demonstrated that this approach yields hierarchies that are not only more interpretable to humans but also quantitatively useful as features in downstream tasks. Furthermore, we showed that the analytical structure of the RTP tree can be repurposed for synthesis, providing a powerful, data-driven method for Controllable Thematic Generation that offers unparalleled control over content.

RTP opens exciting avenues for future research. A key next step is to investigate optimal strategies for integrating human-in-the-loop feedback, especially in niche contexts such as education and law. The explicit, question-based nature of each node creates natural intervention points where a domain expert could validate, override, or refine the LLM’s suggested partitions. Exploring interactive interfaces that allow users to guide the tree-building process could further enhance the model’s alignment with specific analytical goals, bridging the gap between automated discovery and expert-driven knowledge construction.

References

- Abbe, E.; Bengio, S.; Lotfi, A.; and Rizk, K. 2024. Generalization on the Unseen, Logic Reasoning and Degree Curriculum. *Journal of Machine Learning Research*, 25(331): 1–58.
- Arnold, C. W.; Oh, A.; Chen, S.; and Speier, W. 2016. Evaluating topic model interpretability from a primary care physician perspective. *Computer Methods and Programs in Biomedicine*, 124: 67–75.
- Balek, V.; Sýkora, L.; Sklenák, V.; and Kliegr, T. 2024. LLM-based feature generation from text for interpretable machine learning.
- Blei, D. M.; Ng, A. Y.; and Jordan, M. I. 2003. Latent dirichlet allocation. *J. Mach. Learn. Res.*, 3(null): 993–1022.
- Brown, T. B.; Mann, B.; Ryder, N.; Subbiah, M.; Kaplan, J.; Dhariwal, P.; Neelakantan, A.; Shyam, P.; Sastry, G.; Askell, A.; Agarwal, S.; Herbert-Voss, A.; Krueger, G.; Henighan, T.; Child, R.; Ramesh, A.; Ziegler, D. M.; Wu, J.; Winter, C.; Hesse, C.; Chen, M.; Sigler, E.; Litwin, M.; Gray, S.; Chess, B.; Clark, J.; Berner, C.; McCandlish, S.; Radford, A.; Sutskever, I.; and Amodei, D. 2020. Language Models are Few-Shot Learners. arXiv:2005.14165.
- Chang, J.; Gerrish, S.; Wang, C.; Boyd-graber, J.; and Blei, D. 2009. Reading Tea Leaves: How Humans Interpret Topic Models. In Bengio, Y.; Schuurmans, D.; Lafferty, J.; Williams, C.; and Culotta, A., eds., *Advances in Neural Information Processing Systems*, volume 22. Curran Associates, Inc.
- Devlin, J.; Chang, M.-W.; Lee, K.; and Toutanova, K. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. In Burstein, J.; Doran, C.; and Solorio, T., eds., *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, 4171–4186. Minneapolis, Minnesota: Association for Computational Linguistics.
- Gillings, M.; and Hardie, A. 2022. The interpretation of topic models for scholarly analysis: An evaluation and critique of current practice. *Digital Scholarship in the Humanities*, 38(2): 530–543.
- Grinsztajn, L.; Oyallon, E.; and Varoquaux, G. 2022. Why do tree-based models still outperform deep learning on typical tabular data? In *Proceedings of the 36th International Conference on Neural Information Processing Systems, NIPS '22*. Red Hook, NY, USA: Curran Associates Inc. ISBN 9781713871088.
- Grootendorst, M. 2022. BERTopic: Neural topic modeling with a class-based TF-IDF procedure. *arXiv preprint arXiv:2203.05794*.
- Knauer, R.; Koddenbrock, M.; Wallsberger, R.; Brisson, N. M.; Duda, G. N.; Falla, D.; Evans, D. W.; and Rodner, E. 2024. "Oh LLM, I'm Asking Thee, Please Give Me a Decision Tree": Zero-Shot Decision Tree Induction and Embedding with Large Language Models.
- Lewis, P.; Perez, E.; Piktus, A.; Petroni, F.; Karpukhin, V.; Goyal, N.; Küttler, H.; Lewis, M.; Yih, W.-t.; Rocktäschel, T.; Riedel, S.; and Kiela, D. 2020. Retrieval-Augmented Generation for Knowledge-Intensive NLP Tasks.
- Liang, X.; Wang, H.; Wang, Y.; Song, S.; Yang, J.; Niu, S.; Hu, J.; Liu, D.; Yao, S.; Xiong, F.; and Li, Z. 2024. Controllable Text Generation for Large Language Models: A Survey. arXiv:2408.12599.
- Maas, A. L.; Daly, R. E.; Pham, P. T.; Huang, D.; Ng, A. Y.; and Potts, C. 2011. Learning Word Vectors for Sentiment Analysis. In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*, 142–150. Portland, Oregon, USA: Association for Computational Linguistics.
- Mirzadeh, I.; Alizadeh-Vahid, K.; Shahrokhi, H.; Tuzel, O.; Bengio, S.; and Farajtabar, M. 2025. GSM-Symbolic: Understanding the Limitations of Mathematical Reasoning in Large Language Models. In *International Conference on Learning Representations (ICLR)*.
- Mu, Y.; Dong, C.; Bontcheva, K.; and Song, X. 2025. Large Language Models Offer an Alternative to the Traditional Approach of Topic Modelling. In *LREC-COLING 2024*.
- Pham, C. M.; Hoyle, A.; Sun, S.; and Iyyer, M. 2023. TopicGPT: A Prompt-based Topic Modeling Framework. arXiv:2311.01449.
- Quinlan, J. R. 1993. *C4.5: Programs for Machine Learning*. San Mateo, CA: Morgan Kaufmann.
- Reimers, N.; and Gurevych, I. 2019. Sentence-BERT: Sentence Embeddings using Siamese BERT-Networks. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing*. Association for Computational Linguistics.
- Rijcken, E.; Scheepers, F.; Zervanou, K.; Spruit, M.; Mosteiro, P.; and Kaymak, U. 2023. Towards Interpreting Topic Models with ChatGPT. The 20th World Congress of the International Fuzzy Systems Association, IFSA ; Conference date: 20-08-2023 Through 24-08-2023.
- Sanh, V.; Debut, L.; Chaumond, J.; and Wolf, T. 2019. DistilBERT, a distilled version of BERT: smaller, faster, cheaper and lighter. In *5th Workshop on Energy Efficient Machine Learning and Cognitive Computing @ NeurIPS 2019*.
- Schulhoff, S.; Ilie, M.; Balepur, N.; Kahadze, K.; Liu, A.; Si, C.; Li, Y.; Gupta, A.; Han, H.; Schulhoff, S.; Dulepet, P. S.; Vidyadhara, S.; Ki, D.; Agrawal, S.; Pham, C.; Kroiz, G.; Li, F.; Tao, H.; Srivastava, A.; Da Costa, H.; Gupta, S.; Rogers, M. L.; Goncarencu, I.; Sarli, G.; Galynker, I.; Peskoff, D.; Carpuat, M.; White, J.; Anadkat, S.; Hoyle, A.; and Resnik, P. 2024. The Prompt Report: A Systematic Survey of Prompt Engineering Techniques.
- Shojaee, P.; Mirzadeh, I.; Alizadeh, K.; Horton, M.; Bengio, S.; and Farajtabar, M. 2025. The Illusion of Thinking: Understanding the Strengths and Limitations of Reasoning Models via the Lens of Problem Complexity. arXiv:2506.06941.
- Vayansky, I.; and Kumar, S. A. 2020. A review of topic modeling methods. *Information Systems*, 94: 101582.
- Wei, J.; Wang, X.; Schuurmans, D.; Bosma, M.; Ichter, B.; Xia, F.; Chi, E. H.; Le, Q. V.; and Zhou, D. 2022. Chain-of-thought prompting elicits reasoning in large language

models. In *Proceedings of the 36th International Conference on Neural Information Processing Systems*, NIPS '22. Red Hook, NY, USA: Curran Associates Inc. ISBN 9781713871088.

Xiong, S.; Ihlamur, Y.; Alican, F.; and Yin, A. O. 2024. GPTree: Towards Explainable Decision-Making via LLM-powered Decision Trees.

Zhang, X.; Zhao, J.; and LeCun, Y. 2015. Character-level convolutional networks for text classification. In *Proceedings of the 29th International Conference on Neural Information Processing Systems - Volume 1*, NIPS'15, 649–657. Cambridge, MA, USA: MIT Press.

Zheng, H. S.; Mishra, S.; Chen, X.; Cheng, H.-T.; Chi, E. H.; Le, Q. V.; and Zhou, D. 2023. Take a Step Back: Evoking Reasoning via Abstraction in Large Language Models.

Zhu, Y.; Yuan, H.; Wang, S.; Liu, J.; Liu, W.; Deng, C.; Chen, H.; Liu, Z.; Dou, Z.; and Wen, J.-R. 2024. Large Language Models for Information Retrieval: A Survey. arXiv:2308.07107.