
FormaRL: Enhancing Autoformalization with no Labeled Data

Yanxing Huang¹, Xinling Jin⁴, Sijie Liang⁵, Peng Li^{3*}, Yang Liu^{2,3*}

¹Department of Mathematics Sciences, Tsinghua University

²Dept. of Comp. Sci. & Tech., Institute for AI, Tsinghua University, Beijing, China

³Institute for AI Industry Research (AIR), Tsinghua University

⁴School Of Computer Science And Technology, Tongji University

⁵Faculty of Science Mathematics and applied mathematics, Beijing Forestry University

Abstract

Autoformalization is one of the central tasks in formal verification, while its advancement remains hindered due to the data scarcity and the absence efficient methods. In this work we propose **FormaRL**, a simple yet efficient reinforcement learning framework for autoformalization which only requires a small amount of unlabeled data. FormaRL integrates syntax check from Lean compiler and consistency check from large language model to calculate the reward, and adopts GRPO algorithm to update the formalizer. We also curated a proof problem dataset from undergraduate-level math materials, named **uproof**, in the hope to facilitate the exploration of autoformalization and theorem proving in advanced math. Experiments show that FormaRL can increase the pass@1 autoformalization accuracy of Qwen2.5-Coder-7B-Instruct by 4 ~ 6x (4.04% → 26.15% on ProofNet and 2.4% → 9.6% on uproof) with merely 859 unlabeled data. And on uproof our method also achieved a strong improvement in out-of-distribution performance compared to existing open-source state-of-the-art autoformalizers on both pass@1 accuracy (6.2% → 9.6%) and pass@16 accuracy (24.4% → 33.6%). Training code of FormaRL is open-sourced at <https://github.com/THUNLP-MT/FormaRL>.

1 Introduction

Mathematical reasoning has long been regarded as a cornerstone of scientific and technological advancement. Recent large language models (LLMs) have made advancements in solving math problems (OpenAI et al., 2024a; Qwen et al., 2024; Yang et al., 2024a). Large reasoning models (LRMs) gain stronger reasoning abilities, and achieved impressive results on competition level math problems (OpenAI et al., 2024b; DeepSeek-AI et al., 2025a; Team et al., 2025).

Although language models excel in many mathematical tasks, they still struggle with theorem proving. An important reason is that theorem proving typically requires formal verification, and one of the critical steps of it, autoformalization, remains challenging for models (Li et al., 2024b; Yang et al., 2024b). Autoformalization is the process which translates natural language mathematics into formal languages (Li et al., 2024b; Yang et al., 2024b), such as Lean (Moura & Ullrich, 2021), Isabelle (Tobias Nipkow, 2002), or Coq (Yves Bertot, 2013). It is the start point of formal verification for a theorem. And it is crucial for creation of large scale training dataset of following steps of theorem proving (Wu et al., 2024; Li et al., 2024a; Lin et al., 2025; Xin et al., 2025; Castelveccchi, 2024; Xin et al., 2024a;b).

Existing models demonstrate certain ability on autoformalization of elementary mathematics, but their performance significantly drops when it comes to that of advanced mathematics (see Table 4). Advanced math covers a much wider range of concepts and is much more

*Corresponding authors: Peng Li (lipeng@air.tsinghua.edu.cn) and Yang Liu (liuyang2011@tsinghua.edu.cn)

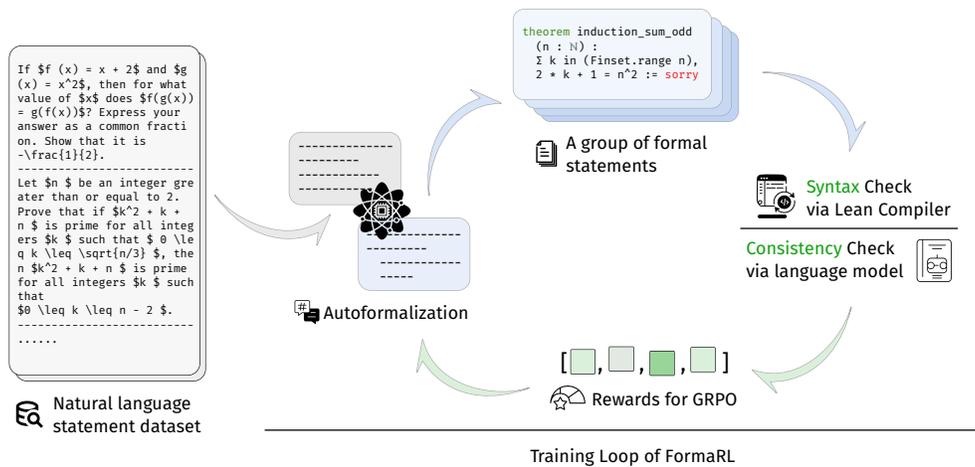


Figure 1: Illustration of FormaRL training loop. We combined lean syntax check from the compiler and LLM based semantic check to assess the quality of formalizations, and adopted GPRO algorithm to update our formalizer.

complex than contest level math, thus is harder to formalize (Azerbaiyev et al., 2023). The lack of training data further limits autoformalization performance in this area. Some prior works (Xin et al., 2024a;b; Li et al., 2024a; Lin et al., 2025; Xin et al., 2025) train autoformalizer on existing large scale formalization datasets, such as MMA (Jiang et al.), Lean Workbook (Ying et al., 2024) or some in-house datasets. Other works boost model performance via supervised fine-tuning (SFT) on manually annotated data (Ying et al., 2024) or informalized statement pairs (Liu et al., 2025; Jiang et al.). However, due to the high cost of human annotation and the inefficiency of training recipe, their performance remains limited.

For the above challenge, we propose a method called **FormaRL**. We utilize reinforcement learning to train our model, with rewards from Lean compiler and LLMs, as shown in Figure 1. Our method is more effective and efficient compared to previous SFT methods. We use training data which is unlabeled, and only 1% of the amount compared to prior works, to reach superior performance. Additionally, our method is applicable to various models, including mathematical foundational models and existing autoformalizers. we also create a dataset, named **uproof**, to evaluate out-of-distribution autoformalization performance in advanced math. It contains 5,273 proof problems from 14 classical textbooks, which covers a wide range of topics from undergraduate-level math.

In summary, our contributions are three-folded:

- We propose **FormaRL**, a simple yet effective RL based training framework to enhance model ability of autoformalization with far less training data.
- We create a benchmark named **uproof**, bridging the gap of evaluation of out-of-distribution autoformalization for advanced math problems.
- We conduct extensive experiments, and find that existing models fall short in advanced math autoformalization, while our proposed method reaches promising performance especially on advanced math autoformalization. Our ablation study further guarantees the effectiveness of FormaRL.

2 Related work

2.1 Autoformalization

Autoformalization aims to automatically translate mathematical materials in natural language into machine-verifiable formal code (Li et al., 2024b). Broadly speaking, it include the translation of both the statements and proofs of a math problem (Cunningham et al., 2023; Jiang et al., 2023; Zhao et al., 2023; Murphy et al., 2024; Patel et al.), while another line of works primarily focus on the translation of the problem statements (Wu et al., 2022; Jiang et al.; Azerbayev et al., 2023).

Autoformalization is a challenging task especially for currently prevalent data-driven approaches (Li et al., 2024b). To alleviate the scarcity of informal-formal corpora, researchers adopted various methods to synthesize large scale datasets for training. This LLM based informalization (Azerbayev et al., 2023; Jiang et al.; Liu et al., 2025), or utilizing in-context learning (ICL) capability to create an expert iteration pipeline for autoformalization (Wu et al., 2022; Ying et al., 2024). One major difference in autoformalization compared to machine translation is the existence of formal verifier. They can provide accurate feedback on the accuracy of the formalized statements and proofs. The verifier is widely used to conduct rejection sampling (Poiroux et al., 2024) or expert iteration (Jiang et al., 2023; Murphy et al., 2024) to enhance autoformalization. It can also contribute to constructing objective evaluation metrics (Azerbayev et al., 2023; Ying et al., 2024; Liu et al., 2025).

2.2 Reinforcement learning

Reinforcement learning (RL) is a machine learning paradigm where an agent learns to make decisions by interacting with the environment to maximize cumulative rewards. Unlike supervised learning, which relies on large scale labeled datasets, RL algorithms learn through trial and error, guided by a reward signal that evaluates the quality of actions taken.

In the development of modern LLMs, there is many works that leverage RL algorithms to optimize their performance. Reinforcement learning from human feedback (RLHF) was proposed to align LLMs behaviour with human preferences and values (Ouyang et al., 2022; Ziegler et al., 2020). Recent work demonstrates RL’s effectiveness in both informal math problem solving (Lightman et al., 2023; Shao et al., 2024) and formal theorem proving (Xin et al., 2024b; Lin et al., 2025; Xin et al., 2025). RL is also the key to the paradigm shift from LLM to LRM (DeepSeek-AI et al., 2025a; Team et al., 2025). RL-based algorithm surpasses SFT is both data efficiency and final performance according to some recent studies (Zeng et al., 2025; Li et al., 2025; Yu et al., 2025).

3 Preliminaries

In this work we primarily focus on formal language Lean 4, with particular attention to the translation of mathematical problem statements. In Lean 4, it is possible to simulate the completion of a proof using the keyword “sorry”. If a theorem statement is syntactically correct and either properly proved or concluded with “sorry”, the Lean compiler returns a “no goals” message, indicating that the statement is accepted.

A typical problem statement in Lean 4 is written as follows:

```
1 theorem exercise_1_13a {f : C → C} (Ω : Set C) (a b : Ω) (h : IsOpen
  Ω) (hf : DifferentiableOn C f Ω) (hc : ∃ (c : ℝ), ∀ z ∈ Ω, (f
  z).re = c) : f a = f b := sorry
```

The “theorem” keyword is used to declare a named theorem, while “example” can be used for unnamed statements. Each declaration is concluded with “sorry” if a proof is omitted. Here we also provide some descriptions of each dataset involved in our experiments.

- miniF2F (Zheng et al., 2022) is a formal theorem proving benchmark proposed by OpenAI. It consists 488 problems from elementary math with several variants in

Lean, Coq and Isabelle. The original purpose of miniF2F was to create a universal benchmark across different formal languages. The problems in miniF2F are drawn from high-school exercises and contests such as AIME, AMC and the IMO. In our experiments we use the version from [Xin et al. \(2024a\)](#) as an autoformalization benchmark for elementary math.

- **ProofNet** ([Azerbayev et al., 2023](#)) was proposed both as a theorem proving benchmark and an autoformalization benchmark. It primarily focus on undergraduate-level math, manually collected and translated 371 problems into Lean. It covers a wide range of topics from advanced mathematics, from real and complex analysis to algebra and topology. Again we use the version provided by [Xin et al. \(2024a\)](#) as an autoformalization benchmark for advanced math.
- **Lean Workbook** ([Ying et al., 2024](#)) is a large scale Lean 4 problem set formalized from contest level math problems in natural language. They crawled the raw problems from AOPS and translated them into Lean 4 using a formalizer trained by themselves. After filtering these results they ended up with 25.2k Lean 4 translation pairs in total, and most of them also belong to elementary math. We primarily use this dataset to train formalizers via SFT as our baseline. Recent researches showed that formalizers trained on this dataset already exhibits strong performance compared to other formalization corpora ([Liu et al., 2025](#)).

4 Methodology

We begin our experiments by designing a reward to assess the translation, which is then integrated into a reinforcement learning framework to iteratively refine translation performance. Our reward design eliminates the need for annotated translation datasets, enabling training of a formalizer without reliance on manual demonstrations.

4.1 Reward design

We adapted the data filtering method in Lean Workbook ([Ying et al., 2024](#)) as the core of our reward system. This process involves two sequential validation stages:

- **Syntax Check (SC)**: Extracted translations will firstly undergo automated validation via the Lean 4 compiler to ensure syntactic correctness. This ensures that the outputs are valid lean 4 code.
- **Consistency Check (CC)**: After stripping comments and metadata, the translation’s semantic alignment with the original problem is evaluated using a large language model (LLM).

For each response from the translation model, a reward of “1.0” is assigned only when it passed both SC and CC, otherwise the reward will always be “0.0”. This hybrid rule-based and LLM-driven assessment ensures robustness, as empirical results demonstrate that neither component alone suffices for reliable validation, see section 5.3 for more details

4.2 Training method

We adopted a simplified version of Group Relative Policy Optimization (GRPO) as our training algorithm. This is also the algorithm behind the success of DeepSeek-R1 ([Shao et al., 2024](#); [DeepSeek-AI et al., 2025a](#)). For each question q , GRPO algorithm samples a group of outputs $\{o_1, o_2, \dots, o_G\}$ from the old policy model $\pi_{\theta_{old}}$, and then optimize the policy model by maximizing the following objective:

$$\mathcal{J}_{GRPO}(\theta) = \mathbb{E}[q \sim P(Q), \{o_i\}_{i=1}^G \sim \pi_{\theta_{old}}]$$

$$\frac{1}{G} \sum_{i=1}^G \frac{1}{|o_i|} \sum_{t=1}^{|o_i|} \left\{ \min \left[\frac{\pi_{\theta}(o_{i,t}|q, o_{i,<t})}{\pi_{\theta_{old}}(o_{i,t}|q, o_{i,<t})} \hat{A}_{i,t}, \text{clip}\left(\frac{\pi_{\theta}(o_{i,t}|q, o_{i,<t})}{\pi_{\theta_{old}}(o_{i,t}|q, o_{i,<t})} \hat{A}_{i,t}, 1 - \epsilon, 1 + \epsilon\right) \right] \right\}$$

Here ϵ and β are hyperparameters, and $\hat{A}_{i,t}$ is the advantage calculated based on relative rewards of the outputs in each group. More accurately it is $\hat{A}_{i,t} = \tilde{r}_i = \frac{r_i - \text{mean}(\mathbf{r})}{\text{std}(\mathbf{r})}$, where \mathbf{r} is the observed reward.

A notable departure from standard GRPO is the omission of the KL divergence regularization term. This simplification, supported by recent empirical studies (Meng et al., 2024; Yu et al., 2025), maintains training stability while reducing computational overhead, and can lead to better performance in many cases.

4.3 Quality assessment

While Lean 4’s syntax checker provides rigorous formal validation, the reliability of the consistency check (CC) warrants closer examination. Inaccuracies in this process could lead to reward hacking or degrade the overall effectiveness of training.

We frame the evaluation of CC as a binary classification task. To assess recall, we applied the consistency check to samples from existing formal datasets paired with their ground truth translations, measuring the rate at which correct samples were accepted. To estimate specificity, we prompted a large language model to deliberately generate incorrect translations by modifying original statements, such as adding, removing, or altering conditions or conclusions, and then tested whether the CC could successfully reject these perturbed examples.

Unless otherwise noted, DeepSeek-V3 (DeepSeek-AI et al., 2025b) was used for CC during most of the FormaRL training process, while Qwen2.5-7B-Instruct (Qwen et al., 2024) served as the evaluation model. The performance of the consistency check is summarized in Table 1.

Model	miniF2F		ProofNet	
	Recall \uparrow	Specificity \uparrow	Recall \uparrow	Specificity \uparrow
Qwen2.5-7B-Instruct	87.29%	92.22%	78.59%	79.68%
DeepSeek-V3	88.52%	98.57%	76.82%	93.53%
GPT-4o	84.22%	97.95%	72.51%	90.84%

Table 1: Performance of the consistency check across different models and datasets.

These results indicate that the consistency check performs reasonably well on simpler datasets like miniF2F, but struggles more with complex mathematical content, as seen in ProofNet, where both recall and specificity are lower. This suggests that using CC as a filtering or selection mechanism may be problematic, particularly in high-throughput scenarios like pass@8 sampling, where specificity can drop sharply (e.g., to 52.31% for miniF2F and 16.25% for ProofNet), allowing a significant number of incorrect samples into the generated dataset.

To mitigate this, our subsequent experiments rely solely on the syntax check (SC) for selection. For each problem, only the first candidate that passes SC proceeds to consistency checking and contributes to the final pass rate.

5 Experiments

5.1 Dataset

To construct our dataset, we curated 14 classical mathematics textbooks spanning core undergraduate curricula, including mathematical analysis, linear algebra, abstract algebra, real analysis, complex analysis, functional analysis, topology, probability, statistics and commutative algebra.

The raw textbook content was preprocessed by converting PDF files into markdown format, followed by segmentation into smaller chunks of reasonable length. We required GPT-4o to extract the lemmas, theorems and exercises from these documents. After that we required GPT-4o again to filter out incomplete problems and reformat math formulas into standard LaTeX syntax.

This results in uproof, a large scale dataset of undergraduate-level proof problems. Here we list some examples in uproof in Table 2.

Problem	Category
If $F : D \rightarrow P$ is a conformal map from the disc D to a polygonal region P , show that F extends to a continuous bijection from the closure of D to the closure of P .	Analysis
Let $\alpha = (2 + \sqrt{2})(3 + \sqrt{3})$ and consider the extension $E = \mathbb{Q}(\alpha)$. Show that α is not a square in $F = \mathbb{Q}(\sqrt{2}, \sqrt{3})$	Algebra
Prove that every closed nonorientable surface has a 2-sheeted orientable covering space.	Topology
Show that if $\frac{\sqrt{n}(X_n - \mu)}{\sigma}$ converges in distribution to $N(0, 1)$, then the expression $\frac{\sqrt{n}(\bar{X}_n - \mu)}{S_n}$ converges in distribution to $N(0, 1)$ as well.	Probability

Table 2: Samples from uproof dataset.

5.2 Results

We utilize two well-known datasets in formal theorem proving, miniF2F and ProofNet, for training with FormaRL. It is important to note that these two datasets contains merely 859 statements in total, which is significantly smaller than the data requirement of existing SFT-based methods (25.2k in Lean Workbook (Ying et al., 2024) and 243k for RAutoformalizer Liu et al. (2025)). The ground truth translations in these datasets are not involved in FormaRL either. Nevertheless, our experiments demonstrate that FormaRL already exhibits superior performance in autoformalization.

In our experiments we used Lean Workbook as the training dataset for our baseline formalizers via SFT. It is worth mentioning that this dataset was synthesized using both miniF2F and ProofNet, making these benchmarks in-distribution for all formalizers evaluated. In our main experiment, we tested two different base models, Qwen2.5-Coder-7B-Instruct (Hui et al., 2024) and DeepSeek-Math-7B (Shao et al., 2024). We randomly selected 1,000 elements from uproof dataset as our validation split. Since our primarily focus is on the generalization ability of different strategies, the results on uProof are particularly informative, as they reflect the models’ out-of-distribution performance.

Our main experiment results are summarized in Table 3.

We can see that FormaRL outperformed SFT baselines by a large margin, demonstrating its strong generalization capability.

DeepSeek-Math-7B-Instruct performs poorly out of the box and struggles to generate correct formalizations without fine-tuning, thereby would severely impact the efficiency of RL. So we applied a minimal warm-up for this model, specifically, we randomly selected 1k translation pairs from Lean Workbook and trained DeepSeek-Math-7B-Instruct for 1 epoch. This does not introduce excessive additional training or data requirement. Meanwhile, Qwen2.5-Coder-7B-Instruct is trained via FormaRL entirely from scratch.

We also evaluated the effect of applying FormaRL on top of a pre-trained formalizer. While this setup showed that FormaRL can further improve performance after extensive SFT, the improvement plateaued, suggesting a limited upper bound. Notably, the most substantial performance gains were observed when using FormaRL without any prior SFT.

Model	Method	SC Pass Rate	Final Pass Rate	Δ
Pass@1				
DeepSeek-V3	ICL	1.3%	1.1%	
GPT-4o		2.9%	2.2%	
DeepSeek-Math-7B-Instruct		0.2%	0.1%	
Qwen2.5-Coder-7B-Instruct		3.7%	2.4%	
RAutoformalizer (Liu et al., 2025)	- FormaRL	14.1% 20.1%	6.2% 11.9%	+ 5.7%
DeepSeek-Math-7B-Instruct	SFT FormaRL	21.2% 14.4%	7.8% 8.6%	+ 0.8%
Qwen2.5-Coder-7B-Instruct	SFT FormaRL	20.4% 18.6%	7.5% <u>9.6%</u>	+ 2.1%
Pass@8				
RAutoformalizer (Liu et al., 2025)	- FormaRL	48.0% 44.8%	20.0% 21.9%	+ 1.9%
DeepSeek-Math-7B-Instruct	SFT FormaRL	54.7% 46.1%	17.0% <u>22.8%</u>	+ 5.8%
Qwen2.5-Coder-7B-Instruct	SFT FormaRL	52.3% 62.2%	15.8% 29.8%	+14.0%
Pass@16				
RAutoformalizer (Liu et al., 2025)	- FormaRL	65.2% 53.4%	24.4% 25.7%	+ 1.3%
DeepSeek-Math-7B-Instruct	SFT FormaRL	66.4% 57.7%	22.5% <u>27.2%</u>	+ 4.7%
Qwen2.5-Coder-7B-Instruct	SFT FormaRL	63.6% 66.7%	21.2% 33.6%	+12.4%

Table 3: The out-of-distribution accuracy of autoformalization on uproof split (advanced math). ICL is for “in-context learning”. The SFT approach utilizes 25.2k Lean Workbook dataset for training, while our FormaRL approach only uses 859 unlabeled statements from miniF2F and ProofNet. As RAutoformalizer has been already fine-tuned on a 243k dataset for autoformalization, whose scale is much larger than our SFT dataset, we do not conduct further SFT on it.

To assess in-distribution performance, we evaluated some of these models on miniF2F and ProofNet, relevant results are listed in Table 4. While these benchmarks are less central to our primary focus, they serve as useful supplementary references.

Both propriaty models, DeepSeek-V3 and GPT-4o exhibit poor performance especially in advanced math such as ProofNet dataset. This mainly stems from their low SC pass rate. More detailed examinations on this can be found in Appendix A.1.

5.3 Ablation study

Our experiments also suggest that FormaRL is a minimal possible RL framework for autoformalization. That means if we eliminate any component in the reward calculation, the RL training would cause severe reward hack and no meaningful results. And at the same time, we can observe consistent performance increment when integrating both SC and CC check.

If we calculate the reward without CC check, the model will quickly learn to generate the same simple statement that is not relevant to the given problem so that it can pass all syntax checks. On the other hand if we eliminate SC check, the model will quickly learn to include natural language statements from the original problem in its response, preserving good consistency but that is not formalization. We list some typical cases and evaluation results in Table 5

Model	Method	miniF2F	ProofNet
DeepSeek-V3 GPT-4o	ICL	24.59% / 20.08%	2.70% / 2.70%
		47.95% / 38.93%	4.04% / 3.23%
RAutoformalizer (Liu et al., 2025)	- FormaRL	49.18% / 25.00%	28.30% / 19.68%
		83.20% / 53.89%	58.49% / 46.90%
DeepSeek-Math-7B-Instruct	SFT FormaRL	82.17% / 48.77%	35.04% / 22.64%
		86.27% / 59.63%	42.59% / 31.81%
Qwen2.5-Coder-7B-Instruct	SFT FormaRL	88.32% / 56.35%	35.85% / 18.87%
		81.56% / 57.58%	35.58% / 26.15%

Table 4: The pass@1 accuracy of in-distribution autoformalization performance. ICL is for “in-context learning”. We use miniF2F dataset to test the autoformalization performance of elementary math, and ProofNet for advanced math. Similar to Table 3, for each test, we report the SC pass rate and the final pass rate after SC and CC.

Method	Case	Pass Rate
w/o SC	holomorphic_open_omega f $\Omega \rightarrow \text{Re_constant } f$ $\rightarrow \text{Constant } f := \text{sorry}$	SC 0.27%
		CC 74.66%
		SC&CC 0.00%
w/o CC	theorem realPartConstantImpliesConstant: False := sorry	SC 100%
		CC 0%
		SC&CC 0%
CC & SC	theorem prove_f_is_constant {f : $\mathbb{C} \rightarrow \mathbb{C}$ } (h_f_holomorphic : $\forall (z : \mathbb{C}), \forall (U : \text{Set } \mathbb{C})$, IsOpen U $\wedge \forall (w : \mathbb{C}), w \in U \rightarrow \exists (L : \mathbb{C})$, $\forall (z1 z2 : \mathbb{C}), z1 \in U \wedge z2 \in U \rightarrow (f z1 - f$ $z2 = L * (z1 - z2))$) (h_im_constant : $\forall (z :$ $\mathbb{C}), \forall (w : \mathbb{C}), f z = f w \rightarrow \text{Im } (f z) = \text{Im}$ $(f w)$) : $\forall (z1 z2 : \mathbb{C}), f z1 = f z2 := \text{sorry}$	SC 35.58%
		CC 57.14%
		SC&CC 26.15%

Table 5: Ablation study on reward design. These formalizers are trained from Qwen2.5-7B-Instruct and tested on ProofNet. These are formalizations from the same proof problem in complex analysis: “Suppose that f is holomorphic in an open set Ω . Prove that if $\text{Im}(f)$ is constant, then f is constant”.

The performance of FormaRL heavily relies on the distinguishing ability of the LLM used in CC. We also tried some weaker language models in the training process. By switching the backend of CC from DeepSeek-V3 to Qwen2.5-7B-Instruct, we can observe performance drop on all benchmarks under pass@8 or pass@16 settings. Typically models trained with weaker LLM in FormaRL exhibit weaker performance in keeping the consistency in autoformalization, but tend to have higher SC pass rate in sampling. This limits their potential to gain improvement from multiple sampling. Nevertheless, these models still outperformed SFT baselines, with significantly less data requirement. Relevant results are summarized in Table 6.

A formal statement that passes both SC and CC checks is typically a promising formalization, however, since we used a large language model to conduct consistency check in both training and evaluation, there exists the possibility of reward hack. We have selected 100 samples for both formalizer, and done some manual reviews on samples generated by formalizer trained via FormaRL and RAutoformalizer. As shown in Table 7, since the formalizer trained with RL did not exhibit significantly higher CC pass rate under LLM-based review than manual, There is no evidence of reward hack in our experiments. We also did some ablation study on the LLM backend of CC, relevant results can be found in Table 10 in the appendix. These results also support the non-existence of reward hack after FormaRL.

Method	Base Model	Settings	Performance
SFT	Qwen2.5-Coder-7B-Instruct	pass@1	20.4% / 7.5%
FormaRL _(w/ deepseek)	Qwen2.5-Coder-7B-Instruct	pass@1	18.6% / 9.6%
FormaRL _(w/ qwen)	Qwen2.5-Coder-7B-Instruct	pass@1	28.5% / 11.7%
SFT	Qwen2.5-Coder-7B-Instruct	pass@8	52.3% / 15.8%
FormaRL _(w/ deepseek)	Qwen2.5-Coder-7B-Instruct	pass@8	62.2% / 29.8%
FormaRL _(w/ qwen)	Qwen2.5-Coder-7B-Instruct	pass@8	69.8% / <u>27.6%</u>
SFT	Qwen2.5-Coder-7B-Instruct	pass@16	63.6% / 21.2%
FormaRL _(w/ deepseek)	Qwen2.5-Coder-7B-Instruct	pass@16	66.7% / 33.6%
FormaRL _(w/ qwen)	Qwen2.5-Coder-7B-Instruct	pass@16	79.8% / <u>31.3%</u>

Table 6: Ablation studies on the CC reward in training. We can see that models trained with DeepSeek-V3 is consistently more performant than that with Qwen2.5-7B-Instruct. Performance is evaluated on uproof dataset and reported as SC pass rate / final pass rate.

Formalizer	Manual	Qwen2.5-7B-Instruct
RAutoformalizer(Liu et al., 2025)	25.0%	37.4%
Qwen2.5-Coder-7B-Instruct with FormaRL	38.8%	50.4%

Table 7: Comparison of CC accuracy after SC under both manual review and LLM-based review.

6 Conclusion and future work

FormaRL is a simple RL based training framework for autoformalization. It requires only a small number of unlabeled training data but still exhibits superior performance compared to vanilla SFT. Recently there are some more advanced methods proposed to enhance the evaluation or sampling process for autoformalized problems, such as Bidirectional Extended Definitional Equivalence (Liu et al., 2025) and dependency retrieval augmentation (Liu et al., 2025). They also exhibit great improvement either in evaluation precision or autoformalization quality. These methods are easy to integrate into our training pipeline. We can add the contents provided by dependency retrieval to the prompts during training and sampling, and use BEq in reward design. We believe this will bring the performance of autoformalization to the next level.

Theorem proving is the central task of modern math research, thus is of more importance than math contests. Some recent experiments suggest that the data amount required to train a powerful LRM is relatively low (Li et al., 2025; Zeng et al., 2025), so maybe we are already able to train a strong theorem prover with a proper RL algorithm and formal verification on our uproof dataset or NaturalProofs (Welleck et al., 2021). We are optimistic about future progress in theorem proving especially in advanced math, an area that remains largely unexplored.

Acknowledgement

This work is supported by the National Natural Science Foundation of China (No. 62276152), and funding from Wuxi Research Institute of Applied Technologies, Tsinghua University under Grant 20242001120.

References

Zhangir Azerbayev, Bartosz Piotrowski, Hailey Schoelkopf, Edward W. Ayers, Dragomir Radev, and Jeremy Avigad. ProofNet: Autoformalizing and formally proving undergraduate-level mathematics, 2023. URL <https://arxiv.org/abs/2302.12433v1>.

Davide Castelvecchi. Deepmind hits milestone in solving maths problems—AI’s next grand challenge. *Nature*, 632(8024):236–237, 2024.

Garett Cunningham, Razvan C. Bunescu, and David Juedes. Towards autoformalization of mathematics and code correctness: Experiments with elementary proofs, 2023. URL <http://arxiv.org/abs/2301.02195>.

DeepSeek-AI, Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, Xiaokang Zhang, Xingkai Yu, Yu Wu, Z. F. Wu, Zhibin Gou, Zhihong Shao, Zhuoshu Li, Ziyi Gao, Aixin Liu, Bing Xue, Bingxuan Wang, Bochao Wu, Bei Feng, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chenyu Zhang, Chong Ruan, Damai Dai, Deli Chen, Dongjie Ji, Erhang Li, Fangyun Lin, Fucong Dai, Fuli Luo, Guangbo Hao, Guanting Chen, Guowei Li, H. Zhang, Han Bao, Hanwei Xu, Haocheng Wang, Honghui Ding, Huajian Xin, Huazuo Gao, Hui Qu, Hui Li, Jianzhong Guo, Jiashi Li, Jiawei Wang, Jingchang Chen, Jingyang Yuan, Junjie Qiu, Junlong Li, J. L. Cai, Jiaqi Ni, Jian Liang, Jin Chen, Kai Dong, Kai Hu, Kaige Gao, Kang Guan, Kexin Huang, Kuai Yu, Lean Wang, Lecong Zhang, Liang Zhao, Litong Wang, Liyue Zhang, Lei Xu, Leyi Xia, Mingchuan Zhang, Minghua Zhang, Minghui Tang, Meng Li, Miaojun Wang, Mingming Li, Ning Tian, Panpan Huang, Peng Zhang, Qiancheng Wang, Qinyu Chen, Qiushi Du, Ruiqi Ge, Ruisong Zhang, Ruizhe Pan, Runji Wang, R. J. Chen, R. L. Jin, Ruyi Chen, Shanghao Lu, Shangyan Zhou, Shanhuang Chen, Shengfeng Ye, Shiyu Wang, Shuiping Yu, Shunfeng Zhou, Shuting Pan, S. S. Li, Shuang Zhou, Shaoqing Wu, Shengfeng Ye, Tao Yun, Tian Pei, Tianyu Sun, T. Wang, Wangding Zeng, Wanxia Zhao, Wen Liu, Wenfeng Liang, Wenjun Gao, Wenqin Yu, Wentao Zhang, W. L. Xiao, Wei An, Xiaodong Liu, Xiaohan Wang, Xiaokang Chen, Xiaotao Nie, Xin Cheng, Xin Liu, Xin Xie, Xingchao Liu, Xinyu Yang, Xinyuan Li, Xuecheng Su, Xuheng Lin, X. Q. Li, Xiangyue Jin, Xiaojin Shen, Xiaosha Chen, Xiaowen Sun, Xiaoxiang Wang, Xinnan Song, Xinyi Zhou, Xianzu Wang, Xinxia Shan, Y. K. Li, Y. Q. Wang, Y. X. Wei, Yang Zhang, Yanhong Xu, Yao Li, Yao Zhao, Yaofeng Sun, Yaohui Wang, Yi Yu, Yichao Zhang, Yifan Shi, Yiliang Xiong, Ying He, Yishi Piao, Yisong Wang, Yixuan Tan, Yiyang Ma, Yiyuan Liu, Yongqiang Guo, Yuan Ou, Yuduan Wang, Yue Gong, Yuheng Zou, Yujia He, Yunfan Xiong, Yuxiang Luo, Yuxiang You, Yuxuan Liu, Yuyang Zhou, Y. X. Zhu, Yanhong Xu, Yanping Huang, Yaohui Li, Yi Zheng, Yuchen Zhu, Yunxian Ma, Ying Tang, Yukun Zha, Yuting Yan, Z. Z. Ren, Zehui Ren, Zhangli Sha, Zhe Fu, Zhean Xu, Zhenda Xie, Zhengyan Zhang, Zhewen Hao, Zhicheng Ma, Zhigang Yan, Zhiyu Wu, Zihui Gu, Zijia Zhu, Zijun Liu, Zilin Li, Ziwei Xie, Ziyang Song, Zizheng Pan, Zhen Huang, Zhipeng Xu, Zhongyu Zhang, and Zhen Zhang. DeepSeek-r1: Incentivizing reasoning capability in LLMs via reinforcement learning, 2025a. URL <http://arxiv.org/abs/2501.12948>.

DeepSeek-AI, Aixin Liu, Bei Feng, Bing Xue, Bingxuan Wang, Bochao Wu, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chenyu Zhang, Chong Ruan, Damai Dai, Daya Guo, Dejian Yang, Deli Chen, Dongjie Ji, Erhang Li, Fangyun Lin, Fucong Dai, Fuli Luo, Guangbo Hao, Guanting Chen, Guowei Li, H. Zhang, Han Bao, Hanwei Xu, Haocheng Wang, Haowei Zhang, Honghui Ding, Huajian Xin, Huazuo Gao, Hui Li, Hui Qu, J. L. Cai, Jian Liang, Jianzhong Guo, Jiaqi Ni, Jiashi Li, Jiawei Wang, Jin Chen, Jingchang Chen, Jingyang Yuan, Junjie Qiu, Junlong Li, Junxiao Song, Kai Dong, Kai Hu, Kaige Gao, Kang Guan, Kexin Huang, Kuai Yu, Lean Wang, Lecong Zhang, Lei Xu, Leyi Xia, Liang Zhao, Litong Wang, Liyue Zhang, Meng Li, Miaojun Wang, Mingchuan Zhang, Minghua Zhang, Minghui Tang, Mingming Li, Ning Tian, Panpan Huang, Peiyi Wang, Peng Zhang, Qiancheng Wang, Qihao Zhu, Qinyu Chen, Qiushi Du, R. J. Chen, R. L. Jin, Ruiqi Ge, Ruisong Zhang, Ruizhe Pan, Runji Wang, Runxin Xu, Ruoyu Zhang, Ruyi Chen, S. S. Li, Shanghao Lu, Shangyan Zhou, Shanhuang Chen, Shaoqing Wu, Shengfeng Ye, Shengfeng Ye, Shirong Ma, Shiyu Wang, Shuang Zhou, Shuiping Yu, Shunfeng Zhou, Shuting Pan, T. Wang, Tao Yun, Tian Pei, Tianyu Sun, W. L. Xiao, Wangding Zeng, Wanxia Zhao, Wei An, Wen Liu, Wenfeng Liang, Wenjun Gao, Wenqin Yu, Wentao Zhang, X. Q. Li, Xiangyue Jin, Xianzu Wang, Xiaodong Liu, Xiaohan Wang, Xiaojin Shen, Xiaokang Chen, Xiaokang Zhang, Xiaosha Chen, Xiaotao Nie, Xiaowen Sun, Xiaoxiang Wang, Xin Cheng, Xin Liu, Xin Xie, Xingchao Liu, Xingkai Yu, Xinnan Song, Xinxia Shan, Xinyi Zhou, Xinyu Yang, Xinyuan Li, Xuecheng Su, Xuheng Lin, Y. K. Li, Y. Q. Wang, Y. X. Wei, Y. X. Zhu, Yang Zhang, Yanhong Xu, Yanhong Xu, Yanping Huang, Yao Li, Yao Zhao, Yaofeng Sun,

-
- Yaohui Li, Yaohui Wang, Yi Yu, Yi Zheng, Yichao Zhang, Yifan Shi, Yiliang Xiong, Ying He, Ying Tang, Yishi Piao, Yisong Wang, Yixuan Tan, Yiyang Ma, Yiyuan Liu, Yongqiang Guo, Yu Wu, Yuan Ou, Yuchen Zhu, Yuduan Wang, Yue Gong, Yuheng Zou, Yujia He, Yukun Zha, Yunfan Xiong, Yunxian Ma, Yuting Yan, Yuxiang Luo, Yuxiang You, Yuxuan Liu, Yuyang Zhou, Z. F. Wu, Z. Z. Ren, Zehui Ren, Zhangli Sha, Zhe Fu, Zhean Xu, Zhen Huang, Zhen Zhang, Zhenda Xie, Zhengyan Zhang, Zhewen Hao, Zhibin Gou, Zhicheng Ma, Zhigang Yan, Zhihong Shao, Zhipeng Xu, Zhiyu Wu, Zhongyu Zhang, Zhuoshu Li, Zihui Gu, Zijia Zhu, Zijun Liu, Zilin Li, Ziwei Xie, Ziyang Song, Ziyi Gao, and Zizheng Pan. DeepSeek-v3 technical report, 2025b. URL <http://arxiv.org/abs/2412.19437>.
- Binyuan Hui, Jian Yang, Zeyu Cui, Jiayi Yang, Dayiheng Liu, Lei Zhang, Tianyu Liu, Jiajun Zhang, Bowen Yu, Keming Lu, Kai Dang, Yang Fan, Yichang Zhang, An Yang, Rui Men, Fei Huang, Bo Zheng, Yibo Miao, Shanghaoran Quan, Yunlong Feng, Xingzhang Ren, Xuancheng Ren, Jingren Zhou, and Junyang Lin. Qwen2.5-coder technical report, 2024. URL <http://arxiv.org/abs/2409.12186>.
- Albert Q. Jiang, Wenda Li, and Mateja Jamnik. Multilingual mathematical autoformalization. URL <http://arxiv.org/abs/2311.03755>.
- Albert Q. Jiang, Sean Welleck, Jin Peng Zhou, Wenda Li, Jiacheng Liu, Mateja Jamnik, Timothée Lacroix, Yuhuai Wu, and Guillaume Lample. Draft, sketch, and prove: Guiding formal theorem provers with informal proofs, 2023. URL <http://arxiv.org/abs/2210.12283>.
- Xuefeng Li, Haoyang Zou, and Pengfei Liu. LIMR: Less is more for RL scaling, 2025. URL <http://arxiv.org/abs/2502.11886>.
- Yang Li, Dong Du, Linfeng Song, Chen Li, Weikang Wang, Tao Yang, and Haitao Mi. HUNYUANPROVER: A scalable data synthesis framework and guided tree search for automated theorem proving, 2024a. URL <http://arxiv.org/abs/2412.20735>.
- Zhaoyu Li, Jialiang Sun, Logan Murphy, Qidong Su, Zenan Li, Xian Zhang, Kaiyu Yang, and Xujie Si. A survey on deep learning for theorem proving, 2024b. URL <http://arxiv.org/abs/2404.09939>.
- Hunter Lightman, Vineet Kosaraju, Yura Burda, Harri Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let’s verify step by step, 2023. URL <http://arxiv.org/abs/2305.20050>.
- Yong Lin, Shange Tang, Bohan Lyu, Jiayun Wu, Hongzhou Lin, Kaiyu Yang, Jia Li, Mengzhou Xia, Danqi Chen, Sanjeev Arora, and Chi Jin. Goedel-prover: A frontier model for open-source automated theorem proving, 2025. URL <http://arxiv.org/abs/2502.07640>. version: 1.
- Qi Liu, Xinhao Zheng, Xudong Lu, Qinxiang Cao, and Junchi Yan. Rethinking and improving autoformalization: towards a faithful metric and a dependency retrieval-based approach. In *The Thirteenth International Conference on Learning Representations*, 2025. URL <https://openreview.net/forum?id=hUb2At2DsQ>.
- Yu Meng, Mengzhou Xia, and Danqi Chen. SimPO: Simple preference optimization with a reference-free reward, 2024. URL <http://arxiv.org/abs/2405.14734>.
- Leonardo de Moura and Sebastian Ullrich. The lean 4 theorem prover and programming language. In André Platzer and Geoff Sutcliffe (eds.), *Automated Deduction – CADE 28*, pp. 625–635, Cham, 2021. Springer International Publishing. ISBN 978-3-030-79876-5.
- Logan Murphy, Kaiyu Yang, Jialiang Sun, Zhaoyu Li, Anima Anandkumar, and Xujie Si. Autoformalizing euclidean geometry, 2024. URL <http://arxiv.org/abs/2405.17216>.
- OpenAI, Aaron Hurst, Adam Lerer, Adam P. Goucher, Adam Perelman, Aditya Ramesh, Aidan Clark, A. J. Ostrow, Akila Welihinda, Alan Hayes, Alec Radford, Aleksander Mądry, Alex Baker-Whitcomb, Alex Beutel, Alex Borzunov, Alex Carney, Alex Chow, Alex Kirillov, Alex Nichol, Alex Paino, Alex Renzin, Alex Tachard Passos, Alexander Kirillov, Alexi

Christakis, Alexis Conneau, Ali Kamali, Allan Jabri, Allison Moyer, Allison Tam, Amadou Crookes, Amin Tootoochian, Amin Tootoonchian, Ananya Kumar, Andrea Vallone, Andrej Karpathy, Andrew Braunstein, Andrew Cann, Andrew Codispoti, Andrew Galu, Andrew Kondrich, Andrew Tulloch, Andrey Mishchenko, Angela Baek, Angela Jiang, Antoine Pelisse, Antonia Woodford, Anuj Gosalia, Arka Dhar, Ashley Pantuliano, Avi Nayak, Avital Oliver, Barret Zoph, Behrooz Ghorbani, Ben Leimberger, Ben Rossen, Ben Sokolowsky, Ben Wang, Benjamin Zweig, Beth Hoover, Blake Samic, Bob McGrew, Bobby Spero, Bogo Giertler, Bowen Cheng, Brad Lightcap, Brandon Walkin, Brendan Quinn, Brian Guarraci, Brian Hsu, Bright Kellogg, Brydon Eastman, Camillo Lugaresi, Carroll Wainwright, Cary Bassin, Cary Hudson, Casey Chu, Chad Nelson, Chak Li, Chan Jun Shern, Channing Conger, Charlotte Barette, Chelsea Voss, Chen Ding, Cheng Lu, Chong Zhang, Chris Beaumont, Chris Hallacy, Chris Koch, Christian Gibson, Christina Kim, Christine Choi, Christine McLeavey, Christopher Hesse, Claudia Fischer, Clemens Winter, Coley Czarnecki, Colin Jarvis, Colin Wei, Constantin Koumouzelis, Dane Sherburn, Daniel Kappler, Daniel Levin, Daniel Levy, David Carr, David Farhi, David Mely, David Robinson, David Sasaki, Denny Jin, Dev Valladares, Dimitris Tsipras, Doug Li, Duc Phong Nguyen, Duncan Findlay, Edede Oiwoh, Edmund Wong, Ehsan Asdar, Elizabeth Proehl, Elizabeth Yang, Eric Antonow, Eric Kramer, Eric Peterson, Eric Sigler, Eric Wallace, Eugene Brevdo, Evan Mays, Farzad Khorasani, Felipe Petroski Such, Filippo Raso, Francis Zhang, Fred von Lohmann, Freddie Sulit, Gabriel Goh, Gene Oden, Geoff Salmon, Giulio Starace, Greg Brockman, Hadi Salman, Haiming Bao, Haitang Hu, Hannah Wong, Haoyu Wang, Heather Schmidt, Heather Whitney, Heewoo Jun, Hendrik Kirchner, Henrique Ponde de Oliveira Pinto, Hongyu Ren, Huiwen Chang, Hyung Won Chung, Ian Kivlichan, Ian O'Connell, Ian O'Connell, Ian Osband, Ian Silber, Ian Sohl, Ibrahim Okuyucu, Ikai Lan, Ilya Kostrikov, Ilya Sutskever, Ingmar Kanitscheider, Ishaan Gulrajani, Jacob Coxon, Jacob Menick, Jakub Pachocki, James Aung, James Betker, James Crooks, James Lennon, Jamie Kiros, Jan Leike, Jane Park, Jason Kwon, Jason Phang, Jason Teplitz, Jason Wei, Jason Wolfe, Jay Chen, Jeff Harris, Jenia Varavva, Jessica Gan Lee, Jessica Shieh, Ji Lin, Jiahui Yu, Jiayi Weng, Jie Tang, Jieqi Yu, Joanne Jang, Joaquin Quinero Candela, Joe Beutler, Joe Landers, Joel Parish, Johannes Heidecke, John Schulman, Jonathan Lachman, Jonathan McKay, Jonathan Uesato, Jonathan Ward, Jong Wook Kim, Joost Huizinga, Jordan Sitkin, Jos Kraaijeveld, Josh Gross, Josh Kaplan, Josh Snyder, Joshua Achiam, Joy Jiao, Joyce Lee, Juntang Zhuang, Justyn Harriman, Kai Fricke, Kai Hayashi, Karan Singhal, Katy Shi, Kavin Karthik, Kayla Wood, Kendra Rimbach, Kenny Hsu, Kenny Nguyen, Keren Gu-Lemberg, Kevin Button, Kevin Liu, Kiel Howe, Krithika Muthukumar, Kyle Luther, Lama Ahmad, Larry Kai, Lauren Itow, Lauren Workman, Leher Pathak, Leo Chen, Li Jing, Lia Guy, Liam Fedus, Liang Zhou, Lien Mamitsuka, Lilian Weng, Lindsay McCallum, Lindsey Held, Long Ouyang, Louis Feuvrier, Lu Zhang, Lukas Kondraciuk, Lukasz Kaiser, Luke Hewitt, Luke Metz, Lyric Doshi, Mada Aflak, Maddie Simens, Madelaine Boyd, Madeleine Thompson, Marat Dukhan, Mark Chen, Mark Gray, Mark Hudnall, Marvin Zhang, Marwan Aljubei, Mateusz Litwin, Matthew Zeng, Max Johnson, Maya Shetty, Mayank Gupta, Meghan Shah, Mehmet Yatbaz, Meng Jia Yang, Mengchao Zhong, Mia Glaese, Mianna Chen, Michael Janner, Michael Lampe, Michael Petrov, Michael Wu, Michele Wang, Michelle Fradin, Michelle Pokrass, Miguel Castro, Miguel Oom Temudo de Castro, Mikhail Pavlov, Miles Brundage, Miles Wang, Minal Khan, Mira Murati, Mo Bavarian, Molly Lin, Murat Yesildal, Nacho Soto, Natalia Gimelshein, Natalie Cone, Natalie Staudacher, Natalie Summers, Natan LaFontaine, Neil Chowdhury, Nick Ryder, Nick Stathas, Nick Turley, Nik Tezak, Niko Felix, Nithanth Kudige, Nitish Keskar, Noah Deutsch, Noel Bundick, Nora Puckett, Ofir Nachum, Ola Okelola, Oleg Boiko, Oleg Murk, Oliver Jaffe, Olivia Watkins, Olivier Godement, Owen Campbell-Moore, Patrick Chao, Paul McMillan, Pavel Belov, Peng Su, Peter Bak, Peter Bakkum, Peter Deng, Peter Dolan, Peter Hoeschele, Peter Welinder, Phil Tillet, Philip Pronin, Philippe Tillet, Prafulla Dhariwal, Qiming Yuan, Rachel Dias, Rachel Lim, Rahul Arora, Rajan Troll, Randall Lin, Rapha Gontijo Lopes, Raul Puri, Reah Miyara, Reimar Leike, Renaud Gaubert, Reza Zamani, Ricky Wang, Rob Donnelly, Rob Honsby, Rocky Smith, Rohan Sahai, Rohit Ramchandani, Romain Huet, Rory Carmichael, Rowan Zellers, Roy Chen, Ruby Chen, Ruslan Nigmatullin, Ryan Cheu, Saachi Jain, Sam Altman, Sam Schoenholz, Sam Toizer, Samuel Miserendino, Sandhini Agarwal, Sara Culver, Scott Ethersmith, Scott Gray, Sean Grove, Sean Metzger, Shamez Hermeni, Shantanu Jain, Shengjia Zhao, Sherwin Wu,

Shino Jomoto, Shirong Wu, Shuaiqi, Xia, Sonia Phene, Spencer Papay, Srinivas Narayanan, Steve Coffey, Steve Lee, Stewart Hall, Suchir Balaji, Tal Broda, Tal Stramer, Tao Xu, Tarun Gogineni, Taya Christianson, Ted Sanders, Tejal Patwardhan, Thomas Cunningham, Thomas Degry, Thomas Dimson, Thomas Raoux, Thomas Shadwell, Tianhao Zheng, Todd Underwood, Todor Markov, Toki Sherbakov, Tom Rubin, Tom Stasi, Tomer Kaftan, Tristan Heywood, Troy Peterson, Tyce Walters, Tyna Eloundou, Valerie Qi, Veit Moeller, Vinnie Monaco, Vishal Kuo, Vlad Fomenko, Wayne Chang, Weiyi Zheng, Wenda Zhou, Wesam Manassra, Will Sheu, Wojciech Zaremba, Yash Patil, Yilei Qian, Yongjik Kim, Youlong Cheng, Yu Zhang, Yuchen He, Yuchen Zhang, Yujia Jin, Yunxing Dai, and Yury Malkov. GPT-4o system card, 2024a. URL <http://arxiv.org/abs/2410.21276>.

OpenAI, Aaron Jaech, Adam Kalai, Adam Lerer, Adam Richardson, Ahmed El-Kishky, Aiden Low, Alec Helyar, Aleksander Madry, Alex Beutel, Alex Carney, Alex Iftimie, Alex Karpenko, Alex Tachard Passos, Alexander Neitz, Alexander Prokofiev, Alexander Wei, Allison Tam, Ally Bennett, Ananya Kumar, Andre Saraiva, Andrea Vallone, Andrew Duberstein, Andrew Kondrich, Andrey Mishchenko, Andy Applebaum, Angela Jiang, Ashvin Nair, Barret Zoph, Behrooz Ghorbani, Ben Rossen, Benjamin Sokolowsky, Boaz Barak, Bob McGrew, Borys Minaiev, Botao Hao, Bowen Baker, Brandon Houghton, Brandon McKinzie, Brydon Eastman, Camillo Lugaresi, Cary Bassin, Cary Hudson, Chak Ming Li, Charles de Bourcy, Chelsea Voss, Chen Shen, Chong Zhang, Chris Koch, Chris Orsinger, Christopher Hesse, Claudia Fischer, Clive Chan, Dan Roberts, Daniel Kappler, Daniel Levy, Daniel Selsam, David Dohan, David Farhi, David Mely, David Robinson, Dimitris Tsipras, Doug Li, Dragos Oprica, Eben Freeman, Eddie Zhang, Edmund Wong, Elizabeth Proehl, Enoch Cheung, Eric Mitchell, Eric Wallace, Erik Ritter, Evan Mays, Fan Wang, Felipe Petroski Such, Filippo Raso, Florencia Leoni, Foivos Tsimpourlas, Francis Song, Fred von Lohmann, Freddie Sulit, Geoff Salmon, Giambattista Parascandolo, Gildas Chabot, Grace Zhao, Greg Brockman, Guillaume Leclerc, Hadi Salman, Haiming Bao, Hao Sheng, Hart Andrin, Hessam Bagherinezhad, Hongyu Ren, Hunter Lightman, Hyung Won Chung, Ian Kivlichan, Ian O’Connell, Ian Osband, Ignasi Clavera Gilaberte, Ilge Akkaya, Ilya Kostrikov, Ilya Sutskever, Irina Kofman, Jakub Pachocki, James Lennon, Jason Wei, Jean Harb, Jerry Twore, Jiacheng Feng, Jiahui Yu, Jiayi Weng, Jie Tang, Jieqi Yu, Joaquin Quiñero Candela, Joe Palermo, Joel Parish, Johannes Heidecke, John Hallman, John Rizzo, Jonathan Gordon, Jonathan Uesato, Jonathan Ward, Joost Huizinga, Julie Wang, Kai Chen, Kai Xiao, Karan Singhal, Karina Nguyen, Karl Cobbe, Katy Shi, Kayla Wood, Kendra Rimbach, Keren Gu-Lemberg, Kevin Liu, Kevin Lu, Kevin Stone, Kevin Yu, Lama Ahmad, Lauren Yang, Leo Liu, Leon Maksin, Leyton Ho, Liam Fedus, Lilian Weng, Linden Li, Lindsay McCallum, Lindsey Held, Lorenz Kuhn, Lukas Kondraciuk, Lukasz Kaiser, Luke Metz, Madelaine Boyd, Maja Trebacz, Manas Joglekar, Mark Chen, Marko Tintor, Mason Meyer, Matt Jones, Matt Kaufer, Max Schwarzer, Meghan Shah, Mehmet Yatbaz, Melody Y. Guan, Mengyuan Xu, Mengyuan Yan, Mia Glaese, Mianna Chen, Michael Lampe, Michael Malek, Michele Wang, Michelle Fradin, Mike McClay, Mikhail Pavlov, Miles Wang, Mingxuan Wang, Mira Murati, Mo Bavarian, Mostafa Rohaninejad, Nat McAleese, Neil Chowdhury, Neil Chowdhury, Nick Ryder, Nikolas Tezak, Noam Brown, Ofir Nachum, Oleg Boiko, Oleg Murk, Olivia Watkins, Patrick Chao, Paul Ashbourne, Pavel Izmailov, Peter Zhokhov, Rachel Dias, Rahul Arora, Randall Lin, Rapha Gontijo Lopes, Raz Gaon, Reah Miyara, Reimar Leike, Renny Hwang, Rhythm Garg, Robin Brown, Roshan James, Rui Shu, Ryan Cheu, Ryan Greene, Saachi Jain, Sam Altman, Sam Toizer, Sam Toyer, Samuel Miserendino, Sandhini Agarwal, Santiago Hernandez, Sasha Baker, Scott McKinney, Scottie Yan, Shengjia Zhao, Shengli Hu, Shibani Santurkar, Shraman Ray Chaudhuri, Shuyuan Zhang, Siyuan Fu, Spencer Papay, Steph Lin, Suchir Balaji, Suvansh Sanjeev, Szymon Sidor, Tal Broda, Aidan Clark, Tao Wang, Taylor Gordon, Ted Sanders, Tejal Patwardhan, Thibault Sottiaux, Thomas Degry, Thomas Dimson, Tianhao Zheng, Timur Garipov, Tom Stasi, Trapit Bansal, Trevor Creech, Troy Peterson, Tyna Eloundou, Valerie Qi, Vineet Kosaraju, Vinnie Monaco, Vitchyr Pong, Vlad Fomenko, Weiyi Zheng, Wenda Zhou, Wes McCabe, Wojciech Zaremba, Yann Dubois, Yinghai Lu, Yining Chen, Young Cha, Yu Bai, Yuchen He, Yuchen Zhang, Yunyun Wang, Zheng Shao, and Zhuohan Li. OpenAI o1 system card, 2024b. URL <http://arxiv.org/abs/2412.16720>.

Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob

-
- Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askill, Peter Welinder, Paul Christiano, Jan Leike, and Ryan Lowe. Training language models to follow instructions with human feedback, 2022. URL <http://arxiv.org/abs/2203.02155>.
- Nilay Patel, Rahul Saha, and Jeffrey Flanigan. A new approach towards autoformalization. URL <http://arxiv.org/abs/2310.07957>.
- Auguste Poiroux, Gail Weiss, Viktor Kunčák, and Antoine Bosselut. Improving autoformalization using type checking, 2024. URL <http://arxiv.org/abs/2406.07222>.
- Qwen, An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Haoran Wei, Huan Lin, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiayi Yang, Jingren Zhou, Junyang Lin, Kai Dang, Keming Lu, Keqin Bao, Kexin Yang, Le Yu, Mei Li, Mingfeng Xue, Pei Zhang, Qin Zhu, Rui Men, Runji Lin, Tianhao Li, Tianyi Tang, Tingyu Xia, Xingzhang Ren, Xuancheng Ren, Yang Fan, Yang Su, Yichang Zhang, Yu Wan, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, and Zihan Qiu. Qwen2.5 technical report, 2024. URL <http://arxiv.org/abs/2412.15115>.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, Y. K. Li, Y. Wu, and Daya Guo. DeepSeekMath: Pushing the limits of mathematical reasoning in open language models, 2024. URL <http://arxiv.org/abs/2402.03300>.
- Kimi Team, Angang Du, Bofei Gao, Bowei Xing, Changjiu Jiang, Cheng Chen, Cheng Li, Chenjun Xiao, Chenzhuang Du, Chonghua Liao, Chuning Tang, Congcong Wang, Dehao Zhang, Enming Yuan, Enzhe Lu, Fengxiang Tang, Flood Sung, Guangda Wei, Guokun Lai, Haiqing Guo, Han Zhu, Hao Ding, Hao Hu, Hao Yang, Hao Zhang, Haotian Yao, Haotian Zhao, Haoyu Lu, Haoze Li, Haozhen Yu, Hongcheng Gao, Huabin Zheng, Huan Yuan, Jia Chen, Jianhang Guo, Jianlin Su, Jianzhou Wang, Jie Zhao, Jin Zhang, Jingyuan Liu, Junjie Yan, Junyan Wu, Lidong Shi, Ling Ye, Longhui Yu, Mengnan Dong, Neo Zhang, Ningchen Ma, Qiwei Pan, Qucheng Gong, Shaowei Liu, Shengling Ma, Shupeng Wei, Sihan Cao, Siying Huang, Tao Jiang, Weihao Gao, Weimin Xiong, Weiran He, Weixiao Huang, Wenhao Wu, Wenyang He, Xianghui Wei, Xianqing Jia, Xingzhe Wu, Xinran Xu, Xinxing Zu, Xinyu Zhou, Xuehai Pan, Y. Charles, Yang Li, Yangyang Hu, Yangyang Liu, Yanru Chen, Yejie Wang, Yibo Liu, Yidao Qin, Yifeng Liu, Ying Yang, Yiping Bao, Yulun Du, Yuxin Wu, Yuzhi Wang, Zaida Zhou, Zhaoji Wang, Zhaowei Li, Zhen Zhu, Zheng Zhang, Zhexu Wang, Zhilin Yang, Zhiqi Huang, Zihao Huang, Ziyao Xu, and Zonghan Yang. Kimi k1.5: Scaling reinforcement learning with LLMs, 2025. URL <http://arxiv.org/abs/2501.12599>.
- Lawrence C. Paulson Tobias Nipkow, Markus Wenzel. Isabelle/hol: A proof assistant for higher-order logic. Springer Berlin, Heidelberg, 2002.
- Leandro von Werra, Younes Belkada, Lewis Tunstall, Edward Beeching, Tristan Thrush, Nathan Lambert, Shengyi Huang, Kashif Rasul, and Quentin Gallouédec. Trl: Transformer reinforcement learning. <https://github.com/huggingface/trl>, 2020.
- Sean Welleck, Jiacheng Liu, Ronan Le Bras, Hannaneh Hajishirzi, Yejin Choi, and Kyunghyun Cho. NaturalProofs: Mathematical theorem proving in natural language, 2021. URL <http://arxiv.org/abs/2104.01112>.
- Yuhuai Wu, Albert Q. Jiang, Wenda Li, Markus N. Rabe, Charles Staats, Mateja Jamnik, and Christian Szegedy. Autoformalization with large language models, 2022. URL <http://arxiv.org/abs/2205.12615>.
- Zijian Wu, Suozhi Huang, Zhejian Zhou, Huaiyuan Ying, Jiayu Wang, Dahua Lin, and Kai Chen. InternLM2.5-StepProver: Advancing automated theorem proving via expert iteration on large-scale LEAN problems, 2024. URL <http://arxiv.org/abs/2410.15700>.
- Huajian Xin, Daya Guo, Zhihong Shao, Zhizhou Ren, Qihao Zhu, Bo Liu, Chong Ruan, Wenda Li, and Xiaodan Liang. DeepSeek-prover: Advancing theorem proving in LLMs through large-scale synthetic data, 2024a. URL <http://arxiv.org/abs/2405.14333>.

-
- Huajian Xin, Z. Z. Ren, Junxiao Song, Zhihong Shao, Wanxia Zhao, Haocheng Wang, Bo Liu, Liyue Zhang, Xuan Lu, Qishi Du, Wenjun Gao, Qihao Zhu, Dejian Yang, Zhibin Gou, Z. F. Wu, Fuli Luo, and Chong Ruan. DeepSeek-prover-v1.5: Harnessing proof assistant feedback for reinforcement learning and monte-carlo tree search, 2024b. URL <http://arxiv.org/abs/2408.08152>.
- Ran Xin, Chenguang Xi, Jie Yang, Feng Chen, Hang Wu, Xia Xiao, Yifan Sun, Shen Zheng, and Kai Shen. BFS-prover: Scalable best-first tree search for LLM-based automatic theorem proving, 2025. URL <http://arxiv.org/abs/2502.03438>.
- An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, Guanting Dong, Haoran Wei, Huan Lin, Jialong Tang, Jialin Wang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Ma, Jianxin Yang, Jin Xu, Jingren Zhou, Jinze Bai, Jinzheng He, Junyang Lin, Kai Dang, Keming Lu, Keqin Chen, Kexin Yang, Mei Li, Mingfeng Xue, Na Ni, Pei Zhang, Peng Wang, Ru Peng, Rui Men, Ruize Gao, Runji Lin, Shijie Wang, Shuai Bai, Sinan Tan, Tianhang Zhu, Tianhao Li, Tianyu Liu, Wenbin Ge, Xiaodong Deng, Xiaohuan Zhou, Xingzhang Ren, Xinyu Zhang, Xipin Wei, Xuancheng Ren, Xuejing Liu, Yang Fan, Yang Yao, Yichang Zhang, Yu Wan, Yunfei Chu, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, Zhifang Guo, and Zhihao Fan. Qwen2 technical report, 2024a. URL <http://arxiv.org/abs/2407.10671>.
- Kaiyu Yang, Gabriel Poesia, Jingxuan He, Wenda Li, Kristin Lauter, Swarat Chaudhuri, and Dawn Song. Formal mathematical reasoning: A new frontier in AI, 2024b. URL <http://arxiv.org/abs/2412.16075>.
- Huaiyuan Ying, Zijian Wu, Yihan Geng, Jiayu Wang, Dahua Lin, and Kai Chen. Lean workbook: A large-scale lean problem set formalized from natural language math problems, 2024. URL <http://arxiv.org/abs/2406.03847>.
- Qiyang Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, Yu Yue, Tiantian Fan, Gaohong Liu, Lingjun Liu, Xin Liu, Haibin Lin, Zhiqi Lin, Bole Ma, Guangming Sheng, Yuxuan Tong, Chi Zhang, Mofan Zhang, Wang Zhang, Hang Zhu, Jinhua Zhu, Jiase Chen, Jiangjie Chen, Chengyi Wang, Hongli Yu, Weinan Dai, Yuxuan Song, Xiangpeng Wei, Hao Zhou, Jingjing Liu, Wei-Ying Ma, Ya-Qin Zhang, Lin Yan, Mu Qiao, Yonghui Wu, and Mingxuan Wang. DAPO: An open-source LLM reinforcement learning system at scale, 2025. URL <http://arxiv.org/abs/2503.14476>.
- Pierre Castéran Yves Bertot. Interactive theorem proving and program development. Springer Berlin, Heidelberg, 2013.
- Weihao Zeng, Yuzhen Huang, Wei Liu, Keqing He, Qian Liu, Zejun Ma, and Junxian He. 7b model and 8k examples: Emerging reasoning with reinforcement learning is both effective and efficient. <https://hkust-nlp.notion.site/simpler1-reason>, 2025. Notion Blog.
- Xueliang Zhao, Wenda Li, and Lingpeng Kong. Decomposing the enigma: Subgoal-based demonstration learning for formal theorem proving, 2023. URL <http://arxiv.org/abs/2305.16366>.
- Kunhao Zheng, Jesse Michael Han, and Stanislas Polu. MiniF2f: a cross-system benchmark for formal olympiad-level mathematics, 2022. URL <http://arxiv.org/abs/2109.00110>.
- Daniel M. Ziegler, Nisan Stiennon, Jeffrey Wu, Tom B. Brown, Alec Radford, Dario Amodei, Paul Christiano, and Geoffrey Irving. Fine-tuning language models from human preferences, 2020. URL <http://arxiv.org/abs/1909.08593>.

A Appendix

A.1 Case studies

We observed that both large scale LLMs, GPT-4o and DeepSeek-V3, can not exhibit promising performance on autoformalization according to our experiments. Things get even worse

when it comes to advanced math. For example on ProofNet, their syntax check pass rate is both below 5%. By examine the cases generated by GPT-4o we can figure out the reason behind this.

Here is a sample of response from GPT-4o, and the original problem comes from ProofNet dataset:

```
To translate this natural language problem into a theorem in Lean4, we first need to introduce the necessary concepts, such as holomorphic functions and the real part of a complex function. Assuming we have these concepts defined, the theorem can be captured as follows:

'''lean
theorem holomorphic_const_real_part_is_const {f : C → C} {Ω : set C}
(hΩ : is_open Ω) (hf : ∀ z ∈ Ω, differentiable_at C f z)
(h_re_const : ∃ c : R, ∀ z ∈ Ω, (f z).re = c) :
  ∀ z1 z2, z1 ∈ Ω → z2 ∈ Ω → f z1 = f z2 :=
sorry
'''

### Natural Language Reasoning
- **Hypothesis 1**:: The function 'f' is holomorphic in the open set 'Ω', represented by an assumption that 'f' is differentiable at every point 'z' in 'Ω'.
- **Hypothesis 2**:: The real part of 'f' is constant on 'Ω', represented by the existence of a real number 'c' such that for every point 'z' in 'Ω', the real part of 'f(z)' equals 'c'.
- **Conclusion**:: The function 'f' itself is constant on the set 'Ω', which means for any two points 'z1' and 'z2' in 'Ω', 'f(z1)' equals 'f(z2)'.

We use 'sorry' as a placeholder for the proof details.
```

The extracted formalization is

```
theorem holomorphic_const_real_part_is_const {f : C → C} {Ω : set C}
(hΩ : is_open Ω) (hf : ∀ z ∈ Ω, differentiable_at C f z)
(h_re_const : ∃ c : R, ∀ z ∈ Ω, (f z).re = c) :
  ∀ z1 z2, z1 ∈ Ω → z2 ∈ Ω → f z1 = f z2 :=
sorry
```

And this is the ground truth formalization adapted from ProofNet dataset.

```
theorem exercise_1_13a {f : C → C} (Ω : Set C) (a b : Ω) (h : IsOpen Ω)
(hf : DifferentiableOn C f Ω) (hc : ∃ (c : R), ∀ z ∈ Ω, (f z).re = c) :
  f a = f b := sorry
```

We can see that GPT-4o does preserved the semantic meanings of the original theorem, but it can not memorize the correct identifiers or terminologies in Mathlib4. This limitation is less problematic in elementary mathematics, where concepts are relatively simple and limited in scope. But as a general-purpose large language model not specialized in formal math, this becomes a significant constraint in advanced mathematical contexts, which involve a vast array of specialized concepts and terminologies. Maybe this can be alleviated via prompt engineering or retrieval augmentation, but exploring these approaches falls outside the scope of our current research.

A.2 Data curation

A.2.1 Prompt template for problem extraction

You are a helpful assistant that extracts complete math problems from text and formats them into a JSON list.

Format requirements:

- Each problem must include symbol definitions
- JSON keys: "problem" (description) and "type" ("proof"/"ans")

Output format:

```
[  
  {"problem": "...", "type": "..."},  
  {"problem": "...", "type": "..."}  
]
```

A.2.2 Prompt template for problem validation

You are a mathematical problem validator. Your task is to check whether a given mathematical problem meets the following criteria:

1. The problem should not be a definition, or descriptive statement.
2. The problem must explicitly state all necessary conditions and clearly state the conclusion to be proven or solved.
3. All symbols mentioned in the problem must be clearly defined and explained, except for standard mathematical terms and symbols in the {category} field that are conventionally understood. If the problem relies on well-known theorems or concepts, they should be referenced explicitly, but their detailed definitions need not be repeated.

If the problem meets all the criteria, return 'true' for the 'valid' field. Otherwise, return 'false'. State your answer as $\boxed{\text{true}}$ or $\boxed{\text{false}}$ at the end of your response.

Now, validate the following mathematical problem:

{problem}

Please think step by step and provide a detailed explanation before giving your final answer.

A.3 Details of uproof dataset

Here is more representative examples in our uproof dataset. We also list the data sources and composition of uproof in Table A.3.

Topology. Show that in terms of the ambient space the property of connectedness of a set can be expressed as follows: A subset E of a topological space (X, τ) is connected if and only if there is no pair of open (or closed) subsets G_1, G_2 of X that are disjoint and such that $E \cap G_1 \neq \emptyset$, $E \cap G_2 \neq \emptyset$, and $E \subset G_1 \cup G_2$.

Analysis. Prove that the metric space $R[a, b]$ of real-valued Riemann-integrable functions defined on the closed interval $[a, b]$ is not complete with respect to the integral metric $d(f, g) = \int_a^b |f - g|(x) dx$.

Algebra. Let G be a group of order 15. According to the Third Sylow Theorem, the number of its Sylow 3-subgroups divides 5 and is congruent to 1 modulo 3. Show that there is one Sylow 3-subgroup, say H , and it is a normal subgroup.

Analysis. Show that on any metric space (X, d) one can introduce a metric $d^-(x_1, x_2) = \frac{d(x_1, x_2)}{1+d(x_1, x_2)}$ in which the distance between the points will be less than 1.

Book	Author(s)	Problems
Mathematical Analysis I	Vladimir A. Zorich	440
Mathematical Analysis II	Vladimir A. Zorich	433
Algebra	Micheal Artin	599
Algebraic Topology	Allen Hatcher	464
Basic Topology	M. A. Armstrong	165
Complex Analysis	Elias M. Stein, Rami Shakarchi	265
Abstract Algebra	David S. Dummit, Richard M. Foote	1355
Functional Analysis	Theo Bühler, Dietmar A. Salamon	330
Commutative Algebra	M. E. Atiyah, I. G. MacDonald	176
Linear Algebra	Gilbert Strang	129
Linear Algebra and Geometry	Igor R. Shafarevich-Alexey O. Remizov	183
Probability: Theory and Examples	Richard Durrett	247
Real Analysis	Elias M. Stein, Rami Shakarchi	239
Statistical Inference	George Casella, Roger L. Berger	248

Table 8: The sources and composition of uproof dataset.

A.4 Details in reward design

Syntax Check. We leverage Lean 4 compiler and Mathlib4 library to conduct syntax check for each formalization. Relevant open-source projects are listed in Table 9.

Name	Link	Version
Lean 4	https://github.com/leanprover/lean4	v4.15.0
Mathlib4	https://github.com/leanprover-community/mathlib4	v4.15.0
Cli	https://github.com/leanprover/lean4-cli	v4.15.0
REPL	https://github.com/leanprover-community/repl.git	v4.15.0

Table 9: Libraries and versions involved in SC process.

For each formalized theorem we will add some predefined headers and imports before it is sent to the verifier. We used the same settings as [Xin et al. \(2024b\)](#). Here is the actual environment provided for each theorem:

```
import Mathlib
import Aesop
set_option maxHeartbeats 0
open Topology
open BigOperators
open Nat
open Real
open Rat
```

Consistency Check. We require a LLM to conduct consistency check with the following prompt template across our experiments.

Here is a natural language math problem and a translation in formal language Lean 4. You need to carefully analyse these problems and figure out whether they are equivalent or not. These problems must have exactly the same conditions and conclusions, they should be

marked false if they violate any of these requirements. You should reply false if the given formal statement is empty or in a weird format.

****Natural Language Problem****

```
{nl_statement}
```

```
'''lean
{fl_statement}
'''
```

State your answer as $\boxed{\{true\}}$ or $\boxed{\{false\}}$ at the end of your response.

The answer will then be extracted from response of the LLM, and can not obtain the expected output from the LLM, the default evaluation will be “false”. Here is the sampling parameters we used in CC:

- Temperature: 0.6
- Min P: 0.05
- Max Completion Tokens: 2048

A.5 Detailed training settings

We adopted a lightweight framework, trl(von Werra et al., 2020), for all of our training process. The actual version we used is v0.15.2.

Baseline Settings. We train our baseline formalizers via vanilla supervised fine-tuning method on Lean Workbook dataset.(Ying et al., 2024) Here is the detailed training hyperparameters of baseline formalizers:

- Learning Rate: 2×10^{-5}
- Weight Decay: 0
- Precision: bf16
- Train Epoch: 2
- Training Devices: 6
- Per Device Train Batch Size: 1
- Gradient Accumulation Steps: 1
- Max Seq Length: 4096
- Optimizer: AdamW

RL Settings. We conducted RL training with the same prompt template for instruction-finetuned models.

```
Translate the statement of this math problem into a single theorem in formal language Lean4. Do not write any proof steps for this theorem or try to solve this problem, you should focus on the translation and simply use 'sorry' as a place holder of the detailed proof. For example, 1+1=2 is translated into '''lean\nexample: 1+1=2 := sorry\n'''.

```

```
### Natural Language Problem
{nl_statement}
```

Then we use GRPO algorithm to optimize our formalizer with the following hyperparameters, other hyperparameters are kept the same as the default settings in trl library.

- Learning Rate: 1×10^{-6}
- Per Device Train Batch Size: 1
- Num Generations: 4
- Train Epoch: 3
- Max Completion Length: 2048
- Gradient Accumulation Steps: 1
- GRPO Beta: 0.0
- Precision: bf16

A.6 Additional experiment results

To assess reward hack issues in FormaRL, we also tested some other LLMs on the evaluation of the same samples generated by our formalizer. Results are summarized in Table 10. Models fine-tuned via FormaRL still outperformed SFT based models across all benchmarks.

Method	Dataset	Evaluation Models		
		Qwen2.5-7B-Instruct	GPT-4o	DeepSeek-V3
(Liu et al., 2025)	ProofNet	19.68%	16.98%	17.52%
FormaRL	ProofNet	31.81%	27.49%	26.68%
(Liu et al., 2025)	uproof	6.2 %	4.7 %	5.1 %
FormaRL	uproof	8.6 %	5.8 %	5.4 %

Table 10: Pass@1 accuracy of both SC and CC on ProofNet and uproof with different large language model as the backend of consistency check. Thees results are all based on DeepSeek-Math-7B.

Here are some other additional experiment results not mentioned in the main part. They are scattered experiments conducted under different settings, and their conclusions are essentially consistent with those in the main text.

Method	Base Model	miniF2F	ProofNet
SFT,	DeepSeek-Math-7B-Instruct	97.34% / 57.79%	67.39% / 36.66%
FormaRL+R	RAutoformalizer	96.52% / 62.30%	81.40% / 53.64%
(Liu et al., 2025)	RAutoformalizer	96.72% / 36.07%	75.74% / 39.89%

Table 11: The pass@8 accuracy of in-distribution autoformalization performance. Statistics are reported as “SC pass rate / final pass rate”.

Model	Dataset	SC Pass Rate	Final Pass Rate
Qwen2.5-7B-Instruct	miniF2F	20.90%	10.66%
Qwen2.5-Coder-7B-Instruct	miniF2F	34.22%	22.54%
Qwen2.5-7B-Instruct	ProofNet	2.43%	1.62%
Qwen2.5-Coder-7B-Instruct	ProofNet	6.73%	4.04%

Table 12: More results of vanilla ICL of different models. Performance are evaluated at pass@1 metric.